
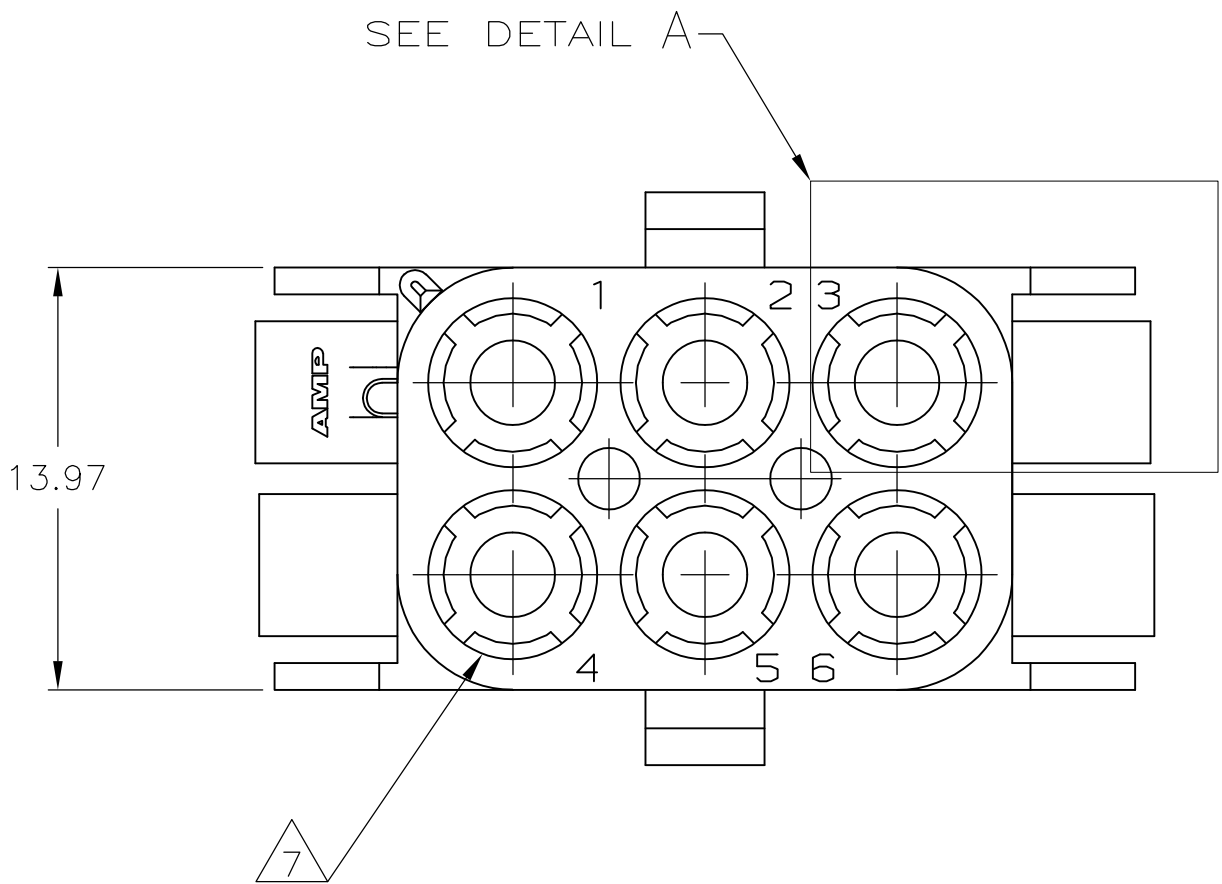
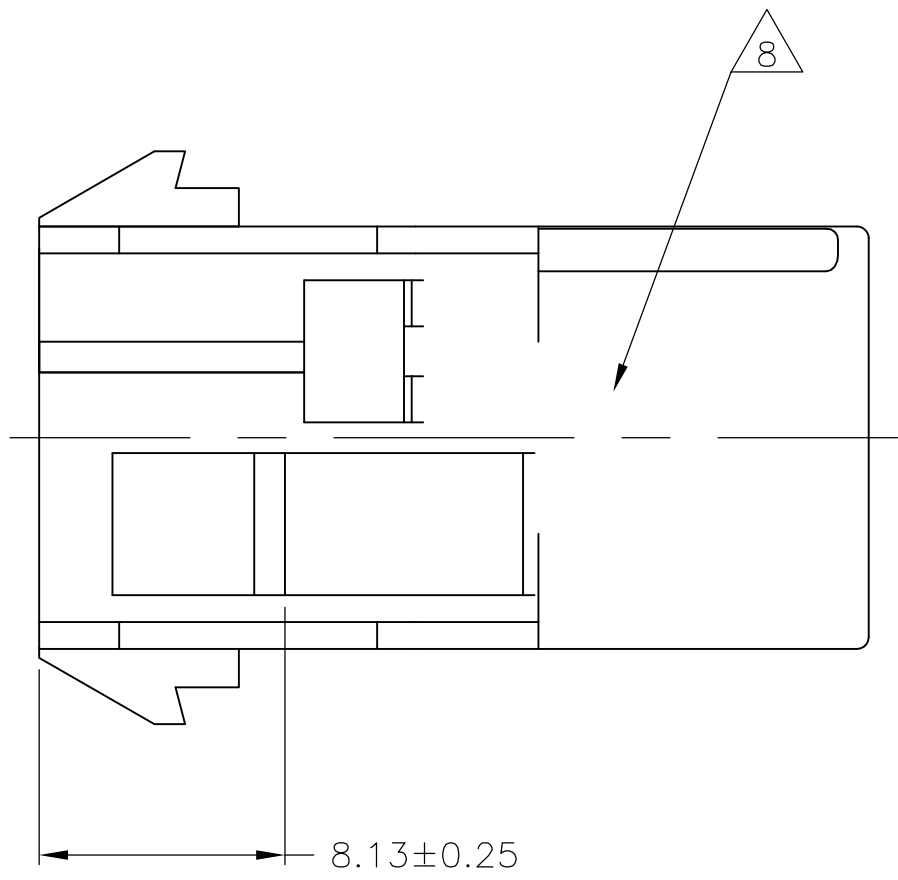



LOC	DIST	REVISIONS				
		F	LTR	DESCRIPTION	DATE	DWN APVD
CM	00		AP4	REVISED PER ECR-17-008392	28JUN2017	BW KR

D


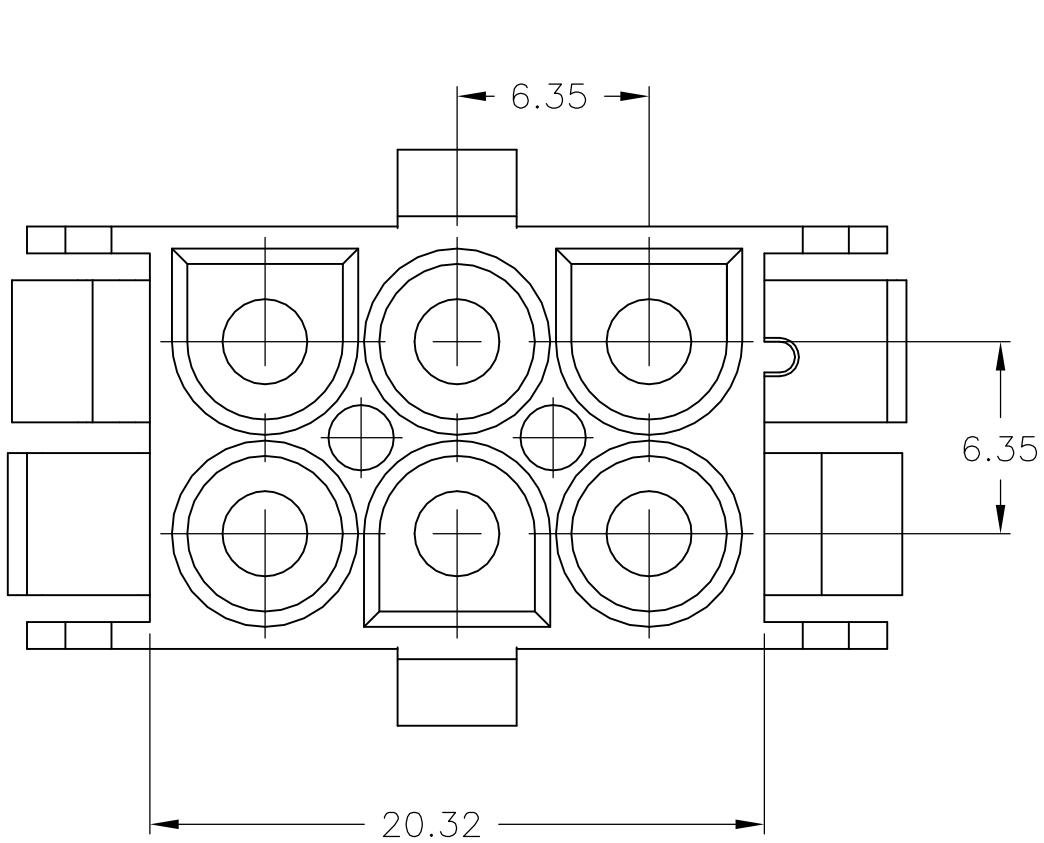


- 1
- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
- 2
- RECOMMENDED PANEL THICKNESS 0.76 - 2.29.
- 3
- PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
- 4
- OPTIONAL FOR KEYING HOUSING IN PANEL.
- 5
- CIRCUIT NUMBER 1 LOCATION.
- 6
- DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
- 7
- FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- 8
- UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
- 9
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

C

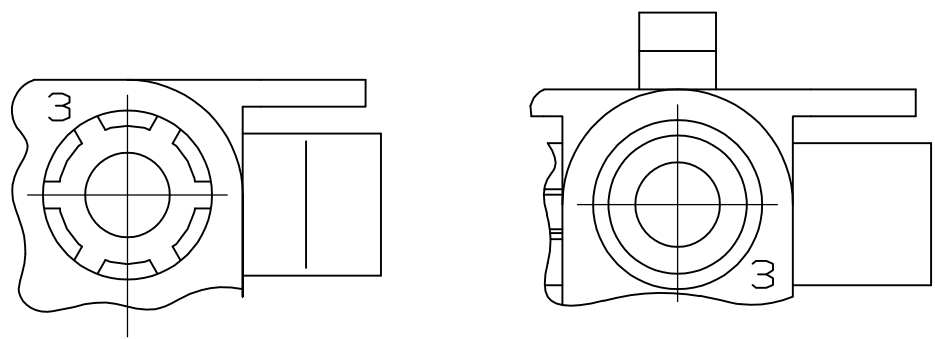


DETAIL A
OPTIONAL CONSTRUCTIONS

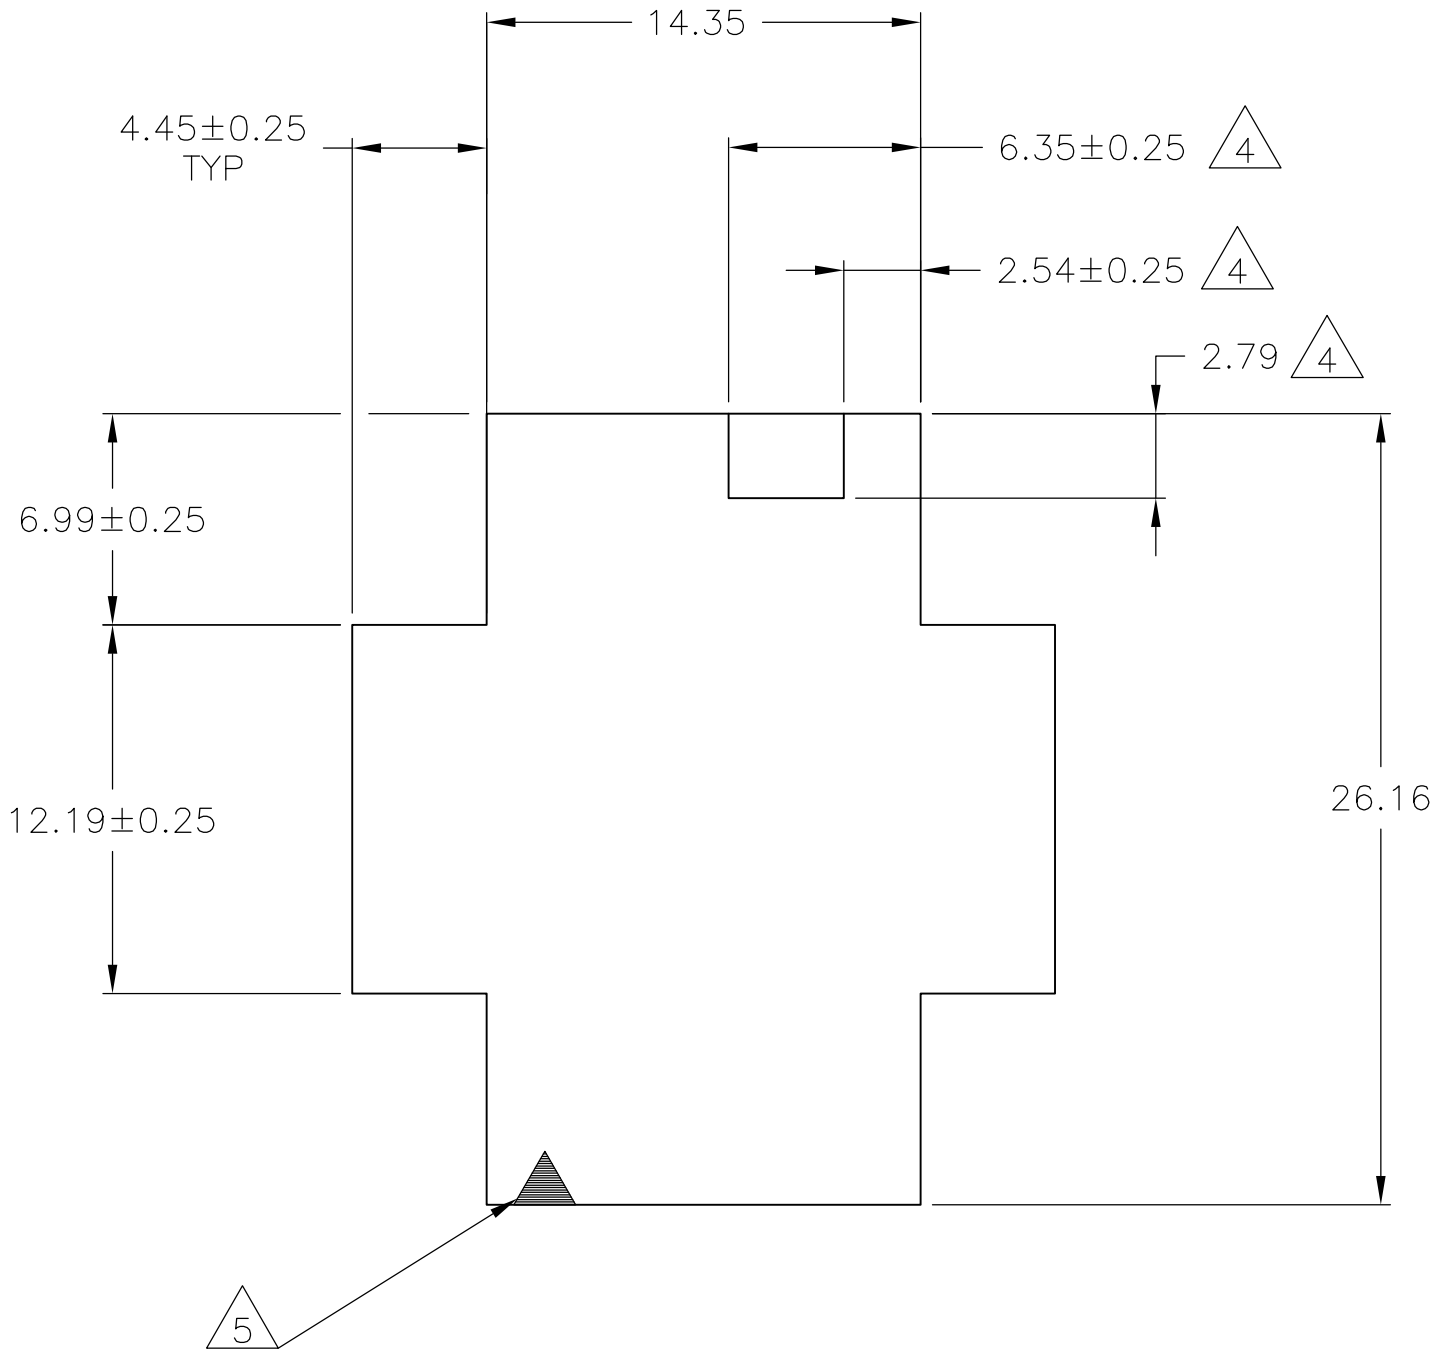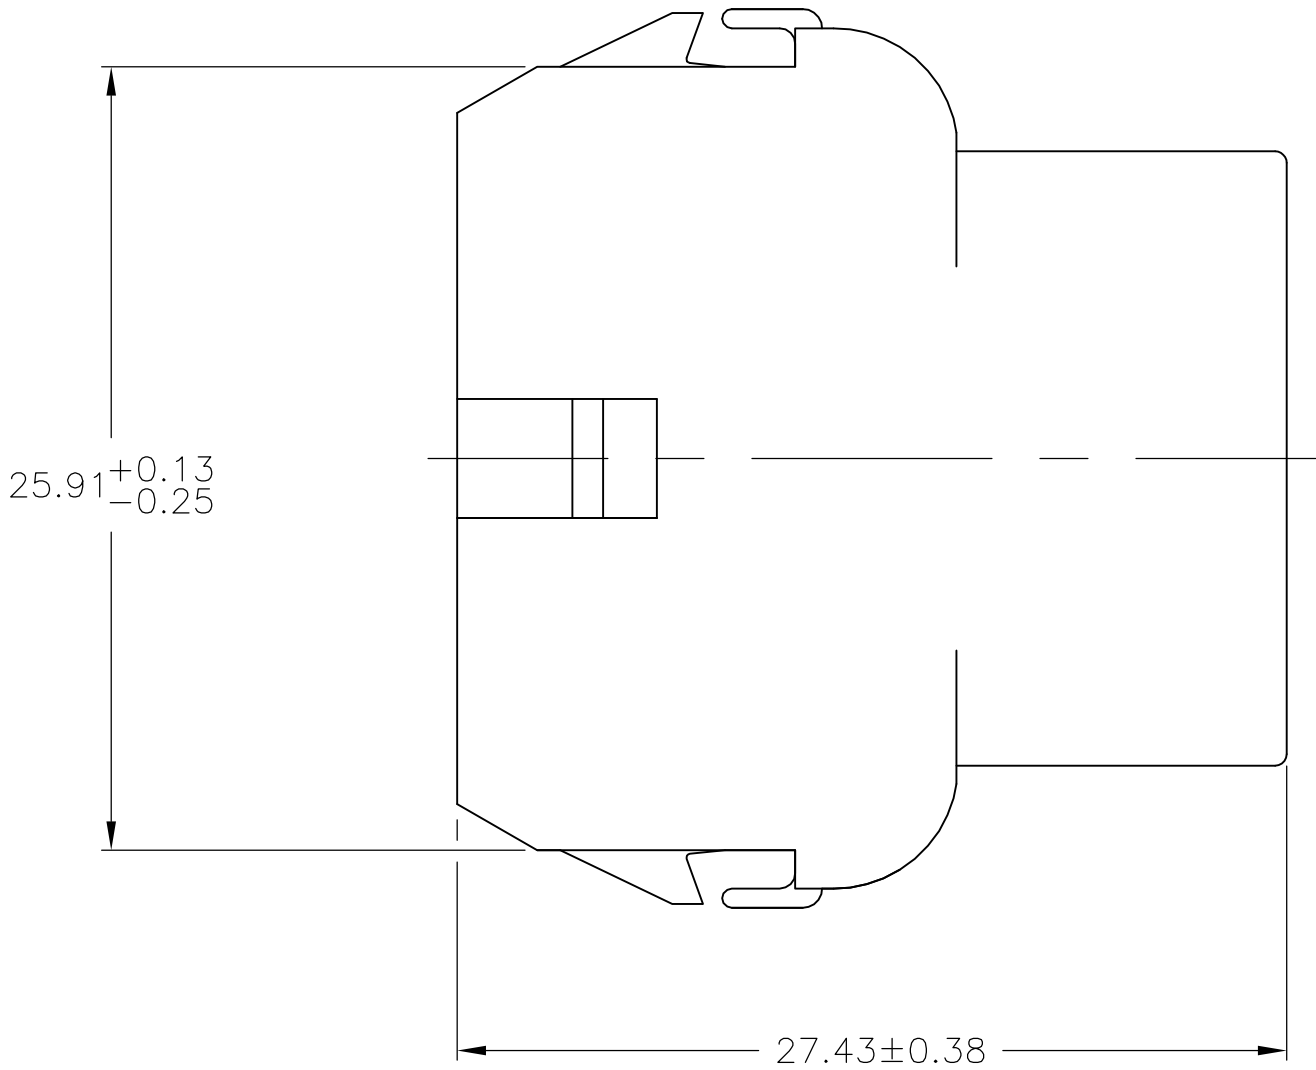

RECOMMENDED PANEL CUT OUT

B

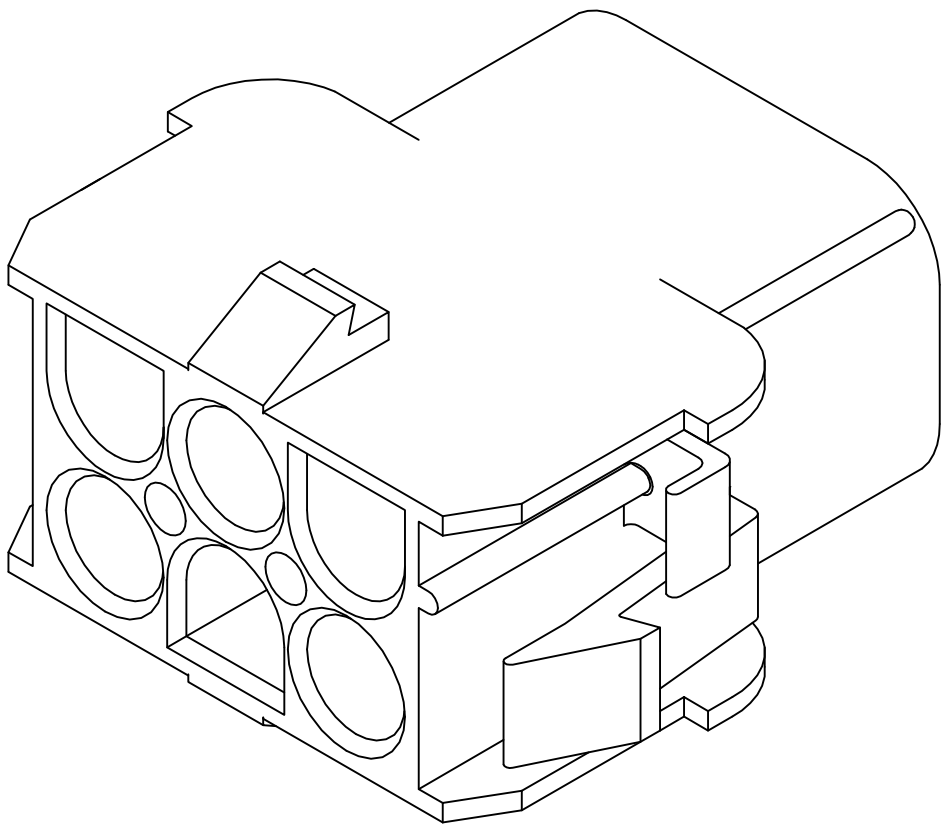

3-DIMENSIONAL MODEL
NTS

6.35	.250	27.43	1.080
4.45	.175	26.16	1.030
2.79	.110	25.91	1.020
2.54	.100	20.32	.800
2.29	.090	14.35	.565
0.76	.030	13.97	.550
0.38	.015	12.19	.480
0.25	.010	8.13	.320
0.13	.005	6.99	.275
MM	IN	MM	IN
CONVERSION TABLE			


D

C

B






A

9 OBSOLETE	BLACK	1-480705-9
	GREY	1-480705-8
	BLUE	1-480705-6
	GREEN	1-480705-5
	YELLOW	1-480705-4
9 OBSOLETE	ORANGE	1-480705-3
	RED	1-480705-2
	BROWN	1-480705-1
	NATURAL	1-480705-0
	COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER	28JUL04	TE Connectivity CAP, 6 CIRCUIT, UNIVERSAL MATE-N-LOK™						
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK S. RIDGILL	28JUL04							
		APVD S. RIDGILL	28JUL04							
		NAME								
	0 PLC ± - 1 PLC ± - 2 PLC ± 0.127 3 PLC ± - 4 PLC ± - ANGLES ± ± 0°30'	PRODUCT SPEC		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO			
		APPLICATION SPEC								
MATERIAL NYLON, UL94V-2		WEIGHT		A1 00779				C=480705		
FINISH -		CUSTOMER DRAWING		SCALE 4:1						
				SHEET 1 OF 2						
				REV AP4						

LOC	DIST	REVISIONS				
		REV	DATE	BY	APPD	
CM	00	-	SEE SHEET 1	-	-	-

- 1
- STAMP NUMBERS 3.18 HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE); CLARIFICATION MARKS UNDER THE 6 & 9.
- 2
- CHARACTERS TO BE STAMPED ON HOUSING IN A MANNER AS TO BE READ FROM WIRE END ONLY.
- 3
- VIOLET,BLACK,BROWN,AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS. ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

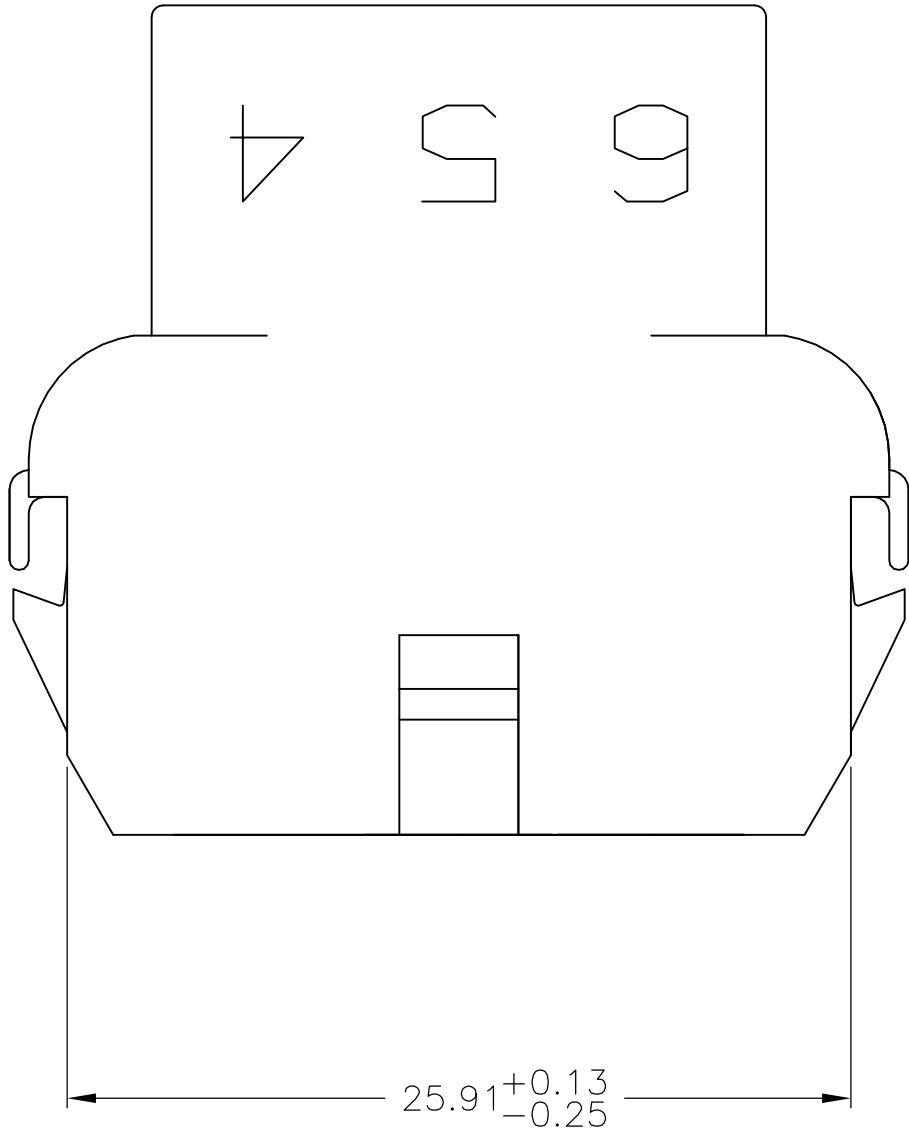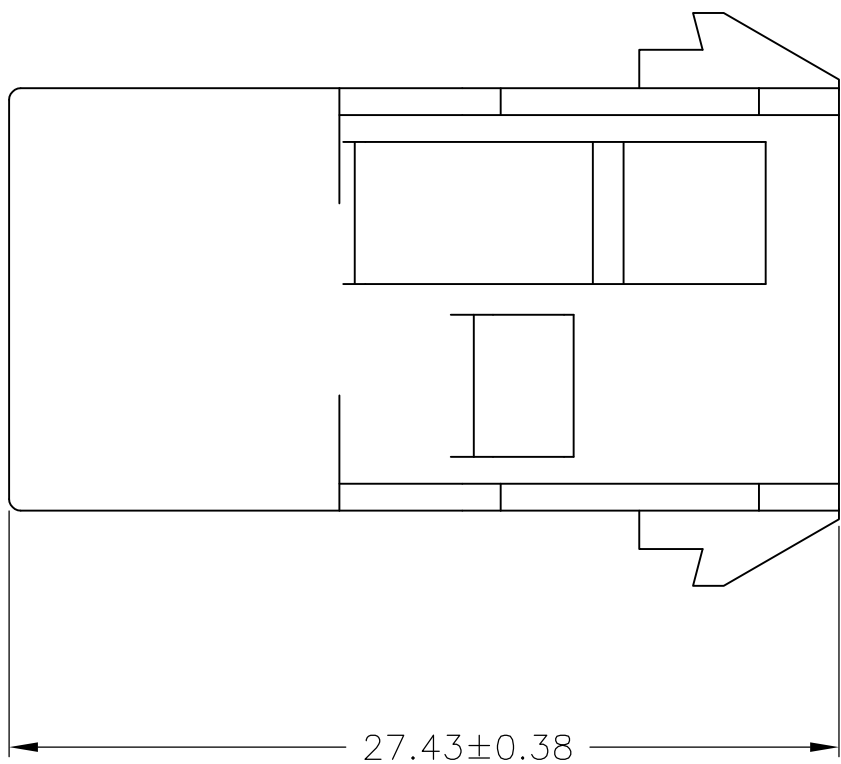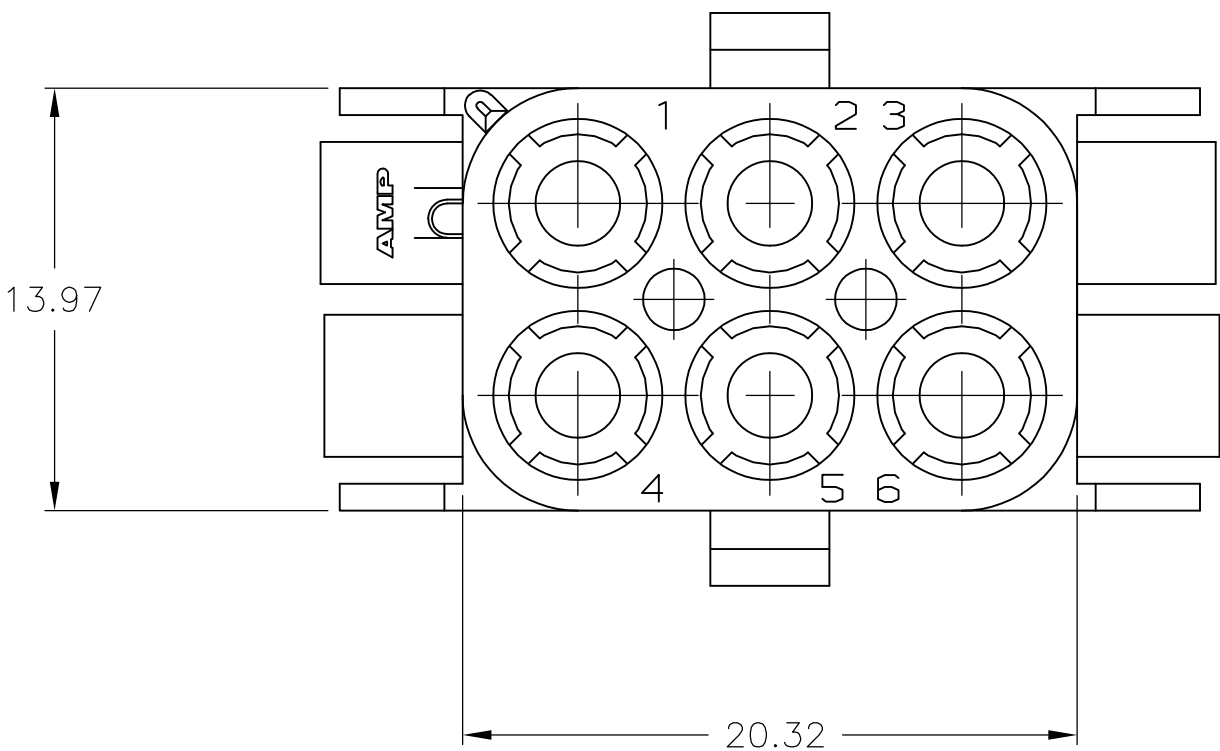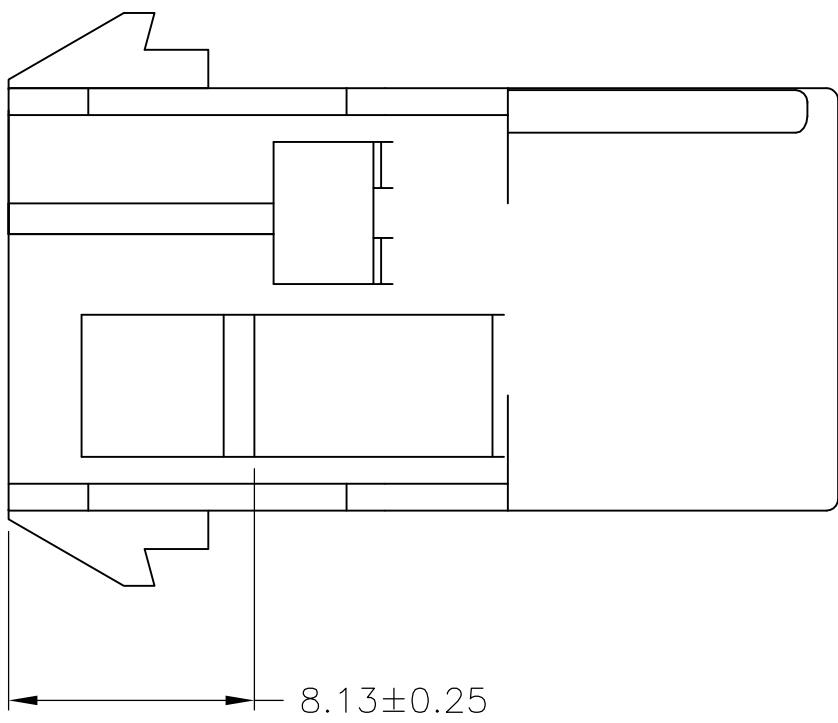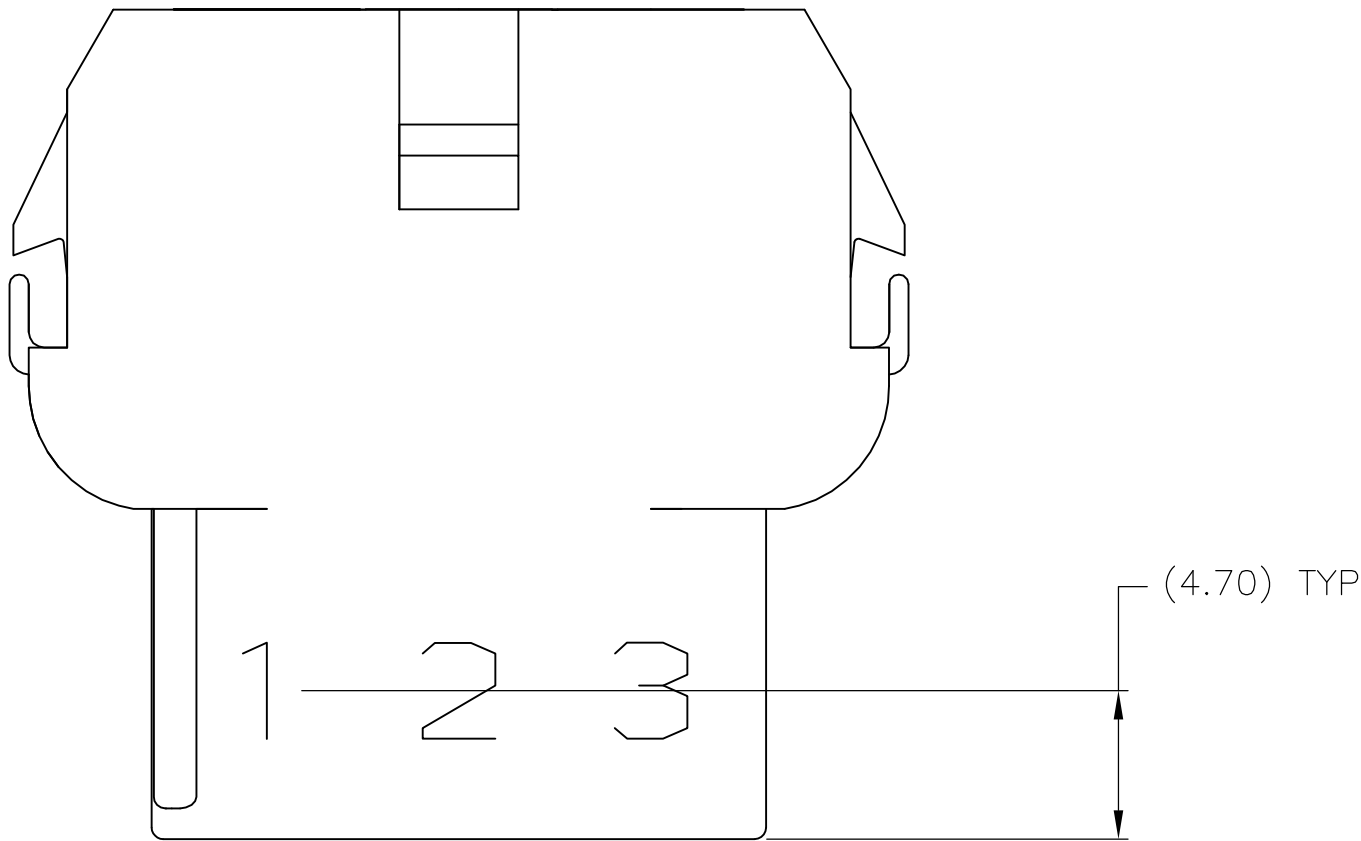

5.08	.200	-	-
4.70	.185	27.43	1.080
3.18	.125	25.91	1.020
0.38	.015	20.32	.800
0.25	.010	13.97	.550
0.13	.005	8.13	.320
MM	IN	MM	IN
CONVERSION TABLE			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER	28JUL04	NATURAL		2-480705-0
		CHK S. RIDGILL	28JUL04	COLOR		PART NO.
DIMENSIONS:		APVD S. RIDGILL	28JUL04	TE Connectivity		
mm		PRODUCT SPEC		NAME		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC		CAP, 6 CIRCUIT, UNIVERSAL MATE-N-LOK™		
0.127		WEIGHT		SIZE	CAGE CODE	DRAWING NO
0.13		MATERIAL		A1	00779	480705
FINISH		CUSTOMER DRAWING		SCALE	4:1	SHEET 2 OF 2

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9