

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0525592652

Status:

Active

Overview:

Description:

0.50mm (.020") Pitch FFC/FPC Connector, Vertical, SMT, ZIF, 26 Circuits, Lead-free, Gold Contact Plating, High Barrier Packaging

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

52559Series

Agency Certification

UL

E29179

General

Product Family

Series

Overview

Product Name

FFC/FPC Connectors

52559

ffc_fpc_smt

N/A

Physical

Circuits (Loaded)

Contact Position

Durability (mating cycles max)

Entry Angle

Flammability

Mated Height (in)

Mated Height (mm)

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Number of Rows

Orientation

PCB Locator

PCB Retention

Packaging Type

Pitch - Mating Interface (in)

Pitch - Mating Interface (mm)

Polarized to PCB

Stackable

Temperature Range - Operating

Termination Interface: Style

Wire/Cable Type

26

N/A

20

Vertical

94V-0

0.154 In

3.90 mm

Phosphor Bronze

Gold

Tin

Nylon

1

Vertical

No

Yes

Embossed Tape on Reel

0.020 In

0.50 mm

No

No

-20°C to +85°C

Surface Mount

FFC/FPC

Electrical

Current - Maximum per Contact

Voltage - Maximum

0.5A

50V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Application Specification

Packaging Specification

Product Specification

Sales Drawing

AS-52559-001





SPK-52559-001, SPK-52559-003

PS-52559-013, RPS-52559-062, RPS-52559-064, RPS-52559-065, RPS-52559-068, RPS-52559-070, RPS-52559-072

SD-52559-048, SD-52559-049

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

10 9 8 7 6 5 4 3 2 1

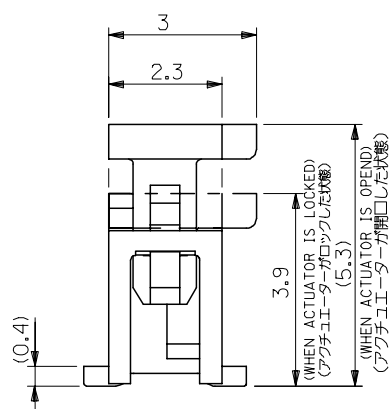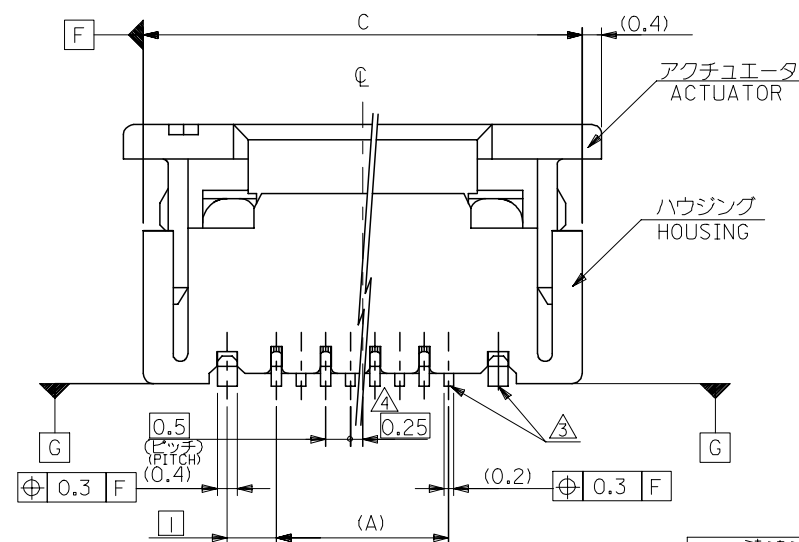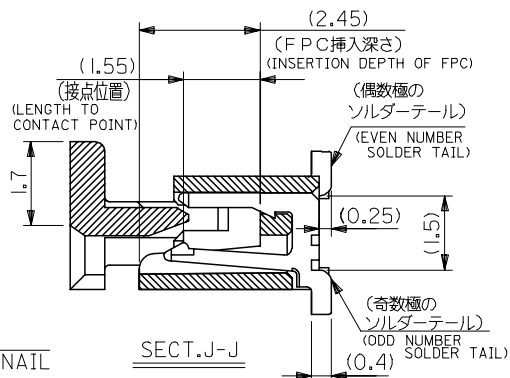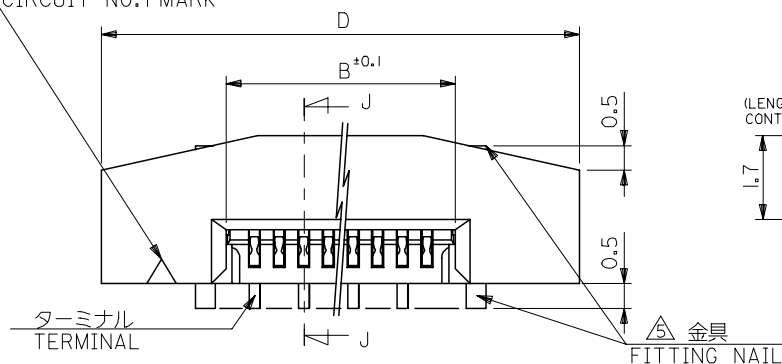回路番号1用マーク
CIRCUIT NO.1 MARK


注記 NOTES

I. 使用材料 : MATERIAL

ハウジング : 46NYLON UL94V-0
HOUSINGアクチュエータ : PPS UL94V-0
ACTUATORターミナル : リン青銅 (t=0.2)
TERMINAL PHOS-BRO: 接点部 金メッキ 0.1マイクロメートル以上
CONTACT GOLD 0.1 MICROMETER MINIMUM: 半田付け部 錫メッキ 1.0マイクロメートル以上
TAIL TIN 1.0 MICROMETER MINIMUM: ニッケル下地 1.0マイクロメートル以上
NICKEL (UNDER PLATING) 1.0 MICROMETER MINIMUM金具 : リン青銅 (t=0.4)
FITTING NAIL PHOS-BRO: 錫メッキ 1.0マイクロメートル以上
TIN 1.0 MICROMETER MINIMUM: ニッケル下地 1.0マイクロメートル以上
NICKEL (UNDER PLATING) 1.0 MICROMETER MINIMUM2. エンボステープ梱包時は、アクチュエータがロックした状態とする。
IN THE PACKAGE, ACTUATOR OF PART NO. 52559-**79 SHOULD BE LOCKED.△3 ソルダータール半田付け面のズレ量、及び金具半田付け面のズレ量は、基準面 [G] に対し上方向 0.05 MAX.、下方向 0.15 MAX. とする。
MISALIGNMENT OF SOLDER TAILS AND FITTING NAILS FROM [G] UPPER DIRECTION: 0.05 MAX., LOWER DIRECTION: 0.15 MAX.△4 偶数極に適用。
APPLY FOR EVEN CIRCUIT.△5 パターンはくり止め用金具。
FITTING NAIL FOR PREVENTION OF PEELING OF P.C.B. PATTERN.△6 R.O. 3は、FPCの導体部にかからないこと。
R.O.3 MUST NOT BE OVERLAPPED TO PATTERN OF FPC.


MODEL NO. 52559-**79

RELEASED EC NO: J2005-0174 DRAWN: MNABE I CHKD: KTOJO APPR: NUKITA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	±0.2	DRAWN BY MNABE I	DATE '04/07/13	TITLE 0.5 FPC CONN ASSY ZIF.				
		10 OVER 30 UNDER	±0.25	CHECKED BY KTOJO	DATE '04/07/13					
		30 OVER	±0.3	APPROVED BY NUKITA	DATE '04/07/13	-LEAD FREE- MOLEX INCORPORATED				
		ANGULAR	±3 °	MATERIAL NO. SEE CHART						
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						


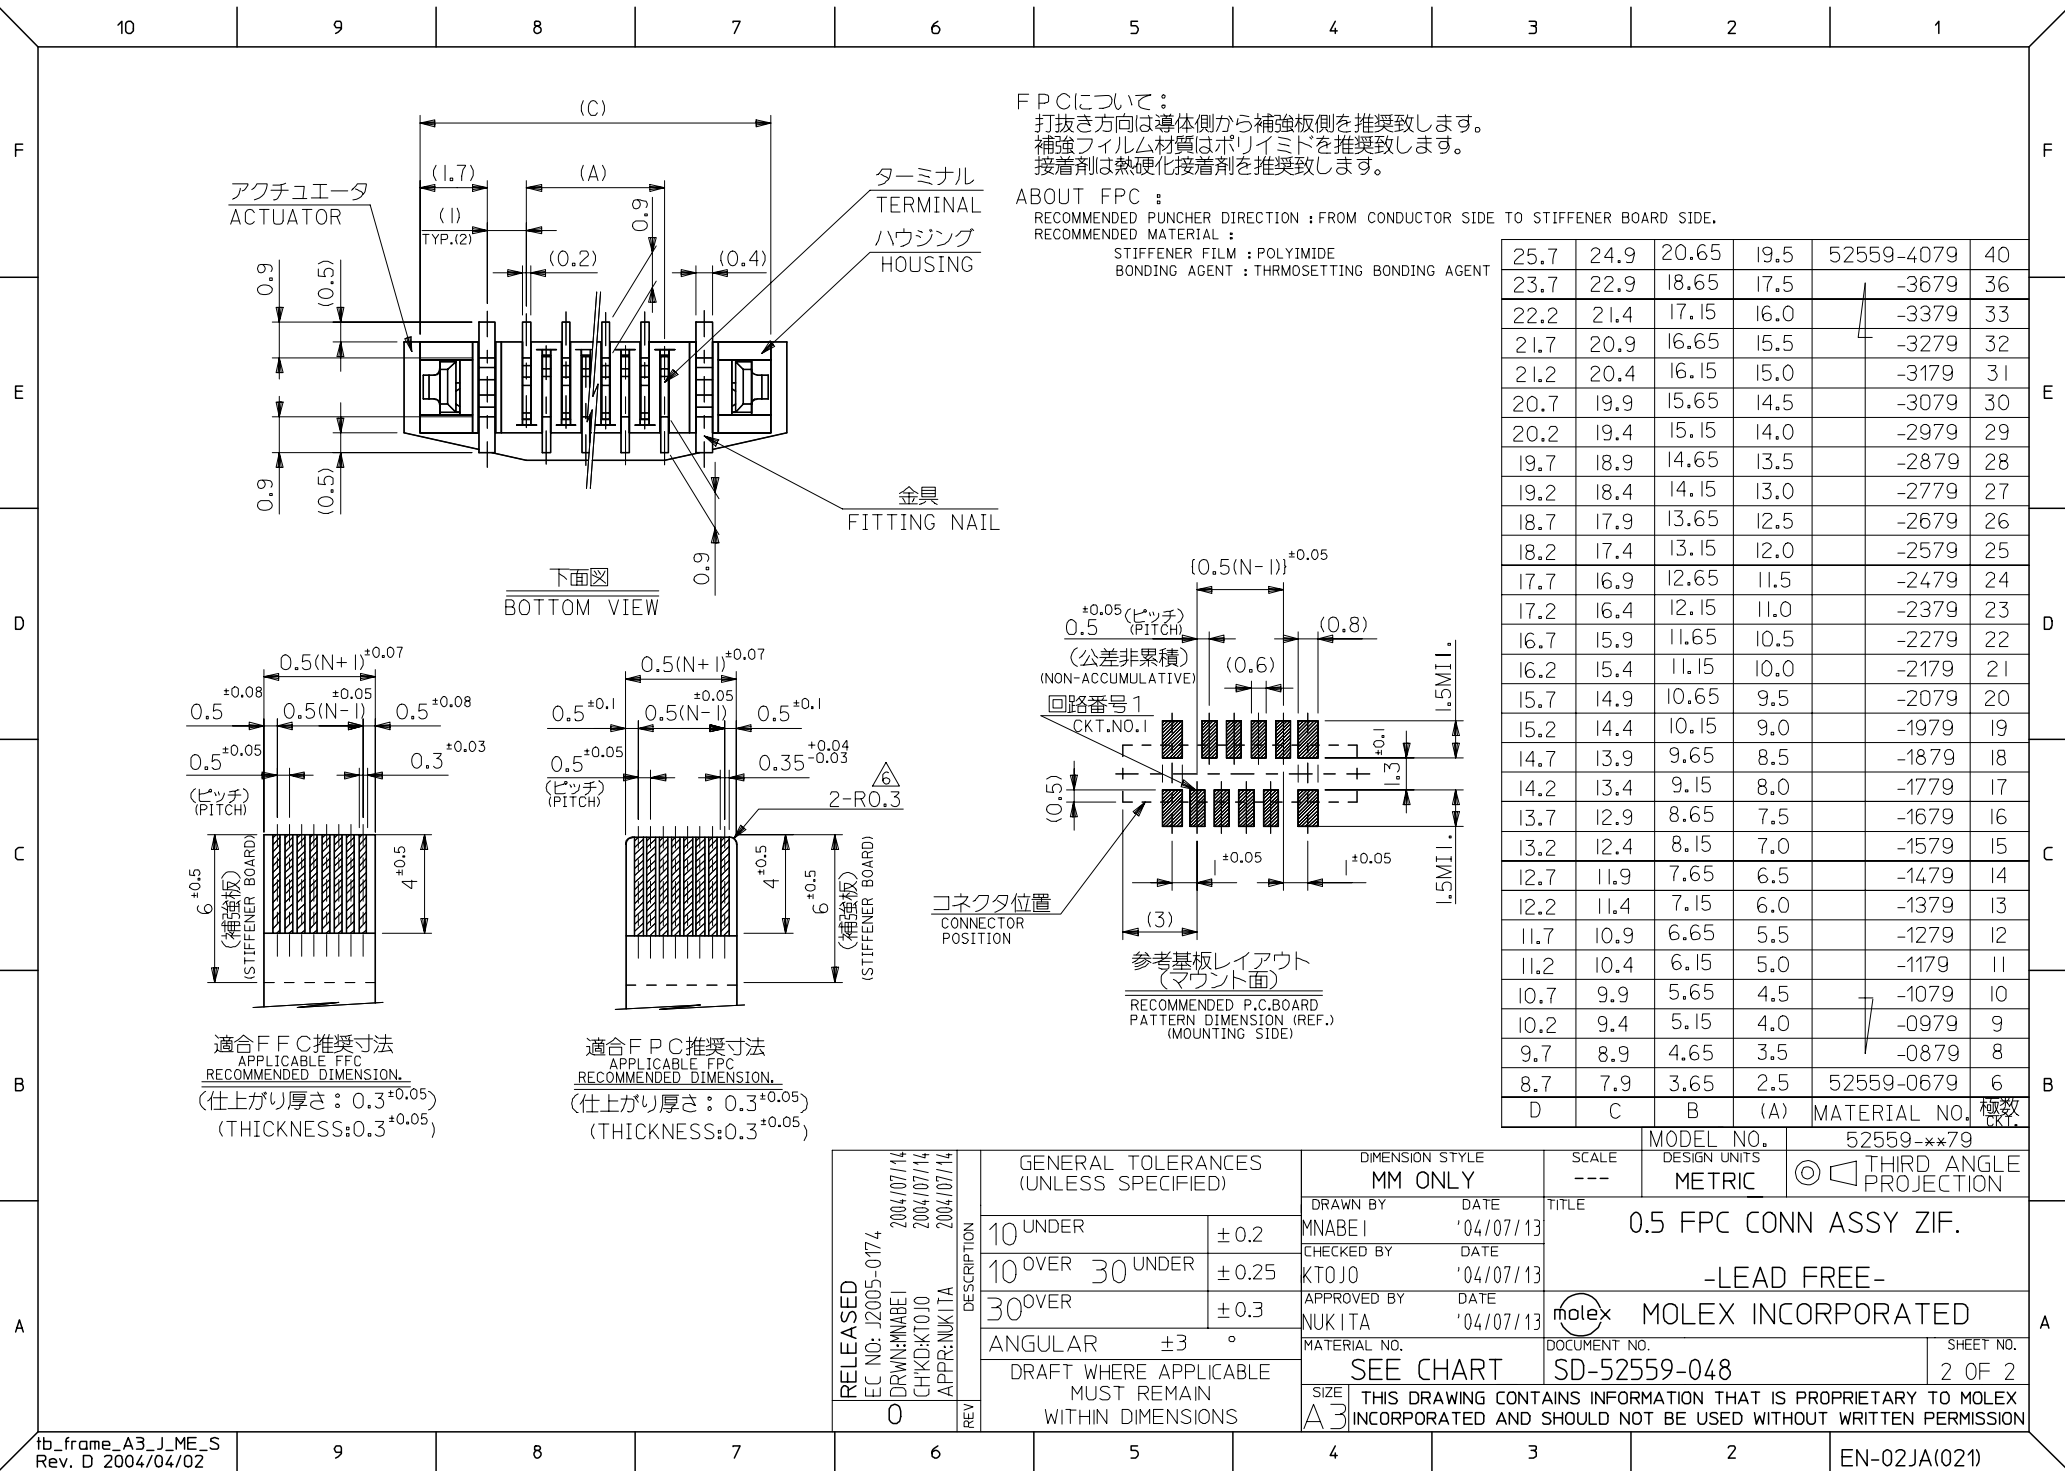


注記 NOTES

- 製品番号 52559-**79 の梱包状態はアクチュエータがロックした状態とする。
詳細寸法については 製品単体図面を参照下さい。
IN THE PACKAGE,ACTUATOR OF PART NO.52559-**79 SHOULD BE LOCKED
RE DETAILED DIMENSIONS,SEE ASSY DRAWING
- 梱包数量：1000個／リール
NUMBER OF CONNECTORS:1000PCS/REEL
- リードテープ長さ LEAD TAPE LENGTH

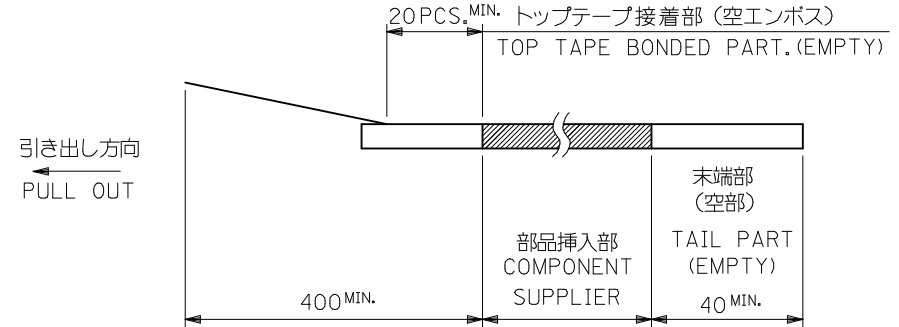

- トップテープの剥離強度：(剥離方向は下図参照)
0.1N~1.3N {10gf~130gf} 尚、本規格値は、出荷時に適用。
(但し、輸送時に剥離が発生しない事。)
PEELING OFF FORCE OF TOP TAPE
0.1N~1.3N {10gf~130gf}(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT
PEEL OFF SHOULD NOT BE ALLOWED,
DURING TRANSPORTATION

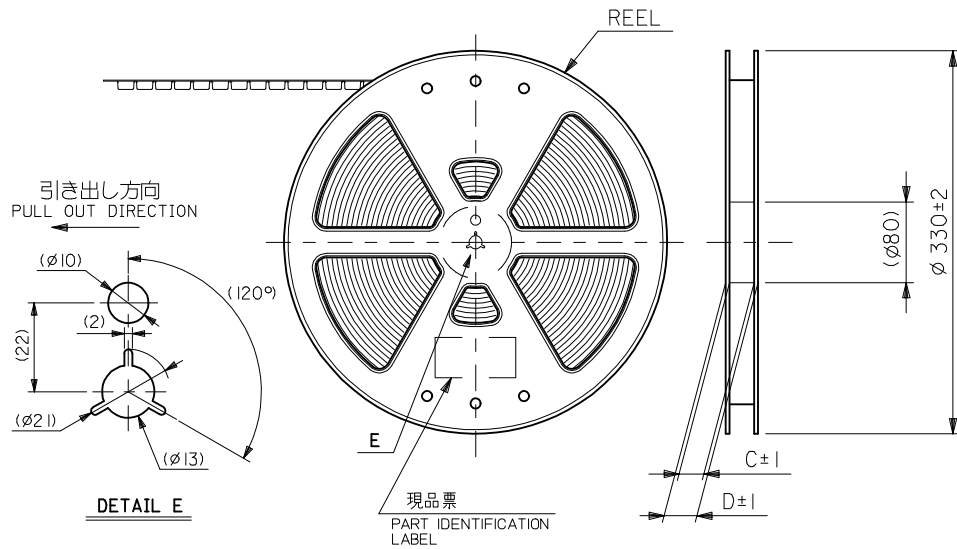
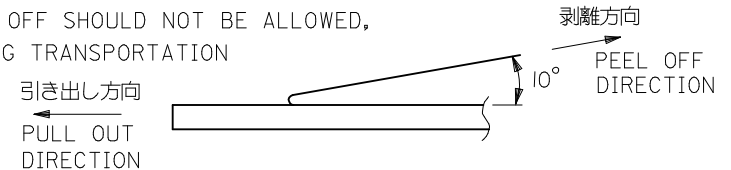


- 材料
キャリアテープ：ポリプロピレン (PP)
トップテープ：PET, PE, PEF
リール：ポリスチレン (PS) <リサイクル材を含む>

MATERIAL CARRIER TAPE:POLYPROPYLENE
TOP TAPE:PET,PE,PEF
REEL:POLYSTYRENE (PS)
<RECYCLE MATERIAL CONTAINED>

- 本製品は 52559-**53 のエンボステープ違い品である。
THIS PRODUCT IS EMBOSSED TAPE DIFFERENCE ARTICLE OF 52559-**53.
- 本製品は乾燥剤入り、ハイバリア梱包仕様である。
THIS PRODUCT IS HIGH BARRIER PACKAGE WITH DESICCANT.

REVISED	EC NO: J2009-2061	DRWN:TKN CHKD:HMATSUMOTO APPR:NUKITA	2009/05/20 2009/05/21 2009/05/21	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
					10 UNDER	± 0.2	DRAWN BY MNABEI	DATE '04/07/13	TITLE 0.5 FPC CONN ASSY ZIF FOR SMT EMBSTP PKG -LEAD FREE-		
					10 OVER 30 UNDER	± 0.25	CHECKED BY KTOJO	DATE '04/07/13			
					30 OVER	± 0.3	APPROVED BY NUKITA	DATE '04/07/13			
					ANGULAR ±3 °		MATERIAL NO.				
					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET 2-4		SD-52559-049		1 OF 4
G	REV				SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

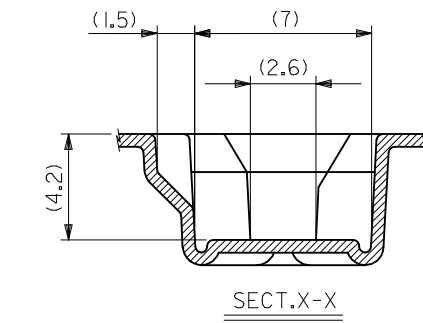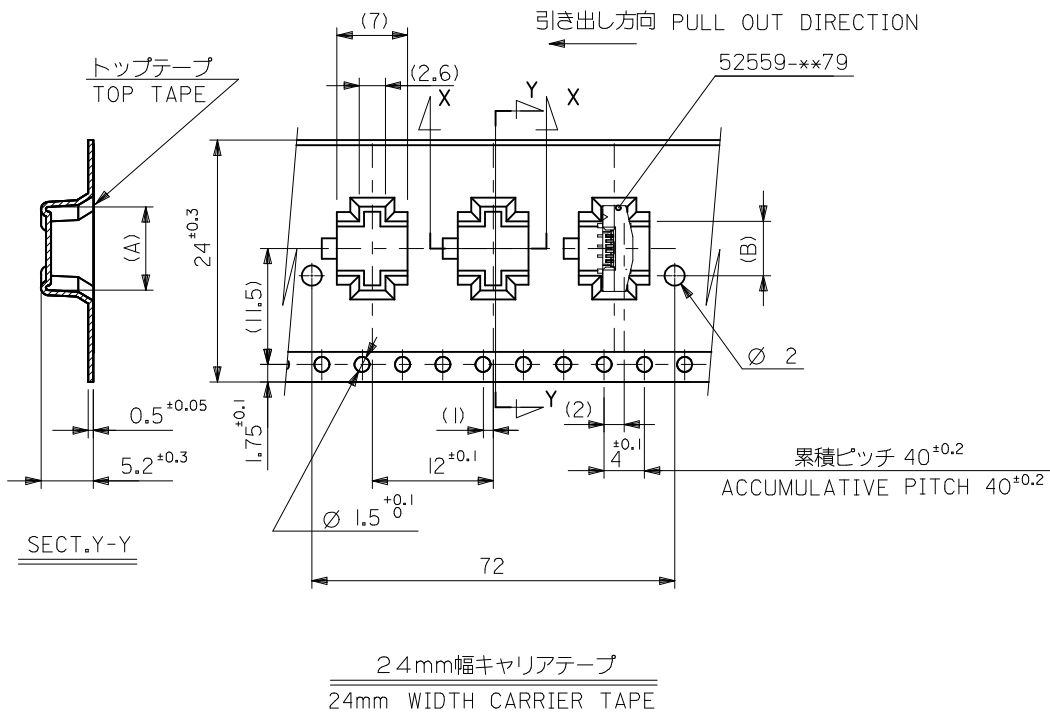

24	29.4	25.4	14.4	17.3	52559-2452	24	C
			13.9	16.8	52559-2352	23	
			12.9	15.8	52559-2152	21	
			12.4	15.3	52559-2052	20	
			10.9	13.8	52559-1752	17	
			10.4	13.3	52559-1652	16	
			9.9	12.8	52559-1552	15	
			9.4	12.3	52559-1452	14	
			8.4	11.3	52559-1252	12	
			7.4	10.3	52559-1052	10	
キャリアテープ幅 CARRIER TAPE WIDTH	D	C	6.9	9.8	52559-0952	9	B
			5.4	8.3	52559-0652	6	
			(B)	(A)	MATERIAL NO.	CIRCUIT NO.	

REVISED EC NO: J2009-2061 DRWN:TKN CHKD:HMATSUMOTO APPR:NUKITA	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY MNABEI	DATE '04/07/13	TITLE 0.5 FPC CONN ASSY ZIF FOR SMT EMBSTP PKG -LEAD FREE-				
		10 OVER 30 UNDER	± 0.25	CHECKED BY KTOJO	DATE '04/07/13					
		30 OVER	± 0.3	APPROVED BY NUKITA	DATE '04/07/13	MOLEX INCORPORATED				
		ANGULAR	± 3 °	MATERIAL NO.		DOCUMENT NO.			SHEET NO.	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-52559-049			2 OF 4	
				SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F

E



D

C

B

A

引き出し方向 PULL OUT DIRECTION

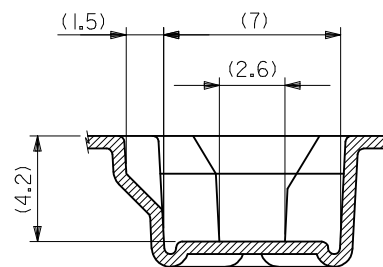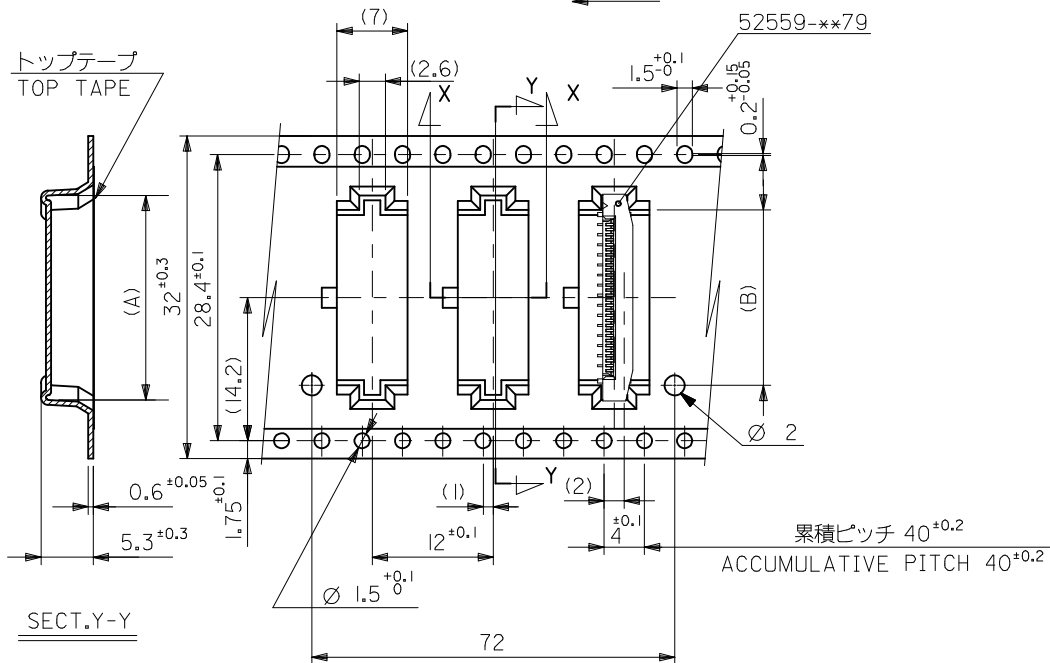

32mm幅キャリアテープ
32mm WIDTH CARRIER TAPE

32	37.4	33.4	18.4	21.3	52559-3252	32
			17.4	20.3	52559-3052	30
			16.4	19.3	52559-2852	28
			15.9	18.8	52559-2752	27
			15.4	18.3	52559-2652	26
キャリアテープ幅 CARRIER TAPE WIDTH			D	C	(B) (A)	MATERIAL NO. CIRCUIT NO.

REVISED EC NO: J2009-2061 2009/05/20 DRWN:TKGN CHKD:HMATSUMOTO 2009/05/21 APPR:NUKITA 2009/05/21	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	±0.2	DRAWN BY MNABEI	DATE '04/07/13	TITLE 0.5 FPC CONN ASSY ZIF FOR SMT EMBSTP PKG -LEAD FREE- MOLEX INCORPORATED				
		10 OVER 30 UNDER	±0.25	CHECKED BY KTOJO	DATE '04/07/13					
		30 OVER	±0.3	APPROVED BY NUKITA	DATE '04/07/13					
		ANGULAR ±3 °		MATERIAL NO.						
	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-52559-049		3 OF 4		
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

10

9

8

7

6

5



4

3

2

1

引き出し方向 PULL OUT DIRECTION

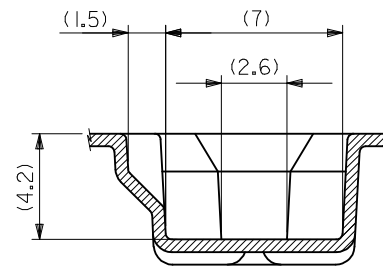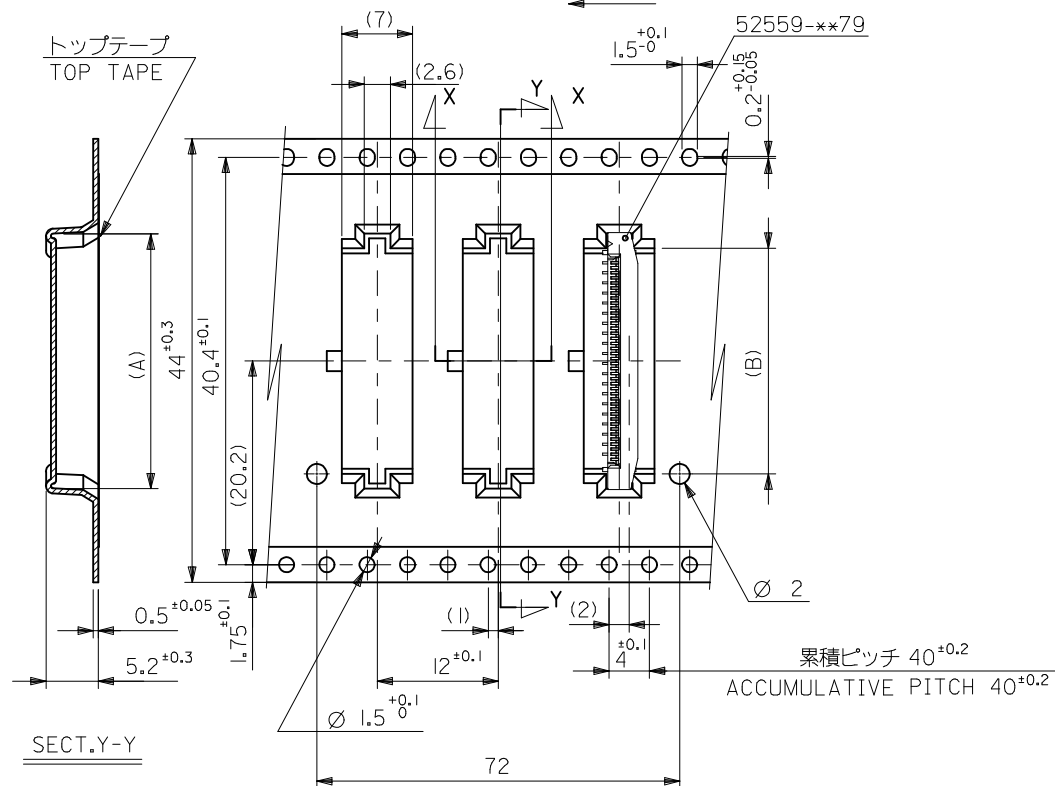

SECT.X-X

44mm幅キャリアテープ
44mm WIDTH CARRIER TAPE

44	49.4	45.4	22.4	25.3	52559-4052	40
キャリアテープ幅 CARRIER TAPE WIDTH	D	C	(B)	(A)	52559-3652	36
MATERIAL NO.					CIRCUIT NO.	

REVISED EC NO: J2009-2061 DRWN:TKON CHKD:HMATSUMOTO APPR:NUKITA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY MNABEI	DATE '04/07/13	TITLE 0.5 FPC CONN ASSY ZIF FOR SMT EMBSTP PKG -LEAD FREE-				
		10 OVER 30 UNDER	± 0.25	CHECKED BY KTOJO	DATE '04/07/13					
		30 OVER	± 0.3	APPROVED BY NUKITA	DATE '04/07/13					
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-52559-049		4 OF 4		
	REV			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

9

8

7

6

5

4

3

2

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9