

7.92 mm Contact Pitch, High-Current Connectors for Internal Power Supplies (UL, C-UL and TÜV Listed)

DF22 Series

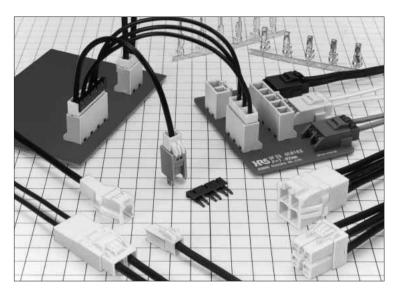



■Features

1. 30 A maximum current

Single position connector can carry current of 30 A with #10 AWG conductor. Please refer to Table #1 for current ratings for multiposition connectors using other conductor sizes.

2. Complete Locking Function

Reliable interior lock protects mated connectors from accidental disconnection.

3. Prevention of Incorrect Connections

To prevent incorrect connection when using multiple connectors having the same Number of contacts, 3 product types having different mating configurations are available.

4. Molded-in contact retention tabs

Handling of terminated contacts during the crimping is easier and avoids entangling of wires, since there are no protruding metal tabs

5. Prevention of incorrect board placement

Built-in posts assure correct connector placement and orientation on the board.

6. Supports encapsulation

Connectors can be encapsulated up to 10 mm without affecting the performance.

7. Prevention of Short Circuits Between Adjacent Contacts
Each Contact is completely surrounded by the insulator housing electrically isolating it from adjacent contacts.

8. Increased Retention Force of Crimped Contacts and confirmation of complete contact insertion

Separate contact retainers are provided for applications where extreme pull-out forces may be applied against the wire or when a visual confirmation of the full contact insertion is required.

9. Full Line of Crimp Socket Contacts

Realizing the market needs for multitude of different applications, Hirose has developed several variants of crimp socket contacts and housings. Continuous development is adding different variations. Contact your nearest Hirose Electric representative for latest developments.

10. In-line Connections

Connectors can be ordered for in-line cable connections. In addition, assemblies can be placed next to each other allowing 4 position total (2×2) in a small space.

11. Listed by UL, C-UL, and TÜV.

Prevention of Incorrect Connections

● R Type (Guide key: right side, Color: black)





● Standard Type (Guide key: inside, Color: natural)





●L Type (Guide key: left side, Color: red)





- *The photographs on the left show header (the board dip side), the photographs on the right show the socket (cable side).
- *The guide key position is indicated in position facing the mating surface of the header.

■Product Specifications

		Number of contacts	AWG10	AWG12	AWG14	AWG16	Operating temperature renge	-35℃ to 85℃ (Note 1)
		1	30A	25A	20A	15A	Operating temperature range	\ /
	Current	2	25A	20A	18A	15A	Operating humidity range	20% to 80%
	rating	3	25A	20A	18A	15A	Storage temperature range	-10°C to 60°C (Note 2)
Ratings		4	22A	18A	15A	13A	Storage humidity range	40% to 70% (Note 2)
		5	22A	18A	15A	13A	UL/C-UL/TÜV File N	o. and Recognition No.
	Voltage rating	Spe	cification		AC/DC 10	V000	UL : E520	653
		Ul	/C-UL		AC/DC	600V	C-UL : E520	653
			TÜV		AC/DC	600V	TÜV : R99	50703

Item	Specification	Condition
Contact resistance	Contact resistance(Initial value): 5 m ohms max.	20mV max., 1mA
2. Insulator resistance	1000 M ohms min.	1000 V DC
3. Withstanding voltage	No flashover or Insulator breakdown	2500 V AC for 1 minute
4. Insertion-Extraction force (per contact)	0.3N min., 5N max.	Measured with a steel pin of 1.6 x 0.8 \pm 0.002 thickness
5. Durability (mating/unmating)	Contact resistance of 10 m ohms max.	30 cycles
6. Vibration	No electrical discontinuity of 1 μ s. min.	Frequency 10 to 55 Hz, single amplitude of 0.75 mm, 3 axis, duration of 2 hours
7. Shock	No electrical discontinuity of 1 μ s. min.	Acceleration of 490 m/s², 11 ms duration, sine half-wave waveform, 3 cycles in each of the 3 axis.
8. Humidity	Contact resistance 10 m ohms max.	Temperature 40°C \pm 2°C, 90% to 95% RH, 96 hours
9. Temperature cycle	Contact resistance of 10 m ohms max.	(-55°C: 30 minutes→ 5 to 35°C: 5 minutes→85°C: 30 minutes→5 to 35°C: 5 minutes) for 5 cycles
10. Resistance to Soldering heat	No deformation of the insulator parts affecting performance	Flow solder temperature 250°C, for 10 seconds Manual soldering: Soldering iron temperature 300°C, 3 seconds

Note 1: Current rating of header is 30A (1 pos.) and 25A (2 to 5 pos.)

Note 2: Includes temperature rise caused by the current flow.

Note 3: The term "storage" refers to products stored for long period of time prior to mounting and use. Operating Temperature Range and Humidity range covers non- conducting condition of installed connectors in storage, shipment or during transportation.

Note 4: Information contained in this catalog represents general requirements for this Series. Contact us for the drawings and specifications for a specific part number shown.

■Materials

Product	Part	Material	Finish	Remarks
Sockets	Insulator	Polyamide	Color: Natural white (Note)	UL94V-0
Crimp contacts	Contacts	High conductivity copper alloy	Tin-lead plated	
Headers	Insulator	Polyamide (Glass reinforced)	Color: Natural beige (Note)	UL94V-0
neaders	Contacts	High conductivity copper alloy	Tin-copper plated	

Note: Standard Color, colors of the differing coupling forms are black for DF22R and red for DF22L.

■Ordering Information

●Socket, Header


●Contacts


 $\frac{\mathsf{DF22}}{\mathsf{0}} \ \frac{\mathsf{B}}{\varnothing} \ \frac{\mathsf{L}}{\varnothing} \ - \ \frac{\mathsf{2}}{\varnothing} \ \frac{\mathsf{S}}{\varnothing} \ - \ \frac{\mathsf{7.92}}{\varnothing} \ \frac{\mathsf{C}}{\varnothing}$

DF22 A - 1416 SCF


Series name: DF22	4 Number of contacts	: 1 to 5	Applicable Cable
2 Form Type	Connector type		Blank : UL1430
Sockets	S	: Socket	A : UL1015
Blank: Standard height, standard lock (Type I)	DS	: Double-row socket	Applicable Conductor
B : Long type, standard lock (Type III)	Р	: Header	1416: AWG 14 to AWG 16
C: Long type, ergonomic lock (Type IV)	EP	: In-line plug	1012 : AWG 10 to AWG 12
In-line Plugs	DEP	: Double-row in-line plug	Packaging
Blank : With panel stop	RS/P	: Retainer	SCF : Socket contacts / Reel
A: Without panel stop	Contact pitch	: 7.92 mm	SC : Socket contacts / Bag
Guide key type	Type of housing		PCF : In-line plug contacts / Reel
Blank : Inside (Color: natural)	С	: Crimp housing	PC : In-line plug contacts / Bag
R : Right side (Color: black)	DSA	: Straight header	
L : Left side (Color: red)	DS	: Right-angle header	
	No letter	: Retainer	

■Crimp Sockets (Standard Type)

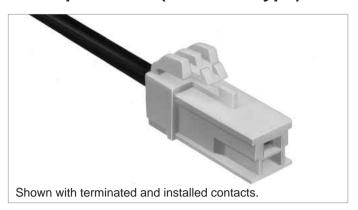







■ Type I

Height: Standard type, Standard lock

Note: The part number and CL No. have changed to accommodate the product form change of the 2 to 5 pos. types.

Standard Type (Guide Key: Inside, Color: White)


Part Number	CL No.	Number of contacts	Α	В
DF22-1S-7.92C(28)	680-1012-2-28	1	8.00	
DF22-2S-7.92C(28)	680-1004-4-28	2	15.50	7.92
DF22-3S-7.92C(28)	680-1005-7-28	3	23.42	15.84
DF22-4S-7.92C(28)	680-1006-0-28	4	31.34	23.76
DF22-5S-7.92C(28)	680-1007-2-28	5	39.26	31.68

R Type (Guide Key: Right Side, Color: Black)


Part Number	CL No.	Number of contacts	Α	В
DF22R-1S-7.92C(28)	680-1026-7-28	1	8.00	-
DF22R-2S-7.92C(28)	680-1027-0-28	2	15.50	7.92
DF22R-3S-7.92C(28)	680-1028-2-28	3	23.42	15.84
DF22R-4S-7.92C(28)	680-1029-5-28	4	31.34	23.76
DF22R-5S-7.92C(28)	680-1030-4-28	5	39.26	31.68


L Type (Guide Key: Left Side, Color: Red)


Part Number	CL No.	Number of contacts	Α	В
DF22L-1S-7.92C(28)	680-1031-7-28	1	8.00	_
DF22L-2S-7.92C(28)	680-1032-0-28	2	15.50	7.92
DF22L-3S-7.92C(28)	680-1033-2-28	3	23.42	15.84
DF22L-4S-7.92C(28)	680-1034-5-28	4	31.34	23.76
DF22L-5S-7.92C(28)	680-1035-8-28	5	39.26	31.68




■Crimp Sockets (Height, Long Type)

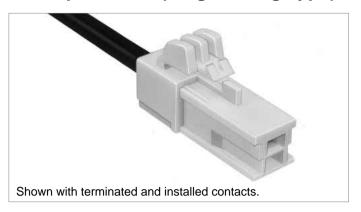

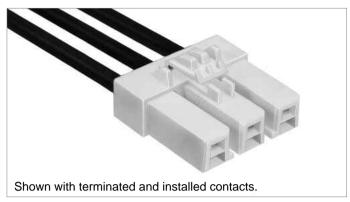



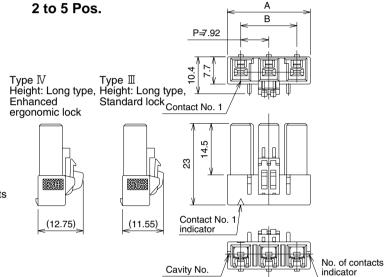

■ Type III Height: Long type, Standard lock

Standard Type (Guide Key: Inside, Color: White)

	Part Number	CL No.	Number of contacts	Α	В
	DF22B-2S-7.92C	680-1097-5	2	15.50	7.92
	DF22B-3S-7.92C	680-1098-8	3	23.42	15.84
	DF22B-4S-7.92C	680-1099-0	4	31.34	23.76
ĺ	DF22B-5S-7.92C	680-1100-8	5	39.26	31.68
	DF22B-5S-7.92C	680-1100-8	5	39.26	3

Note: Bag packaging (100 pieces/bag). Order by number of bags.

■ Type IV

Height: Long type, Enhanced ergonomic lock

Standard Type (Guide Key: Inside, Color: White)

Part Number	CL No.	Number of contacts	Α	В
DF22C-1S-7.92C	680-1101-0	1	8.00	
DF22C-2S-7.92C	680-1102-3	2	15.50	7.92
DF22C-3S-7.92C	680-1103-6	3	23.42	15.84
DF22C-4S-7.92C	680-1104-9	4	31.34	23.76

R Type (Guide Key: Right Side, Color: Black)


Part Number	CL No.	Number of contacts	Α	В
DF22CR-3S-7.92C	680-1130-9	3	23.42	15.84

L Type (Guide Key: Left Side, Color: Red)


Part Number	CL No.	Number of contacts	Α	В
DF22CL-1S-7.92C	680-1133-7	1	8.00	_
DF22CL-3S-7.92C	680-1135-2	3	23.42	15.84


■Straight header






1 Pos.







[Specification number] (05): Tin-copperplated bag packaging

(25) : Tin-copperplated tray packaging

Standard Type (Guide Key: Inside, Color: Natural Beige)

Part Number	CL No.	Number of contacts	Α	В	Bag Packaging	Tray Packaging
DF22-1P-7.92DSA(**)	680-1013-5-**	1	10.08		_	1
DF22-2P-7.92DSA(**)	680-1014-8-**	2	17.22	7.92	✓	
DF22-3P-7.92DSA(**)	680-1015-0-**	3	25.14	15.84	1	
DF22-4P-7.92DSA(**)	680-1016-3-**	4	33.06	23.76	1	
DF22-5P-7.92DSA(**)	680-1017-6-**	5	40.98	31.68	✓	

R Type (Guide Key: Right Side, Color: Black)

Part Number	CL No.	Number of contacts	Α	В	Bag Packaging	Tray Packaging
DF22R-1P-7.92DSA(**)	680-1036-0-**	1	10.08		_	1
DF22R-2P-7.92DSA(**)	680-1037-3-**	2	17.22	7.92	✓	_
DF22R-3P-7.92DSA(**)	680-1038-6-**	3	25.14	15.84	✓	_
DF22R-4P-7.92DSA(**)	680-1039-9-**	4	33.06	23.76	1	_
DF22R-5P-7.92DSA(**)	680-1040-8-**	5	40.98	31.68	1	


L Type (Guide Key: Left Side, Color: Red)

Part Number	CL No.	Number of contacts	Α	В	Bag Packaging	Tray Packaging
DF22L-1P-7.92DSA(**)	680-1041-0-**	1	10.08			1
DF22L-2P-7.92DSA(**)	680-1042-3-**	2	17.22	7.92	✓	
DF22L-3P-7.92DSA(**)	680-1043-6-**	3	25.14	15.84	✓	
DF22L-4P-7.92DSA(**)	680-1044-9-**	4	33.06	23.76	✓	
DF22L-5P-7.92DSA(**)	680-1045-1-**	5	40.98	31.68	1	


Note 1: Bag packaging (100 pieces/bag). Order by number of bags. Note 2: Tray packaging (150 pieces/tray). Order by number of 150.

■PCB mounting pattern (Board thickens: 1.6±0.1)

1 Pos.




2 to 5 Pos.



■Right angle header



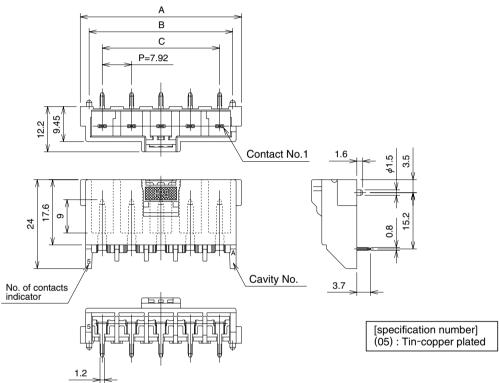

Standard Type (Guide Key: Inside, Color: Natural Beige)

• • •	•	•		0 /	
Part Number	CL No.	Number of contacts	Α	В	С
DF22-2P-7.92DS(05)	680-1008-5-05	2	19.80	15.00	7.92
DF22-3P-7.92DS(05)	680-1009-8-05	3	27.72	22.92	15.84
DF22-4P-7.92DS(05)	680-1010-7-05	4	35.64	30.84	23.76
DF22-5P-7.92DS(05)	680-1011-0-05	5	43.56	38.76	31.68

R Type (Guide Key: Right Side, Color: Black)


Part Number	CL No.	Number of contacts	Α	В	С
DF22R-2P-7.92DS(05)	680-1018-9-05	2	19.80	15.00	7.92
DF22R-3P-7.92DS(05)	680-1019-1-05	3	27.72	22.92	15.84
DF22R-4P-7.92DS(05)	680-1020-0-05	4	35.64	30.84	23.76
DF22R-5P-7.92DS(05)	680-1021-3-05	5	43.56	38.76	31.68

L Type (Guide Key: Left Side, Color: Red)

Part Number	CL No.	Number of contacts	Α	В	С
DF22L-2P-7.92DS(05)	680-1022-6-05	2	19.80	15.00	7.92
DF22L-3P-7.92DS(05)	680-1023-9-05	3	27.72	22.92	15.84
DF22L-4P-7.92DS(05)	680-1024-1-05	4	35.64	30.84	23.76
DF22L-5P-7.92DS(05)	680-1025-4-05	5	43.56	38.76	31.68

Note: Bag packaging (100 pieces/bag). Order by number of bags.

■PCB mounting pattern (Board thickens: 1.6±0.1)





■In-line plug (Panel lock type)





1 Pos.

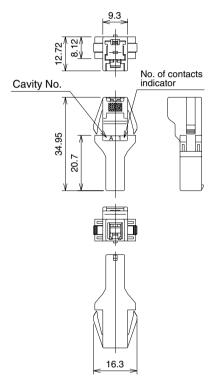

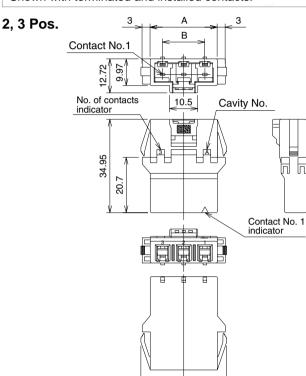

Standard Type (Guide Key: Inside, Color: White)

Part Number	CL No.	Number of contacts	Α	В	С
DF22-1EP-7.92C	680-1048-0	1	9.30		16.30
DF22-2EP-7.92C	680-1049-2	2	17.22	7.92	24.22
DF22-3EP-7.92C	680-1050-1	3	25.14	15.84	32.14

R Type (Guide Key: Right Side, Color: Black)


• • • •	•	•			
Part Number	CL No.	Number of contacts	Α	В	С
DF22R-2EP-7.92C	680-1059-6	2	17.22	7.92	24.22
DF22R-3EP-7.92C	680-1060-5	3	25.14	15.84	32.14


L Type (Guide Key: Left Side, Color: Red)

• • • •		•			
Part Number	CL No.	Number of contacts	Α	В	С
DF22L-1EP-7.92C	680-1063-3	1	9.30	_	16.30
DF22L-2EP-7.92C	680-1064-6	2	17.22	7.92	24.22

Note: Bag packaging (100 pieces/bag). Order by number of bags.

■Panel Cutout





С

Χ

0.48

0.96

1.44


1.92


2.0

1.6


1.2

■In-line Plug

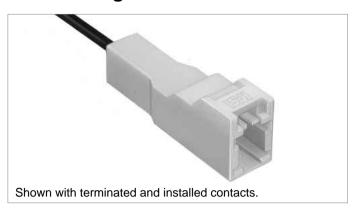


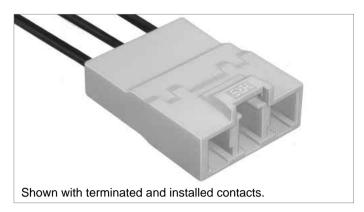

1 Pos.



2, 3 Pos.



Standard Type (Guide Key: Inside, Color: Natural Beige)

Part Number	CL No.	Number of contacts	Α	В
DF22A-1EP-7.92C	680-1053-0	1	9.30	
DF22A-2EP-7.92C	680-1054-2	2	18.00	7.92
DF22A-3EP-7.92C	680-1055-5	3	26.00	15.84


R Type (Guide Key: Right Side, Color: Black)

Part Number	CL No.	Number of contacts	Α	В
DF22AR-2EP-7.92C	680-1069-0	2	18.00	7.92
DF22AR-3EP-7.92C	680-1070-9	3	26.00	15.84

L Type (Guide Key: Left Side, Color: Red)

Part Number	CL No.	Number of contacts	Α	В
DF22AL-2EP-7.92C	680-1074-0	2	18.00	7.92

■In-line Double-row socket

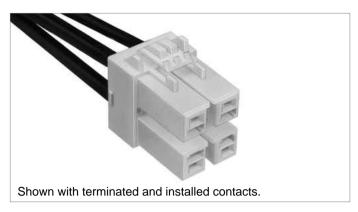

Standard Type (Guide Key: Inside, Color: White)

Part Number	CL No.	Number of contacts	Lock type
DF22B-4DS-7.92C	680-1142-8	4	Standard lock

R Type (Guide Key: Right Side, Color: Black)

Part Number	CL No.	Number of contacts	Lock type
DF22BR-4DS-7.92C	680-1156-2	4	Standard lock

L Type (Guide Key: Left Side, Color: Red)

Part Number CL No.		Number of contacts	Lock type
DF22BL-4DS-7.92C	680-1161-2	4	Standard lock

Note: Bag packaging (100 pieces/bag). Order by number of bags.

Standard lock Standard lock Contact No.1 Cavity No. No. of contacts indicator

■In-line Double-row Plug



Standard Type (Guide Key: Inside, Color: White)

Part Number	CL No.	Number of contacts	Connector type
DF22-4DEP-7.92C	680-1051-4	4	With snap-in tabs
DF22A-4DEP-7.92C	680-1056-8	4	Without snap-in tabs


R Type (Guide Key: Right Side, Color: Black)

Part Number	CL No.	Number of contacts	Connector type
DF22R-4DEP-7.92C	680-1170-3	4	With snap-in tabs
DF22AR-4DEP-7.92C	680-1184-8	4	Without snap-in tabs


L Type (Guide Key: Left Side, Color: Red)

Part Number	CL No.	Number of contacts	Connector type
DF22L-4DEP-7.92C	680-1175-7	4	With snap-in tabs
DF22AL-4DEP-7.92C	680-1189-1	4	Without snap-in tabs

Note: Bag packaging (100 pieces/bag). Order by number of bags.




■Panel Cutout (Panel mount type)




Panel thickness	Х
2.0	0.48
1.6	0.96
1.2	1.44
0.8	1.92

■Retainer




For Standard height, standard lock (Type I)

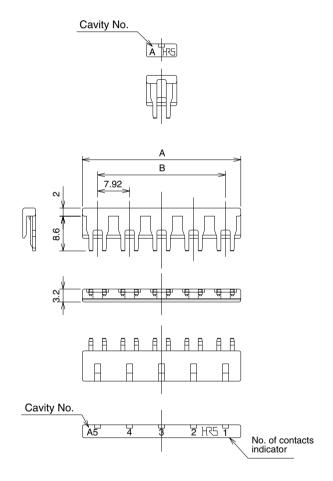

Part Number	CL No.	Number of contacts	Α	В		
DF22-2RS/P-7.92	680-1209-7	2	15.50	7.92		
DF22-3RS/P-7.92	680-1210-6	3	23.42	15.84		
DF22-4RS/P-7.92	680-1211-9	4	31.34	23.76		
DF22-5RS/P-7.92	680-1212-1	5	39.26	31.68		
Applicable Socket	DF22-*S-7.92C For Standard height, standard lock (Type I)					
Applicable 300ket	* indicates number of contacts.					

Note: Bag packaging (100 pieces/bag). Order by number of bags.


For Long type, standard lock (Type III) Long type, enhanced ergonomic lock (Type IV)

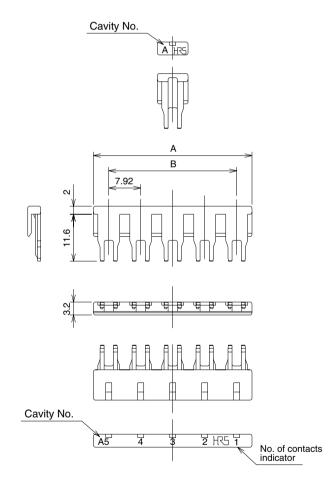


Part Number	CL No.	Number of contacts	Α	В		
DF22B/C-2RS/P-7.92	680-1200-2	2	15.50	7.92		
DF22B/C-3RS/P-7.92	680-1201-5	3	23.42	15.84		
DF22B/C-4RS/P-7.92	680-1202-8	4	31.34	23.76		
DF22B/C-5RS/P-7.92	680-1203-0	5	39.26	31.68		
	DF22B-*S-7.92C For Long type, standard lock (Typ					
	DF22C-*S-7.92C Long type, enhanced ergonomic lock (Type					
Applicable Socket	t DF22-*EP-7.92C					
	DF22A-*EP-7.92C					
	* indicates number of contacts.					

■Crimp Contact for socket

For AWG# 14 to 16



For AWG# 10 to 12



Part Number	CL No.		Applicable cable			Dookoging	Quantity
Fait Number	GL NO.	UL style	Jacket diameter	Wire size	Stranded wire conductor	Packaging	Quantity
DF22-1416SCF	680-1000-3	1420	0.445.2.0			Reel	2,500
DF22-1416SC	680-1001-6	1430	2.4 to 3.0	AWG#16	26/0.254	Bag	100
DF22A-1416SCF	680-1002-9		0.0400	AWG#14	41/0.26	Reel	2,000
DF22A-1416SC	680-1003-1	4045	3.0 to 3.8			Bag	100
DF22A-1012SCF	680-1089-7	1015	204-40	AWG#12	65/0.26	Reel	2,000
DF22A-1012SC	680-1090-6		3.6 to 4.9	AWG#10	104/0.26	Bag	100


Note 1: Applicable wire with tin plated solid soft conductor.

Note 2: When using other than the recommended wire, contact your nearest Hirose representative.

t=0.3

Note 3: Strip length: 3.5 to 4.5mm

■Crimp Contact for In-line Plug



Part Number	CL No.	Applicable cable				Dookoging	Quantity
Part Number	CL NO.	UL style	Jacket diameter	Wire size	Stranded wire conductor	Packaging	Quantity
DF22-1416PCF	680-1078-0	4.400	0.44-0.0			Reel	2,500
DF22-1416PC	680-1080-2	1430	1430 2.4 to 3.0	AWG#16	26/0.254	Bag	100
DF22A-1416PCF	680-1079-3	4045	0.04-0.0	AWG#14	41/0.26	Reel	2,000
DF22A-1416PC	680-1081-5	1015	1015 3.0 to 3.8	3.8		Bag	100

Note 1: Applicable wire with tin plated solid soft conductor.


Note 2: When using other than the recommended wire, contact your nearest Hirose representative.


Note 3: Strip length: 3.5 to 4.5mm

■Mating Dimensions


Socket to Straight Header Connection


1 Pos.






2 to 5 Pos.







Socket to Right angle Header Connection

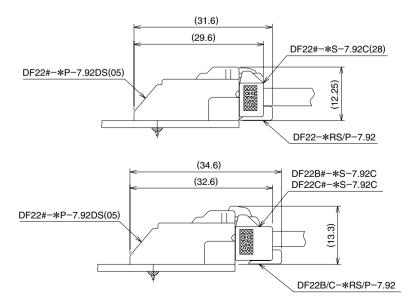


● Socket to In-line Plug (Panel mount type) Connection

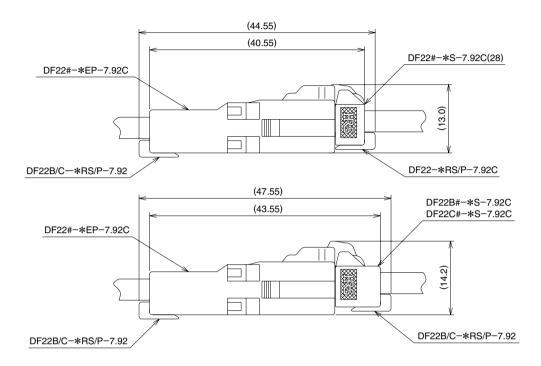


● Socket to In-line Plug Connection

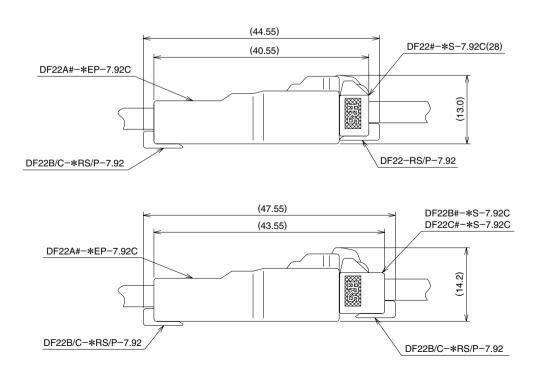

●In-line Double-row socket to In-line Double-row Plug (Panel mount type) Connection

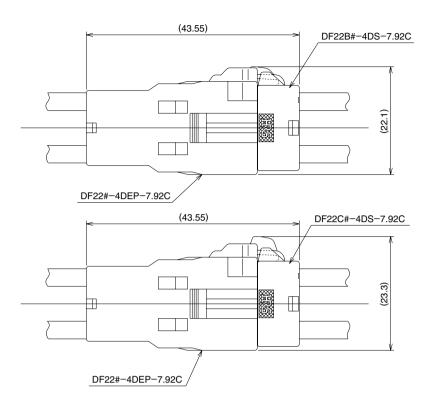

●In-line Double-row socket to In-line Double-row Plug Connection

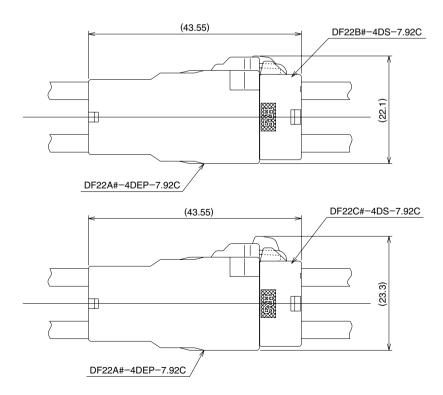

■Tools

Туре	Item	Part Number	CL No.	Applicable Contacts
	Press unit	CM-105	901-0005-4	DF22/DF22A-1416SCF/PCF
	Applicators are used in automatic crimping	AP105-DF22-1416	901-4576-7	DF22-1416SCF/PCF
Automatic	machines manufactured by Hirose Electric	AP105-DF22A-1416	901-4578-2	DF22A-1416SCF/PCF
Automatic	Applicators are used in automatic crimping machines manufactured by other companies	AP109A-DF22-1416	901-4579-5	DF22-1416SCF/PCF
		AP109A-DF22A-1416	901-4580-4	DF22A-1416SCF/PCF
		AP109A-DF22A-1012	901-4582-0	DF22A-1012SCF
	Crimp tools	HT104/DF22-1416	550-0285-0	DF22-1416SC/PC
Manual		HT104/DF22A-1416	550-0286-2	DF22A-1416SC/PC
		HT103/DF22A-1012	550-0288-8	DF22A-1012SC


Note 1: When crimping contact DF22A-1012SCF use a press with 3.5 ton min.

Note 2: AP109A type applicators cannot be used with the CM-105 press.

■Contact Extraction

- Contact extraction tool: Flat-bladed screwdriver, 1.4 mm blade width
- Intended crimp Contacts: DF22-1416SC(F), DF22A-1416SC(F), DF22A-1012SC(F), DF22-1416PC(F), and DF22A-1416PC(F)
- Work Method

Housing Cross-Sectional Diagram

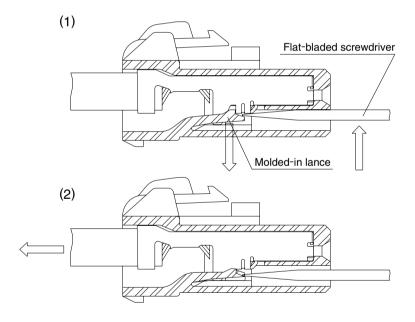

 Refer to the drawing No. 1. Insert correct size screwdriver in the insulator against the molded-in lance. Deflect the lance as shown.

2. Assure that the lance is deflected to release the contact and pull- out wire with the terminated contact.

■Precautions

- ●Make sure that the lock is fully depressed before un-mating the connectors.
- ●Use correct size of the wires. Do NOT forcefully twist or deform wires, as this may affect the crimped contact connection.

■Current Ratings

The current rating listed in the catalog indicates the allowable current per contact. However, in applications requiring current transmission through all the contacts, about one-third of the listed rating should be applied. When the current rating for the connector is 3 A, and the allowable current of the conductor being used is 1 A, then rating of 1 A will be used for the entire assembly.

The connectors should not be mating / unmating when the electrical current is being applied.

Hot swap should not be performed.

■Usage Environment

Please contact us about use in equipment that is subjected to repetitive high temperature and low temperature environmental conditions.



HIROSE ELECTRIC CO.,LTD.

5-23,OSAKI 5-CHOME,SHINAGAWA-KU,TOKYO 141-8587.JAPAN PHONE: 81-3-3491-5300, FAX: 81-3-3495-5230

http://www.hirose.com

http://www.hirose-connectors.com

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru_4 moschip.ru_9