

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0527931070](#)
Status: **Active**
Overview:
Description: 1.00mm (.039") Pitch Right Angle, SMT, Non-ZIF, Top Contact Style, 10 Circuits, Lead-free

Agency Certification

CSA LR19980
 UL E29179

General

Product Family FFC/FPC Connectors
 Series 52793
 Overview ffc_fpc_smt
 Product Name N/A

Physical

Circuits (Loaded) 10
 Contact Position Top
 Durability (mating cycles max) 10
 Entry Angle 90° Angle
 Flammability 94V-0
 Mated Height (in) 0.122 In
 Mated Height (mm) 3.10 mm
 Material - Metal Phosphor Bronze
 Material - Plating Mating Tin-Bismuth
 Material - Plating Termination Tin-Bismuth
 Number of Rows 1
 Orientation Right Angle
 PCB Locator No
 PCB Retention Yes
 Packaging Type Embossed Tape on Reel
 Pitch - Mating Interface (in) 0.039 In
 Pitch - Mating Interface (mm) 1.00 mm
 Plating min: Mating (µin) 40
 Plating min: Mating (µm) 1
 Plating min: Termination (µin) 40
 Plating min: Termination (µm) 1
 Polarized to PCB No
 Stackable No
 Temperature Range - Operating -20°C to +85°C
 Termination Interface: Style Surface Mount
 Wire/Cable Type FFC/FPC

Electrical

Current - Maximum per Contact 0.5A
 Voltage - Maximum 50V

Material Info

Reference - Drawing Numbers

Packaging Specification SPK-52793-001
 Product Specification PS-52793-014, RPS-52793-010, RPS-52793-016,
 RPS-52793-018, RPS-52793-019, RPS-52793-020,
 RPS-52793-021, RPS-52793-024
 Sales Drawing SD-52793-011, SD-52793-012

EU RoHS

**ELV and RoHS
 Compliant
 REACH SVHC
 Contains SVHC: No
 Halogen-Free
 Status
 Not Halogen-Free**

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)





Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[52793Series](#)

This document was generated on 06/05/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

DWG. NO. SD-52793-011

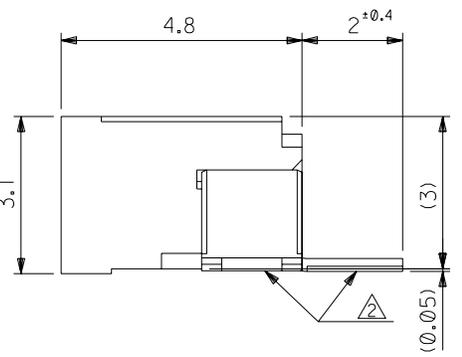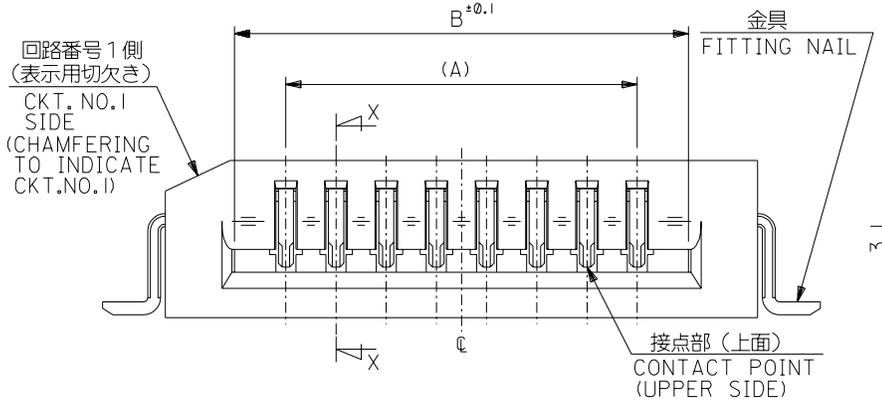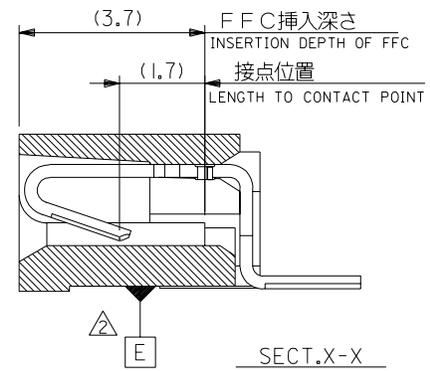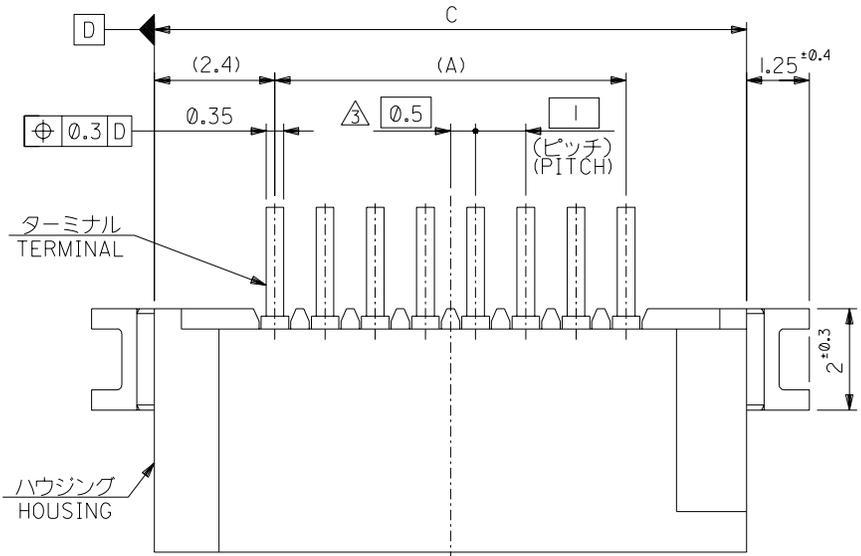

| | | | | |
|------|-------|----|-------------|------------|
| 33.8 | 31.05 | 29 | 52793-3019 | 30 |
| 32.8 | 30.05 | 28 | -2919 | 29 |
| 31.8 | 29.05 | 27 | -2819 | 28 |
| 30.8 | 28.05 | 26 | -2719 | 27 |
| 29.8 | 27.05 | 25 | -2619 | 26 |
| 28.8 | 26.05 | 24 | -2519 | 25 |
| 27.8 | 25.05 | 23 | -2419 | 24 |
| 26.8 | 24.05 | 22 | -2319 | 23 |
| 25.8 | 23.05 | 21 | -2219 | 22 |
| 24.8 | 22.05 | 20 | -2119 | 21 |
| 23.8 | 21.05 | 19 | -2019 | 20 |
| 22.8 | 20.05 | 18 | -1919 | 19 |
| 21.8 | 19.05 | 17 | -1819 | 18 |
| 20.8 | 18.05 | 16 | -1719 | 17 |
| 19.8 | 17.05 | 15 | -1619 | 16 |
| 18.8 | 16.05 | 14 | -1519 | 15 |
| 17.8 | 15.05 | 13 | -1419 | 14 |
| 16.8 | 14.05 | 12 | -1319 | 13 |
| 15.8 | 13.05 | 11 | -1219 | 12 |
| 14.8 | 12.05 | 10 | -1119 | 11 |
| 13.8 | 11.05 | 9 | -1019 | 10 |
| 12.8 | 10.05 | 8 | -0919 | 9 |
| 11.8 | 9.05 | 7 | -0819 | 8 |
| 10.8 | 8.05 | 6 | -0719 | 7 |
| 9.8 | 7.05 | 5 | -0619 | 6 |
| 8.8 | 6.05 | 4 | -0519 | 5 |
| 7.8 | 5.05 | 3 | -0419 | 4 |
| 6.8 | 4.05 | 2 | 52793-0319 | 3 |
| C | B | A | MATERIAL NO | 極数 CIRCUIT |

DO NOT SCALE DRAWING

| | | | | | | | | | |
|----------------------------------|----------------------------------|----------------------------------|----------------------------------|--|--|---|---|--|--|
| EC NO. DRWN: CHK: APPR: | EC NO. DRWN: CHK: APPR: | EC NO. DRWN: CHK: APPR: | EC NO. DRWN: CHK: APPR: | <p>RELEASED</p> <p>EC NO. J2004-1419</p> <p>DRWN: H.KAWABATA '03/12/09</p> <p>CHK: K.TOJO '03/12/09</p> <p>APPR: H. Sasaki '03/12/09</p> | <p>MATERIAL 材料</p> <p>FINISH 仕上げ</p> <p>WIRE RANGE 適用電線範囲</p> <p>INS. RANGE 被覆外径</p> | <p>GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差</p> <p>10 UNDER 未満 ±0.2</p> <p>10 OVER 以上 30 UNDER 未満 ±0.25</p> <p>30 OVER 以上 ±0.3</p> <p>ANGLE 角度 ±3°</p> | <p>SCALE 10:1</p> <p>DESIGN UNITS <input checked="" type="checkbox"/>mm <input type="checkbox"/>INCH</p> <p>DRAWN BY & DATE H.KAWABATA '03/12/09</p> <p>CHECKED BY & DATE K.TOJO '03/12/09</p> <p>APPROVED BY & DATE H. Sasaki '03/12/09</p> <p>CAD FILENAME SD-52793-011.S01</p> | <p>DIMENSIONS: <input type="checkbox"/>mm <input type="checkbox"/>INCH <input checked="" type="checkbox"/>mm ONLY</p> <p>SHT REV</p> <p>REVISE ON CAD ONLY</p> | <p>THIRD ANGLE PROJECTION</p> <p>TITLE: 1.0 FFC CONN. NON ZIF SMT R/A (UPPER CONTACT) -LEAD FREE-</p> <p>MOLEX MOLEX INCORPORATED</p> <p>MATERIAL NO. 52793-**19</p> <p>DRAWING NO. SD-52793-011</p> <p>SHEET NO. 1 OF 2</p> |
|----------------------------------|----------------------------------|----------------------------------|----------------------------------|--|--|---|---|--|--|

注記参照 SEE NOTES



//

//


//

SD-52793-011.S01

- NOTES**
- 製品詳細寸法については 製品単体図面 を参照下さい。
RE DETAILED DIMENSION, SEE SALES DRAWING FOR CONNECTOR.
 - 梱包数量：1000個/リール
NUMBER OF CONNECTORS : 1000PCS/REEL
 - リードテープ長さ LEAD TAPE LENGTH

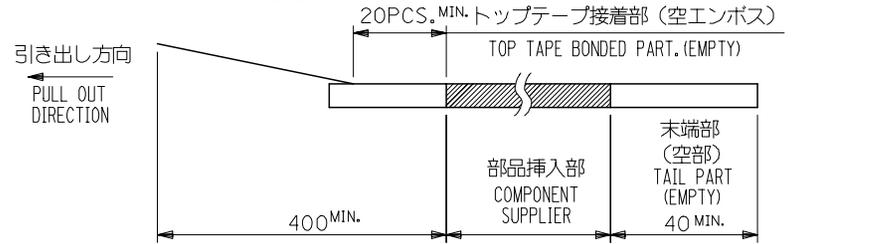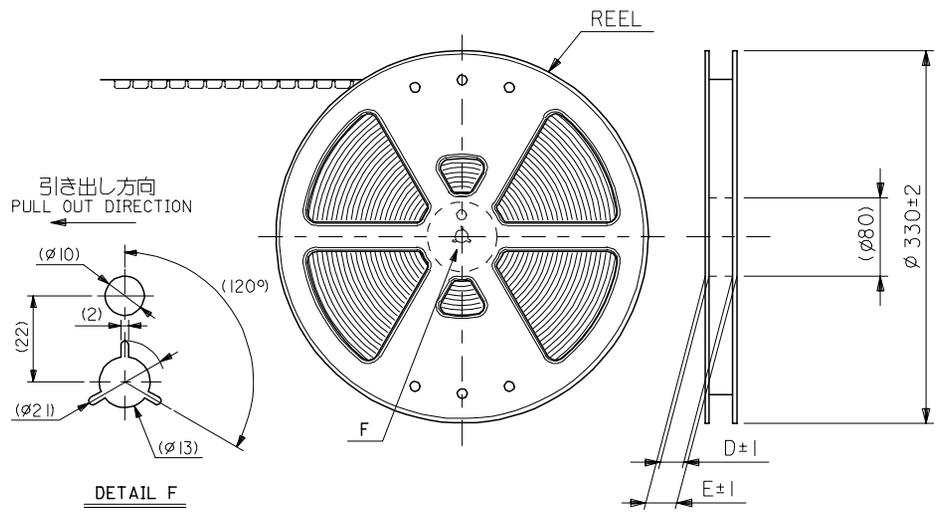

- トップテープの剥離強度：0.1-1.3 N(10-130gf) (剥離方向は下図参照)
尚、本規格値は出荷時に適用。(但し、輸送時に剥離が発生しないこと。)
PEELING OFF FORCE OF TOP TAPE : 0.1-1.3 N(10-130gf)
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT.
PEEL OFF SHOULD NOT BE ALLOWED , DURING TRANSPORTATION.

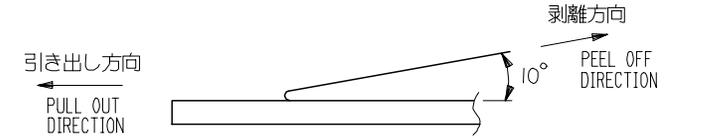

- 材料 (MATERIAL)
キャリアテープ (CARRIER TAPE) : ポリプロピレン (POLYPROPYLENE)
トップテープ (TOPTAPE) : PET , PE , PEF
リール (REEL) : ポリスチレン (PS) <リサイクル材を含む>
POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED>
- 本製品は 52793-***90 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52793-***90

52793-***90 MODEL NO.

| | | | | | | | | |
|---|---------------------------------------|---------------------------|----------------------------|---|--|------------------------|------------------------|--|
| REVISED EC NO: J2006-0384 DRW: NAITA 2005/08/08 CHK: KTOYODA 2005/08/09 APPR: NUKITA 2005/08/22 | GENERAL TOLERANCES (UNLESS SPECIFIED) | | DIMENSION STYLE MM ONLY | | SCALE --- | DESIGN UNITS METRIC | THIRD ANGLE PROJECTION | |
| | 10 UNDER | ±0.2 | DRAWN BY M. NAGATA | DATE '03/12/09 | TITLE 1.0 FFC CONN. NON ZIF SMT RA EMBSTP PKG -LEAD FREE- | | | |
| | 10 OVER 30 UNDER | ±0.25 | CHECKED BY K. TOJO | DATE '03/12/09 | | | | |
| | 30 OVER | ±0.3 | APPROVED BY M. SASAO | DATE '03/12/09 | MOLEX INCORPORATED | | | |
| ANGULAR | ±3 ° | MATERIAL NO. SEE CHART | | DOCUMENT NO. SD-52793-012 | | | | |
| DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | SIZE A3 | | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | | | |

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F


E

D

C

B

A

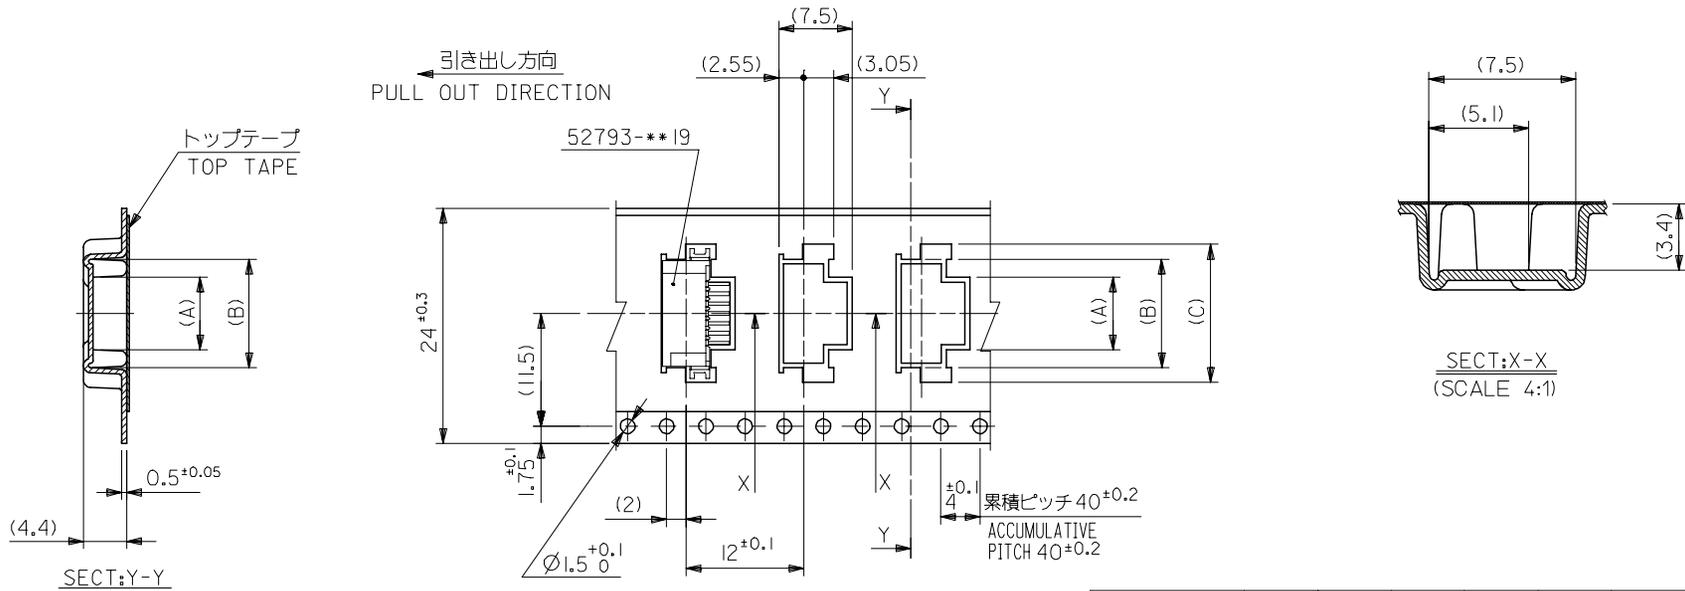

24mm幅キャリアテープ
24mm WIDTH CARRIER TAPE

| | | | | | | | |
|--------------------------------|------|------|------------|------|------|--------------|------------|
| 24 | 29.4 | 25.4 | 18.1 | 15.1 | 11.4 | 52793-1170 | 11 |
| | | | 17.1 | 14.1 | 10.4 | 52793-1070 | 10 |
| | | | 16.1 | 13.1 | 9.4 | 52793-0970 | 9 |
| | | | 15.1 | 12.1 | 8.4 | 52793-0870 | 8 |
| | | | 14.1 | 11.1 | 7.4 | 52793-0770 | 7 |
| | | | 13.1 | 10.1 | 6.4 | 52793-0670 | 6 |
| | | | 12.1 | 9.1 | 5.4 | 52793-0570 | 5 |
| 11.1 | 8.1 | 4.4 | 52793-0470 | 4 | | | |
| キャリアテープ幅 CARRIER TAPE WIDTH | E | D | (C) | (B) | (A) | MATERIAL NO. | 極数 CKT. |
| | | | | | | 52793-***70 | MODEL NO. |




| | | | | | | | |
|---|--|--|----------------------------|---------------------------|--|------------------------|---------------------------|
| REVISED EC NO: J2006-0384 DRW:NAIDA 2005/08/08 CHK:KTOYODA 2005/08/09 APP:NUKITA 2005/08/22 | GENERAL TOLERANCES (UNLESS SPECIFIED) | | DIMENSION STYLE MM ONLY | | SCALE --- | DESIGN UNITS METRIC | THIRD ANGLE PROJECTION |
| | 10 UNDER | ±0.2 | DRAWN BY M. NAGATA | DATE '03/12/09 | TITLE 1.0 FFC CONN. NON ZIF SMT RA EMBSTP PKG -LEAD FREE- | | |
| | 10 OVER 30 UNDER | ±0.25 | CHECKED BY K. TOJO | DATE '03/12/09 | MOLEX INCORPORATED | | |
| | 30 OVER | ±0.3 | APPROVED BY M. SASAO | DATE '03/12/09 | DOCUMENT NO. SD-52793-012 | | |
| | ANGULAR ±3 ° | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | MATERIAL NO. SEE CHART | SHEET NO. 2 OF 5 | | |
| | | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | | | | |

10 9 8 7 6 5 4 3 2 1

F
E
D
C
B
A

F
E
D
C
B
A

引き出し方向
PULL OUT DIRECTION

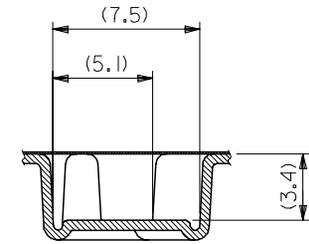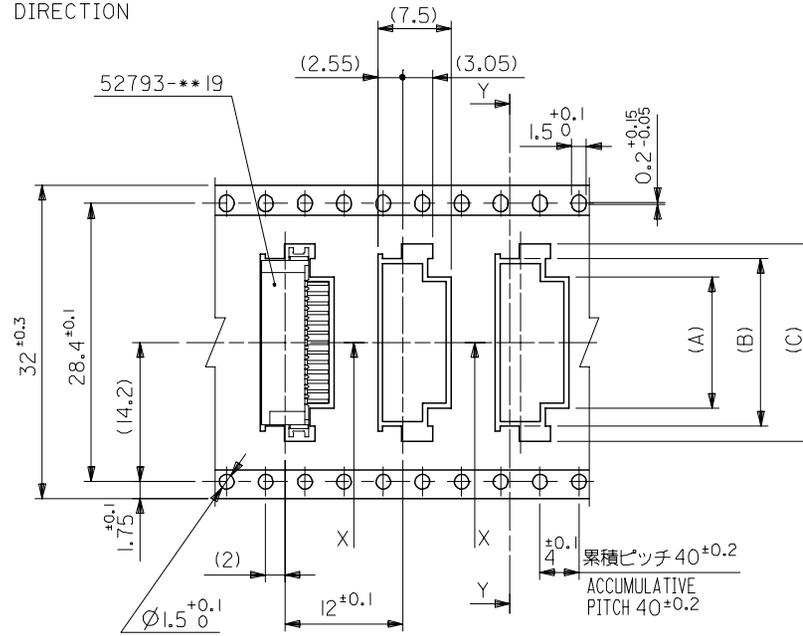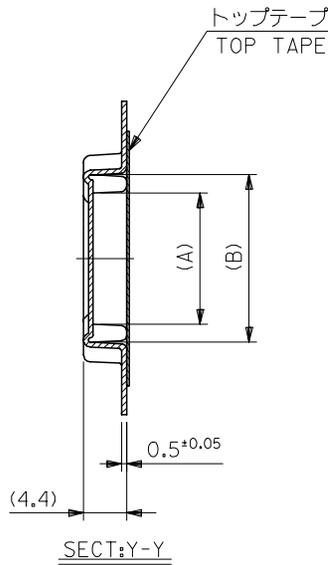

32mm幅キャリアテープ
32mm WIDTH CARRIER TAPE

| | | | | | | | |
|--------------------------------|------|------|------|------|------|--------------|---------------|
| 32 | 37.4 | 33.4 | 23.1 | 20.1 | 16.4 | 52793-1670 | I6 |
| | | | 22.1 | 19.1 | 15.4 | 52793-1570 | I5 |
| | | | 21.1 | 18.1 | 14.4 | 52793-1470 | I4 |
| | | | 20.1 | 17.1 | 13.4 | 52793-1370 | I3 |
| | | | 19.1 | 16.1 | 12.4 | 52793-1270 | I2 |
| キャリアテープ幅 CARRIER TAPE WIDTH | E | D | (C) | (B) | (A) | MATERIAL NO. | 極数 CIRCUIT |

52793-***70 MODEL NO.

| | | | | | | | |
|---|--|-------|--|-------------------|--|--|---------------------------|
| REVISED EC NO: J2006-0384 DRW:NAIDA 2005/08/08 CHK:KTOYODA 2005/08/09 APP:NUKITA 2005/08/22 | GENERAL TOLERANCES (UNLESS SPECIFIED) | | DIMENSION STYLE MM ONLY | | SCALE --- | DESIGN UNITS METRIC | THIRD ANGLE PROJECTION |
| | 10 UNDER | ±0.2 | DRAWN BY M. NAGATA | DATE '03/12/09 | TITLE 1.0 FFC CONN. NON ZIF SMT RA EMBSTP PKG -LEAD FREE- | | |
| | 10 OVER 30 UNDER | ±0.25 | CHECKED BY K. TOJO | DATE '03/12/09 | MOLEX INCORPORATED | | |
| | 30 OVER | ±0.3 | APPROVED BY M. SASAO | DATE '03/12/09 | MATERIAL NO. | DOCUMENT NO. SD-52793-012 | SHEET NO. 3 OF 5 |
| | ANGULAR | ±3 ° | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | SIZE A3 | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | |

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F




E

D

C

B

A

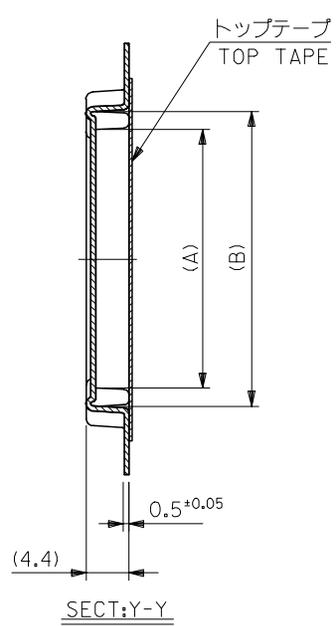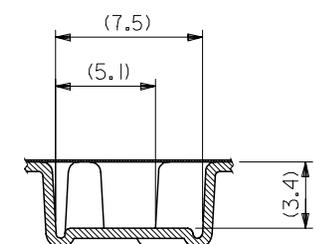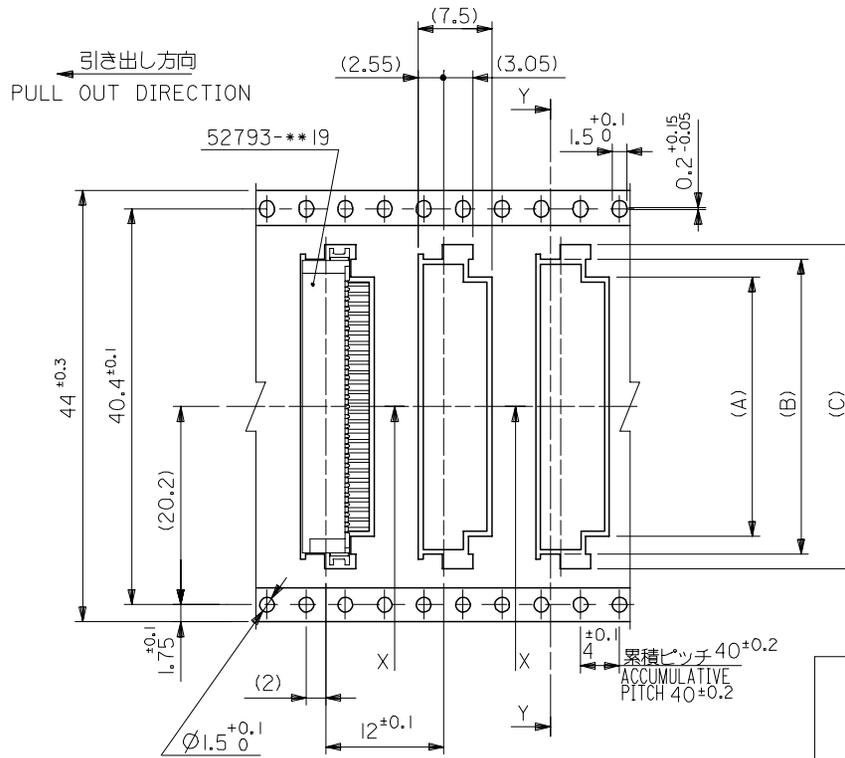

44mm幅キャリアテープ
44mm WIDTH CARRIER TAPE

| | | | | | | | |
|--------------------------------|------|------|------------|------|------|--------------|---------------|
| 44 | 49.4 | 45.4 | 34.1 | 31.1 | 27.4 | 52793-2770 | 27 |
| | | | 33.1 | 30.1 | 26.4 | 52793-2670 | 26 |
| | | | 32.1 | 29.1 | 25.4 | 52793-2570 | 25 |
| | | | 31.1 | 28.1 | 24.4 | 52793-2470 | 24 |
| | | | 30.1 | 27.1 | 23.4 | 52793-2370 | 23 |
| | | | 29.1 | 26.1 | 22.4 | 52793-2270 | 22 |
| | | | 28.1 | 25.1 | 21.4 | 52793-2170 | 21 |
| | | | 27.1 | 24.1 | 20.4 | 52793-2070 | 20 |
| | | | 26.1 | 23.1 | 19.4 | 52793-1970 | 19 |
| | | | 25.1 | 22.1 | 18.4 | 52793-1870 | 18 |
| 24.1 | 21.1 | 17.4 | 52793-1770 | 17 | | | |
| キャリアテープ幅 CARRIER TAPE WIDTH | E | D | (C) | (B) | (A) | MATERIAL NO. | 極数 CIRCUIT |

| | | | | | | | |
|---|---------------------------------------|-------|--|-------------------|--|--|------------------------|
| REVISED EC NO: J2006-0384 DRW: NAITA 2005/08/08 CHK: KTOYODA 2005/08/09 APPR: NUKITA 2005/08/22 | GENERAL TOLERANCES (UNLESS SPECIFIED) | | DIMENSION STYLE MM ONLY | | SCALE --- | DESIGN UNITS METRIC | THIRD ANGLE PROJECTION |
| | 10 UNDER | ±0.2 | DRAWN BY M. NAGATA | DATE '03/12/09 | TITLE 1.0 FFC CONN. NON ZIF SMT RA EMBSTP PKG -LEAD FREE- | | |
| | 10 OVER 30 UNDER | ±0.25 | CHECKED BY K. TOJO | DATE '03/12/09 | MOLEX INCORPORATED | | |
| | 30 OVER | ±0.3 | APPROVED BY M. SASAO | DATE '03/12/09 | MATERIAL NO. | DOCUMENT NO. SD-52793-012 | SHEET NO. 4 OF 5 |
| | ANGULAR | ±3 ° | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | SIZE A3 | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | |

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F




E

D

C

B

A

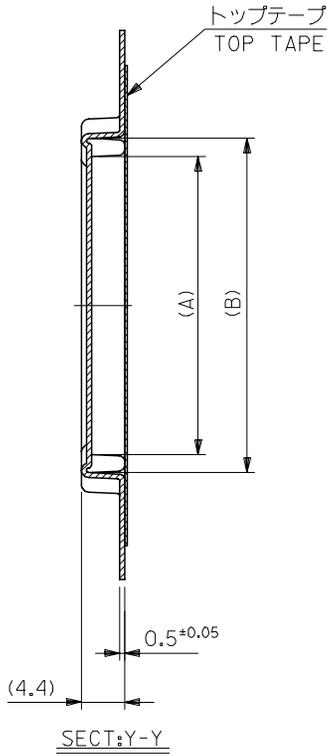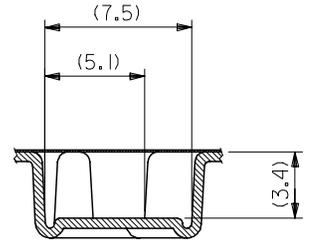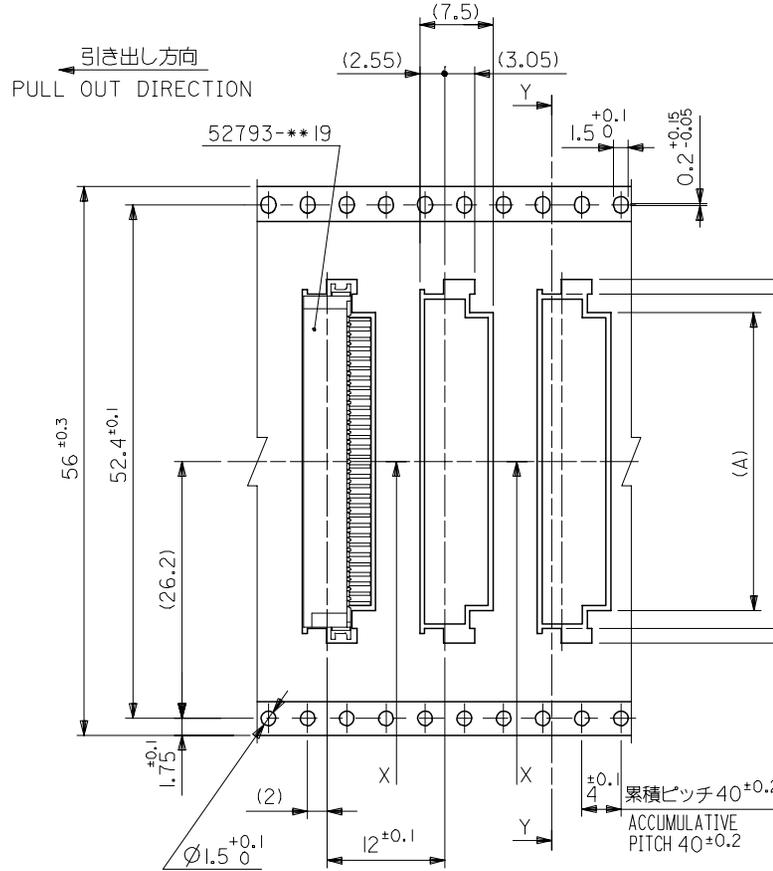

56mm幅キャリアテープ
56mm WIDTH CARRIER TAPE

| | | | | | | | |
|--------------------------------|------|------|------|------|------|--------------|---------------|
| 56 | 61.4 | 57.4 | 37.1 | 34.1 | 30.4 | 52793-3070 | 30 |
| | | | 36.1 | 33.1 | 29.4 | 52793-2970 | 29 |
| | | | 35.1 | 32.1 | 28.4 | 52793-2870 | 28 |
| キャリアテープ幅 CARRIER TAPE WIDTH | E | D | (C) | (B) | (A) | MATERIAL NO. | 極数 CIRCUIT |
| | | | | | | 52793-***70 | MODEL NO. |

| | | | | | | | |
|--|---------------------------------------|--|----------------------------|-------------------|---|------------------------------|------------------------|
| REVISED EC NO: J2006-0384 DRW:NAIDA 2005/08/08 CHK:KTOYODA 2005/08/09 APPR:NUKITA 2005/08/22 | GENERAL TOLERANCES (UNLESS SPECIFIED) | | DIMENSION STYLE MM ONLY | | SCALE --- | DESIGN UNITS METRIC | THIRD ANGLE PROJECTION |
| | 10 UNDER | ±0.2 | DRAWN BY M. NAGATA | DATE '03/12/09 | TITLE 1.0 FFC CONN. NON ZIF SMT RA EMBSTP PKG -LEAD FREE- | | |
| | 10 OVER 30 UNDER | ±0.25 | CHECKED BY K. TOJO | DATE '03/12/09 | MOLEX INCORPORATED | | |
| | 30 OVER | ±0.3 | APPROVED BY M. SASAO | DATE '03/12/09 | MATERIAL NO. SEE CHART | DOCUMENT NO. SD-52793-012 | SHEET NO. 5 OF 5 |
| | ANGULAR ±3 ° | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | SIZE A3 | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | |

9

8

7

6

5

4

3

2

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9