

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0955036651

Status:

Active

Overview:

modular_plugs_jacks

Description:

6/4 JACK SMT VERSION

Documents:

3D Model

Drawing (PDF)

Application Specification (PDF)

Product Specification PS-95503-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

UL

E107635

General

Product Family

Series

Component Type

Magnetic

Overview

Performance Category

Power over Ethernet (PoE)

Product Name

Modular Jacks/Plugs

95503

PCB Jack

No

modular_plugs_jacks

3

N/A

RJ11

Physical

Boot Color

Color - Resin

Durability (mating cycles max)

Flammability

Inverted / Top Latch

Lightpipes/LEDs

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Orientation

PCB Locator

PCB Retention

PCB Thickness Recommended (in)

PCB Thickness Recommended (mm)

Packaging Type

Pitch - Mating Interface (in)

Pitch - Mating Interface (mm)

Pitch - Term. Interface (in)

Pitch - Term. Interface (mm)

Plating min: Mating (µin)

Plating min: Mating (µm)

Plating min: Termination (µin)

Plating min: Termination (µm)

Ports

Positions / Loaded Contacts

Surface Mount Compatible (SMC)

Temperature Range - Operating

Termination Interface: Style

Waterproof / Dustproof

Wire/Cable Type

N/A

Black

1,000

94V-0

No

None

Brass

Gold

Tin

High Temperature Thermoplastic

Vertical (Top Entry)

Yes

Yes

0.062 In

1.57 mm

Tube

0.040 In

1.02 mm

0.050 In

1.27 mm

50.8

1.27

76

1.9

1

6/4

Yes

-40°C to +80°C

Surface Mount

No

N/A

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

95503Series

Mates With

FCC 68 Plugs

Electrical

Current - Maximum per Contact	1.5A
Shielded	No
Voltage - Maximum	125V DC

Solder Process Data

Duration at Max. Process Temperature (seconds)	40
Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	3
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Product Specification	PS-95503-001
Sales Drawing	SD-95503-003

This document was generated on 06/07/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

NOTES :

1- MATERIAL:

- HOUSING: LCP FIBER GLASS FILLED UL 94-V0
COLOR BLACK.
- TERMINAL: TIN BRASS.

PLATING 2:

POST PLATE (0.00127-0.00152)/.000050-.000060 GOLD IN
CONTACT AREA. (0.00190)/.000075 MIN. PURE TIN IN TAIL
AREA BOTH OVER (0.00127)/.000050 MIN. NICKEL OVERALL.

PLATING 7: ONLY ON REQUEST

POST PLATE 0.00005/.000002 MIN GOLD OVER 0.000763
.000030 MIN PALLADIUM NICKEL IN CONTACT AREA.
0.00190/.000075 MIN PURE TIN IN TAIL AREA. BOTH
OVER 0.00127/.000050 MIN NICKEL OVERALL:

2- JACK FOR MATING WITH F.C.C. 68 PLUGS
90075 MOLEX SERIES.


3- PRODUCT SPECIFICATION PS-95503-001

4- PACKAGING SPECIFICATION PK-95003:


- STANDARD PACKAGING SHEET 1.
- TUBE PACKAGING FOR SMT VERSION SHEET 2.
- TUBE PACKAGING FOR THROUGH HOLE VERSION
SHEET 3.

5- MANUFACTURING I.D. CAN BE MXF, MG OR MXL



TYPE DIM.	POS. 4	POS. 6		POS. 8
	4 CKTS.	4 CKTS.	6 CKTS.	8 CKTS.
A	(11.18) / .440	(13.21) / .520	(13.21) / .520	(15.24) / .600
B	(7.62) / .300	(10.16) / .400	(10.16) / .400	(11.43) / .450
D	(3.81) / .150	(3.81) / .150	(6.35) / .250	(8.89) / .350

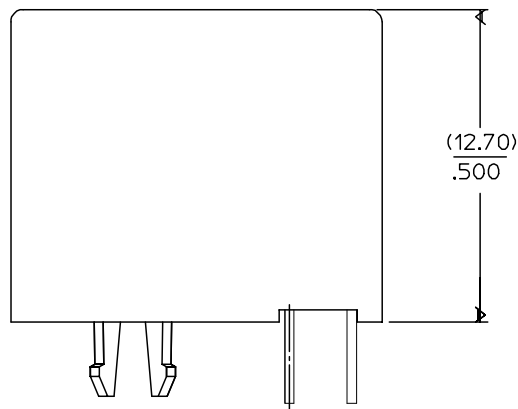

SHORT VERSION

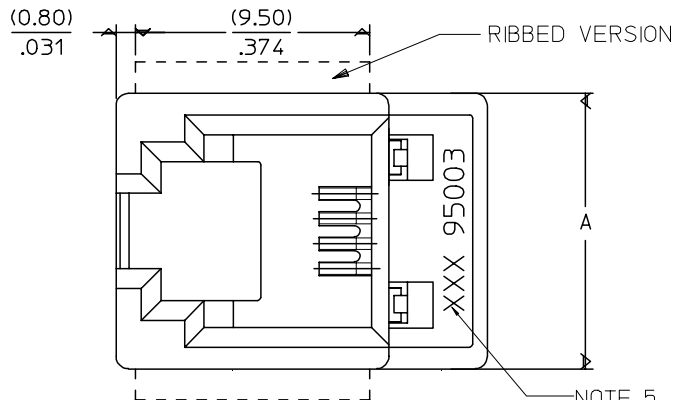

OPTIONAL KEYING

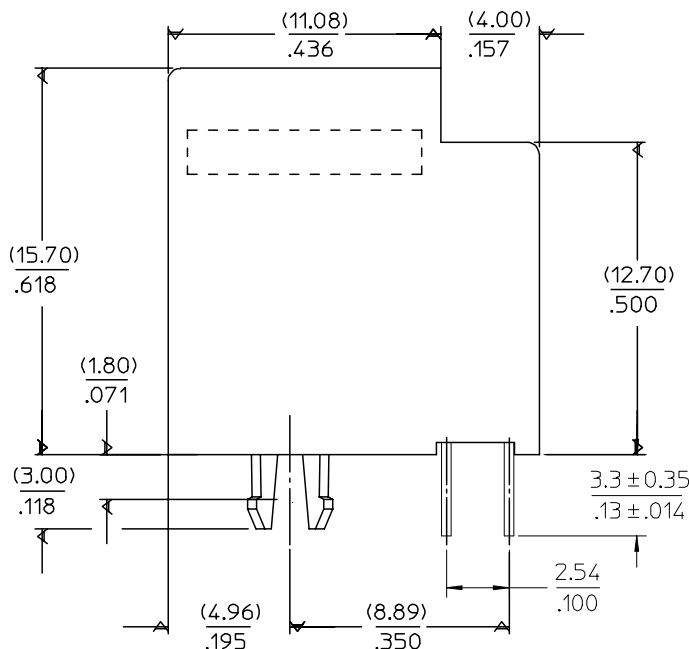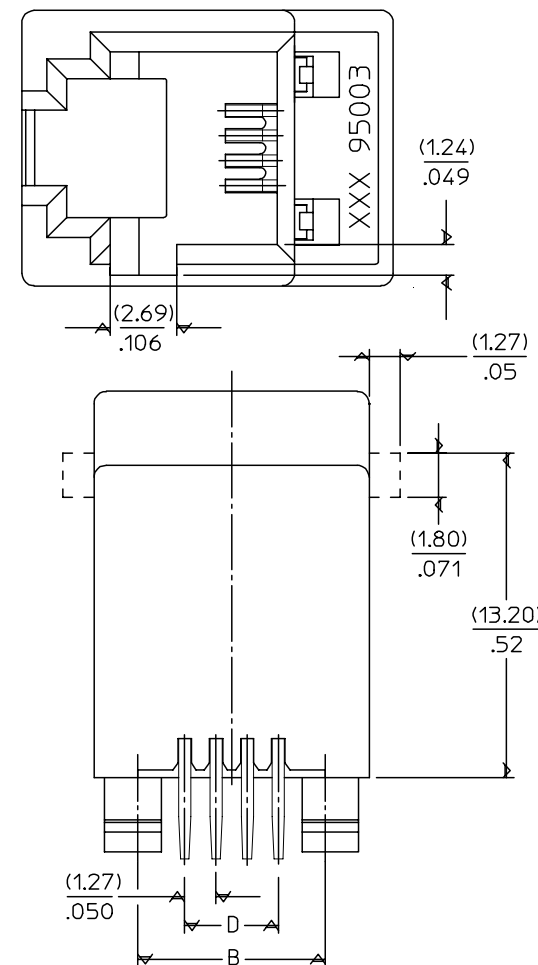

ADDED TABLE EC NO: E2008-0267 DRWN:DBYRNES CHKD: APPR:EOMAHONY	2007/11/27 2007/11/28 2007/11/28	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 5:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	TITLE LOW PROFILE TOP ENTRY JACK (THROUGH HOLE VERSION) MOLEX INCORPORATED		
				4 PLACES	mm	INCH	DRAWN BY	DATE	TITLED				
					± ---	± ---	MARTIN	2005/06/15					
					3 PLACES	± ---	± .006	CHECKED BY				DATE	
					2 PLACES	± 0.15	± .010	FCARABETTA				2005/06/15	
					1 PLACE	± 0.25	± ---	APPROVED BY				DATE	
				ANGULAR ± .5 °		KNOLLER	2005/06/15	DOCUMENT NO.				SD-95503-003	SHEET NO. 1 OF 5
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		SEE SHT 4.5					
				SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

NOTES :


1- MATERIAL:

-HOUSING: L C P FIBER GLASS FILLED UL 94-V0
COLOR BLACK



2- APPLICATION SPECIFICATION: AS-85513-001 (SMT)

3- SEE OTHER NOTES SHEET 1.

4- COPLANARITY OF SIGNAL TAILS 0.1mm MAX
RELEVANT TO EACH OTHER.

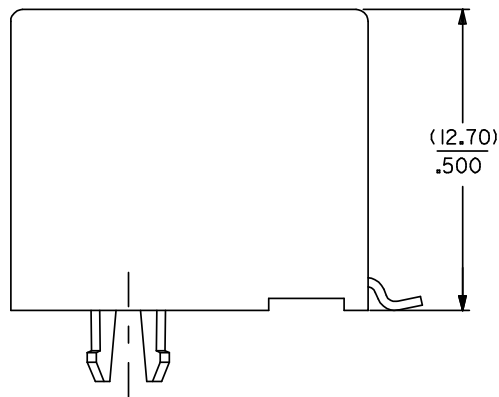

SHORT VERSION

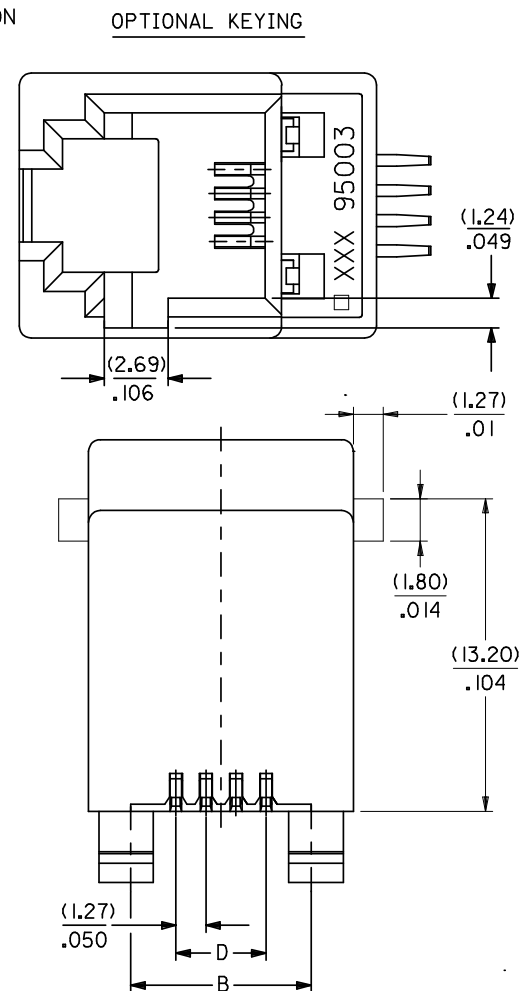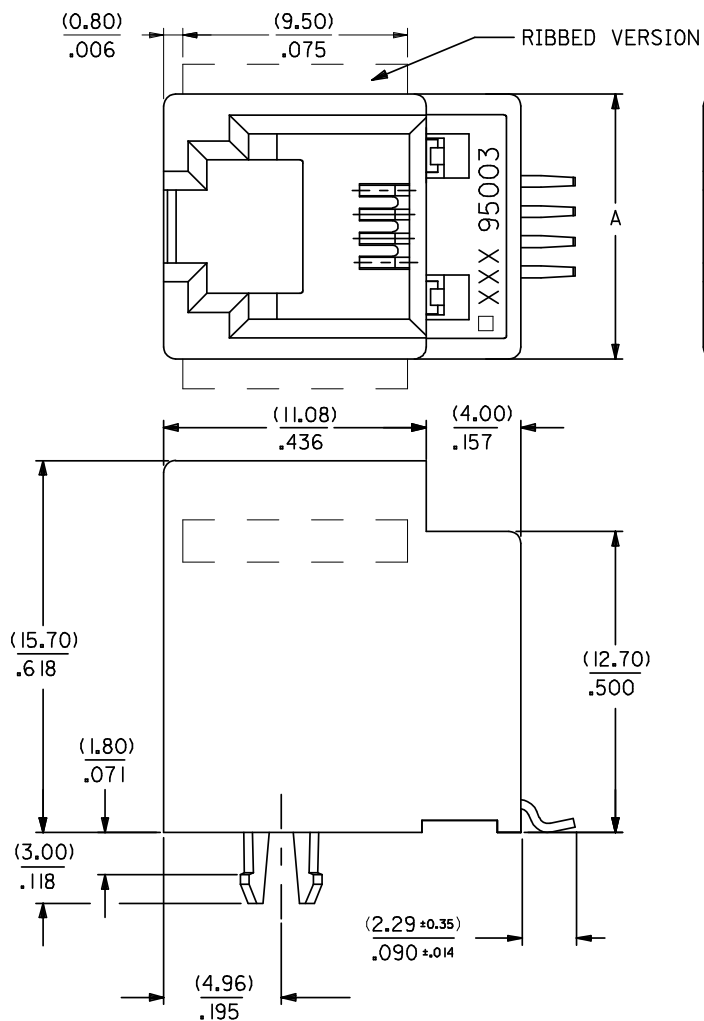

DIM.	TYPE	POS. 4	POS. 6		POS. 8
		4 CKTS.	4 CKTS.	6 CKTS.	8 CKTS.
A		(11.18) / .440	(13.21) / .520	(13.21) / .520	(15.24) / .600
B		(7.62) / .300	(10.16) / .400	(10.16) / .400	(11.43) / .450
D		(3.81) / .150	(3.81) / .150	(6.35) / .250	(8.89) / .350

ADDED NOTE 4.
EC NO: E2008-0585
2008/04/21
DRAWN BY: RYNE
2008/04/22
CHKD: EOMAHONY
2008/04/22
APPR: EOMAHONY

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)
mm INCH
4 PLACES ± --- ± ---
3 PLACES ± --- ± .006
2 PLACES ± 0.15 ± .010
1 PLACE ± 0.25 ± ---
ANGULAR ± .5 °
DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS


DIMENSION STYLE
MM/IN
DRAWN BY DATE
TMARTIN 2005/06/19
CHECKED BY DATE
FCARABETTA 2005/06/19
APPROVED BY DATE
KNOLLER 2005/06/19
MATERIAL NO.
SEE SHT. 4, 5
SIZE A3

SCALE 5:1
DESIGN UNITS METRIC
THIRD ANGLE PROJECTION
TITLE
LOW PROFILE T/E JACK
(SMT VERSION)
MOLEX INCORPORATED
DOCUMENT NO.
SD-95503-003
SHEET NO.
2 OF 5
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


TYPE DIM.	POS. 4	POS. 6		POS. 8
	4 CKTS.	4 CKTS.	6 CKTS.	8 CKTS.
F (± 0.05) / $\pm .002$	(7.62) / .300	(10.16) / .400	(10.16) / .400	(11.43) / .450
G (± 0.05) / $\pm .002$	(3.81) / .150	(3.81) / .150	(6.35) / .250	(8.89) / .350

P.C.B MOUNTING PATTERNS - SEEN FROM COMPONENT SIDE

FOR SMT JACK (SURFACE MOUNT)

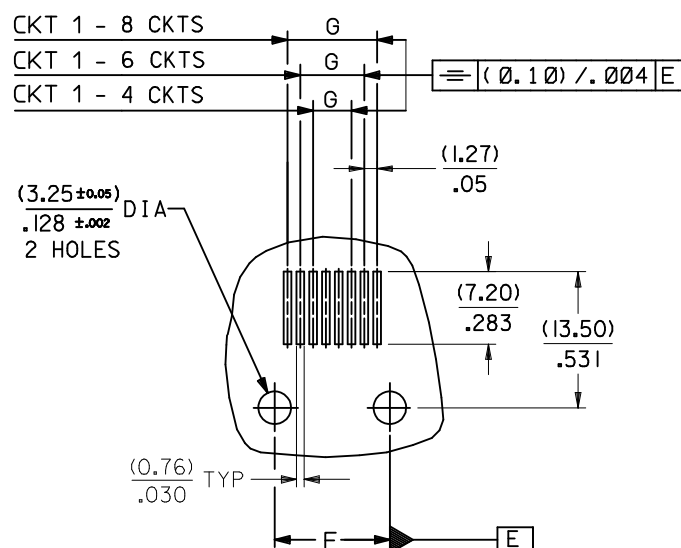

FOR STANDARD JACK (THROUGH HOLE)

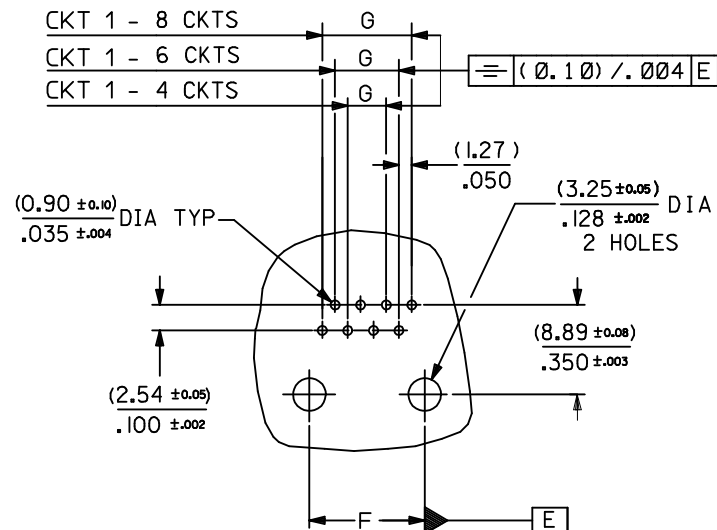

REV	DESCRIPTION	DATE	BY	APP
1	ADDED CKT 1 INDICATOR FOR CKT 1	2009/08/13	DRW:DBYRNES	2009/08/19
2	CHKD: APPR: J WALLACE	2009/08/19		

QUALITY SYMBOLS
$\nabla = 0$
$\nabla = 0$

GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	± .005	± .0005
3 PLACES	± .006	± .0006
2 PLACES	± 0.15	± .010
1 PLACE	± 0.25	± .010
ANGULAR ± .5 °		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
MM/IN	1:1	METRIC	
DRAWN BY	DATE	TITLE	
TMARTIN	2005/06/15	LOW PROFILE T/E JACK	
CHECKED BY	DATE		
FCARABETTA	2005/06/15		
APPROVED BY	DATE		
KNOLLER	2005/06/15		
MATERIAL NO.			
SEE SHT. 4, 5			

MOLEX INCORPORATED	DOCUMENT NO.	SHEET NO.
SD-95503-003		3 OF 5
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9