

## 3000W, 10V - 100V Surface Mount Transient Voltage Suppressor

### FEATURES

- Ideal for automated placement
- Glass passivated junction
- Excellent clamping capability
- Fast response time: Typically less than 1.0ps
- Moisture sensitivity level: level 1, per J-STD-020
- AEC-Q101 qualified available: ordering code with suffix "H"
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC

### KEY PARAMETERS

| PARAMETER     | VALUE          | UNIT |
|---------------|----------------|------|
| $V_{WM}$      | 10 - 100       | V    |
| $V_{BR}$      | 11.1 - 123     | V    |
| $P_{PK}$      | 3000           | W    |
| $T_{J\ MAX}$  | 175            | °C   |
| Package       | DO-214AB (SMC) |      |
| Configuration | Single die     |      |

### APPLICATIONS

- Immunization of sensitive devices in automotive, telecommunications, consumer electronics, and industrial equipment from electrostatic discharge (ESD) and transient voltages induced by load switching and lightning.



DO-214AB (SMC)

### MECHANICAL DATA

- Case : DO-214AB (SMC)
- Molding compound meets UL 94V-0 flammability rating
- Terminal : Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Polarity : As marked
- Weight : 0.29 g (approximately)

### ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

| PARAMETER                                                                           | SYMBOL    | VALUE       | UNIT |
|-------------------------------------------------------------------------------------|-----------|-------------|------|
| Peak power dissipation at $T_A=25^\circ\text{C}$ , $t_p=1\text{ms}^{(1)}$           | $P_{PK}$  | 3000        | W    |
| Steady state power dissipation at $T_A=25^\circ\text{C}$                            | $P_D$     | 6.5         | W    |
| Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load | $I_{FSM}$ | 300         | A    |
| Forward Voltage @ $I_F=100\text{A}$ for Unidirectional only $^{(2)}$                | $V_F$     | 3.5 / 5.0   | V    |
| Junction temperature                                                                | $T_J$     | -55 to +175 | °C   |
| Storage temperature                                                                 | $T_{STG}$ | -55 to +175 | °C   |

#### Notes:

1. Non-repetitive current pulse per Fig. 3 and derated above  $T_A=25^\circ\text{C}$  per Fig. 2
2.  $V_F=3.5\text{V}$  on SMDJ10A - SMDJ90A devices and  $V_F=5.0\text{V}$  on SMDJ100A

Devices for bipolar applications

1. For bidirectional use CA suffix for SMDJ10A – SMDJ64A
2. Electrical characteristics apply in both directions

| <b>THERMAL PERFORMANCE</b>             |                 |            |             |
|----------------------------------------|-----------------|------------|-------------|
| <b>PARAMETER</b>                       | <b>SYMBOL</b>   | <b>TYP</b> | <b>UNIT</b> |
| Junction-to-ambient thermal resistance | $R_{\theta JA}$ | 75         | °C/W        |
| Junction-to-lead thermal resistance    | $R_{\theta JL}$ | 15         | °C/W        |

| <b>ELECTRICAL SPECIFICATIONS</b> ( $T_A = 25^\circ\text{C}$ unless otherwise noted) |          |              |     |                                          |      |                               |                                              |                                                              |                                                  |                                                  |
|-------------------------------------------------------------------------------------|----------|--------------|-----|------------------------------------------|------|-------------------------------|----------------------------------------------|--------------------------------------------------------------|--------------------------------------------------|--------------------------------------------------|
| Part number                                                                         |          | Marking code |     | Breakdown voltage<br>$V_{BR}@I_T$<br>(V) |      | Test current<br>$I_T$<br>(mA) | Working stand-off voltage<br>$V_{WM}$<br>(V) | Maximum Reverse Leakage<br>$I_R@V_{WM}$<br>( $\mu\text{A}$ ) | Maximum peak impulse current<br>$I_{PPM}$<br>(A) | Maximum clamping voltage<br>$V_C@I_{PPM}$<br>(V) |
| UNI.                                                                                | BI.      | UNI.         | BI. | MIN.                                     | MAX. |                               |                                              |                                                              |                                                  |                                                  |
| SMDJ10A                                                                             | SMDJ10CA | PDX          | DDX | 11.1                                     | 12.3 | 1                             | 10                                           | 5                                                            | 176.5                                            | 17.0                                             |
| SMDJ11A                                                                             | SMDJ11CA | PDZ          | DDZ | 12.2                                     | 13.5 | 1                             | 11                                           | 1                                                            | 164.8                                            | 18.2                                             |
| SMDJ12A                                                                             | SMDJ12CA | PEE          | DEE | 13.3                                     | 14.7 | 1                             | 12                                           | 1                                                            | 150.8                                            | 19.9                                             |
| SMDJ13A                                                                             | SMDJ13CA | PEG          | DEG | 14.4                                     | 15.9 | 1                             | 13                                           | 1                                                            | 139.5                                            | 21.5                                             |
| SMDJ14A                                                                             | SMDJ14CA | PEK          | DEK | 15.6                                     | 17.2 | 1                             | 14                                           | 1                                                            | 129.3                                            | 23.2                                             |
| SMDJ15A                                                                             | SMDJ15CA | PEM          | DEM | 16.7                                     | 18.5 | 1                             | 15                                           | 1                                                            | 123.0                                            | 24.4                                             |
| SMDJ16A                                                                             | SMDJ16CA | PEP          | DEP | 17.8                                     | 19.7 | 1                             | 16                                           | 1                                                            | 115.4                                            | 26.0                                             |
| SMDJ17A                                                                             | SMDJ17CA | PER          | DER | 18.9                                     | 20.9 | 1                             | 17                                           | 1                                                            | 108.7                                            | 27.6                                             |
| SMDJ18A                                                                             | SMDJ18CA | PET          | DET | 20.0                                     | 22.1 | 1                             | 18                                           | 1                                                            | 102.7                                            | 29.2                                             |
| SMDJ20A                                                                             | SMDJ20CA | PEV          | DEV | 22.2                                     | 24.5 | 1                             | 20                                           | 1                                                            | 92.6                                             | 32.4                                             |
| SMDJ22A                                                                             | SMDJ22CA | PEX          | DEX | 24.4                                     | 26.9 | 1                             | 22                                           | 1                                                            | 84.5                                             | 35.5                                             |
| SMDJ24A                                                                             | SMDJ24CA | PEZ          | DEZ | 26.7                                     | 29.5 | 1                             | 24                                           | 1                                                            | 77.1                                             | 38.9                                             |
| SMDJ26A                                                                             | SMDJ26CA | PFE          | DFE | 28.9                                     | 31.9 | 1                             | 26                                           | 1                                                            | 71.3                                             | 42.1                                             |
| SMDJ28A                                                                             | SMDJ28CA | PFG          | DFG | 31.1                                     | 34.4 | 1                             | 28                                           | 1                                                            | 66.1                                             | 45.4                                             |
| SMDJ30A                                                                             | SMDJ30CA | PFK          | DFK | 33.3                                     | 36.8 | 1                             | 30                                           | 1                                                            | 62.0                                             | 48.4                                             |
| SMDJ33A                                                                             | SMDJ33CA | PFM          | DFM | 36.7                                     | 40.6 | 1                             | 33                                           | 1                                                            | 56.3                                             | 53.3                                             |
| SMDJ36A                                                                             | SMDJ36CA | PFP          | DFP | 40.0                                     | 44.2 | 1                             | 36                                           | 1                                                            | 51.6                                             | 58.1                                             |
| SMDJ40A                                                                             | SMDJ40CA | PFR          | DFR | 44.4                                     | 49.1 | 1                             | 40                                           | 1                                                            | 46.5                                             | 64.5                                             |
| SMDJ43A                                                                             | SMDJ43CA | PFT          | DFT | 47.8                                     | 52.8 | 1                             | 43                                           | 1                                                            | 43.2                                             | 69.4                                             |
| SMDJ45A                                                                             | SMDJ45CA | PFV          | DFV | 50.0                                     | 55.3 | 1                             | 45                                           | 1                                                            | 41.3                                             | 72.7                                             |
| SMDJ48A                                                                             | SMDJ48CA | PFX          | DFX | 53.3                                     | 58.9 | 1                             | 48                                           | 1                                                            | 38.8                                             | 77.4                                             |
| SMDJ51A                                                                             | SMDJ51CA | PFZ          | DFZ | 56.7                                     | 62.7 | 1                             | 51                                           | 1                                                            | 36.4                                             | 82.4                                             |
| SMDJ54A                                                                             | SMDJ54CA | PGE          | DGE | 60.0                                     | 66.3 | 1                             | 54                                           | 1                                                            | 34.4                                             | 87.1                                             |
| SMDJ58A                                                                             | SMDJ58CA | PGG          | DGG | 64.4                                     | 71.2 | 1                             | 58                                           | 1                                                            | 32.1                                             | 93.6                                             |
| SMDJ60A                                                                             | SMDJ60CA | PGK          | DGK | 66.7                                     | 73.7 | 1                             | 60                                           | 1                                                            | 31.0                                             | 96.8                                             |
| SMDJ64A                                                                             | SMDJ64CA | PGM          | DGM | 71.1                                     | 78.6 | 1                             | 64                                           | 1                                                            | 29.1                                             | 103                                              |
| SMDJ70A                                                                             |          | PGP          |     | 77.8                                     | 86.0 | 1                             | 70                                           | 1                                                            | 26.5                                             | 113                                              |
| SMDJ75A                                                                             |          | PGR          |     | 83.3                                     | 92.1 | 1                             | 75                                           | 1                                                            | 24.8                                             | 121                                              |
| SMDJ78A                                                                             |          | PGT          |     | 86.7                                     | 95.8 | 1                             | 78                                           | 1                                                            | 23.8                                             | 126                                              |
| SMDJ85A                                                                             |          | PGV          |     | 94.4                                     | 104  | 1                             | 85                                           | 1                                                            | 21.9                                             | 137                                              |
| SMDJ90A                                                                             |          | PGX          |     | 100                                      | 111  | 1                             | 90                                           | 1                                                            | 20.5                                             | 146                                              |
| SMDJ100A                                                                            |          | PGZ          |     | 111                                      | 123  | 1                             | 100                                          | 1                                                            | 18.5                                             | 162                                              |

| <b>ORDERING INFORMATION</b>            |                |                          |
|----------------------------------------|----------------|--------------------------|
| <b>ORDERING CODE</b><br>(Note 1, 2, 3) | <b>PACKAGE</b> | <b>PACKING</b>           |
| SMDJxxxxHR7G                           | SMC            | 850 / 7" Plastic reel    |
| SMDJxxxxHR6G                           | SMC            | 3,000 / 13" Paper reel   |
| SMDJxxxxHM6G                           | SMC            | 3,000 / 13" Plastic reel |
| SMDJxxxx R7G                           | SMC            | 850 / 7" Plastic reel    |
| SMDJxxxx R6G                           | SMC            | 3,000 / 13" Paper reel   |
| SMDJxxxx M6G                           | SMC            | 3,000 / 13" Plastic reel |
| SMDJxxxxHV7G                           | Matrix SMC     | 850 / 7" Plastic reel    |
| SMDJxxxxHV6G                           | Matrix SMC     | 3,000 / 13" Plastic reel |
| SMDJxxxx V7G                           | Matrix SMC     | 850 / 7" Plastic reel    |
| SMDJxxxx V6G                           | Matrix SMC     | 3,000 / 13" Plastic reel |
| SMDJxxxxHR7                            | SMC            | 850 / 7" Plastic reel    |
| SMDJxxxxHR6                            | SMC            | 3,000 / 13" Paper reel   |
| SMDJxxxxHM6                            | SMC            | 3,000 / 13" Plastic reel |
| SMDJxxxx R7                            | SMC            | 850 / 7" Plastic reel    |
| SMDJxxxx R6                            | SMC            | 3,000 / 13" Paper reel   |
| SMDJxxxx M6                            | SMC            | 3,000 / 13" Plastic reel |

**Note 1:**

"xxxx" defines voltage from 10V (SMDJ10A)  
to 100V (SMDJ100A)

**Note 2:**

"H" means AEC-Q101 qualified


**Note 3:**

"G" means green compound (halogen free)


## CHARACTERISTICS CURVES

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Peak Pulse Power Rating Curve**

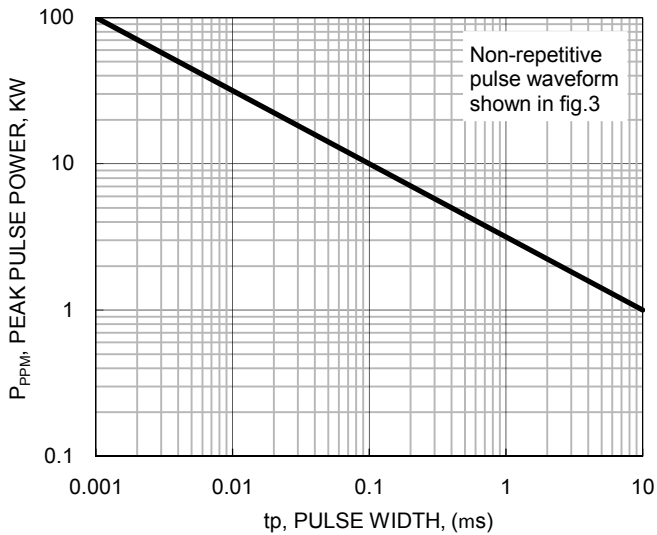


**Fig.2 Pulse Derating Curve**

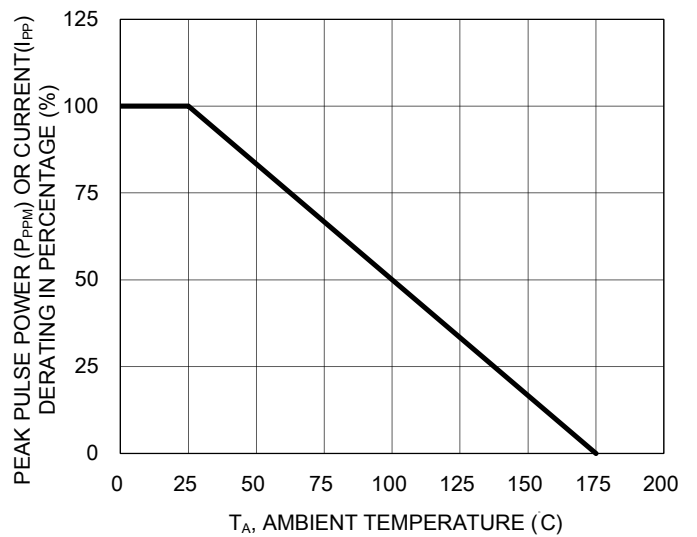

**Fig.3 Clamping Power Pulse Waveform**

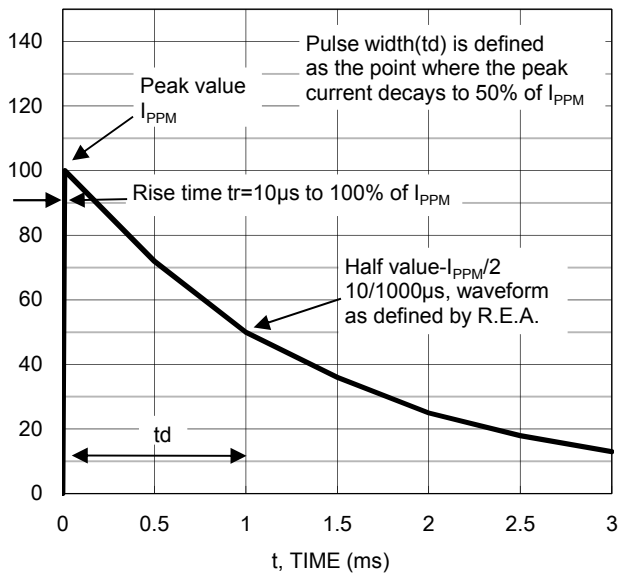


**Fig.4 Typical Junction Capacitance**

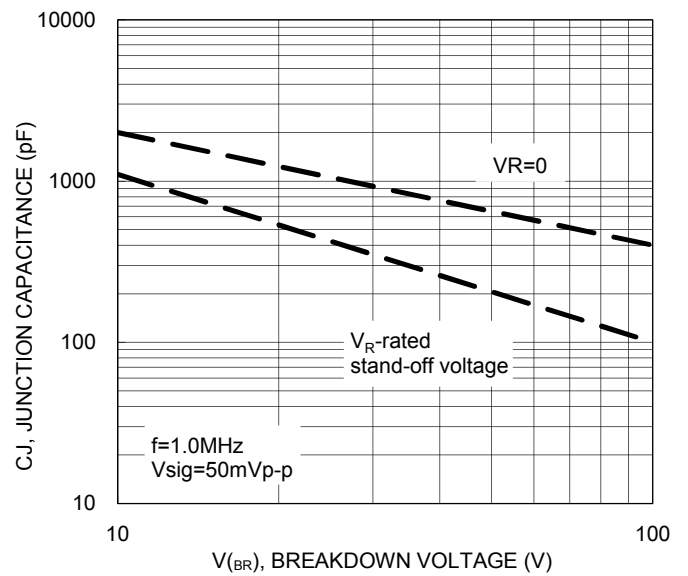

## CHARACTERISTICS CURVES


( $T_A = 25^\circ\text{C}$  unless otherwise noted)

**Fig.5 Maximum Non-repetitive Forward Surge Current**

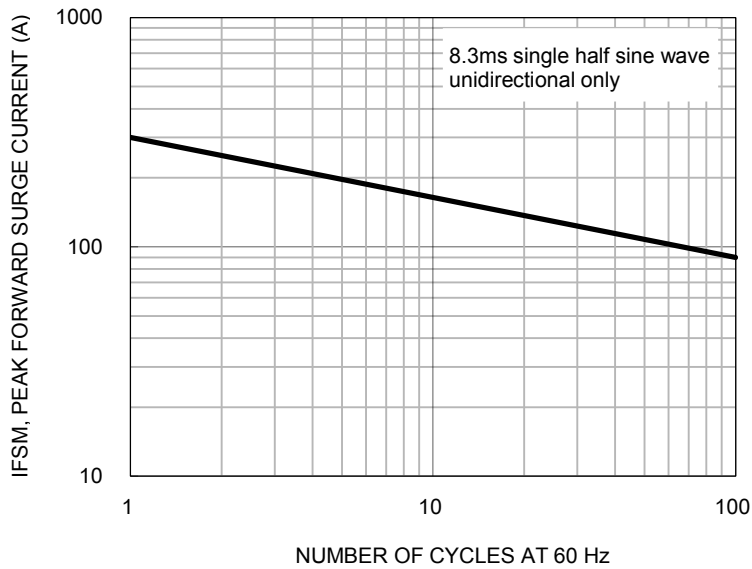


## PACKAGE OUTLINE DIMENSIONS

DO-214AB (SMC)

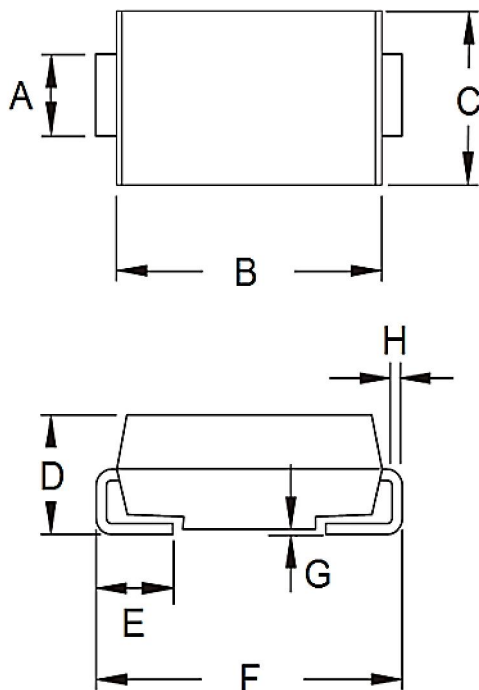

| DIM. | Unit (mm) |      | Unit (inch) |       |
|------|-----------|------|-------------|-------|
|      | Min.      | Max. | Min.        | Max.  |
| A    | 2.90      | 3.20 | 0.114       | 0.126 |
| B    | 6.60      | 7.11 | 0.260       | 0.280 |
| C    | 5.59      | 6.22 | 0.220       | 0.245 |
| D    | 2.00      | 2.62 | 0.079       | 0.103 |
| E    | 1.00      | 1.60 | 0.039       | 0.063 |
| F    | 7.75      | 8.13 | 0.305       | 0.320 |
| G    | 0.10      | 0.20 | 0.004       | 0.008 |
| H    | 0.15      | 0.31 | 0.006       | 0.012 |

## SUGGESTED PAD LAYOUT

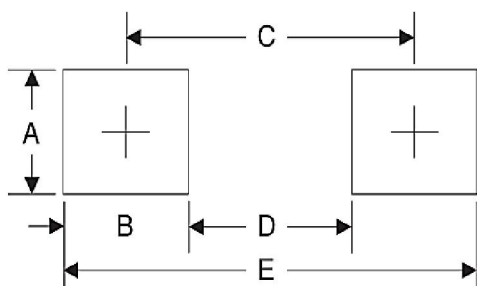

| Symbol | Unit (mm) | Unit (inch) |
|--------|-----------|-------------|
| A      | 3.30      | 0.130       |
| B      | 2.50      | 0.098       |
| C      | 6.80      | 0.268       |
| D      | 4.40      | 0.173       |
| E      | 9.40      | 0.370       |

## MARKING DIAGRAM

SMC

Matrix SMC



Note: Cathode band for unidirectional products only

P/N =Marking Code

G =Green Compound

YW =Date Code

F =Factory Code

## Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9