2A Ultra-Small Controlled Load Switch with Auto-Discharge Path

The NCP434 and NCP435 are a low Ron MOSFET controlled by external logic pin, allowing optimization of battery life, and portable device autonomy.

Indeed, due to a current consumption optimization with PMOS structure, leakage currents are eliminated by isolating connected IC's on the battery when not used.

Output discharge path is also embedded to eliminate residual voltages on the output (NCP435 only).

Available in wide input voltage range from 1.0 V to 4.0 V, and a very small 0.96 x 0.96 mm WLCSP4, 0.5 mm pitch.

Features

- 1 V 3.6 V Operating Range
- 29 m Ω P MOSFET at 3.3 V
- DC current up to 2 A
- Output Auto-discharge (NCP435)
- Active high EN pin
- WLCSP4 0.96 x 0.96 mm
- These are Pb-Free Devices

Typical Applications

- Mobile Phones
- Tablets
- Digital Cameras
- GPS
- Portable Devices



ON Semiconductor®

http://onsemi.com



WLCSP4 CASE 567FG




MARKING

XX

= Specific Device Code

PIN DIAGRAM



(Top View)

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 9 of this data sheet.

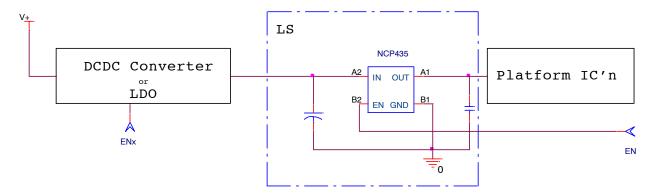


Figure 1. Typical Application Circuit

PIN FUNCTION DESCRIPTION

Pin Name	Pin Number	Туре	Description		
IN	A2	POWER	Load–switch input voltage; connect a 1 μF or greater ceramic capacitor from IN to GND as close as possible to the IC.		
GND	B1	POWER	Ground connection.		
EN	B2	INPUT	Enable input, logic high turns on power switch.		
OUT	A1	OUTPUT	Load–switch output; connect a 1 μF ceramic capacitor from OUT to GND as close as possible to the IC is recommended.		

BLOCK DIAGRAM

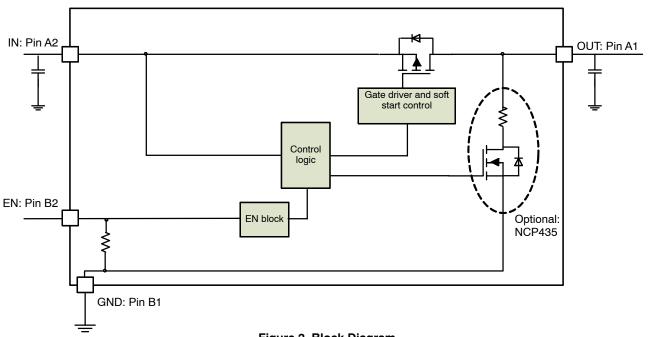


Figure 2. Block Diagram

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
IN, OUT, EN, Pins	V _{EN} , V _{IN} , V _{OUT}	-0.3 to + 4.0	V
From IN to OUT Pins: Input/Output	V_{IN} , V_{OUT}	0 to + 4.0	V
Maximum Junction Temperature	TJ	-40 to + 125	°C
Storage Temperature Range	T _{STG}	-40 to + 150	°C
Moisture Sensitivity (Note 1)	MSL	Level 1	

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Moisture Sensitivity Level (MSL): 1 per IPC/JEDEC standard: J-STD-020.

OPERATING CONDITIONS

Symbol	Parameter	C	Conditions	Min	Тур	Max	Unit
V _{IN}	Operational Power Supply			1.0		3.6	V
V _{EN}	Enable Voltage			0		3.6	
T _A	Ambient Temperature Range			-40	25	+85	°C
C _{IN}	Decoupling input capacitor	nput capacitor		1			μF
C _{OUT}	Decoupling output capacitor			1			μF
$R_{\theta JA}$	Thermal Resistance Junction-to-Air	WLCSP package (Note 6)			100		°C/W
l _{OUT}	Maximum DC current					2	Α
P_{D}	Power Dissipation Rating (Note 7)	$T_A \le 25^{\circ}C$	WLCSP package		0.5		W
		T _A = 85°C	WLCSP package		0.2		W

- According to JEDEC standard JESD22-A108.
 This device series contains ESD protection and passes the following tests:
- 4. Human Body Model (HBM) ±4.0 kV per JEDEC standard: JESD22-A114 for all pins. Machine Model (MM) ±250 V per JEDEC standard: JESD22–A114 for all pins.
 Charge Device Model (CDM) ±2.0 kV per JEDEC standard: JESD22–C101 for all pins.
 Latch up Current Maximum Rating: ±100 mA per JEDEC standard: JESD78 class II.
 The R_{θJA} is dependent of the PCB heat dissipation and thermal via.

- 7. The maximum power dissipation (PD) is given by the following formula:

$$P_{D} = \frac{T_{JMAX} - T_{A}}{R_{\theta JA}}$$

ELECTRICAL CHARACTERISTICS Min and Max Limits apply for T_A between -40°C to +85°C for VIN between 1.0 V to 3.6 V (Unless otherwise noted). Typical values are referenced to $T_A = +25$ °C and $V_{IN} = 3.3$ V (Unless otherwise noted).

Symbol	Parameter	Conditions		Min	Тур	Max	Unit
POWER S	WITCH	•					
	Static drain-source on-	V _{IN} = 4 V	T _A = 25°C, I = 200 mA (Note 9)		27	30	mΩ
	state resistance	V _{IN} = 3.3 V	T _A = 25°C, I = 200 mA		29	34	
		V _{IN} = 3.3 V	T _A = 85°C			38	
R _{DS(on)}		V _{IN} = 1.8 V	T _A = 25°C, I = 200 mA		43	52	
		V _{IN} = 1.2 V	T _A = 25°C, I = 200 mA		80	120	
		V _{IN} = 1.1 V	T _A = 25°C, I = 100 mA		110		
R _{DIS}	Output discharge path	EN = low	V _{IN} = 3.3 V, NCP435 only		65	90	Ω
T _R	Output rise time	V _{IN} = 3.3 V	C_{LOAD} = 1 μ F, R_{LOAD} = 25 Ω (Note 8)	35	61	90	μs
T _F	Output fall time	V _{IN} = 3.3 V	C_{LOAD} = 1 μ F, R_{LOAD} = 25 Ω (Note 8)	20	42	70	μs
T _{on}	Gate turn on	V _{IN} = 3.3 V	Gate turn on + Output rise time	65	126	190	μs
T _{en}	Enable time	V _{IN} = 3.3 V	From EN low to high to V _{OUT} = 10% of fully on	30	66	100	μS
V _{IH}	High-level input voltage			0.9			V
V _{IL}	Low-level input voltage					0.5	V
R _{EN}	Pull down resistor				5.1	7	$M\Omega$
QUIESCEN	IT CURRENT	-		-	-	-	
		V _{IN}		0.15	0.6	μΑ	
ΙQ	Current consumption	V _{IN} =		0.3	0.6	μΑ	

Parameters are guaranteed for C_{LOAD} and R_{LOAD} connected to the OUT pin with respect to the ground
 Guaranteed by design and characterization, not production tested.

TIMINGS

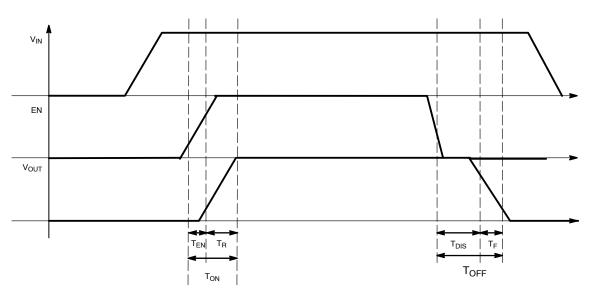


Figure 3. Enable, Rise and fall time

TYPICAL CHARACTERISTICS




Figure 4. ${\rm R_{DS(on)}}~({\rm m}\Omega)$ vs. ${\rm V_{IN}}~({\rm V})$ from 1 V to 2. 6 V




Figure 6. ${\rm R_{DS(on)}}~({\rm m}\Omega)$ vs. ${\rm I_{load}}~({\rm mA})$




Figure 5. ${\rm R_{DS(on)}}~({\rm m}\Omega)$ vs. ${\rm V_{IN}}$ (V) from 1 V to 4 V





Figure 7. $R_{DS(on)}$ (m Ω) vs. Temperature (°C)



Temp (°C)

Figure 8. R_{DS(on)} (mΩ) vs.

Temperature (°C) at 1.2 V and

3.6 V




Figure 9. $R_{DS(on)}$ (m Ω) vs. Current (mA)




Figure 10. Standby Current (μ A) versus V_{IN} (V), No Load




Figure 11. Standby Current (μ A) versus V_{IN} (V), V_{OUT} Short to GND




Figure 12. Quiescent Current (μA) versus V_{IN} (V), No Load

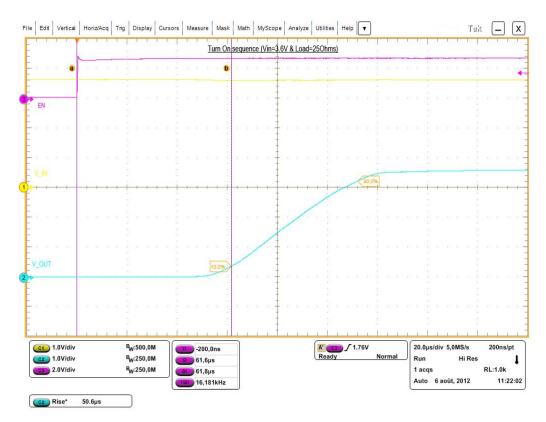


Figure 13. Enable Time, Rise Time, and Ton Time

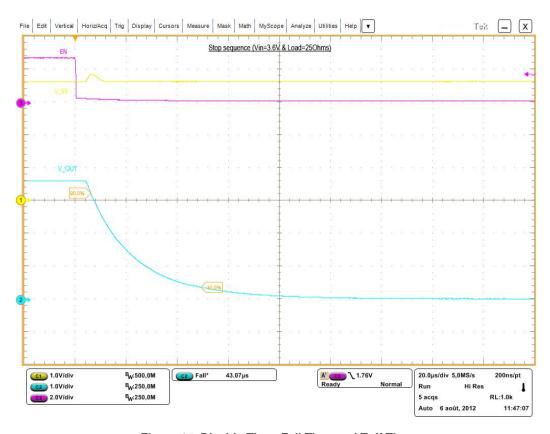


Figure 14. Disable Time, Fall Time and Toff Time

FUNCTIONAL DESCRIPTION

Overview

The NCP434 – NCP435 are high side P channel MOSFET power distribution switch designed to isolate ICs connected on the battery in order to save energy. The part can be turned on, with a range of battery from 1.0 V to 4 V.

Enable Input

Enable pin is an active high. The path is opened when EN pin is tied low (disable), forcing P MOS switch off.

The IN/OUT path is activated with a minimum of V_{IN} of 1.0 V and EN forced to high level.

Auto Discharge (NCP435 Only)

NMOS FET is placed between the output pin and GND, in order to discharge the application capacitor connected on OUT pin.

The auto-discharge is activated when EN pin is set to low level (disable state).

The discharge path (Pull down NMOS) stays activated as long as EN pin is set at low level and $V_{\rm IN}$ > 1.0 V.

In order to limit the current across the internal discharge NMOSFET, the typical value is set at 65 Ω .

CIN and COUT Capacitors

IN and OUT, 1 μ F, at least, capacitors must be placed as close as possible the part for stability improvement.

APPLICATION INFORMATION

 T_{J}

 T_A

 $R_{\theta JA}$

Power Dissipation

Main contributor in term of junction temperature is the power dissipation of the power MOSFET. Assuming this, the power dissipation and the junction temperature in normal mode can be calculated with the following equations:

$$P_D = R_{DS(on)} \times (I_{OUT})^2$$

 P_D = Power dissipation (W)

 $R_{DS(on)}$ = Power MOSFET on resistance (Ω)

I_{OUT} = Output current (A)

$$T_J = R_D \times R_{\theta JA} + T_A$$

= Junction temperature (°C)
= Package thermal resistance (°C/W)
= Ambient temperature (°C)

PCB Recommendations

The NCP434 – NCP435 integrate an up to 2 A rated PMOS FET, and the PCB design rules must be respected to properly evacuate the heat out of the silicon. By increasing PCB area, especially around IN and OUT pins, the $R_{\theta JA}$ of the package can be decreased, allowing higher power dissipation.

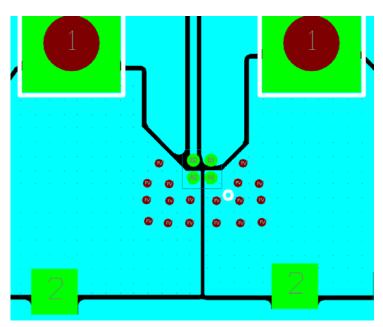


Figure 15. Routing Example 1 oz, 2 Layers, 100°C/W

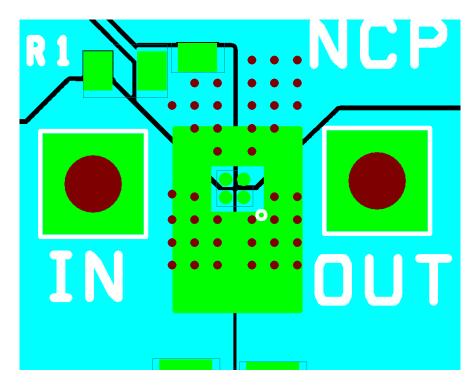


Figure 16. Routing Example 2 oz, 4 Layers, 60°C/W

Example of Application Definition

$$\textbf{T}_{J} - \textbf{T}_{A} = \textbf{R}_{\theta JA} \times \textbf{P}_{D} = \textbf{R}_{\theta JA} \times \textbf{R}_{DS(on)} \times \textbf{I}^{2}$$

T_J: Junction Temperature.

T_A: Ambient Temperature.

 R_{θ} = Thermal resistance between IC and air, through PCB. $R_{DS(on)}$: intrinsic resistance of the IC MOSFET.

I: load DC current.

Taking into account of R_{θ} obtain with:

• 1 oz, 2 layers: 100°C/W.

At 2 A, 25°C ambient temperature, $R_{DS(on)}$ 44 m Ω @ V_{IN} 1.8 V, the junction temperature will be:

$$T_J = R_{\theta JA} \times P_D = 25 + (0.044 \times 2^2) \times 100 = 46^{\circ}C$$

Taking into account of Rt_{θ} obtain with:

• 2 oz, 4 layers: 60°C/W.

At 2 A, 25°C ambient temperature, $R_{DS(on)}$ 44 m Ω @ V_{IN} 1.8 V, the junction temperature will be:

$$T_J = T_A + R_\theta \times P_D = 25 + (0.044 \times 2^2) \times 60 = 35.5^{\circ}C$$


ORDERING INFORMATION


Device	Marking	Package	Shipping [†]
NCP434FCT2G	AJ	WLCSP 0.96 x 0.96 mm (Pb-Free)	3000 / Tape & Reel
NCP435FCT2G	AH	WLCSP 0.96 x 0.96 mm (Pb-Free)	3000 / Tape & Reel


[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

PACKAGE DIMENSIONS

WLCSP4, 0.96x0.96 CASE 567FG ISSUE O








NOTES:

- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
 CONTROLLING DIMENSION: MILLIMETERS.
- COPLANARITY APPLIES TO SPHERICAL CROWNS OF SOLDER BALLS.

	MILLIMETERS			
DIM	MIN	MAX		
Α	0.54	0.63		
A1	0.22	0.28		
A2	0.33 REF			
b	0.29	0.34		
D	0.96 BSC			
E	0.96 BSC			
е	0.50 BSC			

RECOMMENDED **SOLDERING FOOTPRINT***



DIMENSIONS: MILLIMETERS

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and un are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, ON semiconductor and war registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC wors the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent—Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implications the polar or other applications intended to surgical implication in which the failure of the SCILLC products could create a situation where surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA

Phone: 303–675–2175 or 800–344–3860 Toll Free USA/Canada **Fax**: 303–675–2176 or 800–344–3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru_4 moschip.ru_9