General Description

The MAX14777 quad SPST switch supports analog signals above and below the rails with a single 3.0V to 5.5V supply. The device features a selectable -15V/+35V or -15V/+15V analog signal range for all switches. Each switch has a separate control input to allow independent switching, making the device an alternative to opto-relays in applications that do not need galvanic isolation.

The IC features 10Ω (max) on-resistance, and $9m\Omega$ (typ) R_{ON} flatness, along with a low 50nA (max at +85°C) onleakage. For maximum signal integrity, the device keeps this performance over the entire common-mode voltage range. Each switch can carry up to 60mA (max) of continuous current in either direction.

The MAX14777 is available in a 20-pin (4mm x 4mm) TQFN package and is specified over the -40°C to +105°C temperature range.

Applications

- Industrial Measurement Systems
- Instrumentation Systems
- 4–20mA Switching
- ATE Systems


Benefits and Features

- Simple, Flexible Board Design
 - -15V/+35V Beyond-the-Rails[™] Signal Range from a Single 3.0V to 5.5V Supply
 - Selectable -15V/+15V Signal Range for Lower Supply Current
 - · 60mA Maximum Current through Each Switch
 - · 1.62V to 5.5V Logic Interface
- High-Performance 10Ω R_{ON} (max)
- 150mΩ (max) R_{ON} Flatness
- ±50nA (max) On-Leakage at T_A = +85°C
- Saves Board Space
 - Small 20-Pin TQFN Package (4mm x 4mm)
- -40°C to +105°C Operating Temperature Range

Beyond-the-Rails is a registered trademark of Maxim Integrated Products. Inc.

Ordering Information appears at end of data sheet.

Functional Diagram

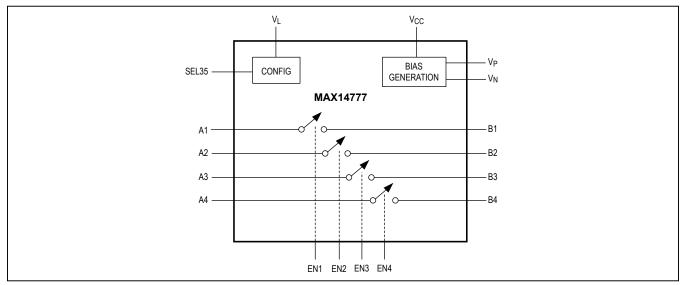

For related parts and recommended products to use with this part, refer to www.maximintegrated.com/MAX14777 related.



Absolute Maximum Ratings

(All voltages referenced to GND, unless otherwise noted.)	V_N the greater of -26V and (V_P - 70V) to +0.3V
V _{CC} 0.3V to +6V	Absolute Difference Between Switch I/Os (A B_)70V
V _L 0.3V to +6V	Continuous Current±80mA
EN1, EN2, EN3, EN4, SEL35, I.C0.3V to +6V	Continuous Power Dissipation (T _A = +70°C)
A1, A2, A3, A4, B1, B2, B3, B4 (V _N - 0.3V) to the lesser of	TQFN (derate 25.6mW/°C above +70°C)2051.3mW
$(V_P + 0.3V)$ and $(V_N + 70V)$	Operating Temperature Range40°C to +105°C
V_{P}	Junction Temperature+150°C
SEL35 = High0.3V to +70V	Storage Temperature Range65°C to +150°C
SEL35 = Low0.3V to +48V	Lead Temperature (soldering, 10s)+300°C
V _P to V _N 0.3V to +70V	Soldering Temperature (reflow)+260°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Package Thermal Characteristics (Note 1)

Junction-to-Ambient Thermal Resistance (θ _{JA})	
TQFN	39°C/W
Junction-to-Case Thermal Resistance (θ _{JC})	
TQFN	6°C/W

Note 1: Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to www.maximintegrated.com/thermal-tutorial.

Electrical Characteristics

 $(V_{CC} = 3.0V \text{ to } 5.5V, V_L = 3.3V, T_A = -40^{\circ}\text{C} \text{ to } +105^{\circ}\text{C}, \text{ unless otherwise noted.}$ Typical values are at $V_{CC} = 5V$ and $T_A = +25^{\circ}\text{C}.)$ (Note 2)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS	
DC CHARACTERISTICS								
Supply Voltage Range	V _{CC}			3.0		5.5	V	
V _L Supply Voltage Range	VL			1.62		5.5	V	
		V _{CC} = 3.3V,	SEL35 = low		1.8	3.4		
V Committee Committee		V _{EN} _ = V _L	SEL35 = high		2.2	4.3] ^	
V _{CC} Supply Current	lcc	V _{CC} = 5.5V,	SEL35 = low		0.6	1.2	mA mA	
		V _{EN} _= V _L	SEL35 = high		0.8	1.65	1	
V _L Supply Current	IL	SEL35, EN_ =	low or high	-1		+1	μΑ	
Analysis Cinnal Danas	V _{A_} ,V _{B_}	SEL35 = low		-15		+15		
Analog Signal Range		SEL35 = high		-15		+35	V	
Positive High-Voltage Charge-	.,	SEL35 = low		22.5		27.1	V	
Pump Output (Note 3)	V_{P}	SEL35 = high		41.7		49.8	1 V	
Negative High-Voltage Charge- Pump Output	V _N	(Note 3)		-18.2		-14.9	V	
Continuous Current Through Switch	I _A _	EN_ = high		-60		+60	mA	

Electrical Characteristics (continued)

(V_{CC} = 3.0V to 5.5V, V_L = 3.3V, T_A = -40°C to +105°C, unless otherwise noted. Typical values are at V_{CC} = 5V and T_A = +25°C.) (Note 2)

PARAMETER	SYMBOL	CONDITION	IS	MIN	TYP	MAX	UNITS	
On Decistance Figure 4		$-15V \le V_A \le +35V$, SE $I_{IN} = \pm 60$ mA, Figure 1	L35 = high,		4.4	10	0	
On-Resistance, Figure 1	R _{ON}	-15V ≤ V _A _ ≤ +15V, SE I _{IN} = ±60mA, Figure 1	£L35 = low,		4.4	10	Ω	
On Decistance Flatness	AD	-15V ≤ V _A _ ≤ +35V, SE I _{IN} = ±60mA	L35 = high,		9	150	0	
On-Resistance Flatness	ΔR _{ON}	-15V ≤ V _A _ ≤ +15V, SE I _{IN} = ±60mA	:L35 = low,		8	150	mΩ	
On-Resistance Matching	AD	$-15V \le V_{A_{-}} \le +35V$, SE $I_{1N} = \pm 60$ mA, (Note 4)	L35 = high,			200	0	
Between Channels	ΔR _{ON_M}	$-15V \le V_{A_{-}} \le +15V$, SE $I_{1N} = \pm 60$ mA, (Note 4)	£L35 = low,	-	-	200	mΩ	
A Off Lockory Current		-15V ≤ V_A ≤ +35V, SE V_B = 0V, +40°C ≤ T_A : Figure 2	≤ +85°C,	-20		+20	- A	
A_ Off-Leakage Current	l_off_a	$-15V \le V_A \le +35V$, SE $V_B = 0V$, $+40^{\circ}C \le T_A \le 0$ Figure 2	≤ +105°C,	-80		+80	· nA	
		$-15V \le V_B$ ≤ +35V, SEL35 = high, V_A = 0V, +40°C ≤ T_A ≤ +85°C, Figure 2		-20		+20		
B_ Off-Leakage Current	l_OFF_B	$-15V \le V_B$ ≤ +35V, SEL35 = high, V_A = 0V, +40°C ≤ T_A ≤ +105°C, Figure 2		-80		+80	- nA	
On Lordon Connect		-15V ≤ V_A ≤ +35V, SEL35 = high, B_ unconnected, +40°C ≤ T_A ≤ +85°C, Figure 2 -15V ≤ V_A ≤ +35V, SEL35 = high, B_ unconnected, +40°C ≤ T_A ≤ +105°C, Figure 2		-50		+50		
On-Leakage Current	I _{L_ON}			-200		+200	nA	
A_ Power-Off Leakage Current	IL_PWROFF_A	V _{CC} _= 0V or unconnected, V _A V _B _ > 3V, current measured at A	-15V ≤ V _A _ ≤ +35V	-5		+5	μΑ	
B_ Power-Off Leakage Current	l_pwroff_b	V _{CC} _= 0V or unconnected, V _A V _B _ > 3V, current measured at B	-15V ≤ V _A _ ≤ +35V	-5		+5	μA	
DIGITAL LOGIC (EN1, EN2, EN3, EN4, SEL35)								
Input Voltage Low	V _{IL}					0.3 x V _L	V	
Input Voltage High	V _{IH}			0.7 x V _L			V	
Input Leakage Current	I _{DLKG}	V _{EN} _ = low or high		-1		+1	μA	

Maxim Integrated | 3 www.maximintegrated.com

Electrical Characteristics (continued)

 $(V_{CC} = 3.0 \text{V to } 5.5 \text{V}, V_L = 3.3 \text{V}, T_A = -40 ^{\circ}\text{C} \text{ to } +105 ^{\circ}\text{C}, \text{ unless otherwise noted.}$ Typical values are at $V_{CC} = 5 \text{V}$ and $T_A = +25 ^{\circ}\text{C}.)$ (Note 2)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
AC CHARACTERISTICS							
Power-Up Time	t _{PWRON}	C _{VP} = C _{VN} = 10nF (Note 6)			5		ms
Enable Turn-On Time		V_{A} = ±10V, SEL35 = low, R _L = 10k Ω , Figure 3				40	
Enable furn-Off filme	t _{ON}	V_{A} = ±10V, SEL R_{L} = 10k Ω , Figure				40	– μs
Enable Turn-Off Time	t _{OFF}	V _A _= ±10V, R _L = (Note 5)	10kΩ, Figure 3			100	μs
Off-Isolation	V	V _A _= 1V _{RMS} , f = 100kHz,	V _{CC} = 3V to 5.5V		-88		
Oli-isolation	V _{ISO}	$R_L = 50\Omega$, $C_L = 15pF$, Figure 4	V _{CC} = 0V or unconnected		-66		- dB
0 4 11	$V_{CT} = 1V_{RMS},$ $f = 100kHz,$ $R_{S} = R_{L} = 50\Omega,$ Figure 5	V _{CC} = 3V to 5.5V		-101		- dB	
Crosstalk			V _{CC} = 0V or unconnected		-93		ub
-3dB Bandwidth	BW	V _A _ = 1V _{P-P} , R _S Figure 6	$=R_L=50\Omega$,		380		MHz
Total Harmonic Distortion	THD+N	$R_S = R_L = 1k\Omega$, f	= 20Hz to 20kHz		0.038		%
Charge Injection	Q	V _A _ = GND, C _L =	1nF, Figure 7		225		pC
	C _{ON}	A_, B_ pins, f = 1MHz			16		pF
Input Capacitance	C _{OFF}	At A_ when B_ = GND, or at B_ when A_ = GND, f = 1MHz			12		pF
THERMAL SHUTDOWN							
Thermal Shutdown Threshold	T _{SHDN}	Temperature rising			160		°C
Thermal Shutdown Hysteresis	T _{HYST}				32		°C
ESD PROTECTION							
All Pins		Human Body Model ±2			kV		

Note 2: All units are 100% production tested at +85°C. Specifications over temperature are guaranteed by design.

Note 3: Do not use V_P or V_N to power external circuitry.

Note 4: Tested at -1V, guaranteed by design for -15V \leq V_A \leq +35V.

Note 5: This parameter does not depend on the status of SEL35.

Note 6: Power-up time is the time needed of V_P and V_N to reach steady-state values.

Test Circuits/Timing Diagrams

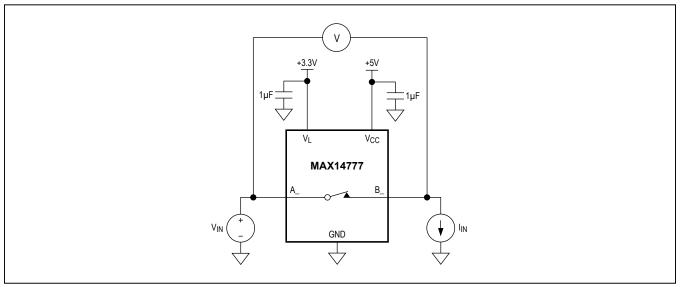


Figure 1. On-Resistance Measurement

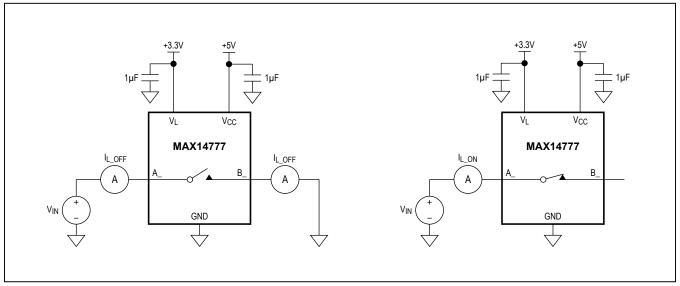


Figure 2. Leakage Current Measurements

Test Circuits/Timing Diagrams (continued)

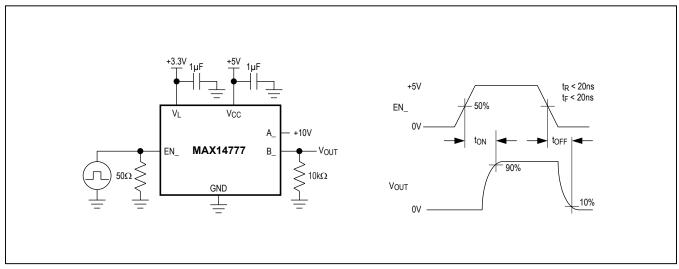


Figure 3. Enable Switching Time

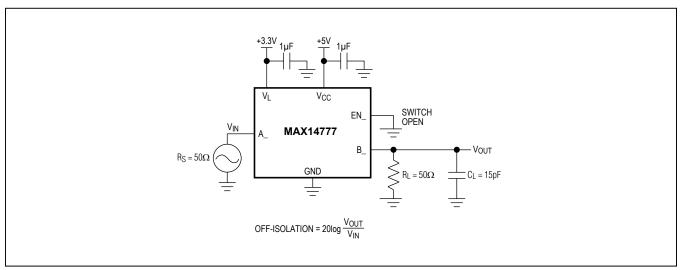


Figure 4. Off-Isolation

Test Circuits/Timing Diagrams (continued)

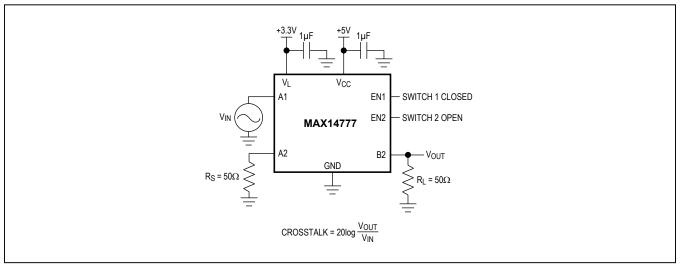


Figure 5. Crosstalk

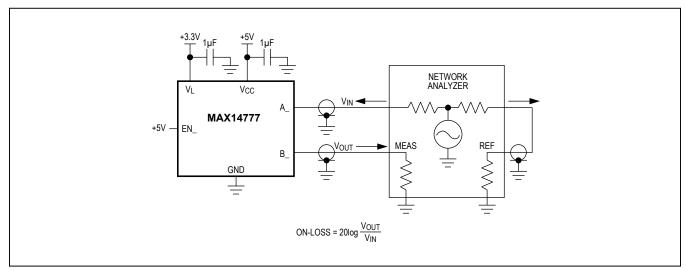


Figure 6. Frequency Response

Test Circuits/Timing Diagrams (continued)


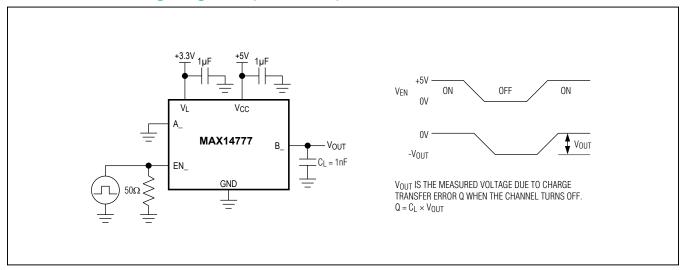


Figure 7. Charge Injection


Typical Operating Characteristics


 $(V_{CC} = 5V, V_L = 3.3V, T_A = +25^{\circ}C, unless otherwise noted.)$

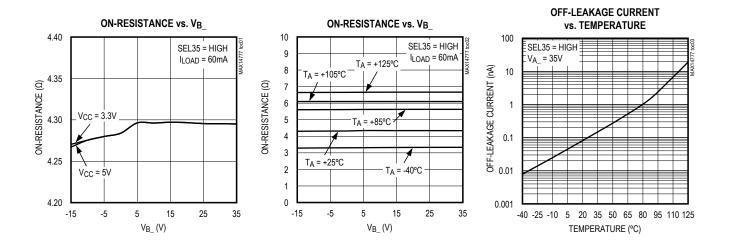



Typical Operating Characteristics (continued)


(V_{CC} = 5V, V_L = 3.3V, T_A = +25°C, unless otherwise noted.)


















Typical Operating Characteristics (continued)

(Vcc = 5V, V_L = 3.3V, T_A = +25°C, unless otherwise noted.)










Pin Configuration

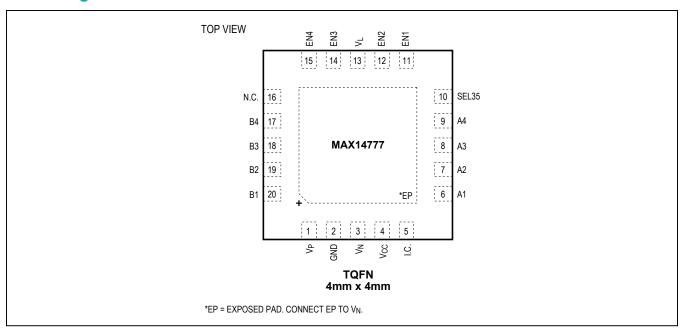

PIN	NAME	FUNCTION
1	V _P	Positive Charge-Pump Output. Bypass V_P to GND with a 10nF, 50V capacitor for applications with an input range of ±15V (SEL35 = low) or a 100V capacitor for applications with an input range of -15V/+35V (SEL 35 = high). Place the capacitor as close as possible to the device.
2	GND	Ground
3	V _N	Negative Charge-Pump Output. Bypass V_N to GND with a 50V, 10nF ceramic capacitor placed as close as possible to the device.
4	V _{CC}	Power-Supply Input. Bypass V _{CC} to GND with a 1µF ceramic capacitor placed as close as possible to the device.
5	I.C.	Internally Connected. Connect to GND.
6	A1	Analog Switch 1 Terminal A. Switch 1 is open when EN1 is low.
7	A2	Analog Switch 2 Terminal A. Switch 2 is open when EN2 is low.
8	A3	Analog Switch 3 Terminal A. Switch 3 is open when EN3 is low.
9	A4	Analog Switch 4 Terminal A. Switch 4 is open when EN4 is low.
10	SEL35	Analog-Signal Range Select Input. Drive SEL35 low to enable the -15V/+15V analog signal range. Drive SEL35 high to enable the -15V/+35V analog signal range.
11	EN1	Switch 1 Control Input. Drive EN1 high to close switch 1. Drive EN1 low to open switch 1.

Pin Description (continued)

PIN	NAME	FUNCTION
12	EN2	Switch 2 Control Input. Drive EN2 high to close switch 2. Drive EN2 low to open switch 2.
13	VL	Logic Interface Reference Supply Input. Bypass V _L to GND with a 1µF ceramic capacitor.
14	EN3	Switch 3 Control Input. Drive EN3 high to close switch 3. Drive EN3 low to open switch 3.
15	EN4	Switch 4 Control Input. Drive EN4 high to close switch 4. Drive EN4 low to open switch 4.
16	N.C.	No Connection. Not internally connected.
17	B4	Analog Switch 4 Terminal B. Switch 4 is open when EN4 is low.
18	В3	Analog Switch 3 Terminal B. Switch 3 is open when EN3 is low.
19	B2	Analog Switch 2 Terminal B. Switch 2 is open when EN2 is low.
20	B1	Analog Switch 1 Terminal B. Switch 1 is open when EN1 is low.
_	EP	Exposed Pad. Connect EP to V _N . Do not connect to ground. EP is not intended as an electrical connection point.

Detailed Description

The MAX14777 quad SPST switch supports analog signals above and below the rails with a single 3.0V to 5.5V supply. The device features up to -15V/+35V analog signal range for all switches when pin SEL35 is high. When pin SEL35 is low, the analog signal range reduces to -15V/+15V signal range, also resulting in a lower V $_{\rm CC}$ supply current. SEL35 trades off high-side analog signal range for supply current. Each switch has a separate control input to allow independent switching.

The MAX14777 features 10Ω (max) on-resistance, and $9m\Omega$ (typ) R_{ON} flatness, along with a 50nA (max at +85°C) on-leakage. For maximum signal integrity, the IC keeps this performance over the entire common-mode voltage range. Each switch can carry up to 60mA (max) of continuous current in either direction.

Integrated Bias Generation

The MAX14777 contains a total of three charge pumps to generate bias voltages for the internal switches: a 5V regulated charge pump, a positive high-voltage charge pump (V_P), and a negative high-voltage charge pump (V_N). When V_{CC} is above 4.75V (typ), the 5V charge pump is bypassed and V_{CC} provides the input for the high-voltage charge pumps, reducing overall supply current.

The voltage at V_N is always -16V (typ); however, the MAX14777 features a pin-selectable (SEL35) voltage-high range for the analog signal. When the SEL35 input is low, the voltage on V_P is +26V (typ) and the analog signal range is -15V/+15V. When the SEL35 input is high, the voltage on V_P is +46V (typ) and the analog signal range is extended to -15V/+35V.

An external 10nF capacitor is required for each high-voltage charge pump between V_P/V_N and GND. Use a 50V-rated capacitor on V_N . On V_P use a 50V capacitor if SEL35 = low or use a 100V capacitor if SEL35 = high. Never use V_P or V_N to power external circuitry.

Analog Signal Levels

The MAX14777 transmits signals above and below the rails with a single 3.0V to 5.5V supply due to its integrated bias circuitry. The analog signal range is pin selectable using the SEL35 input. Drive SEL35 low to switch signals between -15V and +15V. Drive SEL35 high to switch signals between -15V and +35V.

Setting SEL35 low reduces both turn-on delay and $\ensuremath{\text{V}_{\text{CC}}}$ supply current.

The MAX14777 features 10Ω (max) on-resistance and $9m\Omega$ (typ) R_{ON} flatness for analog signals between -15V and +35V. The current flow through the switches can be bidirectional.

V_L Supply Logic Input

The MAX14777 features a separate logic supply input (V_L) that sets the high and low thresholds for the logic inputs (EN_ and SEL35). This feature allows flexibility in interfacing to controllers that have a different logic level than V_{CC} . Connect V_L to a voltage between 1.62V and 5.5V for normal operation.

Applications Information

Non-Powered Condition

To understand the behavior of the MAX14777 when not powered (i.e. V_{CC} = 0V), both the transient and DC signal conditions should be considered. Every A_ and B_ pin has internal diodes to V_P and V_N, as shown in Figure 8. Applying a positive voltage on A_ or B_ charges the V_P capacitor through the diode to V_P. Applying a negative voltage on A_ or B_ charges the V_N capacitor negative through the diode to V_N. Switch terminals A_, B_ are tolerant to high-voltage signals ranging from -15V to +35V when device is unpowered; i.e, V_{CC} = 0 or V_{CC} floating.

Once the capacitor is charged to a DC voltage, the $I_{L_IO_OFF}$ current flows. Thus, under transient conditions, applying a changing voltage to an A_ or B_ pin results in flow into or out of the pin due to a charge movement at the external capacitors on V_P and V_N .

Under DC conditions, when a voltage is applied to an A_ or B_ pin, with V_CC unpowered, the switch is open when the voltage difference between the A_and B_ pin is larger than 3V. Under these conditions, DC leakage current flows into the pin. When $|V_A - V_B| < 3V$ DC, the switch is not fully open, and currents up to a few mA can flow between A_and B_.

If SEL35 is connected low, the V_P capacitor charges to about 25V. Applying a positive voltage above about 25V on A_ or B_ charges the V_P capacitor through the diode to V_P . Once the V_P capacitor is charged to this increased voltage, current flow from A_ or B_ ceases. Thus, even when SEL35 is low, any of A_ or B_ tolerate voltages up to 35V.

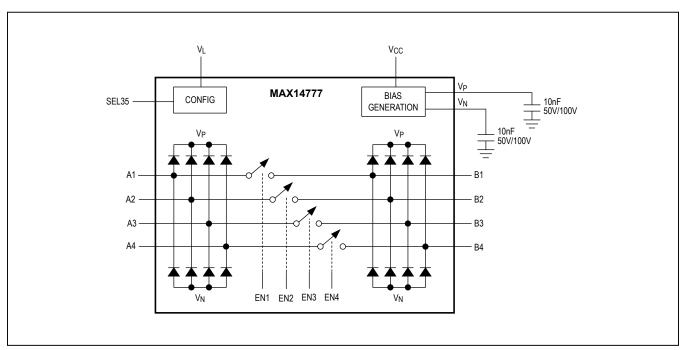


Figure 8. Typical Application Circuit

Application Example

The MAX14777 can be used for designing an industrial single-supply analog input module that supports both $\pm 15 \text{V}$ voltages and 4mA–20mA current measurements. In this scheme, the MAX14777 switches in a 250Ω resistor, typically used for translating the current-loop current to a voltage for analog measurement, as shown in Figure 9. By using three of the four MAX14777 switches, which provide accurate current and voltage measurement, the device handles voltages up to 36V, as maximally found in current-loop power supplies. In voltage measurement

mode, with switch positions as shown in Figure 9, analog input voltages in the ± 15 V range are switched to the amplifier input. Invert all switch positions for current loop measurement operation.

When the analog input module is not powered, the MAX14777 tolerates and protects the resistor and PGA against voltages mistakenly connected to the AIN terminal.

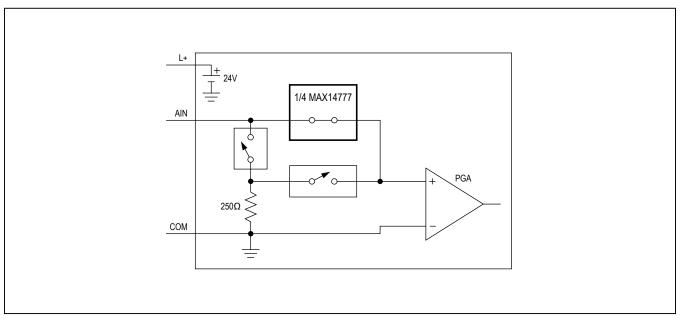


Figure 9. Analog Input Module for Voltage and Current Loop Measurement

MAX14777

Quad Beyond-the-Rails -15V to +35V Analog Switch

Ordering Information

PART	TEMP RANGE	PIN-PACKAGE
MAX14777GTP+	-40°C to +105°C	20 TQFN-EP*

⁺Denotes a lead(Pb)-free/RoHS-compliant package.

Chip Information

PROCESS: BICMOS

Package Information

For the latest package outline information and land patterns (footprints), go to www.maximintegrated.com/packages. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

PACKAGE	PACKAGE	OUTLINE	LAND
TYPE	CODE	NO.	PATTERN NO.
20 TQFN-EP	T2044+4	21-0139	90-0409

^{*}EP = Exposed Pad

MAX14777

Quad Beyond-the-Rails -15V to +35V **Analog Switch**

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	6/13	Initial release	_
1	10/13	Removed reference to prereleased op amp	14

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at www.maximintegrated.com.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru_4 moschip.ru_9