



K10 series

15 Amp General Purpose Miniature Relay

File E22575

File LR15734

Users should thoroughly review the technical data before selecting a product part number. It is recommended that users also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.

Features

- K10 - DPDT contact arrangement standard.
- AC and DC coils.
- Mounting options include socket, PCB, top flange.
- UL Class B coil insulation system.

Contact Data @ 25°C

Materials: Silver-cadmium oxide.

Expected Life: 10 million operations, mechanical; 100,000 operations minimum at rated loads.

Contact Ratings

Contact Code	Material	UL/CSA Ratings	Type
5	Silver-cadmium oxide	15A @ 30VDC 15A @ 120VAC 10A @ 277VAC 1/3HP @ 120VAC 1/2HP @ 250VAC	Resistive Resistive Resistive

Initial Dielectric Strength

Between Open Contacts: 1,000V rms.

Between Adjacent Contacts: 1,500V rms.

Between Contacts and Coil: 1,500V rms.

Coil Data @ 25°C

Nominal Power:

DC Coils: .9 Watts.

AC Coils: 1.2VA.

Maximum Power: 2.0 Watts.

Duty Cycle: Continuous.

Insulation: Class B: (130°C).

Coil Data

Nominal Voltage	DC Coils		AC Coils	
	Resistance in Ohms $\pm 10\%$	Nominal Current in Milliamps	Resistance in Ohms $\pm 15\%$	Nominal Current in Milliamps
6	40	150	10.5	200
12	160	75	43	100
24	650	37	160	52
48	2,600	18.5	668	26
110	11,000	10	—	—
120*	—	—	3,900	11
240*	—	—	12,000	6

*For 220/240VDC operation, use 11,000 Ohm, 5 Watt dropping resistor in series with the 110VDC coil.

Operate Data @ 25°C

Must Operate Voltage:

DC Coils: 75% of nominal voltage.

AC Coils: 85% of nominal voltage.

Operate Time (Excluding Bounce): 13 milliseconds, typical, at nominal voltage.

Release Time (Excluding Bounce): 6 milliseconds, typical, at nominal voltage.

Environmental Data

Temperature Range:

Storage: -60°C to +105°C.

Operating: -45°C to +70°C.

Mechanical Data

Mounting: Socket mount, printed circuit board, top flange.

Termination: .187" (4.75mm) quick connect/solder terminals, or printed circuit terminals.

Enclosure: Smoke-color polycarbonate dust cover.

Weight: 1.8 oz. (51g) approximately.

Ordering Information


Typical Part No. ▶	K10	P	-11	D	1	5	-6
1. Basic Series: K10 = 15 amp miniature relay.							
2. Cover: P = Polycarbonate (smoke color).							
3. Contact Arrangement: 11 = 2 Form C (DPDT)							
4. Coil Input: A = 50/60 Hz. AC D = DC							
5. Mounting & Termination: 1 = Socket mount; .187" (4.75mm) quick connect/solder terminals. 5 = Printed circuit terminals; .160" length. T = Mounting bracket on end of cover; .187" (4.75mm) quick connect/solder terminals.							
6. Contact Type: 5 = 15 amp silver-cadmium oxide							
7. Coil Voltage: To 240VAC or 110VDC, see coil data table.							

Our authorized distributors are more likely to stock the following items for immediate delivery.


K10P-11A15-6	K10P-11D15-6	K10P-11D55-24
K10P-11A15-12	K10P-11D15-12	K10P-11D55-110
K10P-11A15-24	K10P-11D15-24	K10P-11DT5-12
K10P-11A15-120	K10P-11D15-110	K10P-11DT5-24
K10P-11AT5-120	K10P-11DT5-12	

Outline Dimensions


Mounting Code 1 Socket Mount

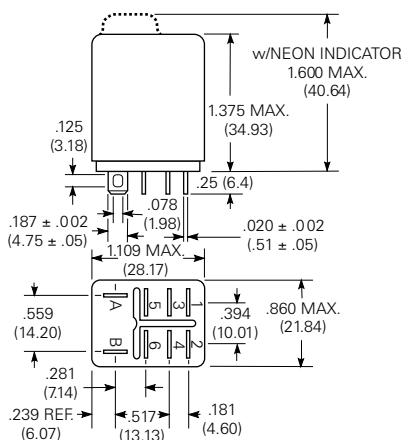


Mounting Code 5 Printed Circuit Terminals




Mounting Code T

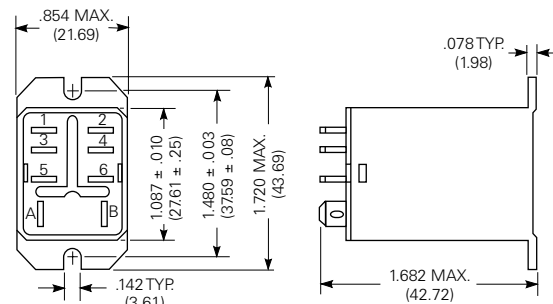

PC Board Layout



Wiring Diagram



Dimensions are shown for reference purposes only.

Dimensions are in inches over (millimeters) unless otherwise specified.


Specifications and availability
subject to change.

www.tycoelectronics.com
Technical support:
Refer to inside back cover.


Sockets and Accessories for K10 Relays

Sockets for K10 series relays are rated 10 amps, and are UL recognized, File E59244, and CSA certified, File LR15734.


27E488 Pierced Solder Terminals

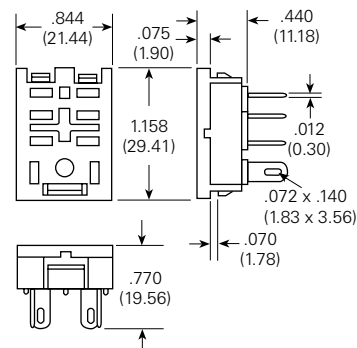

20C217 Hold Down Spring For 27E488 & 27E489




Chassis Cutout For Mounting 27E488 Socket



Recommended chassis
thickness .039" (.99mm) to
.079" (2.01mm).


Socket punch
Greenlee part
5015115.0, Type 731R
available from
Greenlee Tool Co.,
Rockford, Illinois.

37D633 Mounting Strip

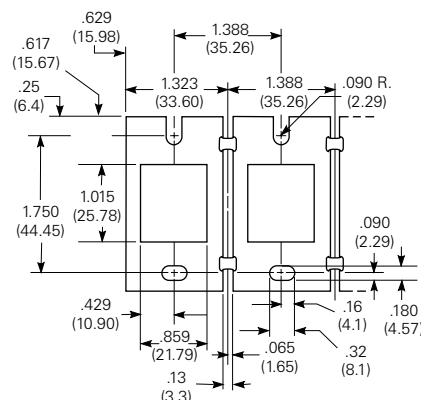


37D633 will mount eight 27E488 sock-
ets in one length of aluminum strip mea-
suring 10.97" x 2.25" x .062".
(278.64 x 57.15 x 1.57)

27E489 Printed Circuit Terminals

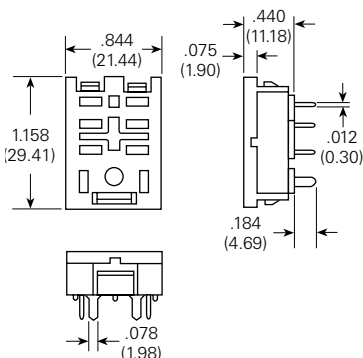


PC. Board Layout For Socket




Note: PC. terminal socket will also fit PC. board
layout for relay. However, in order to accomplish
this, terminals must be formed accordingly.

Caution: Printed circuit sockets are manufac-
tured with "floating" (loose) terminals. This per-
mits them to align with holes in the circuit board
and with the relay terminals. During the mount-
ing and soldering of the socket, vertical float
should be eliminated and the terminals seated
on the board. (This may be accomplished by
inserting a dummy relay in the socket.) Failure to
eliminate float may cause fracture of the solder
joint or separation of the copper conductor from
the printed circuit board when a relay is inserted
in the socket after soldering.


27E895 Screw Terminals, DIN Rail Snap-Mount (Use with mounting track 24A110)

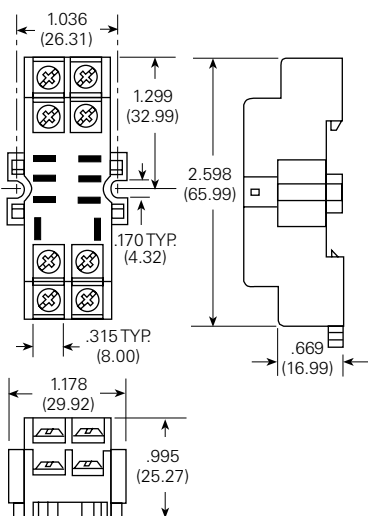


Terminal Location



27E487 Screw Terminals

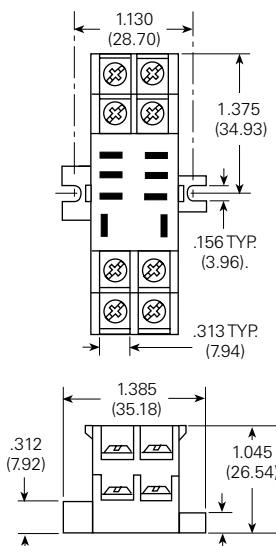

Terminal Location



20C426 Hold Down Spring For 27E487 & 27E895

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9