


OptiMOS® - T Power-Transistor
Features

- N-channel Logic Level - Enhancement mode
- Automotive AEC Q101 qualified
- MSL1 up to 260°C peak reflow
- 175°C operating temperature
- Green package (lead free)
- Ultra low Rds(on)
- 100% Avalanche tested

Product Summary

V_{DS}	40	V
$R_{DS(on),max}$	2.7	mΩ
I_D	160	A

PG-TO263-7-3


Type	Package	Ordering Code	Marking
IPB160N04S2L-03	PG-TO263-7-3	SP0002-18153	P2N04L03

Maximum ratings, at $T_J=25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
Continuous drain current	I_D	$T_C=25\text{ °C}$	160	A
		$T_C=100\text{ °C}^{2)}$	160	
Pulsed drain current ²⁾	$I_{D,pulse}$	$T_C=25\text{ °C}$	640	
Avalanche energy, single pulse	E_{AS}	$I_D=80\text{ A}$, $R_{GS}=25\text{ Ω}$	810	mJ
	V_{GS}		±20	V
Power dissipation	P_{tot}	$T_C=25\text{ °C}$	300	W
Operating and storage temperature	T_j , T_{stg}		-55 ... 175	°C
IEC climatic category; DIN IEC 68-1			55/175/56	

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	

Thermal characteristics²⁾

Thermal resistance, junction - case	R_{thJC}		-	-	0.5	K/W
SMD version, device on PCB	R_{thJA}	minimal footprint	-	-	62	
		6 cm ² cooling area ³⁾	-	-	40	

Electrical characteristics, at $T_j=25\text{ °C}$, unless otherwise specified
Static characteristics

Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS}=0\text{ V}, I_D=1\text{ mA}$	40	-	-	V
Gate threshold voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\text{ }\mu\text{A}$	1.2	1.6	2	
Zero gate voltage drain current	I_{DSS}	$V_{DS}=40\text{ V}, V_{GS}=0\text{ V}, T_j=25\text{ °C}$	-	0.1	1	μA
		$V_{DS}=40\text{ V}, V_{GS}=0\text{ V}, T_j=125\text{ °C}^{2)}$	-	10	100	
Gate-source leakage current	I_{GSS}	$V_{GS}=20\text{ V}, V_{DS}=0\text{ V}$	-	1	100	nA
Drain-source on-state resistance	$R_{DS(on)}$	$V_{GS}=4.5\text{ V}, I_D=80\text{ A},$ SMD version	-	2.8	3.7	m Ω
Drain-source on-state resistance	$R_{DS(on)}$	$V_{GS}=10\text{ V}, I_D=80\text{ A},$ SMD version	-	2.0	2.7	

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	

Dynamic characteristics²⁾

Input capacitance	C_{iss}	$V_{GS}=0\text{ V}, V_{DS}=15\text{ V},$ $f=1\text{ MHz}$	-	6000	-	pF
Output capacitance	C_{oss}		-	2200	-	
Reverse transfer capacitance	C_{rss}		-	700	-	
Turn-on delay time	$t_{d(on)}$	$V_{DD}=20\text{ V}, V_{GS}=10\text{ V},$ $I_D=160\text{ A}, R_G=1.1\ \Omega$	-	20	-	ns
Rise time	t_r		-	51	-	
Turn-off delay time	$t_{d(off)}$		-	75	-	
Fall time	t_f		-	30	-	

Gate Charge Characteristics²⁾

Gate to source charge	Q_{gs}	$V_{DD}=32\text{ V}, I_D=160\text{ A},$ $V_{GS}=0\text{ to }5\text{ V}$	-	20	28	nC
Gate to drain charge	Q_{gd}		-	46	90	
Gate charge total	Q_g		-	163	230	
Gate plateau voltage	$V_{plateau}$		-	3.4	-	V

Reverse Diode

Diode continuous forward current	I_S	$T_C=25\text{ °C}$	-	-	160	A
Diode pulse current	$I_{S,pulse}$		-	-	640	
Diode forward voltage	V_{SD}	$V_{GS}=0\text{ V}, I_F=80\text{ A},$ $T_j=25\text{ °C}$	-	0.84	1.3	V


¹⁾ Current is limited by bondwire; with an $R_{thJC} = 0.5\text{K/W}$ the chip is able to carry 243A at 25°C. For detailed information see Application Note ANPS071E at www.infineon.com/optimos

²⁾ Defined by design. Not subject to production test.

³⁾ Device on 40 mm x 40 mm x 1.5 mm epoxy PCB FR4 with 6 cm² (one layer, 70 µm thick) copper area for drain connection. PCB is vertical in still air.


1 Power dissipation

$$P_{\text{tot}} = f(T_C)$$

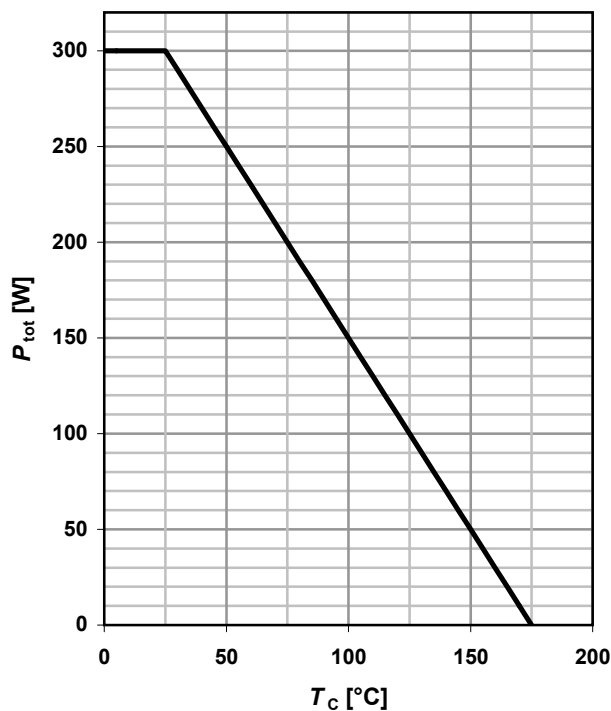

2 Drain current


$$I_D = f(T_C); V_{GS} \geq 10 \text{ V}$$

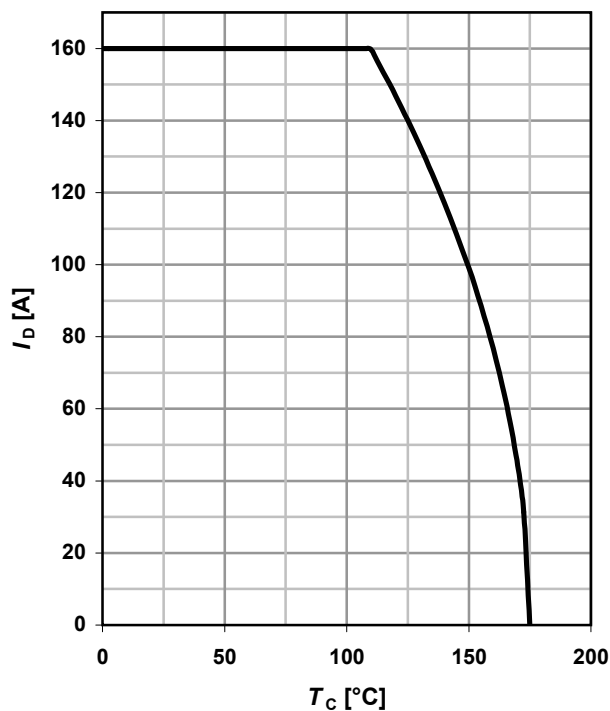

3 Safe operating area

$$I_D = f(V_{DS}); T_C = 25 \text{ °C}; D = 0$$


parameter: t_p

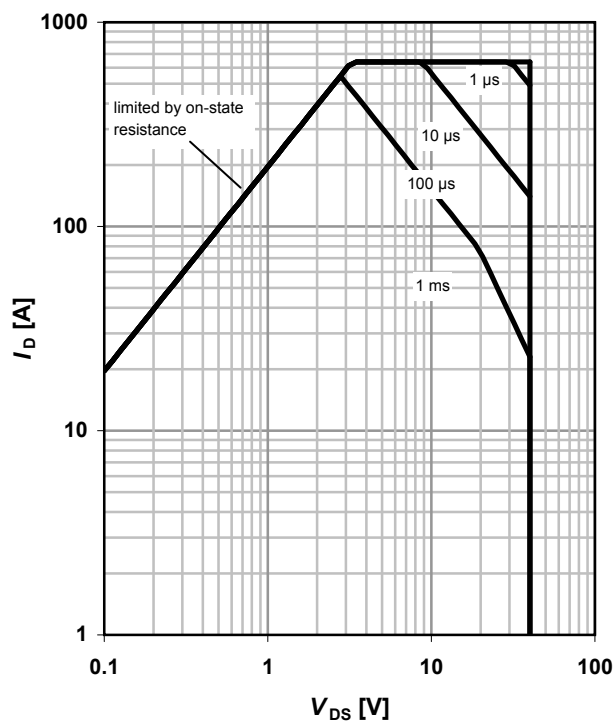

4 Max. transient thermal impedance


$$Z_{\text{thJC}} = f(t_p)$$

parameter: $D = t_p / T$

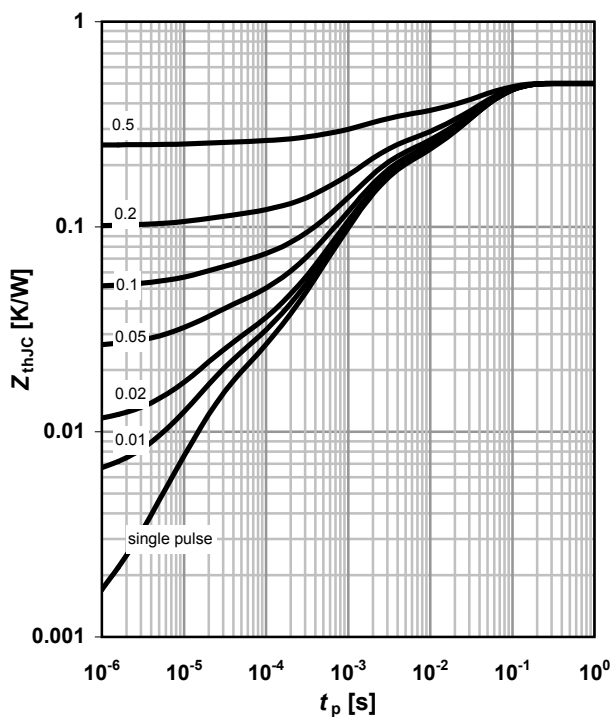


5 Typ. output characteristics

 $I_D = f(V_{DS}); T_j = 25^\circ\text{C}$

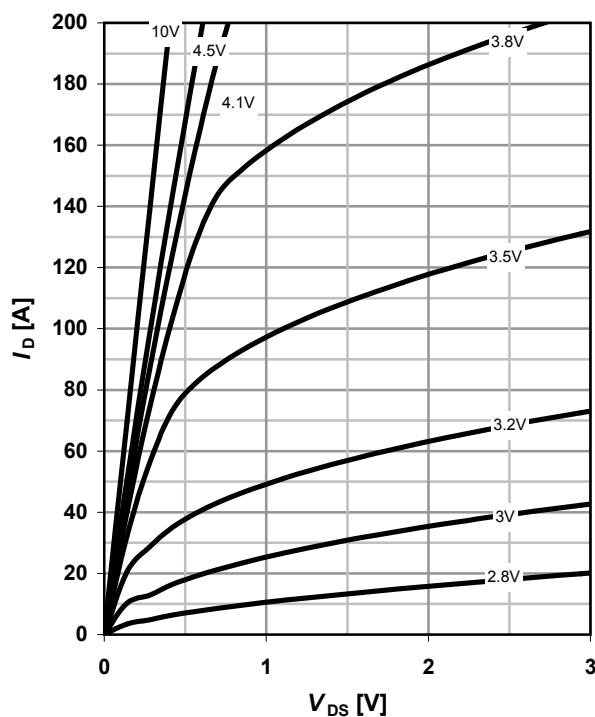parameter: V_{GS}


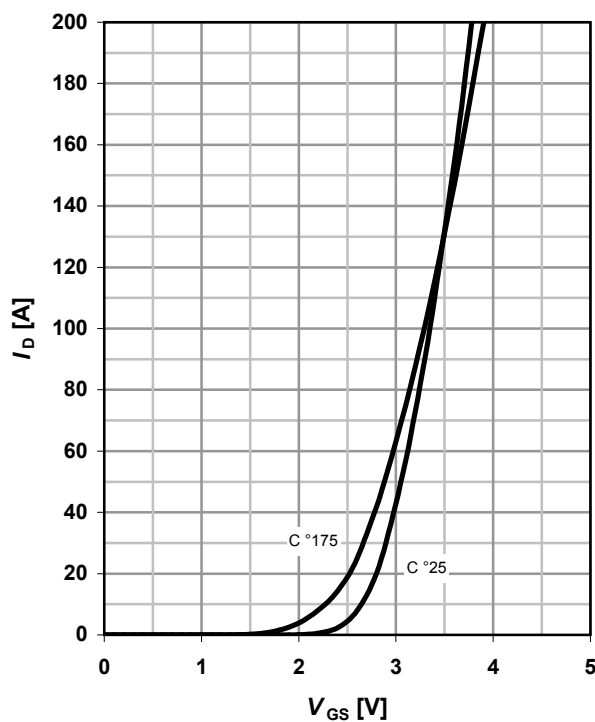
6 Typ. drain-source on resistance

 $R_{DS(on)} = f(I_D); T_j = 25^\circ\text{C}$

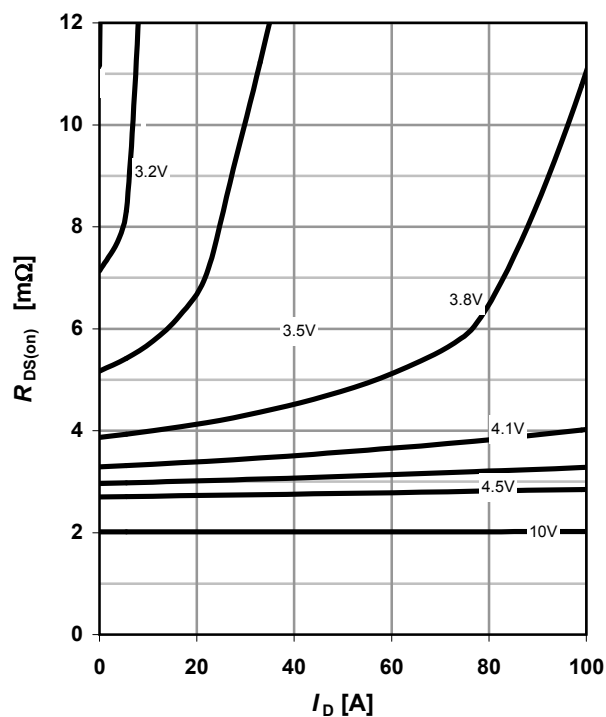
parameter: V_{GS}


7 Typ. transfer characteristics

 $I_D = f(V_{GS}); |V_{DS}| > 2|I_D| R_{DS(on)max}$


parameter: T_j


8 Typ. forward transconductance

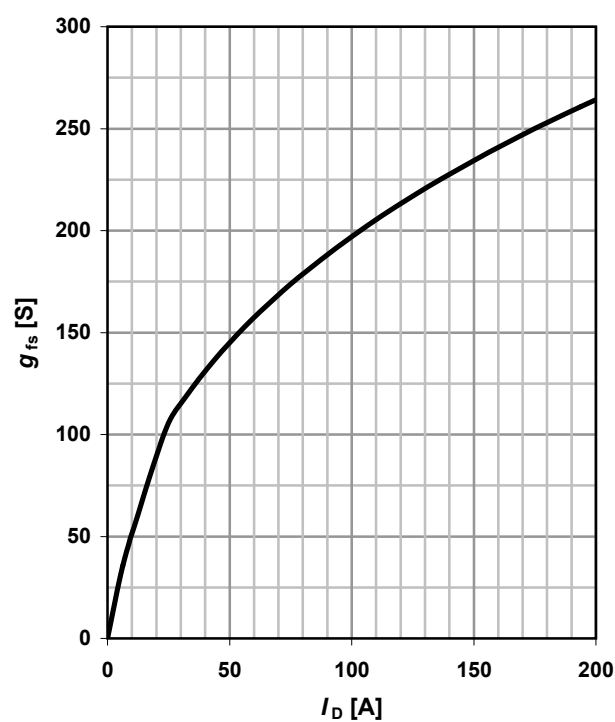 $g_{fs} = f(I_D); T_j = 25^\circ\text{C}$


9 Drain-source on-state resistance


$$R_{DS(on)} = f(T_j); I_D = 60 \text{ A}; V_{GS} = 10 \text{ V}$$

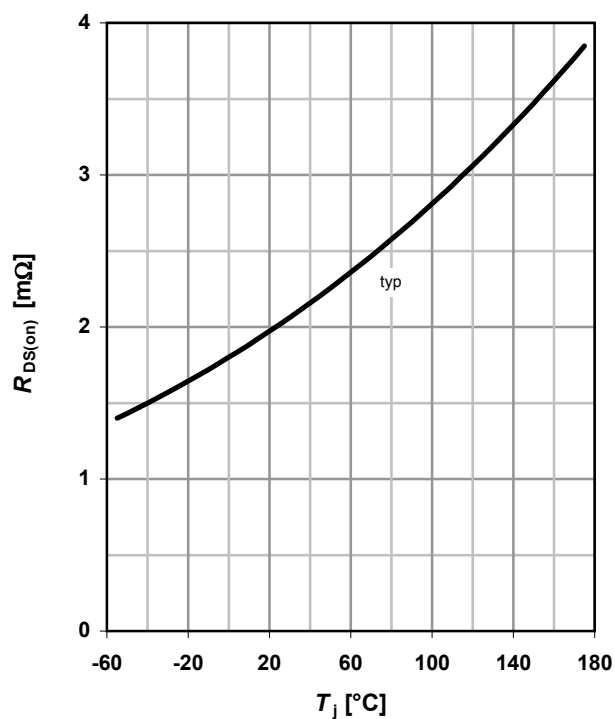

10 Typ. gate threshold voltage


$$V_{GS(th)} = f(T_j); V_{GS} = V_{DS}$$

parameter: I_D

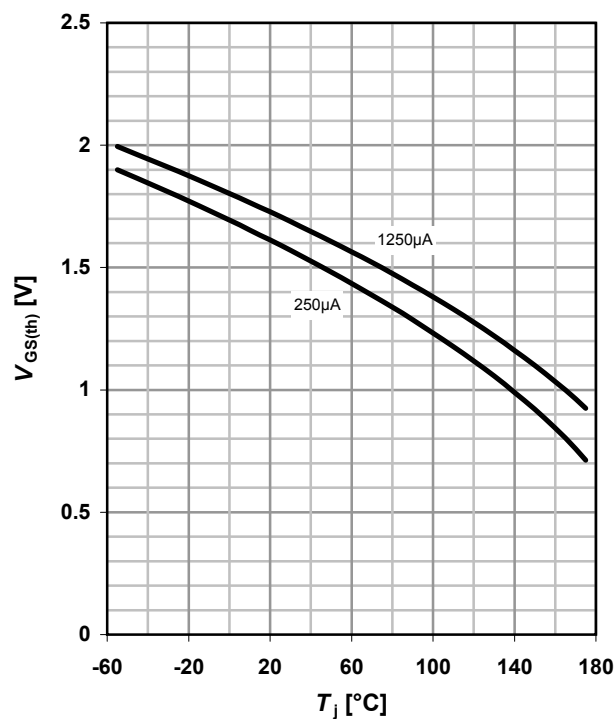

11 Typ. capacitances


$$C = f(V_{DS}); V_{GS} = 0 \text{ V}; f = 1 \text{ MHz}$$

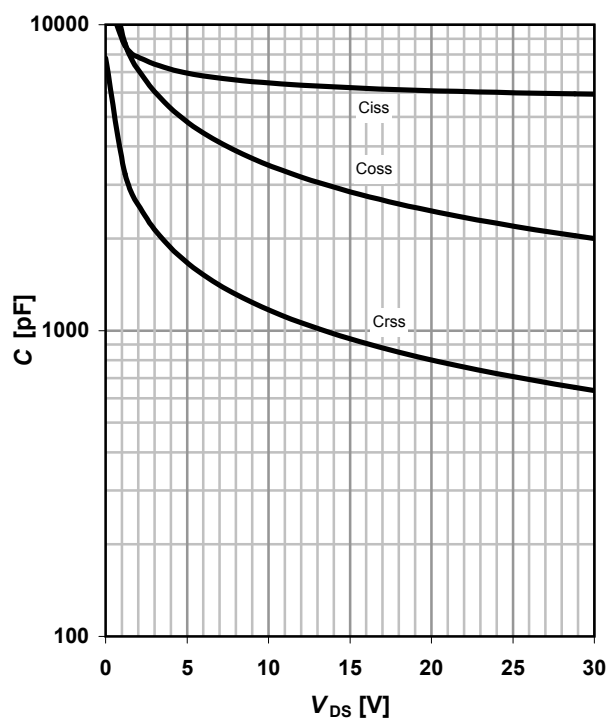

12 Typ. Forward characteristics of reverse diode

$$I_F = f(V_{SD})$$


parameter: T_j

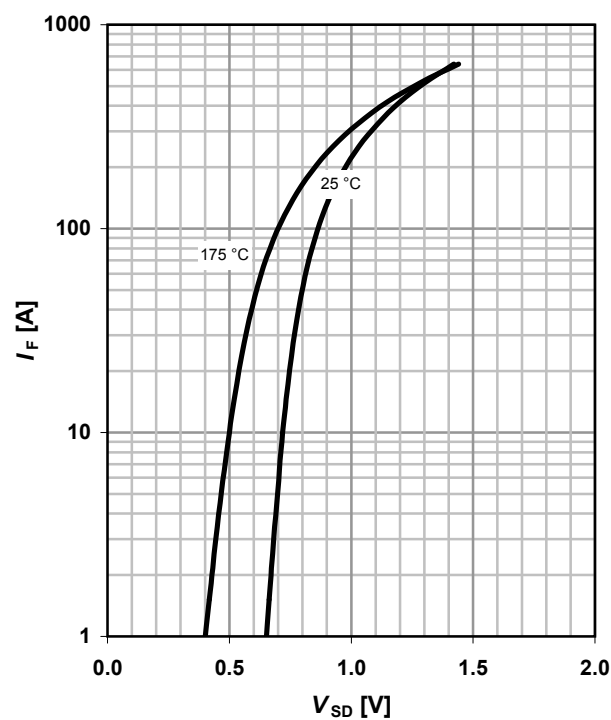

13 Typ. avalanche energy

$$E_{AS}=f(T_J)$$


parameter: $I_D=80A$, $V_{DD}=25V$

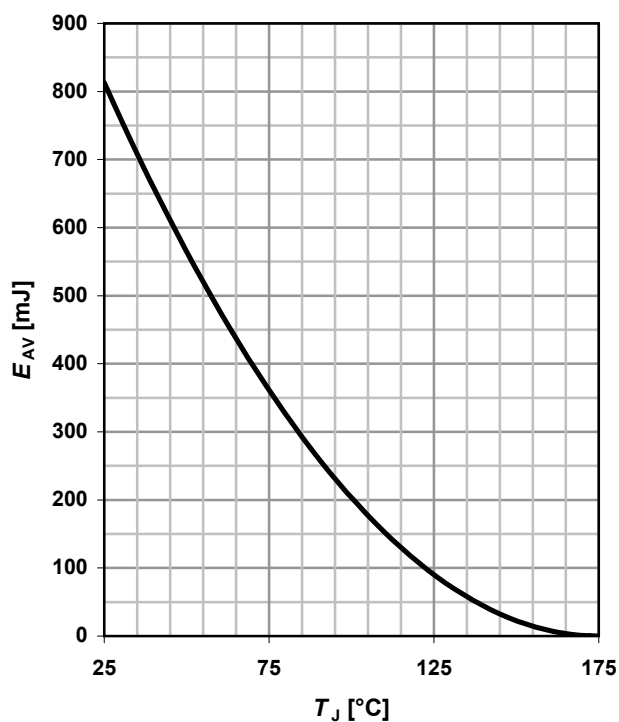

14 Typ. gate charge


$$V_{GS}=f(Q_{gate}); I_D=160A \text{ pulsed}$$

parameter: V_{DD}

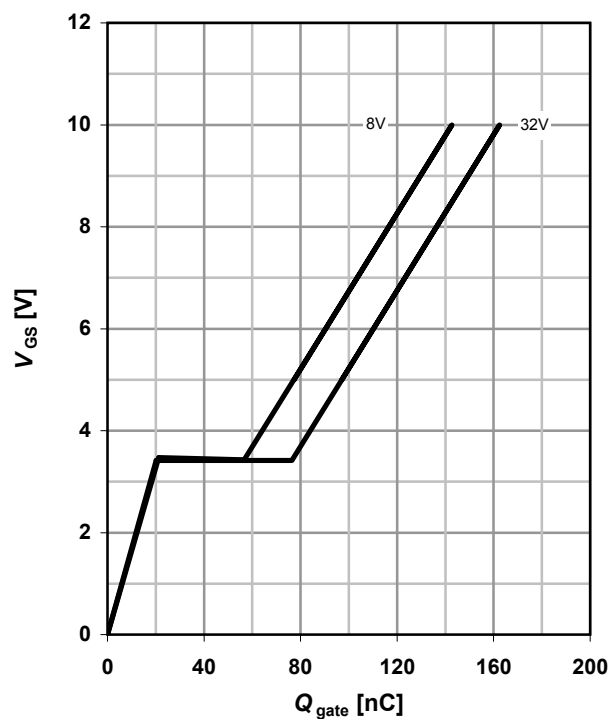


15 Drain-source breakdown voltage

$$V_{BR(DSS)}=f(T_J); I_D=1 \text{ mA}$$

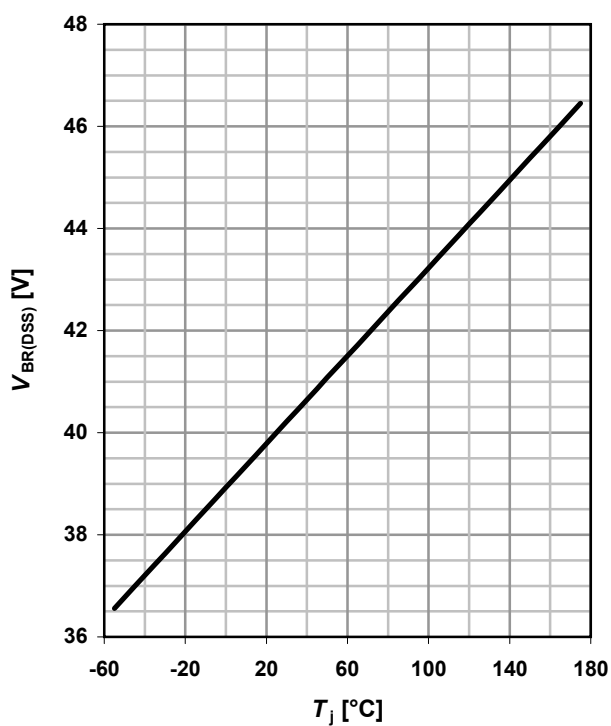

16 Gate charge waveforms

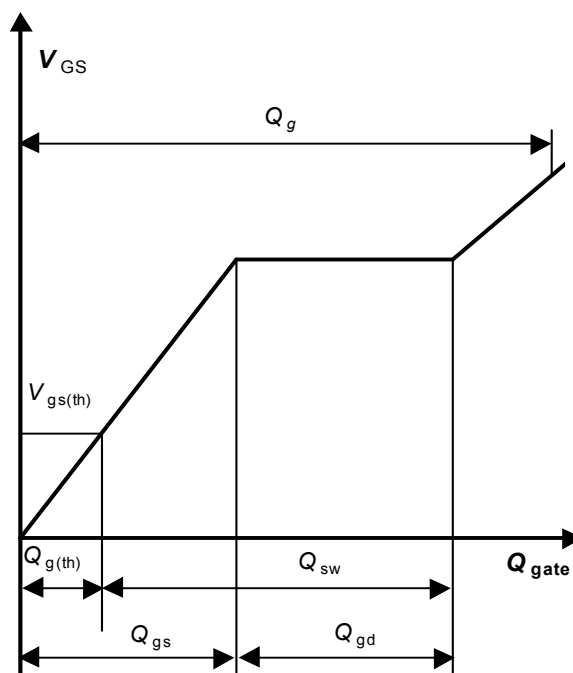

Published by
Infineon Technologies AG
Bereich Kommunikation
St.-Martin-Straße 53
D-81541 München
© Infineon Technologies AG 2004
All Rights Reserved.

• Pb-free lead plating; RoHS compliant

Attention please!

The information herein is given to describe certain components and shall not be considered as warranted characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

Information

For further information on technology, delivery terms and conditions and prices, please contact your nearest Infineon Technologies office in Germany or our Infineon Technologies representatives worldwide (see address list).

Warnings

Infineon Technologies' components may only be used in life-support devices or systems with the expressed written approval of Infineon Technologies if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9