


HIGH-CURRENT MULTILAYER FERRITE CHIP BEAD

ACML-0402H

RoHS
Compliant



1.0 x 0.5 x 0.5mm

FEATURES:

- Multilayer monolithic structure yields high reliability
- Unique terminal electrode structure ensures permissible currents
- High impedance over a wide frequency range

APPLICATIONS:

- Video Equipment, Audio equipment
- Automotive Electrical Equipment
- Communication Equipment
- OA Equipment and other

STANDARD SPECIFICATIONS:


PARAMETERS	
ABRACON P/N:	ACML-0402H-xxx
Operating Temperature:	-55°C to + 125°C
Storage Temperature:	- 5 to + 40 °C, Humidity 40 % ~ 70%

Part No.	Impedance	Test Freq.	RDC	Rated Current
	(Ω) $\pm 25\%$			
ACML-0402H-060	6	100 MHZ,200 mV	0.05	500
ACML-0402H-100	10	100 MHZ,200 mV	0.05	500
ACML-0402H-110	11	100 MHZ,200 mV	0.05	500
ACML-0402H-150	15	100 MHZ,200 mV	0.1	500
ACML-0402H-190	19	100 MHZ,200 mV	0.1	500
ACML-0402H-220	22	100 MHZ,200 mV	0.15	500
ACML-0402H-300	30	100 MHZ,200 mV	0.2	500
ACML-0402H-320	32	100 MHZ,200 mV	0.2	500
ACML-0402H-330	33	100 MHZ,200 mV	0.2	500
ACML-0402H-400	40	100 MHZ,200 mV	0.2	500
ACML-0402H-470	47	100 MHZ,200 mV	0.2	500
ACML-0402H-500	50	100 MHZ,200 mV	0.2	500
ACML-0402H-600	60	100 MHZ,200 mV	0.2	500
ACML-0402H-700	70	100 MHZ,200 mV	0.2	500
ACML-0402H-750	75	100 MHZ,200 mV	0.2	500
ACML-0402H-800	80	100 MHZ,200 mV	0.2	500
ACML-0402H-900	90	100 MHZ,200 mV	0.25	500
ACML-0402H-101	100	100 MHZ,200 mV	0.25	500
ACML-0402H-121	120	100 MHZ,200 mV	0.25	500
ACML-0402H-151	150	100 MHZ,200 mV	0.4	400
ACML-0402H-181	180	100 MHZ,200 mV	0.4	400
ACML-0402H-221	220	100 MHZ,200 mV	0.4	400
ACML-0402H-241	240	100 MHZ,200 mV	0.4	400
ACML-0402H-301	300	100 MHZ,200 mV	0.5	300
ACML-0402H-331	330	100 MHZ,200 mV	0.5	300

HIGH-CURRENT MULTILAYER FERRITE CHIP BEAD

ACML-0402H

RoHS
Compliant



1.0 x 0.5 x 0.5mm

STANDARD SPECIFICATIONS - continued:

Part No.	Impedance	Test Freq.	RDC	Rated Current
	(Ω) $\pm 25\%$	(MHZ)	(Ω)Max.	(mA)Max.
ACML-0402H-421	420	100 MHZ, 200 mV	0.5	300
ACML-0402H-481	480	100 MHZ, 200 mV	0.5	300
ACML-0402H-601	600	100 MHZ, 200 mV	0.6	300
ACML-0402H-102	1000	100 MHZ, 200 mV	0.95	200
ACML-0402H-152	1500	100 MHZ, 200 mV	1.15	100
ACML-0402H-182	1800	100 MHZ, 200 mV	1.4	100

I_r: Rate Current. Applied the current to coils, the temperature rise shall not be more than 30°C

Standard Testing Condition


	Unless otherwise specified	In case of doubt
Temperature	Ordinary Temperature(15 to 35°C)	20 \pm 2°C
Humidity	Ordinary Humidity(25 to 85% RH)	60 to 70 % RH

OPTIONS AND PART IDENTIFICATION

ACML-0402H- [] [] - []

Inductance Code	Tolerance	Packaging
Please refer to the table on Page 2	N: $\pm 30\%$	Blank: Bulk T: Tape and Reel

REFLOW PROFILE

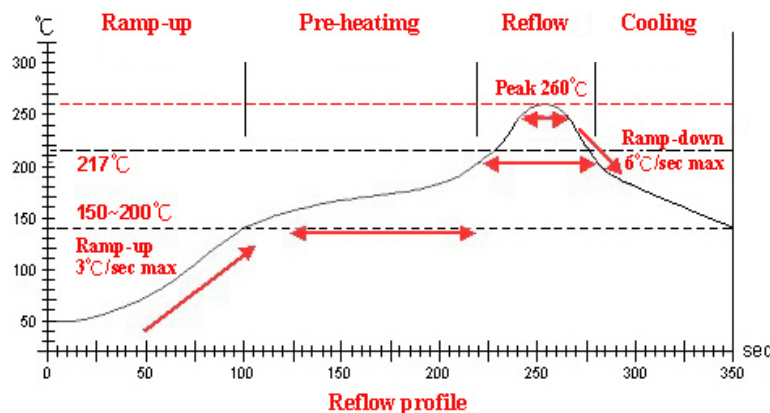

Item	Ramp-up	Pre-heating	Reflow	Peak Temp.	Cooling
Temp. scope	R.T. ~ 150°C	150°C ~ 200°C	217°C	260 \pm 5°C	Peak Temp. ~ 150°C
Time spec.	--	60 ~ 180 sec	60 ~ 150 sec	20 ~ 40 sec	--

ABRACON IS
ISO9001:2008
CERTIFIED




Visit www.abracon.com for Terms & Conditions of Sale **Revised: 08.11.10**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

HIGH CURRENT MULTILAYER FERRITE CHIP BEAD


ACML-0402H

RoHS
Compliant



1.0 x 0.5 x 0.5mm


OUTLINE DRAWING:

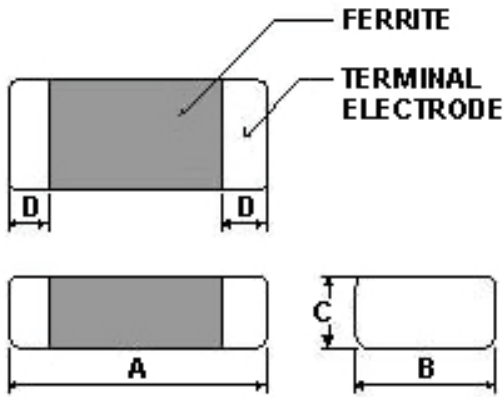

A	B	C	D
1.00±0.1	0.5±0.1	0.5±0.1	0.25±0.1


Dimension : mm

Recommended Land Pattern

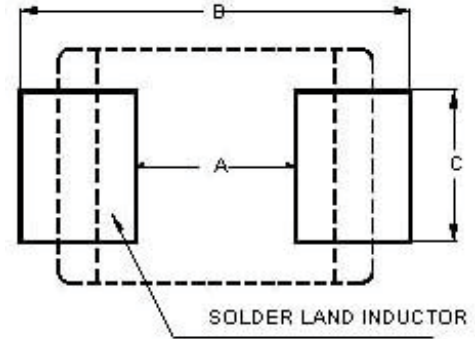


A	B	C
0.4	1.2~1.4	0.5

TAPE & REEL: T= tape and reel (10,000pcs/reel)

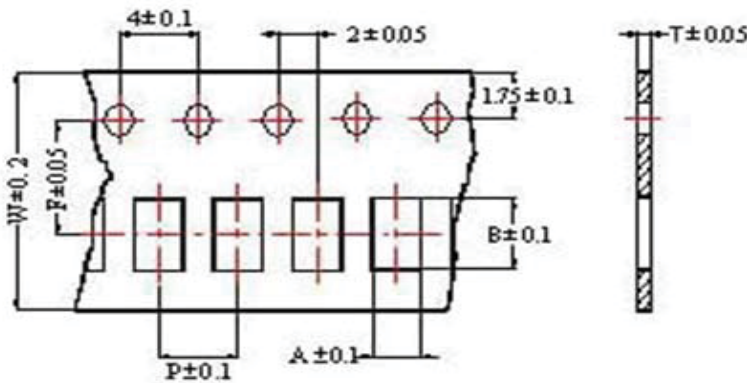

A	B	T	W	P	F
0.65	1.15	0.60	8	2	3.5

Dimension : mm

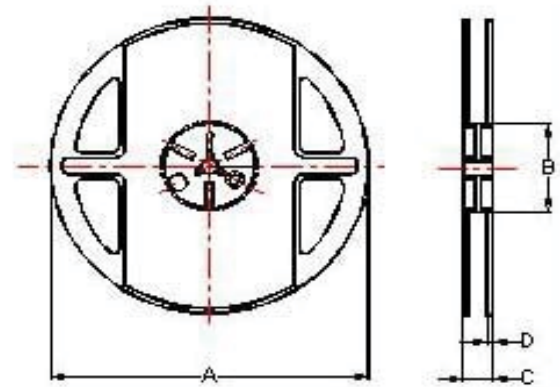

A	B	C	D
178	60	10	2

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO9001:2008
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale **Revised: 08.11.10**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9