
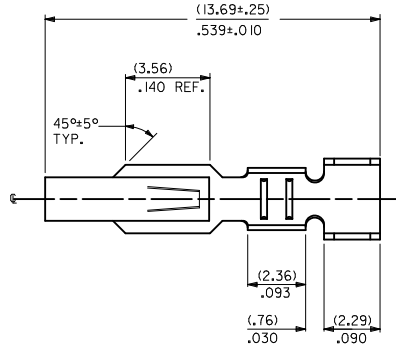


20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1







MATERIAL CODE
(.27)/.0106 THK
I=BRASS
3=PHOS BRONZE

WINDING SPEC.
A=PER ES-339-A
BLANK=PER ES-339-B
L=LOOSE

OPTION CODE
BLANK=AS SHOWN
C=CAT EAR OPTION


FINISH:

(P909) OVERALL HOT TIN DIP: (0.00254)/.000100 MIN.
(122) OVERALL TIN: (0.00381)/.000150 MIN.
OVER (0.00076)/.000030 MIN. NICKEL
(154) OVERALL TIN: (0.00254)/.000100 MIN.
OVER (0.00127)/.000050 MIN. NICKEL
(224) OVERALL MATTE TIN: (0.00508)/.000200 MIN.
OVER (0.00127)/.000050 MIN. NICKEL
(550) SELECT GOLD: (0.00038)/.000015 MIN.
OVERALL GOLD FLASH: (0.00005)/.000002 MIN.
OVERALL NICKEL UNDERPLATE: (0.00076)/.000030 MIN.
(555) SELECT GOLD: (0.00038)/.000015 MIN.
OVERALL NICKEL UNDERPLATE: (0.00076)/.000030 MIN.
(558) SELECT GOLD: (0.00076)/.000030 MIN.
OVERALL GOLD FLASH: (0.00005)/.000002 MIN.
OVERALL NICKEL UNDERPLATE: (0.00127)/.000050 MIN.
(561) SELECT GOLD: (0.00076)/.000030 MIN.
OVERALL NICKEL UNDERPLATE: (0.00127)/.000050 MIN.
(591) SELECT GOLD: (0.00127)/.000050 MIN.
OVERALL GOLD FLASH: (0.00005)/.000002 MIN.
OVERALL NICKEL UNDERPLATE: (0.00127)/.000050 MIN.

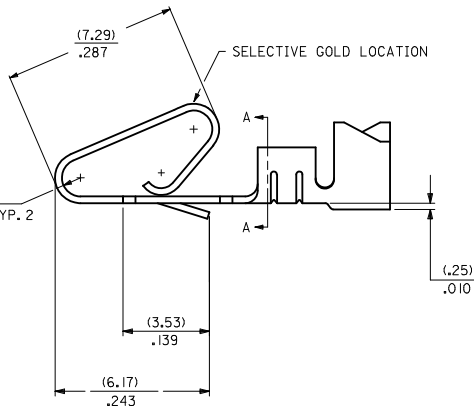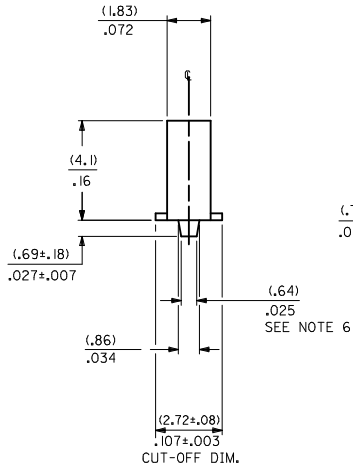

NOTES:

1. MATERIAL: SEE LEGEND
2. FINISH: SEE LEGEND
3. THIS PART CONFORMS TO PRODUCT SPECIFICATION PS-08-50.
4. PACKAGING SPECIFICATION: LOOSE TERMINALS: PER PK-2759-001
CHAIN FORM TERMINALS: NONE
5. DIMENSIONS GIVEN ACROSS CENTERLINES ARE SYMMETRICAL ABOUT THOSE CENTERLINES WITHIN HALF THE TOTAL TOLERANCE.
6. (0.86 ±0.05)/.034 ±.002 IS AN OPTIONAL DESIGN.
7. CRIMP ACCEPTS 18 TO 24 AWG WIRE WITH (2.79)/.110 MAX. INSULATION DIAMETER.
AND CAN ACCEPT (3.00)/.118 MAX. INSULATION DIAMETER WITH SPECIAL TOOLING.
8. TERMINAL FOR USE IN 2139, 3001, 3069, AND 91813 SERIES HOUSINGS WITH (2.54)/.100 MAX. INSULATION DIAMETER,
2574, 6422, AND 5239 SERIES HOUSINGS WITH (2.79)/.110 MAX. INSULATION DIAMETER,
AND 41695 SERIES HOUSING WITH (3.00)/.118 MAX. INSULATION DIAMETER.
9. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

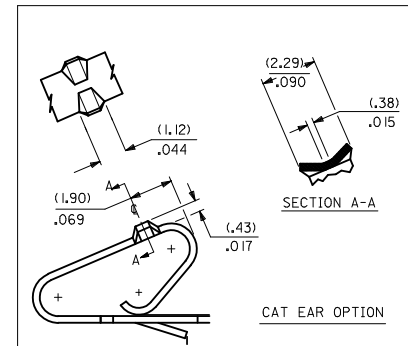

REMOVE 208 PLTING EC NO: UCP2012-2810 DRAWN: JAGUILAR 2012/02/27 CHKD: MATT KIPPER 2012/02/27 APPR: F. SMITH 2012/03/20	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 10:1		DESIGN UNITS INCH		THIRD ANGLE PROJECTION	
					DRAWN BY DATE		TITLE					
			4 PLACES ±.--- ±.---		SAMIEC 06/03/86		CRIMP TERMINAL					
			3 PLACES ±.--- ±.010		CHECKED BY DATE		.156 CENTERS					
			2 PLACES ±.025 ±.014		PATEL 06/03/86		18 TO 24 GA WIRE					
			1 PLACE ±.036 ±.---		APPROVED BY DATE							
			ANGULAR ±1/2°		FSMITH 2012/03/20		MOLEX MOLEX INCORPORATED					
					MATERIAL NO.		DOCUMENT NO.					
					SEE CHART		SD-2478					
					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE D THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				SHEET NO. 1 OF 2	

	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	
M	2478-1-(***)*				2478-3-(***)*				2478-1C-(***)*				2478-3C-(***)*								M
	PART NO.	ENG. NO.			PART NO.	ENG. NO.			PART NO.	ENG. NO.			PART NO.	ENG. NO.							
	08-50-0105	2478-1-(P909)			08-52-0071	2478-3-(P909)			08-50-0091	2478-1C-(154)			08-52-0044	2478-3C-(P909)							
	08-50-0106	2478-1-(P909)L			08-52-0072	2478-3-(P909)L			08-50-0093	2478-1C-(154)L			08-52-0045	2478-3C-(P909)L							
L	08-56-0105	2478-1-(550)			08-65-0114	2478-3-(555)							08-52-0023	2478-3C-(154)							L
	08-56-0106	2478-1-(550)L			08-65-0115	2478-3-(555)L							08-52-0024	2478-3C-(154)L							
	08-55-0103	2478-1-(555)			08-52-0811	2478-3-(154)															
	08-55-0104	2478-1-(555)L			08-52-0812	2478-3-(154)L															
K	08-50-0119	2478-1-(122)			08-50-0281	2478-3-(122)															K
	08-50-0120	2478-1-(122)L				2478-3-(122)L															
	08-50-0271	2478-1-(P909)A			08-58-0121	2478-3-(550)															
	08-50-0015	2478-1-(154)			08-58-0122	2478-3-(550)L															
	08-50-0016	2478-1-(154)L			08-58-0103	2478-3-(591)															
J	08-50-0063	2478-1-(224)			08-58-0104	2478-3-(591)L															J
	08-50-0064	2478-1-(224)L			08-58-0114	2478-3-(558)															
	08-55-0133	2478-1-(561)			08-58-0115	2478-3-(558)L															
	08-55-0134	2478-1-(561)L																			
I																					I
H																					H
G																					G
F																					F
E																					E
D																					D
C																					C
B																					B
A																					A

REMOVE 208 PLTG
IEC NO: UCP2012-2810
DRAWN: JAGUILAR 2012/02/27
CHKD: MATT KIPPER 2012/02/27
APPR: F. SMITH 2012/03/20

REV
Y

QUALITY SYMBOLS
▽=0
▽=0
▽=0

DESCRIPTION

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES ±	---	±---
3 PLACES ±	---	±.010
2 PLACES ±	0.25	±.014
1 PLACE ±	0.36	±---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN

DRAWN BY
SAMIEC

CHECKED BY
PATEL

APPROVED BY
FSMITH

MATERIAL NO.

DATE
2012/03/20

SCALE
1:1

DESIGN UNITS
INCH

THIRD ANGLE PROJECTION

TITLE
CRIMP TERMINAL
.156 CENTERS
18 TO 24 GA WIRE

MOLEX INCORPORATED

DOCUMENT NO.
SD-2478

SHEET NO.
2 OF 2

SIZE
D

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9