
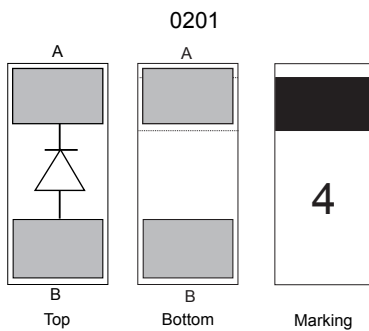


30 V signal Schottky diode



Features

- Very low conduction losses
- Negligible switching losses
- 0201 package
- Low capacitance diode
- ECOPACK[®]2 and RoHS compliant

Applications

- Reverse polarity protection
- Fingerprint module
- Camera module
- Bluetooth wireless earbud
- Biometric computer card

Description

The **BAT30F4** uses 30 V Schottky barrier diodes in a 0201 package. This device is intended to be used in smartphones, and is especially suited for rail to rail protection where its low forward voltage drop will help designers to get an efficient protection of their ICs.

Product status link

[BAT30F4](#)

Product summary

V_{RRM}	30 V
T_j (max)	85 °C
I_F	300 mA

1 Characteristics

Table 1. Absolute ratings (limiting values, at 25 °C, unless otherwise specified)

Symbol	Parameter	Value	Unit
V_{RRM}	Repetitive peak reverse voltage	30	V
I_F	Continuous forward current	300	mA
I_{FSM}	Surge non repetitive forward current	$t_p = 10$ ms sinusoidal 4	A
$P_D^{(1)}$	Power dissipation	200	mW
T_{stg}	Storage temperature range	-55 to + 150	°C
T_{OP}	Operating junction temperature range	-40 to +85	°C
T_j	Maximum junction temperature in DC forward mode	150	°C
T_L	Maximum soldering temperature during 10 s	260	°C

1. On epoxy printed circuit board with minimum recommended footprint

Table 2. Thermal resistance parameter

Symbol	Parameter	Value (Typ.)	Unit
$R_{th(j-a)}$	Junction to ambient ⁽¹⁾	450	°C/W

1. On epoxy printed circuit board with minimum recommended footprint

Table 3. Static electrical characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit	
$I_R^{(1)}$	Reverse leakage current	$T_j = 25$ °C	$V_R = 10$ V	-	2.2	6.0	μ A
		$T_j = 85$ °C		-		300	
		$T_j = 25$ °C	$V_R = 30$ V	-	18		
		$T_j = 85$ °C		-		1600	
$V_F^{(2)}$	Forward voltage drop	$T_j = 25$ °C	$I_F = 5$ mA	-		0.285	V
		$T_j = 85$ °C		-		0.205	
		$T_j = 25$ °C	$I_F = 10$ mA	-	0.27	0.31	
		$T_j = 85$ °C		-		0.24	
		$T_j = 25$ °C	$I_F = 100$ mA	-	0.39	0.44	
		$T_j = 85$ °C		-		0.40	
		$T_j = 25$ °C	$I_F = 300$ mA	-	0.55	0.625	
		$T_j = 85$ °C		-		0.64	

1. Pulse test: $t_p = 5$ ms, $\delta < 2\%$

2. Pulse test: $t_p = 380$ μ s, $\delta < 2\%$

Table 4. Dynamic characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
C	Diode capacitance	$V_R = 1\text{ V}$, $F = 1\text{ MHz}$	-	10	14	pF

1.1 Characteristics (curves)

Figure 1. Reverse leakage current versus reverse applied voltage (typical values)

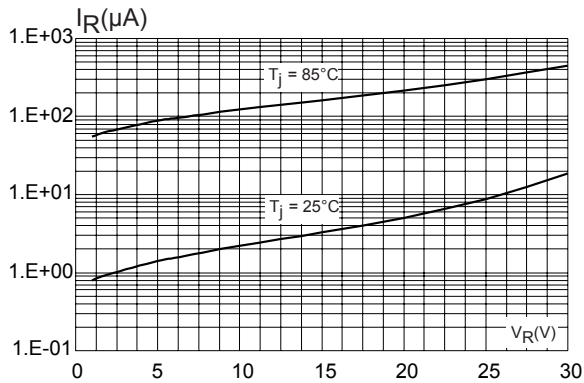


Figure 2. Forward voltage drop versus forward current (typical values)

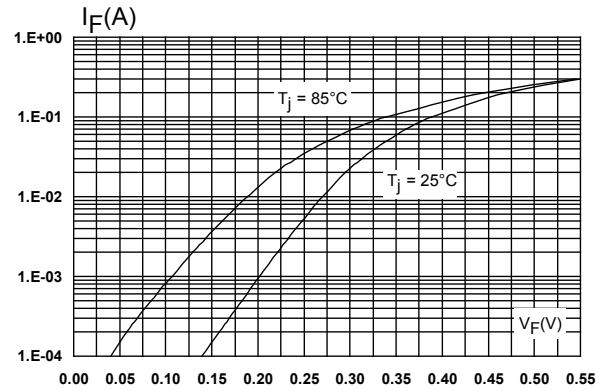


Figure 3. Relative variation of reverse leakage current versus junction temperature

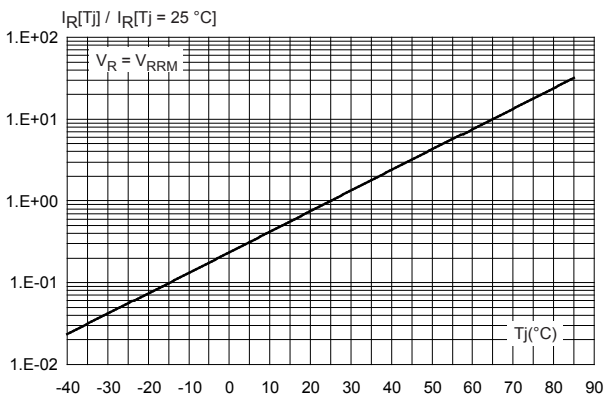


Figure 4. Junction capacitance versus reverse applied voltage (typical values)


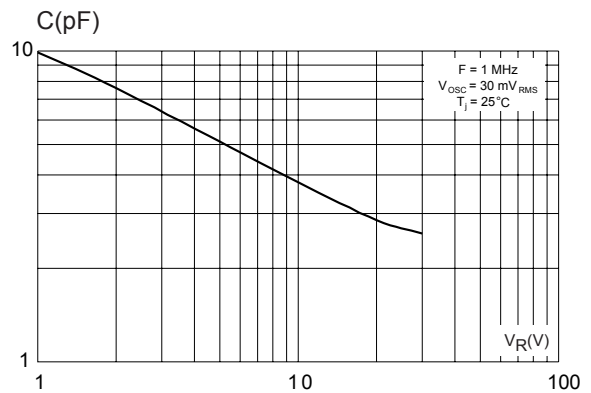


Figure 5. Continuous forward current versus ambient temperature

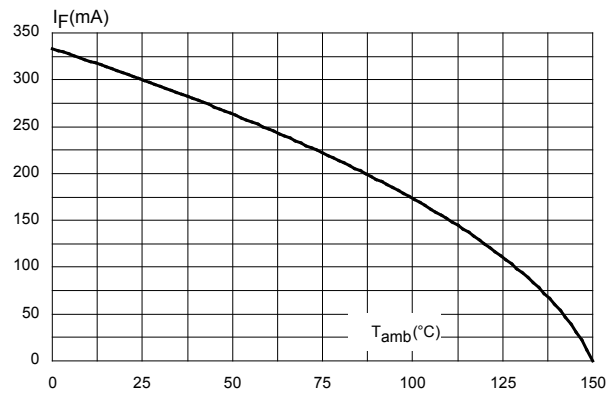

2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

2.1 0201 package information

Figure 6. 0201 package outline

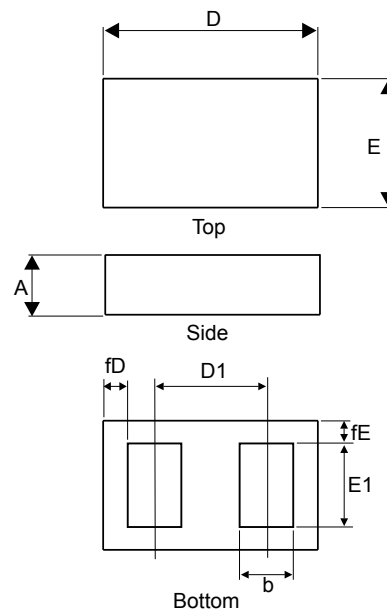


Table 5. 0201 package mechanical data


Ref.	Dimensions					
	Millimeters			Inches (for reference only)		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	0.28	0.30	0.32	0.0110	0.0118	0.0126
b	0.125	0.14	0.155	0.0049	0.0055	0.0061
D	0.57	0.60	0.63	0.0224	0.0236	0.0248
D1		0.35			0.0138	
E	0.27	0.30	0.33	0.0106	0.0118	0.0130
E1	0.175	0.19	0.205	0.0069	0.0075	0.0081
fD	0.040	0.055	0.070	0.0015	0.0021	0.0027
fE	0.040	0.055	0.070	0.0015	0.0021	0.0027

3 Recommendation on PCB assembly

3.1 Stencil opening design


1. General recommendation on stencil opening design
 - a. Stencil opening dimensions: L (Length), W (Width), T (Thickness).

Figure 10. Stencil opening recommendation



- b. General design rule
 - Stencil thickness (T) = 75 ~ 125 μm
 - $\frac{W}{T} \geq 1.5$
 - $\frac{L \times W}{2T(L + W)} \geq 0.66$
1. Reference design
 - a. Stencil opening thickness: 80 μm
 - b. Other dimensions: see below figure.

Figure 11. Recommended stencil window position, stencil opening thickness: 80 μm

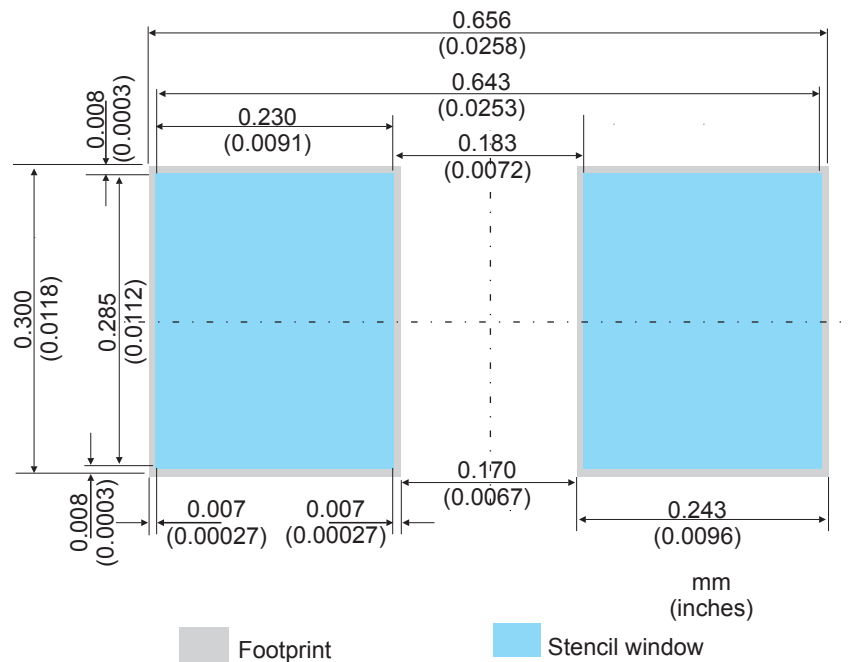

3.2 Solder paste

1. Halide-free flux qualification ROL0 according to ANSI/J-STD-004.
2. "No clean" solder paste is recommended.
3. Offers a high tack force to resist component displacement during PCB movement.
4. Use solder paste with fine particles: Type 4 (powder particle size 20-48 μm per IPC J STD-005).

3.3 Placement


1. Manual positioning is not recommended.
2. It is recommended to use the lead recognition capabilities of the placement system, not the outline centering
3. Standard tolerance of ± 0.05 mm is recommended.
4. 1.0 N placement force is recommended. Too much placement force can lead to squeezed out solder paste and cause solder joints to short. Too low placement force can lead to insufficient contact between package and solder paste that could cause open solder joints or badly centered packages.
5. To improve the package placement accuracy, a bottom side optical control should be performed with a high resolution tool.
6. For assembly, a perfect supporting of the PCB (all the more on flexible PCB) is recommended during solder paste printing, pick and place and reflow soldering by using optimized tools.

3.4 PCB design preference

1. To control the solder paste amount, the closed via is recommended instead of open vias.
2. The position of tracks and open vias in the solder area should be well balanced. A symmetrical layout is recommended, to avoid any tilt phenomena caused by asymmetrical solder paste due to solder flow away.

3.5 Reflow profile

Figure 12. ST ECOPACK® recommended soldering reflow profile for PCB mounting

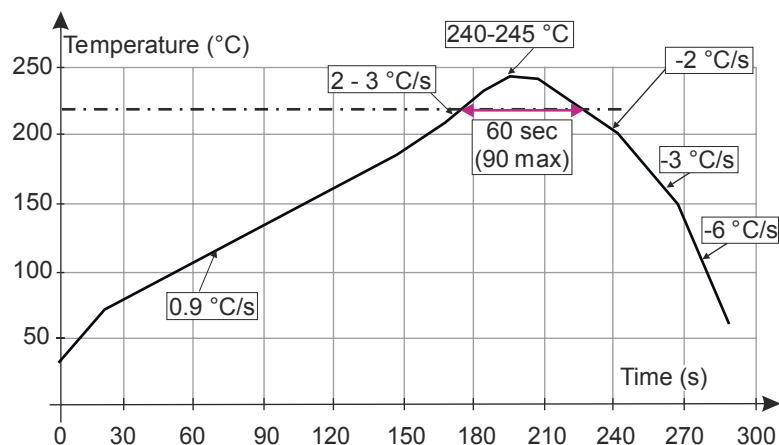

Note: Minimize air convection currents in the reflow oven to avoid component movement.

4 Ordering information

Table 6. Ordering information

Order code	Marking	Package	Weight	Base qty	Delivery mode
BAT30F4	4 ⁽¹⁾	Flat CSPS	0.116 mg	15000	Tape and reel

1. The marking codes can be rotated by 90° or 180° to differentiate assembly location

Revision history

Table 7. Document revision history

Date	Revision	Changes
13-May-2014	1	First issue
24-Nov-2014	2	Updated Table 2.
13-Apr-2015	3	Updated Features and Description.
11-Feb-2016	4	Updated Table 3 and Figure 4.
26-Feb-2016	5	Updated Table 2. Added Table 3, Table 5 and Figure 7.
05-Jun-2018	6	Updated Table 3. Static electrical characteristics , Table 5. 0201 package mechanical data and Table 6. Ordering information .
24-Sep-2018	7	Updated Table 3. Static electrical characteristics .

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9