

# QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 1099

## PUSH BUTTON ON/OFF CONTROLLER WITH BATTERY AND SUPPLY MONITORING

LTC2953CDD-1

### DESCRIPTION

Demonstration circuit 1099 features the LTC2953, a push button On/Off controller that manages system power via a push button interface. An enable output toggles system power while an interrupt output provides debounced push button status. The interrupt output can be used in menu driven applications to request a system power down.

The length of time that the push button must be held low for a power down is configurable with an external capacitor. The LTC2953 allows a user to force an immediate power down by tying /INT with /KILL and a push button turn off.

The LTC2953 also features input and output supply monitors. An uncommitted power fail comparator provides real time input monitor threshold information, while a de-glitched under voltage lockout comparator gracefully initiates a system power down. The under voltage lockout comparator prevents from powering from a bad battery.

The adjustable supply monitor input is compared against an accurate internal 0.5V reference. The reset output remains low until the supply monitor input has been in compliance for 200ms.

The DC1099 accepts voltages of 2.7V to 27V over the operating range of the LTC2953 input voltage. The LTC2953 draws only 12uA of current. Reverse polarity protection is provided with RPP and CPP on the DC1099. Two versions of the part accommodate either positive or negative enable polarities. For the DC1099, the LTC2953-1 with Enable active high is shown.

On the DC1099, an LT3010 is used to demonstrate a supply with its shutdown pin driven by the enable of the LTC2953.

**Design files for this circuit board are available. Call the LTC factory.**

LTC is a trademark of Linear Technology Corporation

**Table 1. Typical Performance Summary ( $T_A = 25^\circ\text{C}$ )**

| PARAMETER                      | CONDITION   | VALUE         |
|--------------------------------|---|---------------|
| Input Voltage Range $V_{IN}$   | Operating Range (Note 1)  | 2.7V to 27V   |
| DC/DC Out 2P6V                 | DC/DC LT3010 Enabled through Push Button                                | 2.6V          |
| Power Fail Input Voltage PFI   | $V_{IN}$ Threshold, Resistor Divider ( $R_{14} + R_{13}$ ) and $R_{12}$ | 3.00V         |
| UVLO Monitor Input Voltage     | $V_{IN}$ Threshold, Resistor Divider $R_{14}$ and ( $R_{13} + R_{12}$ ) | 2.65V         |
| Voltage Monitor VM             | Voltage Threshold to VM (2P6V), Resistor Divider $R_3$ and $R_2$        | 2.33V         |
| Monitor Pins Threshold Voltage | /PFI, VM, UVLO  | 500mV         |
| UVLO Input Hysteresis          | UVLO Pin (Note 1)   | 30mV          |
| Turn ON Debounce Time          | Push Button Turn On   | 32ms          |
| Turn OFF Debounce Time         | JP2 Set to OPEN, Push Button Turn Off                                   | 32ms          |
|                                | JP2 Set to CAP to Connect 0.47uF to PDT Pin (Note 2)                    | 32ms + 3008ms |

Note 1: The resistor divider at UVLO sets 2.7V above the UVLO threshold. Supply must first ramp up above 3.0V to exceed the UVLO Input Hysteresis for operation between 2.7V to 3.0V.

Note 2:  $0.47\mu\text{F} * (6.4 \text{ seconds} / \mu\text{F}) = 3.008 \text{ seconds}$

# QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 1099

## PUSH BUTTON ON/OFF CONTROLLER WITH BATTERY AND SUPPLY MONITORING

### QUICK START PROCEDURE

Demonstration circuit 1099 is easy to set up to evaluate the performance of the LTC2953. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below.

1. Place jumpers in the following positions:

**JP1** UNTIE

**JP2** CAP

2. Apply a voltage of 3.0V to 27V across VIN and GND.
3. Push down on Push Button SW1 for a Turn On. 2P6V LED will turn on from the 2.6V output.
4. Push down on Push Button SW1 for over 3 seconds for a turn off. /INT LED will momentarily turn on then turn off along with 2P6V LED.

5. Again, push down on Push Button SW1 for a Turn On.

6. Ramp down supply below 3.0V and no lower than 2.7V. /PFO LED will turn on.

7. Ramp down supply below 2.65V. /INT LED will momentarily turn on, then turn off along with 2P6V LED and /PFO LED.

#### Additional Tests:

8. Move JP2 to OPEN for a faster Push Button power down time and repeat steps 1 through 8.
9. Move JP1 to TIE for an immediate Push Button shutdown.


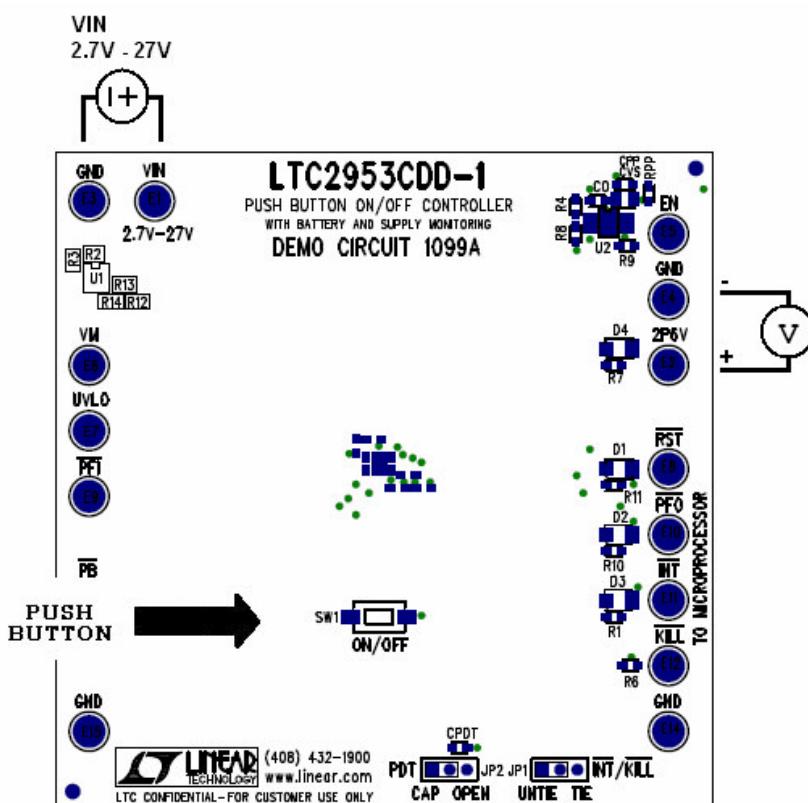


Figure 1. Proper Measurement Equipment Setup

# QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 1099

## PUSH BUTTON ON/OFF CONTROLLER WITH BATTERY AND SUPPLY MONITORING

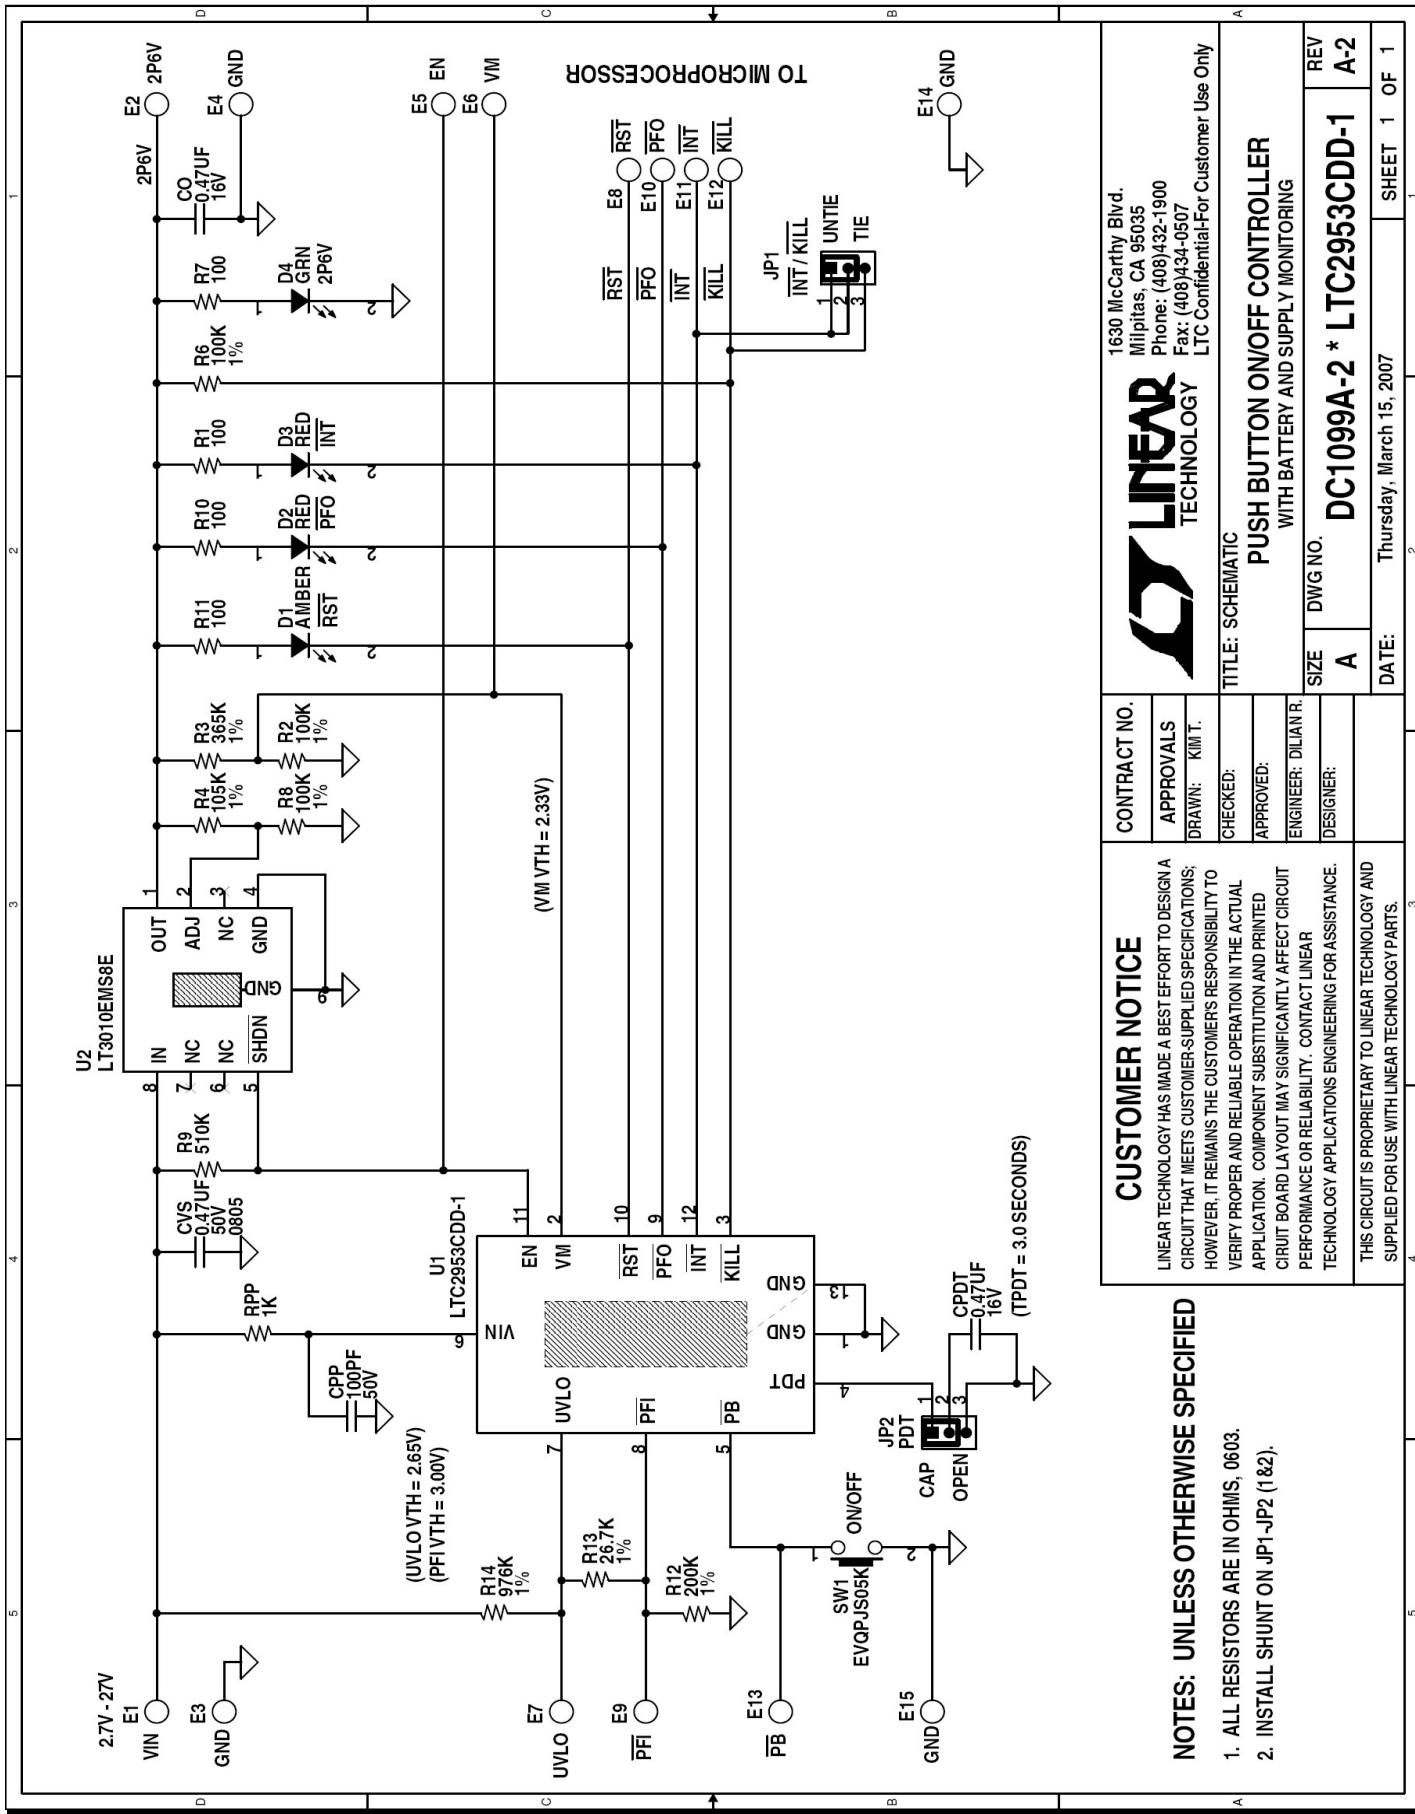

### CUSTOMER NOTICE

LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS; HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE.

THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.

### NOTES: UNLESS OTHERWISE SPECIFIED

- ALL RESISTORS ARE IN OHMMS, 0603.
- INSTALL SHUNT ON JP1-JP2 (1&2).

**LINEAR TECHNOLOGY**  
1630 McCarthy Blvd.  
Milpitas, CA 95035  
Phone: (408)432-1900  
Fax: (408)434-0507  
LTC Confidential-For Customer Use Only

| TITLE: SCHEMATIC                 |                   | REV A-2                            |   |
|----------------------------------|-------------------|------------------------------------|---|
| PUSH BUTTON ON/OFF CONTROLLER    |                   | WITH BATTERY AND SUPPLY MONITORING |   |
| DWG NO. DC1099A-2 * LTC2953CDD-1 |                   | SHEET 1 OF 1                       |   |
| SIZE A                           | DWG NO. DC1099A-2 | DATE Thursday, March 15, 2007      | 1 |

**Данный компонент на территории Российской Федерации****Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

**Офис по работе с юридическими лицами:**

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru  
moschip.ru\_4

moschip.ru\_6  
moschip.ru\_9