


D2MC

Low-Torque Basic Switch

Highly Reliable Rotary-action Switch for Low Torque Operation (0.5 mN·m)

- 0.5A rated model employs crossbar gold-alloy contacts for excellent contact reliability in the micro load range.
- Long durability (10,000,000 mechanical operations min.) through use of a movable coil spring.

RoHS Compliant

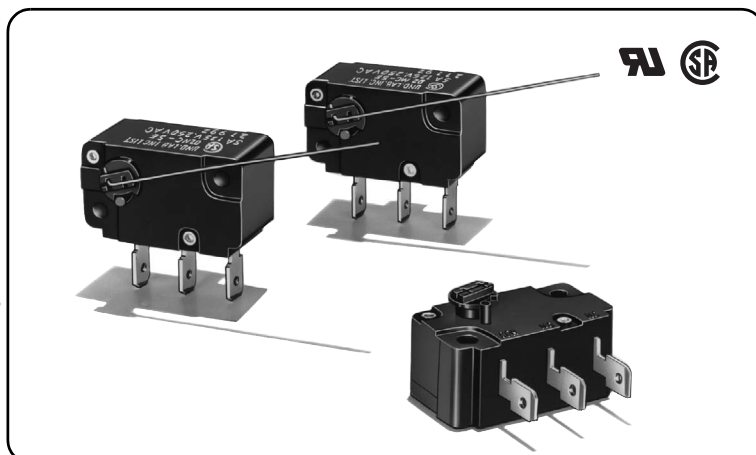

Model Number Legend

D2MC -	1	2	3
	1. Ratings 5: 250 VAC 5A 01: 30 VDC 0.5A		
	2. Maximum Operating Torque (OTq) E: 0.5 m N·m {5.1 gf·cm} F: 0.75 m N·m {7.6 gf·cm} H: 1.00 m N·m {10.2 gf·cm}		
	3. Direction of Actuator None: Clockwise L : Counterclockwise		


List of Models

Direction of actuation	Ratings	5A	0.5A
	Operating Torque (OTq)		
Clockwise (CW)	0.5 m N·m {5.1 gf·cm}	D2MC-5E	D2MC-01E
	0.75 m N·m {7.6 gf·cm}	D2MC-5F	D2MC-01F
	1.00 m N·m {10.2 gf·cm}	D2MC-5H	D2MC-01H
Counterclockwise (CCW)	0.5 m N·m {5.1 gf·cm}	D2MC-5EL	D2MC-01EL
	0.75 m N·m {7.6 gf·cm}	D2MC-5FL	D2MC-01FL
	1.00 m N·m {10.2 gf·cm}	D2MC-5HL	D2MC-01HL

Note. All the models listed here are supplied without actuator lever.
If an actuator lever is required, please order separately by indicating the model number of the actuator lever (CAA1M).

Contact Form

●SPDT



Contact Specifications

Item	Model	D2MC-5	D2MC-01
Contact	Specification	Rivet	Crossbar
	Material	Silver alloy	Gold alloy
	Gap (standard value)	0.5 mm	
Inrush current	NC	15A max.	0.5A max.
	NO	7A max.	0.5A max.
Min. applicable load (see note)		5 VDC 160mA	5 VDC 1mA

Ratings

Model	Rated voltage	Resistive load
D2MC-5 models	125 VAC	5A
	250 VAC	5A
D2MC-01 models	125 VAC	0.5A
	30 VDC	0.5A

Note. The above rating values apply under the following test conditions.

- (1) Ambient temperature: 20±2°C
- (2) Ambient humidity: 65±5%
- (3) Operating frequency: 30 operations/min

Characteristics

Item	Model	D2MC-5 models	D2MC-01 models
Permissible operating speed		1° to 360°/s	
Permissible operating frequency	Mechanical	240 operations/min	
	Electrical	60 operations/min (for 0.5 m N·m)	
Insulation resistance		100 MΩ min. (at 500 VDC with insulation tester)	
Contact resistance (initial value)		20 mΩ max.	100 mΩ max.
Dielectric strength	Between terminals of the same polarity	600 VAC 50/60 Hz 1min	
	Between current-carrying metal parts and ground	1,500 VAC 50/60 Hz 1min	
	Between each terminal and non-current-carrying metal parts	1,500 VAC 50/60 Hz 1min	
Vibration resistance * 1	Malfunction	10 to 55 Hz, 1.5 mm double amplitude	
Shock resistance	Durability	1,000 m/s ² {approx. 100G} max.	
	Malfunction * 1	Models with OTq of 0.5 m N·m:	100 m/s ² {10 G} max.
		Models with OTq of 0.75 m N·m:	100 m/s ² {10 G} max.
		Models with OTq of 1.00 m N·m:	200 m/s ² {20 G} max.
Durability * 2	Mechanical	10,000,000 operations min. (60 operations/min)	
	Electrical	100,000 operations min. (30 operations/min)	
Degree of protection		IEC IP40	
Ambient operating temperature		-25°C to +80°C (at ambient humidity of 60% max.) (with no icing or condensation)	
Ambient operating humidity		85% max. (for +5°C to +35°C)	
Weight		Approx. 10g	

Note. The data given above are initial values.

*1. Close or open circuit of the contact is 1ms max.

*2. For testing conditions, consult your OMRON sales representative.

Approved Safety Standard

UL (UL1054) /CSA (CSA C22.2 No.55)



Rated voltage	Model	D2MC-01	D2MC-5
125 VAC 250 VAC		0.5A -	5A 5A
30 VDC		0.5A	-

Dimensions (Unit: mm) /Operating Characteristics

The □ in the model number are for the Ratings and OTq code. See the "**List of Models**" for available combinations of models.

●Clockwise (CW)



D2MC-□□

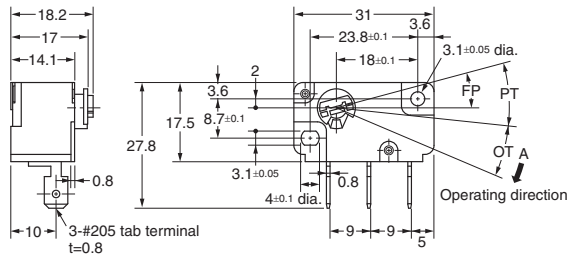

Operating Model		D2MC-5E	D2MC-5F	D2MC-5H
characteristics		D2MC-01E	D2MC-01F	D2MC-01H
Operating Torque	OTq Max.	0.5 m N·m (5.1 gf·cm)	0.75 m N·m (7.6 gf·cm)	1.00 m N·m (10.2 gf·cm)
Releasing Torque	RTq Min.	0.06 m N·m (0.6 gf·cm)	0.09 m N·m (0.9 gf·cm)	0.13 m N·m (1.3 gf·cm)
Pretravel	PT Max.	21°	21°	21°
Overtravel	OT Min.	17°	17°	17°
Movement Differential	MD Min.	3°	3°	3°
Release Travel	RT Min.	5°		5°
Total Travel	TT Min.	38°		
Free Position	FP	15°±3°		

●Counterclockwise (CCW)

D2MC-□□L

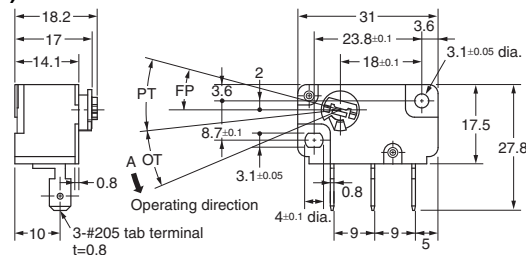

Operating characteristics		Model D2MC-01EL	D2MC-5FL D2MC-01FL	D2MC-5HL D2MC-01HL
Operating Torque	OTq Max.	0.5 N·m (5.1 gf·cm)	0.75 N·m (7.6 gf·cm)	1.00 N·m (10.2 gf·cm)
Releasing Torque	RTq Min.	0.06 N·m (0.6 gf·cm)	0.09 N·m (0.9 gf·cm)	0.13 N·m (1.3 gf·cm)
Pretravel	PT Max.	21°	21°	21°
Overtravel	OT Min.	17°	17°	17°
Movement Differential	MD Min.	3°	3°	3°
Release Travel	RT Min.	5°		5°
Total Travel	TT Min.	38°		
Free Position	FP	15°±3°		

Note 1. Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.

Note 2. The operating characteristics are for operation in the A direction (↓).

Precautions


★Please refer to "Basic Switches Common Precautions" for correct use.

Cautions	Correct Use
Connecting to the tab terminal #205 Insert the receptacle for #205 straight toward the terminal. Applying excessive external force horizontally or vertically may cause deformation of terminals and may damage the housings.	●Mounting Use M3 mounting screw with plane washers or spring washers to securely mount the Switch. Tighten the screws to a torque of 0.2 to 0.29 N·m {2 to 3 kgf·cm}.

Actuator Lever (Sold Separately)

●CAA1M

In addition to the standard wire lever model shown here, various other levers (wire levers) are available upon request. Please purchase the actuator lever you need separately.

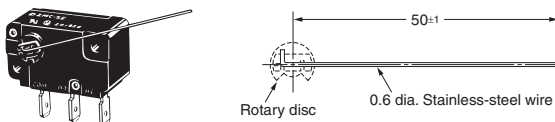


●Mounting Actuator Lever

Lever can be mounted easily with one touch as shown below.

1. Insert the end of the actuator lever into the hole in the rotary disc.




2. Push the lever down in the direction of the groove in the rotary disc.



●Designing Own Actuator

Read the following instructions if you decide to design your own actuator lever.

- Materials: stainless steel, piano wire, hard aluminum wire, etc.
- Shape: There are no restrictions on the tip shape or length of the actuator lever. However, if the lever is too long, improper switch resetting or contact chattering may occur. Therefore, the shape of lever as shown below is suitable. The appropriate value of dimension (ℓ) from the fulcrum is 50 mm.

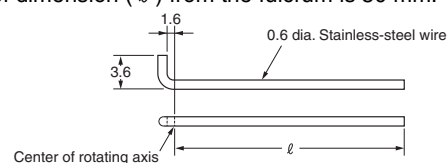

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation
ELECTRONIC AND MECHANICAL COMPONENTS COMPANY

Contact: www.omron.com/ecb

Cat. No. B051-E1-09
0812(0207)(O)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9