


## NTC Thermistors, Special Long Lead Sensors



### FEATURES

- Accurate over wide temperature range
- High stability
- Excellent price/performance ratio
- High adhesive strength between PVC wire and the encapsulating laquer
- Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC

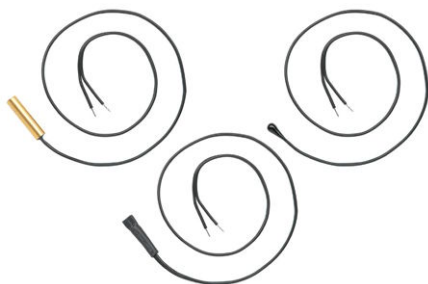

**RoHS**  
COMPLIANT

### APPLICATIONS

Temperature measurement, sensing and control in remote locations and for various environmental conditions.

### DESCRIPTION

These sensors exist of a small NTC chip reflow soldered between two AWG24 UL-2468 wires. They are lacquered and insulated with black epoxy (NTCLE400 type), sleeved (NTCLS100 type) or potted into a brass pipe (NTCLP100 type).

### MARKING

UL mark on wire, no mark on body.

### PACKAGING

The thermistors are packed in cardboard boxes; each box containing 500 pieces.

### DESIGN-IN SUPPORT

Other wire length and wire type (UL-2651 PVC 105 °C) are available on request. The products can be provided with a connector on request.

For complete curve computation, visit:

[www.vishay.com/resistors-non-linear/curve-computation-list/](http://www.vishay.com/resistors-non-linear/curve-computation-list/)

### MOUNTING

By soldering or clamping the wire ends, in any position. Body can be inserted or taped attached. Not intended for fluid immersed applications.

| QUICK REFERENCE DATA                        |                         |          |
|---------------------------------------------|-------------------------|----------|
| PARAMETER                                   | VALUE                   | UNIT     |
| Resistance value at 25 °C ( $R_{25}$ )      | 2.2K to 100K            | $\Omega$ |
| Tolerance on $R_{25}$ -value <sup>(2)</sup> | $\pm 3$                 | %        |
| $B_{25/85}$ -value                          | 3977 to 4190            | K        |
| Tolerance on $B_{25/85}$ -value             | $\pm 0.75$ to $\pm 1.5$ | %        |
| Operating temperature range:                |                         | °C       |
| At zero dissipation (continuously)          | - 40 to + 85            |          |
| At maximum dissipation                      | 0 to + 55               |          |
| Maximum power dissipation at 55 °C          | 250                     | mW       |
| Dissipation factor:                         |                         | mW/K     |
| NTCLE400...                                 | 6.0                     |          |
| NTCLS100...                                 | 8.0                     |          |
| NTCLP100...                                 | 6.0                     |          |
| Response time <sup>(1)</sup> :              |                         | s        |
| NTCLE400...                                 | $\approx 7$             |          |
| NTCLS100...                                 | $\approx 15$            |          |
| NTCLP100...                                 | $\approx 10$            |          |
| Climatic category (LCT/UCT/days)            | 40/085/56               |          |
| Weight                                      |                         | g        |
| NTCLE400...                                 | $\approx 4$             |          |
| NTCLS100...                                 | $\approx 6$             |          |
| NTCLP100...                                 | $\approx 6$             |          |

#### Notes

<sup>(1)</sup> Response time in silicone oil MS 200/50. This is the time needed for the sensor to reach 63.2 % of the total temperature difference when subjected to a temperature change from 25 °C in air to 85 °C in oil.

<sup>(2)</sup> Tighter tolerances on  $R_{25}$  are available upon request.

| ELECTRICAL DATA AND ORDERING INFORMATION |                    |                                                    |                |                |                              |              |                 |
|------------------------------------------|--------------------|----------------------------------------------------|----------------|----------------|------------------------------|--------------|-----------------|
| $R_{25}$<br>(k $\Omega$ )                | $B_{25/85}$ -VALUE | SAP MATERIAL AND ORDERING NUMBER <sup>(3)(4)</sup> |                |                | OLD 12NC CODE 2381 641 ..... |              |                 |
|                                          |                    | EPOXY TYPE                                         | SLEEVED TYPE   | PIPE TYPE      | EPOXY-COATED TYPE            | SLEEVED TYPE | BRASS-PIPE TYPE |
| 2.2                                      | 3977K $\pm 0.75$ % | NTCLE400E3222H                                     | NTCLS100E3222H | NTCLP100E3222H | 26222                        | 36222        | 46222           |
| 4.7                                      | 3977K $\pm 0.75$ % | NTCLE400E3472H                                     | NTCLS100E3472H | NTCLP100E3472H | 26472                        | 36472        | 46472           |
| 5                                        | 3977K $\pm 0.75$ % | NTCLE400E3502H                                     | NTCLS100E3502H | NTCLP100E3502H | 26502                        | 36502        | 46502           |
| 10                                       | 3977K $\pm 0.75$ % | NTCLE400E3103H                                     | NTCLS100E3103H | NTCLP100E3103H | 26103                        | 36103        | 46103           |
| 47                                       | 4090K $\pm 1.5$ %  | NTCLE400E3473H                                     | NTCLS100E3473H | NTCLP100E3473H | 26473                        | 36473        | 46473           |
| 100                                      | 4190K $\pm 1.5$ %  | NTCLE400E3104H                                     | NTCLS100E3104H | NTCLP100E3104H | 26104                        | 36104        | 46104           |

#### Notes

<sup>(3)</sup> Other values and tolerances based on the NTCC100E4 series are available on request. ([www.vishay.com/doc?29058](http://www.vishay.com/doc?29058))

<sup>(4)</sup> The specified catalog numbers refer to products with L = 400 mm, without connector and adopt UL-2468.AWG24 wire.

# NTCLE400, NTCLS100, NTCLP100


Vishay BCcomponents

NTC Thermistors, Special Long  
Lead Sensors



## DIMENSIONS in millimeters


Epoxy-coated type NTCLE400E....

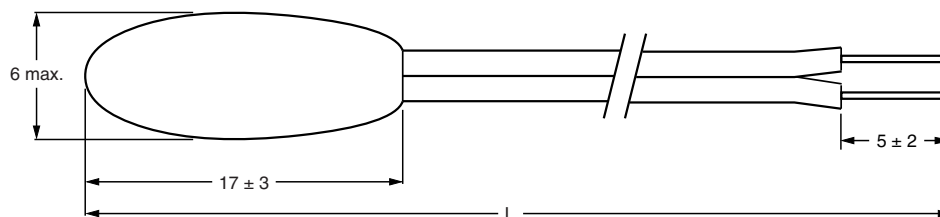

$$L = 400 \text{ mm} + 15/-0$$

Other wire lengths or connector attached available on request.


Sleeved type NTCLS100E....

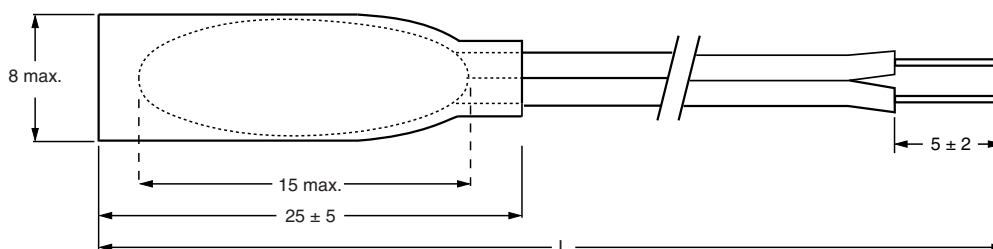

$$L = 400 \text{ mm} + 15/-0$$

Other wire lengths or connector attached available on request.

Brass-pipe type NTCLP100E....

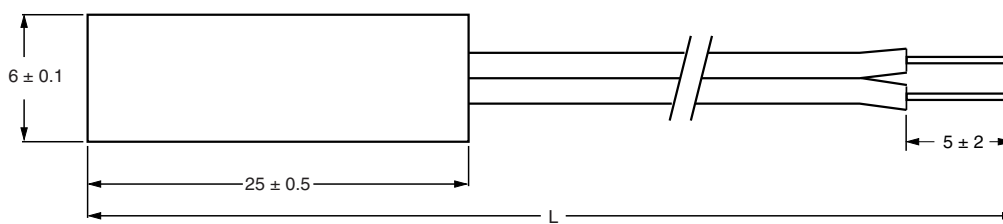


$$L = 400 \text{ mm} + 15/-0$$

Other wire lengths or connector attached available on request.

## DERATING

Power derating curve.

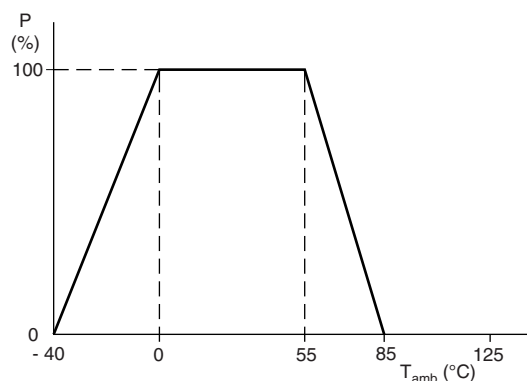

### Note

- Zero power is considered as measuring power max. 1 % of max. power.



# NTCLE400, NTCLS100, NTCLP100

NTC Thermistors, Special Long  
Lead Sensors

Vishay BCcomponents

## RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH $R_{25}$ AT 2.2 k $\Omega$ , 4.7 k $\Omega$ , 5.0 k $\Omega$ , AND 10 k $\Omega$

| $T_{OPER}$<br>(°C) | PART NR.<br>NTCL**00E3222H | PART NR.<br>NTCL**00E3472H | PART NR.<br>NTCL**00E3502H | PART NR.<br>NTCL**00E3103H | $\Delta R/R$<br>(%) | TCR<br>(%/K) | $\Delta T_{max.}$<br>(± K) |
|--------------------|----------------------------|----------------------------|----------------------------|----------------------------|---------------------|--------------|----------------------------|
|                    | $R_T$<br>( $\Omega$ )      | $R_T$<br>( $\Omega$ )      | $R_T$<br>( $\Omega$ )      | $R_T$<br>( $\Omega$ )      |                     |              |                            |
| - 40               | 73 061                     | 156 084                    | 166 047                    | 332 094                    | 5.87                | - 6.62       | 0.89                       |
| - 35               | 52 778                     | 112 753                    | 119 950                    | 239 900                    | 5.60                | - 6.39       | 0.88                       |
| - 30               | 38 544                     | 82 344                     | 87 600                     | 175 200                    | 5.33                | - 6.18       | 0.86                       |
| - 25               | 28 443                     | 60 765                     | 64 643                     | 129 287                    | 5.08                | - 5.98       | 0.85                       |
| - 20               | 21 199                     | 45 288                     | 48 179                     | 96 358                     | 4.83                | - 5.78       | 0.84                       |
| - 15               | 15 950                     | 34 075                     | 36 250                     | 72 500                     | 4.60                | - 5.60       | 0.82                       |
| - 10               | 12 110                     | 25 872                     | 27 523                     | 55 046                     | 4.37                | - 5.42       | 0.81                       |
| - 5                | 9275                       | 19 814                     | 21 078                     | 42 157                     | 4.15                | - 5.25       | 0.79                       |
| 0                  | 7162                       | 15 300                     | 16 277                     | 32 554                     | 3.94                | - 5.09       | 0.77                       |
| 5                  | 5574                       | 11 909                     | 12 669                     | 25 339                     | 3.74                | - 4.93       | 0.76                       |
| 10                 | 4372                       | 9340                       | 9936                       | 19 872                     | 3.55                | - 4.79       | 0.74                       |
| 15                 | 3454                       | 7378                       | 7849                       | 15 698                     | 3.36                | - 4.64       | 0.72                       |
| 20                 | 2747                       | 5869                       | 6244                       | 12 488                     | 3.18                | - 4.51       | 0.70                       |
| 25                 | 2200                       | 4700                       | 5000                       | 10 000                     | 3.00                | - 4.38       | 0.69                       |
| 30                 | 1773                       | 3788                       | 4030                       | 8059                       | 3.17                | - 4.25       | 0.75                       |
| 35                 | 1438                       | 3071                       | 3267                       | 6535                       | 3.33                | - 4.13       | 0.81                       |
| 40                 | 1173                       | 2505                       | 2665                       | 5330                       | 3.49                | - 4.02       | 0.87                       |
| 45                 | 961.8                      | 2055                       | 2186                       | 4372                       | 3.65                | - 3.91       | 0.93                       |
| 50                 | 793.2                      | 1694                       | 1803                       | 3605                       | 3.80                | - 3.80       | 1.00                       |
| 55                 | 657.5                      | 1405                       | 1494                       | 2989                       | 3.94                | - 3.70       | 1.07                       |
| 60                 | 547.8                      | 1170                       | 1245                       | 2490                       | 4.08                | - 3.60       | 1.13                       |
| 65                 | 458.6                      | 979.7                      | 1042                       | 2084                       | 4.22                | - 3.51       | 1.20                       |
| 70                 | 385.7                      | 823.9                      | 876.5                      | 1753                       | 4.35                | - 3.42       | 1.27                       |
| 75                 | 325.8                      | 696.0                      | 740.5                      | 1481                       | 4.48                | - 3.33       | 1.35                       |
| 80                 | 276.4                      | 590.5                      | 628.2                      | 1256                       | 4.60                | - 3.25       | 1.42                       |
| 85                 | 235.5                      | 503.0                      | 585.2                      | 1070                       | 4.73                | - 3.17       | 1.49                       |

# NTCLE400, NTCLS100, NTCLP100

Vishay BCcomponents

NTC Thermistors, Special Long  
Lead Sensors



## RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH $R_{25}$ AT 47 k $\Omega$

| $T_{OPER}$<br>(°C) | PART NR.<br>NTCL**00E3473H | $\Delta R/R$ (%) | TCR<br>(%/K) | $\Delta T_{max.}$<br>(± K) |
|--------------------|----------------------------|------------------|--------------|----------------------------|
|                    | $R_T$<br>( $\Omega$ )      |                  |              |                            |
| - 40               | 1 589 068                  | 8.91             | - 6.54       | 1.36                       |
| - 35               | 1 151 627                  | 8.34             | - 6.34       | 1.32                       |
| - 30               | 842 790                    | 7.79             | - 6.15       | 1.27                       |
| - 25               | 622 597                    | 7.27             | - 5.96       | 1.22                       |
| - 20               | 464 110                    | 6.77             | - 5.79       | 1.17                       |
| - 15               | 348 989                    | 6.28             | - 5.62       | 1.12                       |
| - 10               | 264 628                    | 5.82             | - 5.45       | 1.07                       |
| - 5                | 202 280                    | 5.37             | - 5.30       | 1.01                       |
| 0                  | 155 823                    | 4.94             | - 5.14       | 0.96                       |
| 5                  | 120 932                    | 4.52             | - 5.00       | 0.91                       |
| 10                 | 94 528                     | 4.12             | - 4.86       | 0.85                       |
| 15                 | 74 399                     | 3.74             | - 4.72       | 0.79                       |
| 20                 | 58 945                     | 3.36             | - 4.59       | 0.73                       |
| 25                 | 47 000                     | 3.00             | - 4.47       | 0.67                       |
| 30                 | 37 706                     | 3.35             | - 4.35       | 0.77                       |
| 35                 | 30 429                     | 3.69             | - 4.23       | 0.87                       |
| 40                 | 24 696                     | 4.02             | - 4.12       | 0.97                       |
| 45                 | 20 154                     | 4.33             | - 4.01       | 1.08                       |
| 50                 | 16 534                     | 4.64             | - 3.91       | 1.19                       |
| 55                 | 13 633                     | 4.94             | - 3.81       | 1.30                       |
| 60                 | 11 296                     | 5.23             | - 3.71       | 1.41                       |
| 65                 | 9404                       | 5.51             | - 3.62       | 1.52                       |
| 70                 | 7865                       | 5.78             | - 3.53       | 1.64                       |
| 75                 | 6607                       | 6.04             | - 3.44       | 1.75                       |
| 80                 | 5573                       | 6.30             | - 3.36       | 1.87                       |
| 85                 | 4721                       | 6.55             | - 3.28       | 2.00                       |



# NTCLE400, NTCLS100, NTCLP100

NTC Thermistors, Special Long  
Lead Sensors

Vishay BCcomponents

## RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES WITH $R_{25}$ AT 100 k $\Omega$

| $T_{\text{OPER}}$<br>(°C) | PART NR.<br>NTCL**00E3104H | $\Delta R/R$ (%) | TCR<br>(%/K) | $\Delta T_{\text{max.}}$<br>(± K) |
|---------------------------|----------------------------|------------------|--------------|-----------------------------------|
|                           | $R_T$<br>( $\Omega$ )      |                  |              |                                   |
| - 40                      | 3 666 299                  | 9.05             | - 6.69       | 1.35                              |
| - 35                      | 2 637 588                  | 8.47             | - 6.49       | 1.31                              |
| - 30                      | 1 916 576                  | 7.91             | - 6.29       | 1.26                              |
| - 25                      | 1 406 111                  | 7.37             | - 6.10       | 1.21                              |
| - 20                      | 1 041 184                  | 6.86             | - 5.92       | 1.16                              |
| - 15                      | 777 846                    | 6.36             | - 5.75       | 1.11                              |
| - 10                      | 586 097                    | 5.89             | - 5.58       | 1.06                              |
| - 5                       | 445 257                    | 5.43             | - 5.42       | 1.00                              |
| 0                         | 340 942                    | 4.99             | - 5.26       | 0.95                              |
| 5                         | 263 054                    | 4.56             | - 5.11       | 0.89                              |
| 10                        | 204 446                    | 4.15             | - 4.97       | 0.84                              |
| 15                        | 160 014                    | 3.75             | - 4.83       | 0.78                              |
| 20                        | 126 087                    | 3.37             | - 4.70       | 0.72                              |
| 25                        | 100 000                    | 3.00             | - 4.57       | 0.66                              |
| 30                        | 79 808                     | 3.36             | - 4.45       | 0.75                              |
| 35                        | 64 077                     | 3.70             | - 4.33       | 0.86                              |
| 40                        | 51 745                     | 4.04             | - 4.22       | 0.96                              |
| 45                        | 42 021                     | 4.36             | - 4.11       | 1.06                              |
| 50                        | 34 308                     | 4.68             | - 4.00       | 1.17                              |
| 55                        | 28 156                     | 4.98             | - 3.90       | 1.28                              |
| 60                        | 23 222                     | 5.28             | - 3.80       | 1.39                              |
| 65                        | 19 246                     | 5.57             | - 3.71       | 1.50                              |
| 70                        | 16 025                     | 5.85             | - 3.62       | 1.62                              |
| 75                        | 13 402                     | 6.12             | - 3.53       | 1.73                              |
| 80                        | 11 258                     | 6.38             | - 3.45       | 1.85                              |
| 85                        | 9496                       | 6.64             | - 3.36       | 1.97                              |

## TESTS AND REQUIREMENTS

### STABILITY TESTS

| IEC         | TEST                          | PROCEDURE                         | DRIFT REQUIREMENT   |
|-------------|-------------------------------|-----------------------------------|---------------------|
| 60068-2-2   | Endurance dry heat            | 85 °C; 1000 h                     | $\Delta R/R < 5 \%$ |
| 60068-2-1   | Endurance cold                | - 40 °C; 1000 h                   | $\Delta R/R < 5 \%$ |
| 60539       | Endurance max. dissipation    | 250 mW; 55 °C; 1000 h             | $\Delta R/R < 5 \%$ |
| 60068-2-3   | Damp heat, steady state       | 56 days at 40 °C; 90 % to 95 % RH | $\Delta R/R < 7 \%$ |
| 60068-20-14 | - 40 °C to + 85 °C; 50 cycles | Rapid change of temperature       | $\Delta R/R < 5 \%$ |



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9