



### Main

|                                    |  |
|------------------------------------|--|
| Range of product                   | Harmony XVC1   |
| Product or component type          | Complete pre-wired monolithic tower light  |
| Beacon or indicator bank unit type | 4 illuminated units  |
| Sound signalling                   | Without  |
| Mounting diameter                  | 3.94 in (100 mm)   |
| Component name                     | XVC  |
| Light source                       | Blue LED steady or flashing signalling<br>Green LED steady or flashing signalling<br>Orange LED steady or flashing signalling<br>Red LED steady or flashing signalling |
| [Us] rated supply voltage          | 100...240 V  |
| Supply circuit type                | AC   |

### Complementary

|  |   |
|--|---|
| Material                               | Illuminated unit: polycarbonate<br>Base unit: ABS (acrylonitrile butadiene-styrene)<br>Top cover: PBT + ABS (UL94-V0) |
| Product mounting                       | On base   |
| Cable cross section                    | 0 in <sup>2</sup> (0.33 mm <sup>2</sup> )<br>0 in <sup>2</sup> (0.83 mm <sup>2</sup> )                                |
| AWG gauge                              | AWG 18<br>AWG 22  |
| Cable length                           | 19.69 in (500 mm)   |
| Marking                                | CE  |
| [Uimp] rated impulse withstand voltage | 4 kV  |
| Current consumption                    | 215 mA  |
| Flashing frequency                     | 0.7...3 Hz  |
| Product weight                         | 3.53 lb(US) (1.6 kg)  |
| Height                                 | 17.72 in (450 mm)   |

### Environment

|                                       |                                    |
|---------------------------------------|------------------------------------|
| standards                             | EN/IEC 60947-1<br>EN/IEC 60947-5-1 |
| product certifications                | UL                                 |
| protective treatment                  | TC                                 |
| ambient air temperature for storage   | -31...158 °F (-35...70 °C)         |
| ambient air temperature for operation | -22...122 °F (-30...50 °C)         |
| electrical shock protection class     | Class I conforming to EN/IEC 61140 |
| IP degree of protection               | IP54 conforming to EN/IEC 60529    |

### Offer Sustainability

|   |   |
|---|---|
| Green Premium product   | Green Premium product   |
| Compliant - since 0808 - Schneider Electric declaration of conformity | Compliant - since 0808 - Schneider Electric declaration of conformity |
| Reference not containing SVHC above the threshold                     | Reference not containing SVHC above the threshold                     |
| Available   | Available   |
| Need no specific recycling operations                                 | Need no specific recycling operations                                 |
| WARNING: This product can expose you to chemicals including:          | WARNING: This product can expose you to chemicals including:          |

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm.

Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm.

For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)


### Contractual warranty

Warranty period 18 months

## Pre-assembled and Pre-wired Tower Light

### Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

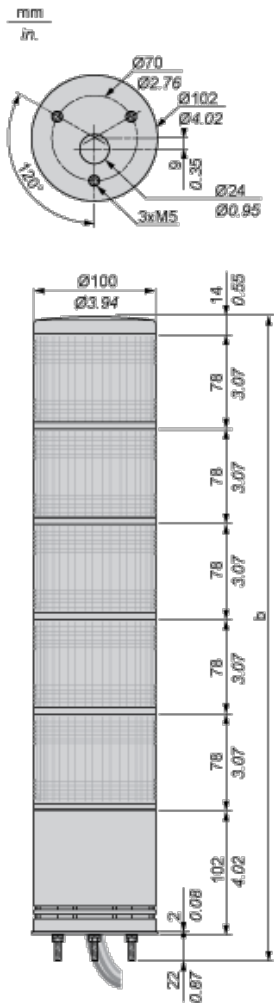


| No. of illuminated units | b in mm | b in in. |
|--------------------------|---------|----------|
| 1                        | 216     | 8.50     |
| 2                        | 294     | 11.57    |
| 3                        | 372     | 14.65    |
| 4                        | 450     | 17.72    |
| 5                        | 528     | 20.79    |

## Pre-assembled and Pre-wired Tower Light

### Mounting on Horizontal Support (Direct or with Fixing Plate)

Panel cut-out

mm  
in.



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9