



### FEATURES

- Automatically restarts a microprocessor after power failure
- Maintains reset for 150 ms after  $V_{CC}$  returns to an in-tolerance condition
- Reduces need for discrete components
- Precision temperature-compensated voltage reference and voltage sensor
- Low-cost TO-92 or space saving surface mount SOT-23 packages available
- Push-Pull output for low current operation
- Operating temperature  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$

### PIN ASSIGNMENT



BOTTOM VIEW  
TO-92 PACKAGE  
See Mech.  
Drawings Section  
On Website

### PIN DESCRIPTION

#### TO-92

|   |                         |                         |
|---|-------------------------|-------------------------|
| 1 | $\overline{\text{RST}}$ | Active Low Reset Output |
| 2 | $V_{CC}$                | Power Supply            |
| 3 | GND                     | Ground                  |

#### SOT-23

|   |                         |                         |
|---|-------------------------|-------------------------|
| 1 | $\overline{\text{RST}}$ | Active Low Reset Output |
| 2 | $V_{CC}$                | Power Supply            |
| 3 | GND                     | Ground                  |


### DESCRIPTION

The DS1810 EconoReset uses a precision temperature reference and comparator circuit to monitor the status of the power supply ( $V_{CC}$ ). When an out-of-tolerance condition is detected, an internal power-fail signal is generated which forces reset to the active state. When  $V_{CC}$  returns to an in-tolerance condition, the reset signal is kept in the active state for approximately 150 ms to allow the power supply and processor to stabilize.


## OPERATION - POWER MONITOR

The DS1810 provides the function of detecting out-of-tolerance power supply conditions and warning a processor-based system of impending power failure. When  $V_{CC}$  is detected as out-of-tolerance, the  $\overline{RST}$  signal is asserted. On power-up,  $\overline{RST}$  is kept active for approximately 150 ms after the power supply has reached the selected tolerance. This allows the power supply and microprocessor to stabilize before  $\overline{RST}$  is released.

### BLOCK DIAGRAM (PUSH-PULL OUTPUT) Figure 1



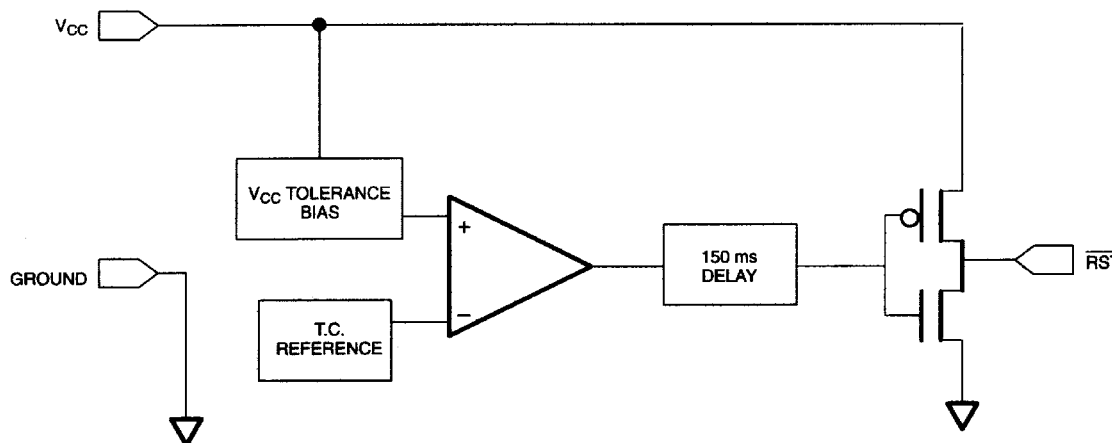


### APPLICATION EXAMPLE Figure 2

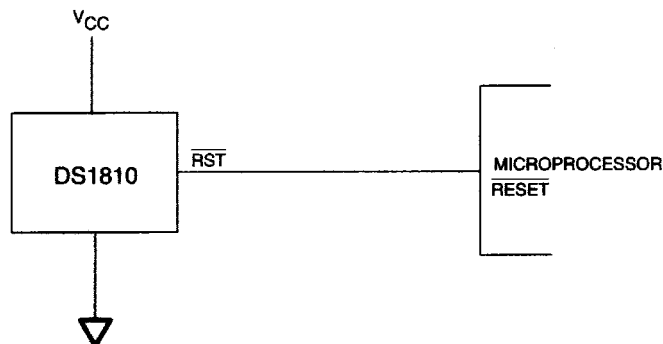

### OUTPUT VALID CONDITIONS

All versions of the DS1810 can maintain a valid output as long as  $V_{CC}$  remains above 1.2 volt. However, the  $\overline{RST}$  outputs on the DS1810 use a push-pull structure which can maintain a valid output below 1.2 volts on an input. To sink current below 1.2 volts, a resistor can be connected from  $\overline{RST}$  to Ground (see Figure 3). This arrangement will maintain a valid value on the  $\overline{RST}$  outputs even if  $V_{CC}$  approaches 0 volts. During both power-up and -down this arrangement will draw current when  $\overline{RST}$  is in the high state. A value of about 100 k $\Omega$  should be adequate to maintain a valid condition.

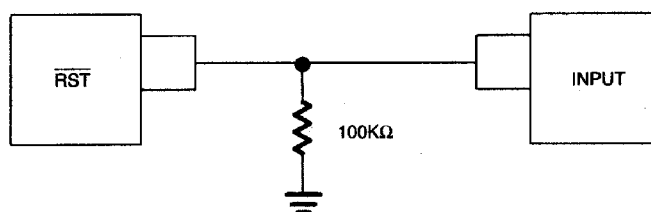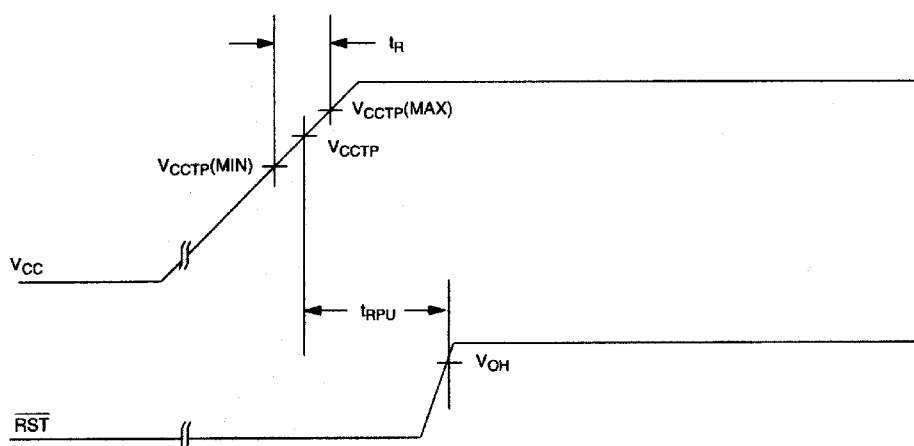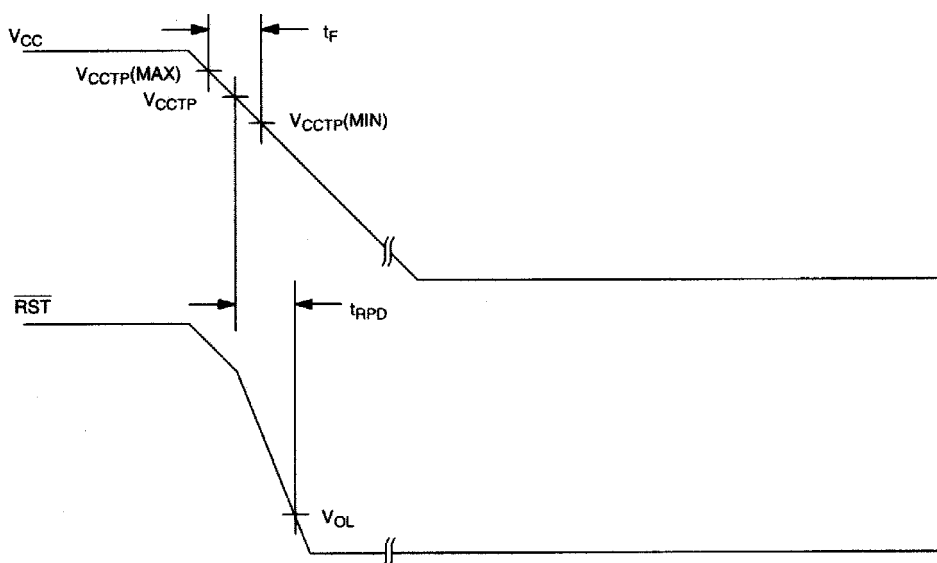**APPLICATION DIAGRAM:** **$\overline{\text{RST}}$  VALID TO 0 VOLTS  $V_{CC}$  ON THE DS1810 Figure 3****TIMING DIAGRAM: POWER-UP Figure 4****TIMING DIAGRAM: POWER-DOWN Figure 5**

**ABSOLUTE MAXIMUM RATINGS\***

|                                                |                          |
|------------------------------------------------|--------------------------|
| Voltage on $V_{CC}$ Pin Relative to Ground     | -0.5V to +7.0V           |
| Voltage on $\overline{RST}$ Relative to Ground | -0.5V to $V_{CC} + 0.5V$ |
| Operating Temperature                          | -40°C to +85°C           |
| Storage Temperature                            | -55°C to +125°C          |
| Soldering Temperature                          | 260°C for 10 seconds     |

\* This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

**RECOMMENDED DC OPERATING CONDITIONS** (-40°C to +85°C)

| PARAMETER      | SYMBOL   | MIN | TYP | MAX | UNITS | NOTES |
|----------------|----------|-----|-----|-----|-------|-------|
| Supply Voltage | $V_{CC}$ | 1.2 |     | 5.5 | V     | 1     |

**DC ELECTRICAL CHARACTERISTICS** (-40°C to +85°C;  $V_{CC}=1.2V$  to 5.5V)


| PARAMETER                        | SYMBOL     | MIN           | TYP           | MAX  | UNITS   | NOTES |
|----------------------------------|------------|---------------|---------------|------|---------|-------|
| Output Voltage @ 0-500 $\mu A$   | $V_{OH}$   | $V_{CC}-0.5V$ | $V_{CC}-0.1V$ |      | V       | 1     |
| Output Current @ 2.4V            | $I_{OH}$   |               | 350           |      | $\mu A$ | 2     |
| Output Current @ 0.4V            | $I_{OL}$   | +10           |               |      | mA      | 2     |
| Operating Current $V_{CC} < 5.5$ | $I_{CC}$   |               | 30            | 40   | $\mu A$ | 3     |
| $V_{CC}$ Trip Point (DS1810-5)   | $V_{CCTP}$ | 4.50          | 4.62          | 4.75 | V       | 1     |
| $V_{CC}$ Trip Point (DS1810-10)  | $V_{CCTP}$ | 4.25          | 4.37          | 4.49 | V       | 1     |
| $V_{CC}$ Trip Point (DS1810-15)  | $V_{CCTP}$ | 4.00          | 4.12          | 4.24 | V       | 1     |
| Output Capacitance               | $C_{OUT}$  |               |               | 10   | pF      |       |

**AC ELECTRICAL CHARACTERISTICS** (-40°C to +85°C;  $V_{CC}=1.2V$  to 5.5V)

| PARAMETER                                                     | SYMBOL    | MIN | TYP | MAX | UNITS   | NOTES |
|---------------------------------------------------------------|-----------|-----|-----|-----|---------|-------|
| RESET Active Time                                             | $t_{RST}$ | 100 | 150 | 300 | ms      |       |
| $V_{CC}$ Detect to $\overline{RST}$                           | $t_{RPD}$ |     | 2   | 5   | $\mu s$ |       |
| $V_{CC}$ Slew Rate<br>( $V_{CCTP}$ (MAX) to $V_{CCTP}$ (MIN)) | $t_F$     | 300 |     |     | $\mu s$ |       |
| $V_{CC}$ Slew Rate<br>( $V_{CCTP}$ (MIN) to $V_{CCTP}$ (MAX)) | $t_R$     | 0   |     |     | ns      |       |
| $V_{CC}$ Detect to $\overline{RST}$                           | $t_{RPU}$ | 100 | 150 | 300 | ms      | 4     |

**NOTES:**

1. All voltages are referenced to ground.
2. Measured with  $V_{CC} \geq 2.7$  volts.
3. Measured with  $\overline{RST}$  output open.
4.  $t_R = 5 \mu s$ .

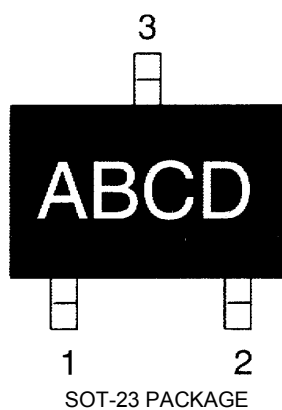**PART MARKING CODES**

“A”, “B”, & “C” represent the device type.

|     |   |        |
|-----|---|--------|
| 810 | - | DS1810 |
| 811 | - | DS1811 |
| 812 | - | DS1812 |
| 813 | - | DS1813 |
| 815 | - | DS1815 |
| 816 | - | DS1816 |
| 817 | - | DS1817 |
| 818 | - | DS1818 |

“D” represents the device tolerance.

|   |   |     |
|---|---|-----|
| A | - | 5%  |
| B | - | 10% |
| C | - | 15% |
| D | - | 20% |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9