

# Inductors for Power Circuits

Wound/STD • magnetic shielded

## SPM series

**Type:** **SPM3012 (3.2x3.0 mm)**  
**SPM5030 (5.2x5.0 mm)**  
**SPM6530 (7.1x6.5 mm)**

Issue date: September 2011

- All specifications are subject to change without notice.
- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

# Inductors for Power Circuits

## Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

### SPM Series SPM3012

The SPM3012 is a large-current SMD power inductor that uses a magnetic metal material. In addition to the conventional SPM6530 and SPM5030 products, the SPM Series now includes this 3x3.2mm product with a maximum height of 1.2mm.

#### FEATURES

- Small and low profile design.
- Size: 3.2x3.0mm.
- Height: 1.2mm max.
- Uses a magnetic metal material with a high magnetic flux density.
- Has a high curie temperature, which ensures a wide operating temperature range.
- Available for automatic mounting in tape and reel package.

#### APPLICATIONS

Cellular phones, note book type computers, etc.

#### PRODUCT IDENTIFICATION

SPM 3012 T - 1R0 - M  
(1) (2) (3) (4) (5)

(1) Series name

(2) Dimensions LxH

3012 3.0x1.2mm max.

(3) Packaging style

T Embossed carrier tape

(4) Inductance value

1R0 1.0 $\mu$ H


(5) Inductance tolerance

M  $\pm 20\%$

#### PACKAGING STYLE AND QUANTITIES

Packaging style	Quantity
Taping	2000 pieces/reel


#### SHAPES AND DIMENSIONS

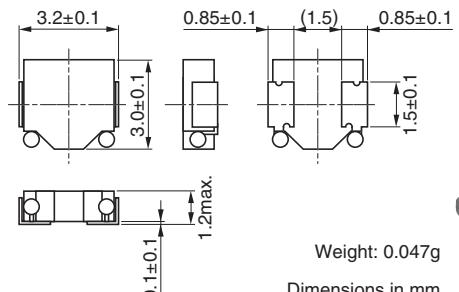

Weight: 0.047g

Dimensions in mm

#### RECOMMENDED PC BOARD PATTERN

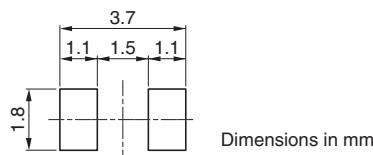


Dimensions in mm

#### CIRCUIT DIAGRAM



#### RECOMMENDED SOLDERING CONDITION

##### REFLOW SOLDERING

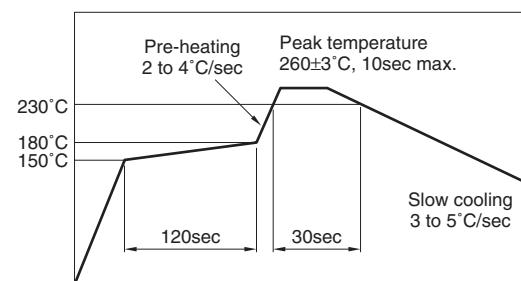

#### HANDLING AND PRECAUTIONS

- Please contact us before cleaning this product.
- Maintain a safe distance between this product and other components according to the working voltage.
- If this product is left in a humid environment for a long period of time, rust may appear on the surface. However, this does not affect performance.







- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
- Please contact our Sales office when your application is considered the following: The device's failure or malfunction may directly endanger human life (e.g. application for automobile/aircraft/medical/nuclear power devices, etc.)
- All specifications are subject to change without notice.

**ELECTRICAL CHARACTERISTICS**

Part No.	Inductance ( $\mu$ H)	Tolerance (%)	Test frequency (kHz)	DC resistance(m $\Omega$ )		Rated current(A)*		
				max.	typ.	Based on inductance change max.	typ.	Based on temperature rise typ.
SPM3012T-1R0M	1.0	$\pm 20$	100	65	57	3.4	5.4	2.8
SPM3012T-1R5M	1.5	$\pm 20$	100	90	77	2.8	4.7	2.5
SPM3012T-2R2M	2.2	$\pm 20$	100	115	100	2.5	3.4	2.2
SPM3012T-3R3M	3.3	$\pm 20$	100	210	183	1.8	2.8	1.5
SPM3012T-4R7M	4.7	$\pm 20$	100	270	232	1.5	2.6	1.3


\* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

• Operating temperature range: -40 to +125°C (Including self-temperature rise)

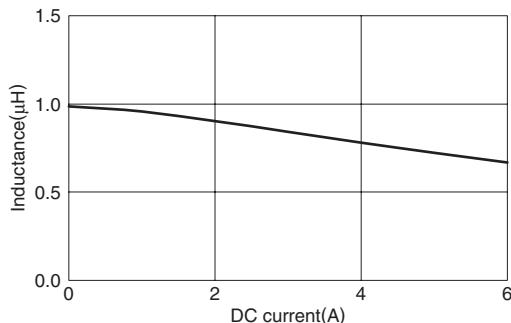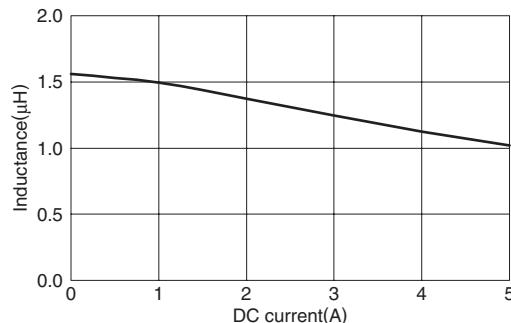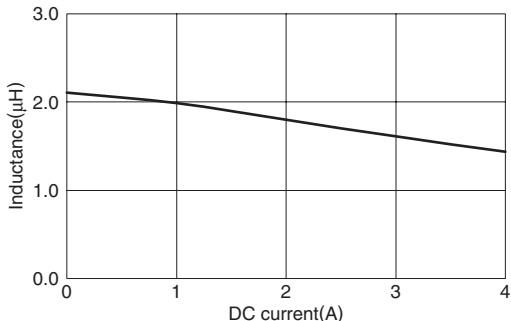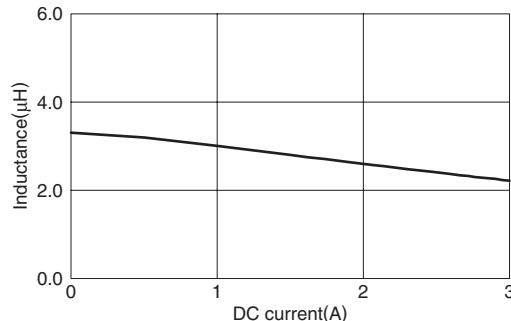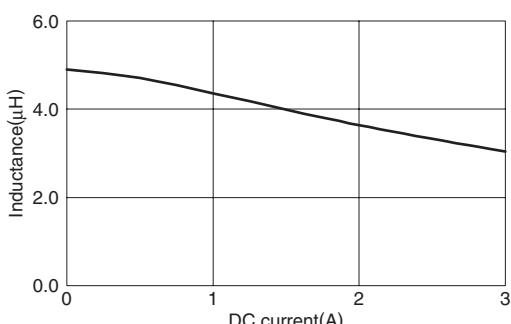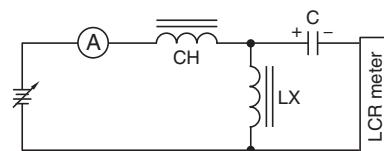**TYPICAL ELECTRICAL CHARACTERISTICS**
**INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS**
**SPM3012T-1R0M**

**SPM3012T-1R5M**

**SPM3012T-2R2M**

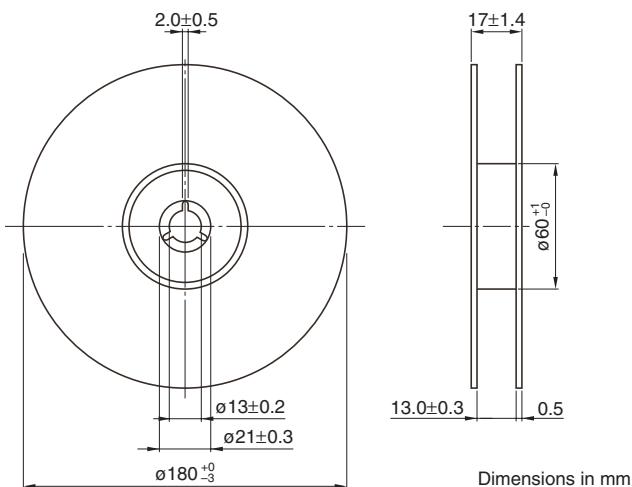**SPM3012T-3R3M**

**SPM3012T-4R7M**

**TEST CIRCUIT**


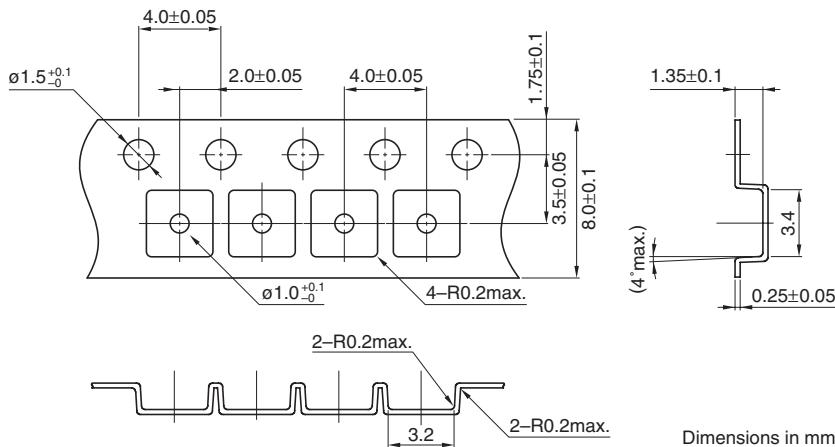
## PACKAGING STYLES

### REEL DIMENSIONS



Dimensions in mm

### TAPE DIMENSIONS



Dimensions in mm

# Inductors for Power Circuits

## Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

### SPM Series SPM5030

The SPM5030 contains SMD inductors for large currents. They have a high saturation current, and the DC superimposition characteristics have low temperature variance. This series can meet the needs of customers requiring products smaller than the SPM6530.

#### FEATURES

- Small and low profile design  
Size: 5.2×5.0mm  
Height: 3.0mm max.
- High power handling capability:  
Small copper loss  
Using large saturation induction of Fe-based metals
- Wide operating temperature range due to high Curie temperature of around 550°C.
- Available for automatic mounting in tape and reel package.

#### APPLICATIONS

Note book type computers, servers, VRMs, etc.

#### PRODUCT IDENTIFICATION

SPM 5030 T - □□□ - □  
(1) (2) (3) (4) (5)

(1) Series name

(2) Dimensions L×H

5030 5.0×3.0mm max.

(3) Packaging style

T Embossed carrier tape

(4) Inductance value

R20 0.20μH


(5) Inductance tolerance

M ±20%

#### PACKAGING STYLE AND QUANTITIES

Packaging style	Quantity
Taping	500 pieces/reel


#### SHAPES AND DIMENSIONS

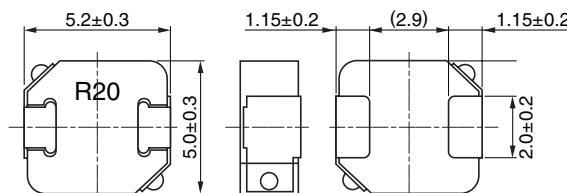

Weight: 0.364g

Dimensions in mm

#### RECOMMENDED PC BOARD PATTERN




Dimensions in mm

#### CIRCUIT DIAGRAM



#### RECOMMENDED SOLDERING CONDITION

##### REFLOW SOLDERING

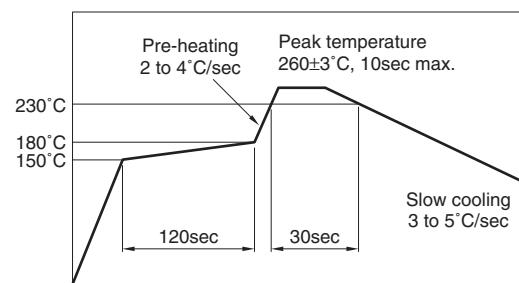

#### HANDLING AND PRECAUTIONS

- Please contact us before cleaning this product.
- Maintain a safe distance between this product and other components according to the working voltage.
- If this product is left in a humid environment for a long period of time, rust may appear on the surface. However, this does not affect performance.

- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
- Please contact our Sales office when your application is considered the following: The device's failure or malfunction may directly endanger human life (e.g. application for automobile/aircraft/medical/nuclear power devices, etc.)
- All specifications are subject to change without notice.

## ELECTRICAL CHARACTERISTICS

Part No.	Inductance ( $\mu$ H)	Tolerance (%)	Test frequency (kHz)	DC resistance(m $\Omega$ )		Rated current(A)*	
				max.	typ.	Based on inductance change typ.	Based on temperature rise typ.
SPM5030-R20M	0.20	$\pm 20$	100	2.31	2.1	21.0	22.2
SPM5030-R35M	0.35	$\pm 20$	100	4.29	3.9	14.9	16.6
SPM5030-R75M	0.75	$\pm 20$	100	9.35	8.5	9.7	11.3


\* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 20%, whichever is smaller.

• Operating temperature range: -40 to +125°C (Including self-temperature rise)


## TYPICAL ELECTRICAL CHARACTERISTICS

## INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS


SPM5030T-R20M

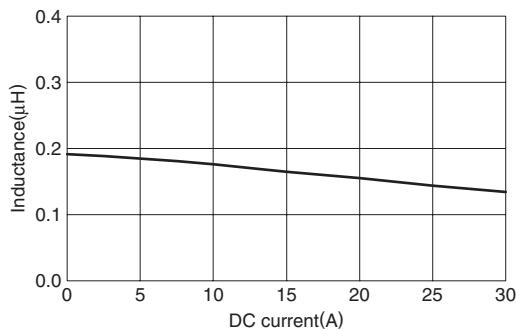


SPM5030T-R35M

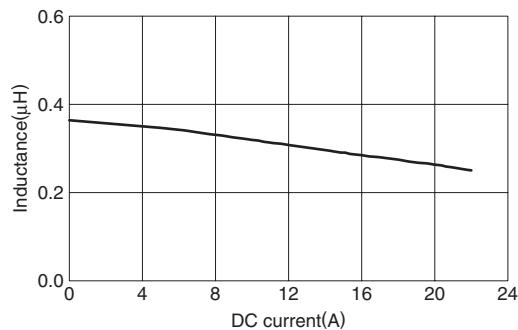

SPM5030T-R75M

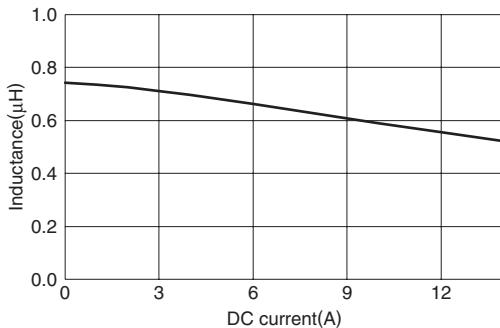


## TEST CIRCUIT

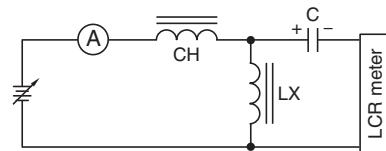


## PACKAGING STYLES

### REEL DIMENSIONS

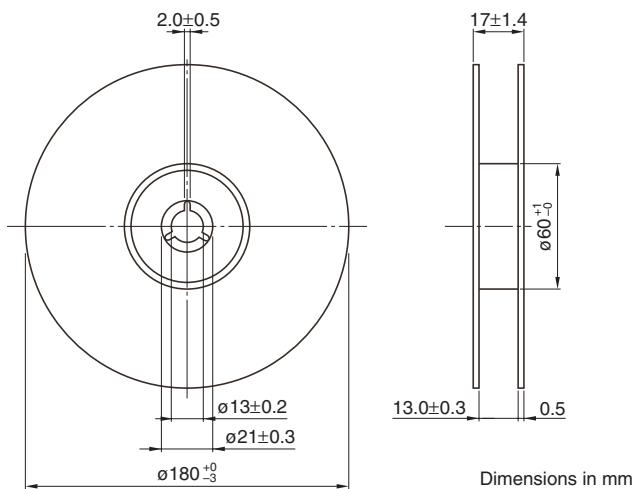

Dimensions in mm

### TAPE DIMENSIONS

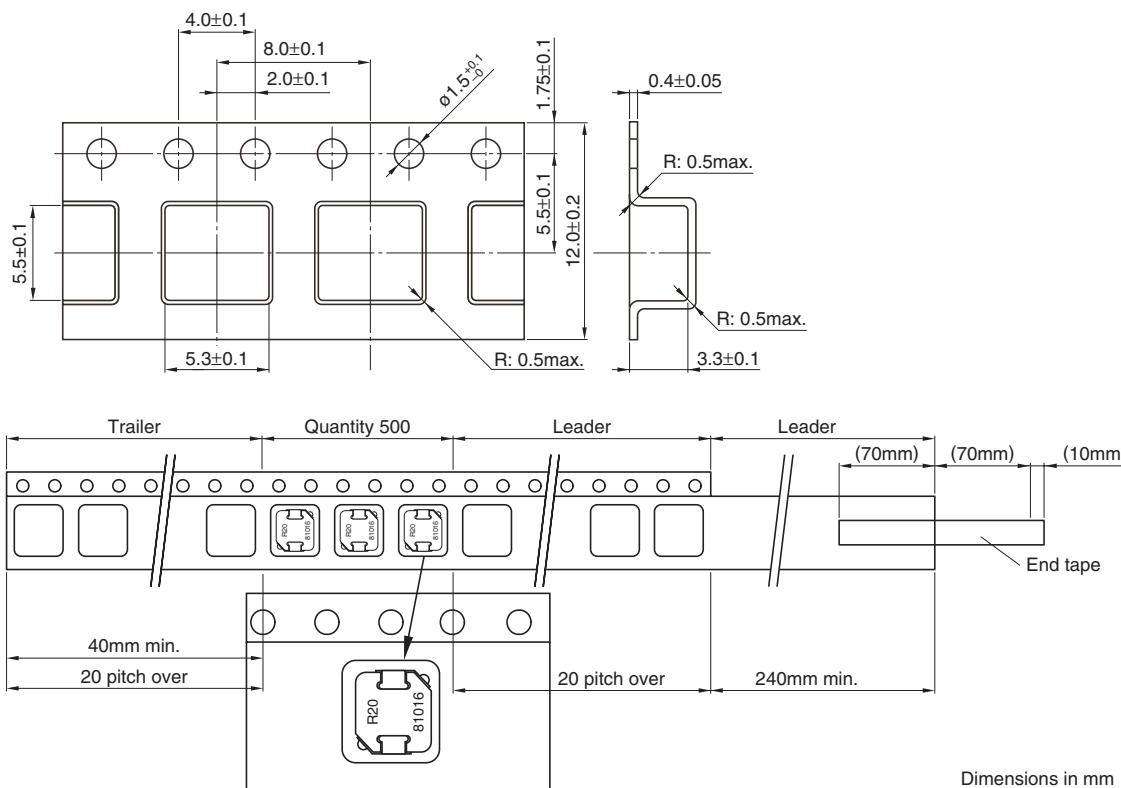

Dimensions in mm

# Inductors for Power Circuits

## Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

### SPM Series SPM6530

The SPM6530 is a large-current SMD power inductor that uses a magnetic metal material.

This product has good superimposition characteristics and low DC resistance.

#### FEATURES

- Small footprint and Low profile design  
Footprint:  $7.1 \times 6.5\text{mm}$   
Height: 3.0mm max.
- High power handling capability:  
Small copper loss  
Using large saturation induction of Fe-based metals
- A high Curie temperature of about  $550^\circ\text{C}$  means low inductance temperature variance.
- Available for automatic mounting in tape and reel package.

#### APPLICATIONS

Note book type computers, VRMs, etc.

#### PRODUCT IDENTIFICATION

SPM	6530	T	- 3R3 -	M
(1)	(2)	(3)	(4)	(5)

(1) Series name

(2) Dimensions L×H

6530	$6.5 \times 3.0\text{mm}$ max.
------	--------------------------------

(3) Packaging style

T	Embossed carrier tape
---	-----------------------

(4) Inductance value

3R3	$3.3\mu\text{H}$
-----	------------------


(5) Inductance tolerance

M	$\pm 20\%$
---	------------

#### PACKAGING STYLE AND QUANTITIES


Packaging style	Quantity
Taping	1000 pieces/reel

#### SHAPES AND DIMENSIONS

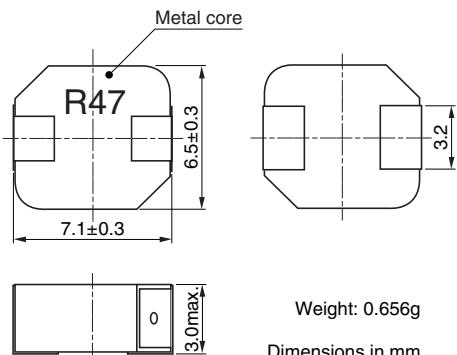

Dimensions in mm

#### RECOMMENDED PC BOARD PATTERN

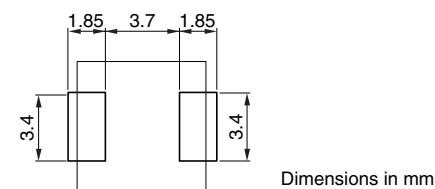


Dimensions in mm

#### CIRCUIT DIAGRAM



#### RECOMMENDED SOLDERING CONDITION

##### REFLOW SOLDERING

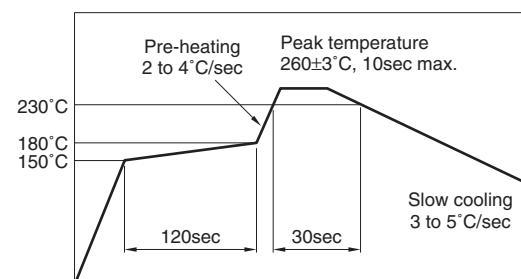

#### HANDLING AND PRECAUTIONS

- Please contact us before cleaning this product.
- Maintain a safe distance between this product and other components according to the working voltage.
- If this product is left in a humid environment for a long period of time, rust may appear on the surface. However, this does not affect performance.

- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
- Please contact our Sales office when your application is considered the following:  
The device's failure or malfunction may directly endanger human life (e.g. application for automobile/aircraft/medical/nuclear power devices, etc.)
- All specifications are subject to change without notice.

## ELECTRICAL CHARACTERISTICS

Part No.	Inductance ( $\mu$ H)	Tolerance (%)	Test frequency (kHz)	DC resistance(m $\Omega$ )		Rated current(A)*	
				max.	typ.	Based on inductance change typ.	Based on temperature rise typ.
SPM6530T-R25M230	0.25	$\pm 20$	100	2.31	2.1	28.5	23
SPM6530T-R47M170	0.47	$\pm 20$	100	3.63	3.3	20.5	20
SPM6530T-R68M140	0.68	$\pm 20$	100	5.39	4.9	16.6	16
SPM6530T-1R0M120	1	$\pm 20$	100	7.81	7.1	14.1	13
SPM6530T-1R5M100	1.5	$\pm 20$	100	10.67	9.7	11.5	11
SPM6530T-2R2M	2.2	$\pm 20$	100	19	17.3	8.4	8.2
SPM6530T-3R3M	3.3	$\pm 20$	100	29.7	27	7.3	6.8
SPM6530T-4R7M	4.7	$\pm 20$	100	39.4	35.8	6.2	5.6

\* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 20%, whichever is smaller.


• Operating temperature range: -40 to +125°C (Including self-temperature rise)

• The cleaning agent can not be used for these parts.


## TYPICAL ELECTRICAL CHARACTERISTICS

### INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS


SPM6530T-R25M230

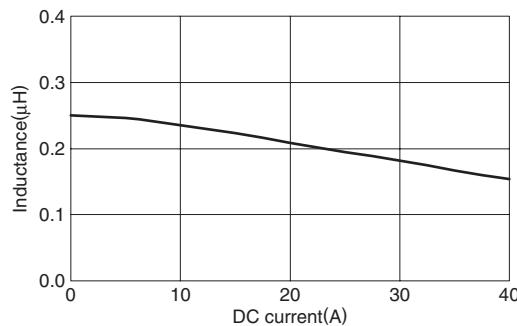


SPM6530T-R47M170

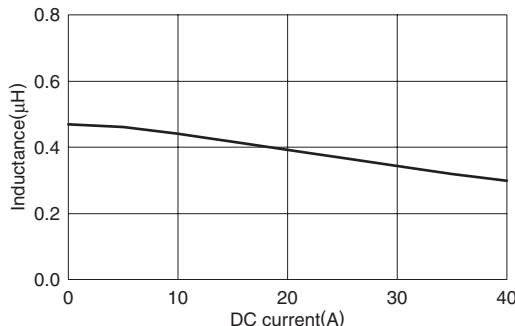


SPM6530T-R68M140

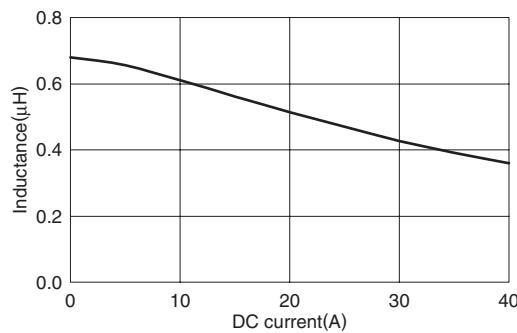


SPM6530T-1R0M120

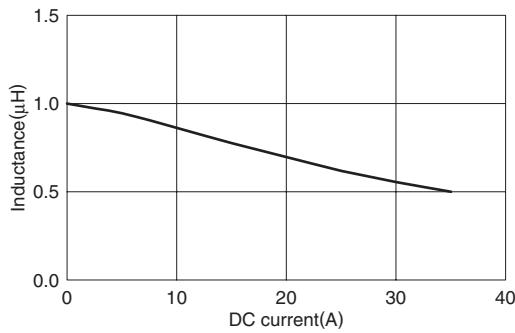

SPM6530T-1R5M100

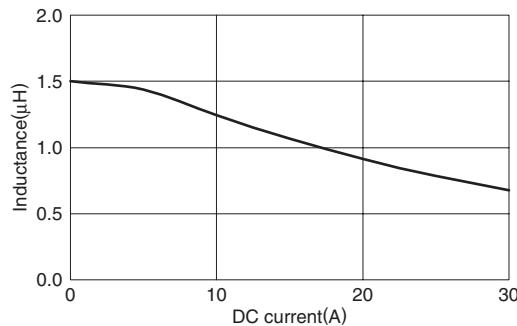


SPM6530T-2R2M

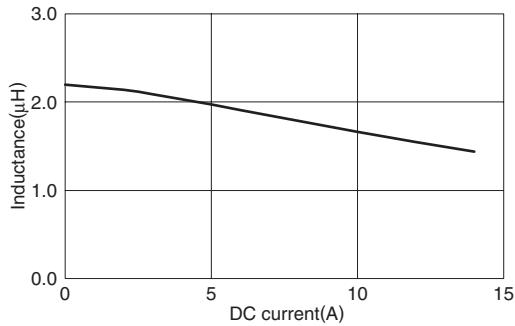


## TYPICAL ELECTRICAL CHARACTERISTICS

### INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS


SPM6530T-3R3M

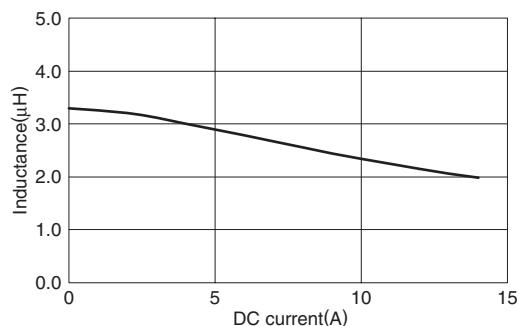

SPM6530T-4R7M

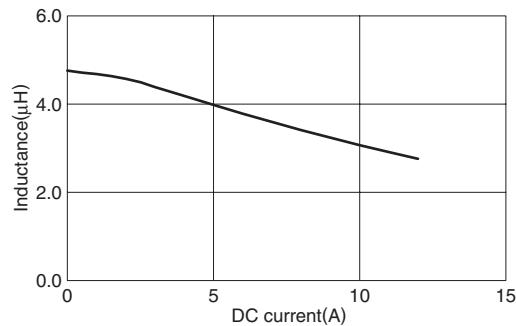


## TEST CIRCUIT

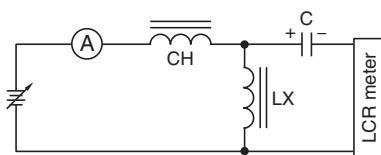


## PACKAGING STYLES

### REEL DIMENSIONS

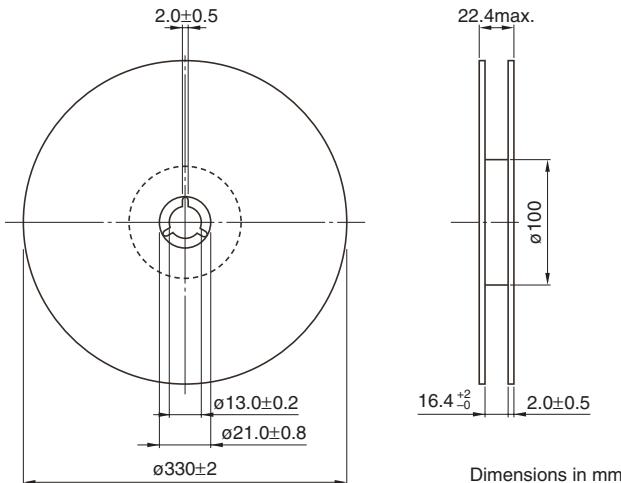

## TAPE DIMENSIONS

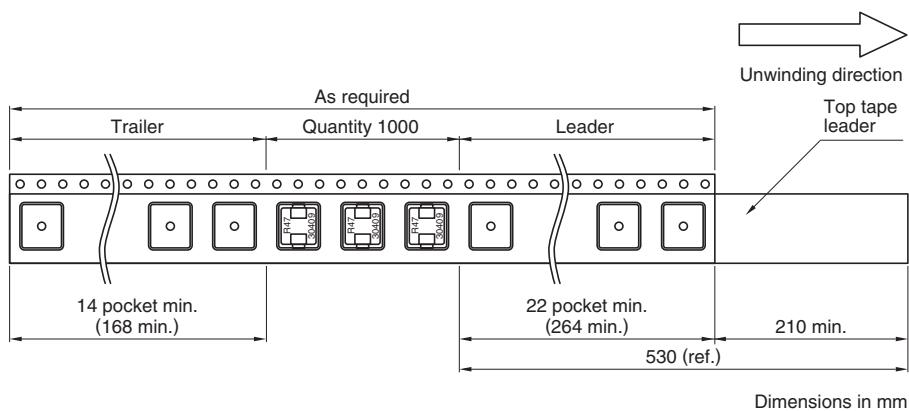

**Данный компонент на территории Российской Федерации****Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

**Офис по работе с юридическими лицами:**

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru  
moschip.ru\_4

moschip.ru\_6  
moschip.ru\_9