



# Amphenol

ENTERTAINMENT INTERCONNECT CATALOGUE

Amphenol Australia Pty Ltd



## Amphenol Australia Pty. Ltd.

Amphenol Australia's head office is based in Melbourne, Victoria and is the Sales, Marketing and Engineering centre of excellence for an extensive range of professional connector and cabling products. Satellite facilities of Amphenol Australia also exist in Colorado and Los Angeles, in the USA as well as Shenzhen, China.

Amphenol's global presence allows us to take full advantage of our numerous corporate resources and product portfolio to provide you with a vast offering and choice. Our extensive range is designed to meet the specific needs of the entertainment markets to make the selection of your interconnect partner an easy choice.

The Amphenol Audio international brand name was launched by Amphenol Australia in 2006 and represents the flag ship of one of the company's main core businesses and specialist product ranges. The company has been producing

products for the pro-audio industry for over fifty years. Since the development of our XLR AC Series connectors, we have continued to provide our customers with exacting quality in an increasingly competitive environment.














Amphenol Australia's award winning IDC (Insulation Displacement Contact) XLR showcases the company's commitment to both Engineering Excellence and "Green Gigging" philosophies. It is the world's first XLR to use solderless technology for a pro-audio microphone cabling application. It allows for cable assemblies to be made, or repairs performed to assemblies in the field, without the need for solder, resins and fluxes or externally powered soldering stations.

Continuous improvement through ISO9001, a focus on environmental awareness and development of next generation industry leading products is our philosophy. As the entertainment

industry moves into the future the emerging technologies from other industries has become more prevalent and more challenging. Amphenol Australia's global presence combined with its close technical relationships with other Amphenol sister divisions, each a specialist and leader in their own interconnect field, places it well to support innovation and meet this challenge head on.

The ability of Amphenol to provide a full range of design services required to support the customers applications design and modelling, applications engineering, fabrication, value-added assembly and testing, coupled with the largest interconnect offering on the market means that we can support all of your system level needs.

# CONTENTS

|   | <b>PAGE</b>   |                             |
|---|---|-----------------------------|
|                                    | <b>AX SERIES XLR CABLE CONNECTORS</b>                       | <b>3</b>                    |
|   | METAL SHELL TYPE - SOLDER                                   | 4                           |
|                                    | <b>AC SERIES XLR CABLE CONNECTORS</b>                       | <b>9</b>                    |
|   | METAL SHELL TYPE - SOLDER                                   | 10                          |
|   | THERMOPLASTIC SHELL TYPE - SOLDER                           | 14                          |
|   | METAL SHELL TYPE RIGHT ANGLE - SOLDER                       | 15                          |
|   | METAL SHELL TYPE - IDC (SOLDERLESS)                         | 16                          |
|   | THERMOPLASTIC SHELL TYPE - IDC (SOLDERLESS)                 | 18                          |
|                                    | <b>AC "Z" SERIES XLR METAL CHASSIS MOUNT CONNECTORS</b>     | <b>22</b>                   |
|   | METAL D TYPE FLANGE - SOLDER AND PCB                        | 23                          |
|   | METAL P TYPE FLANGE - SOLDER AND PCB                        | 26                          |
|                                    | <b>AC SERIES XLR PCB CHASSIS MOUNT CONNECTORS</b>           | <b>34</b>                   |
|   | THERMOPLASTIC A - TYPE FLANGE 3 CONTACT                     | 35                          |
|   | METAL B - TYPE FLANGE 3 CONTACT                             | 39                          |
|   | THERMOPLASTIC A - TYPE FLANGE 5 CONTACT                     | 43                          |
|                | <b>AC SERIES DUAL 1/4" (6.35mm) / XLR</b>                   | <b>50</b>                   |
|   | C - TYPE LOW PROFILE DUAL JACK / XLR CONNECTORS             | <small>NEW ITEM</small> 51  |
|   | C - TYPE DUAL JACK / XLR CONNECTORS                         | 53                          |
|                                   | <b>AC SERIES XLR THERMOPLASTIC CHASSIS MOUNT CONNECTORS</b> | <b>59</b>                   |
|   | THERMOPLASTIC D - TYPE FLANGE                               | 60                          |
|   | THERMOPLASTIC TYPE - IDC (SOLDERLESS)                       | 62                          |
|                                  | <b>SP/EP/AP SERIES HIGH POWER / LOUDSPEAKER CONNECTORS</b>  | <b>67</b>                   |
|   | SP SERIES LOUDSPEAKER CONNECTORS                            | 68                          |
|   | EP METAL TYPE - SOLDER                                      | 76                          |
|   | AP THERMOPLASTIC TYPE - SOLDER                              | 78                          |
|                                  | <b>XLRnet SERIES</b>  | <b>81</b>                   |
|   | RJ45 CABLE PLUG HOUSING                                     | <small>NEW ITEM</small> 81  |
|   | RJ45 PCB CHASSIS MOUNT CONNECTORS                           | <small>NEW ITEM</small> 85  |
|                                  | <b>BNC 75 Ω RF CONNECTORS</b>                               | <b>89</b>                   |
|   | BNC 75Ω RF CONNECTORS                                       | 90                          |
|   | BNC PATCH PANELS  | 92                          |
|          | <b>1/4" PHONE CONNECTORS</b>                                | <b>95</b>                   |
|   | T-SERIES  | 97                          |
|   | T-SERIES SWITCHPLUG   | <small>NEW ITEM</small> 99  |
|   | MUSICIAN SERIES II  | 104                         |
|  | <b>1/4" PHONE JACK CONNECTORS</b>                           | <b>109</b>                  |
|                                  | <b>PLUGS AND SOCKETS</b>                                    | <b>118</b>                  |
|   | 3.5mm K-SERIES  | <small>NEW ITEM</small> 119 |
|   | RCA SERIES  | 121                         |
|   | G-TYPE MINIATURE XLR  | 123                         |
|                                  | <b>MULTIPIN CONNECTORS</b>                                  | <b>127</b>                  |
|   | MP-41 SERIES  | 128                         |
|   | MP-62/MP-65 SERIES  | 133                         |
|   | <b>ACCESSORIES</b>  | <b>137</b>                  |
|   | <b>CONNECTOR WIRING INFORMATION</b>                         | <b>140</b>                  |
|   | <b>INDEX</b>  | <b>142</b>                  |



## ISO VIEW OF AX SERIES XLR CABLE CONNECTOR

One piece ground / latch spring design incorporating twin wipe contacts for a direct connection path from mating shell to ground providing enhanced connection and EMI performance

Precision socket contacts with compact solder buckets reduce termination time and material wastage during soldering.

Leading first mate last break socket contact (Pin 1)

Ground solder tag.

Concentric socket contact design provides optimal contact resistance

Oversized ergonomic latch for quick and easy mating

Chuck style cable clamp c/w split opening for the widest cable acceptance range

O-ring provides vibration resistance and sealing.

Overmolded boot with flex bend relief for improved aesthetics, cable protection and boot retention.


Ergonomic sleeve with integrated expansion ring. Channel I.D capability.

Zinc Diecast Shell for robustness and wear resistance.

Concealed latching point for improved aesthetics, sealing and strength.

Ground solder tag.

Precision Machined Pin contacts with compact solder buckets reduce termination time and material wastage during soldering.

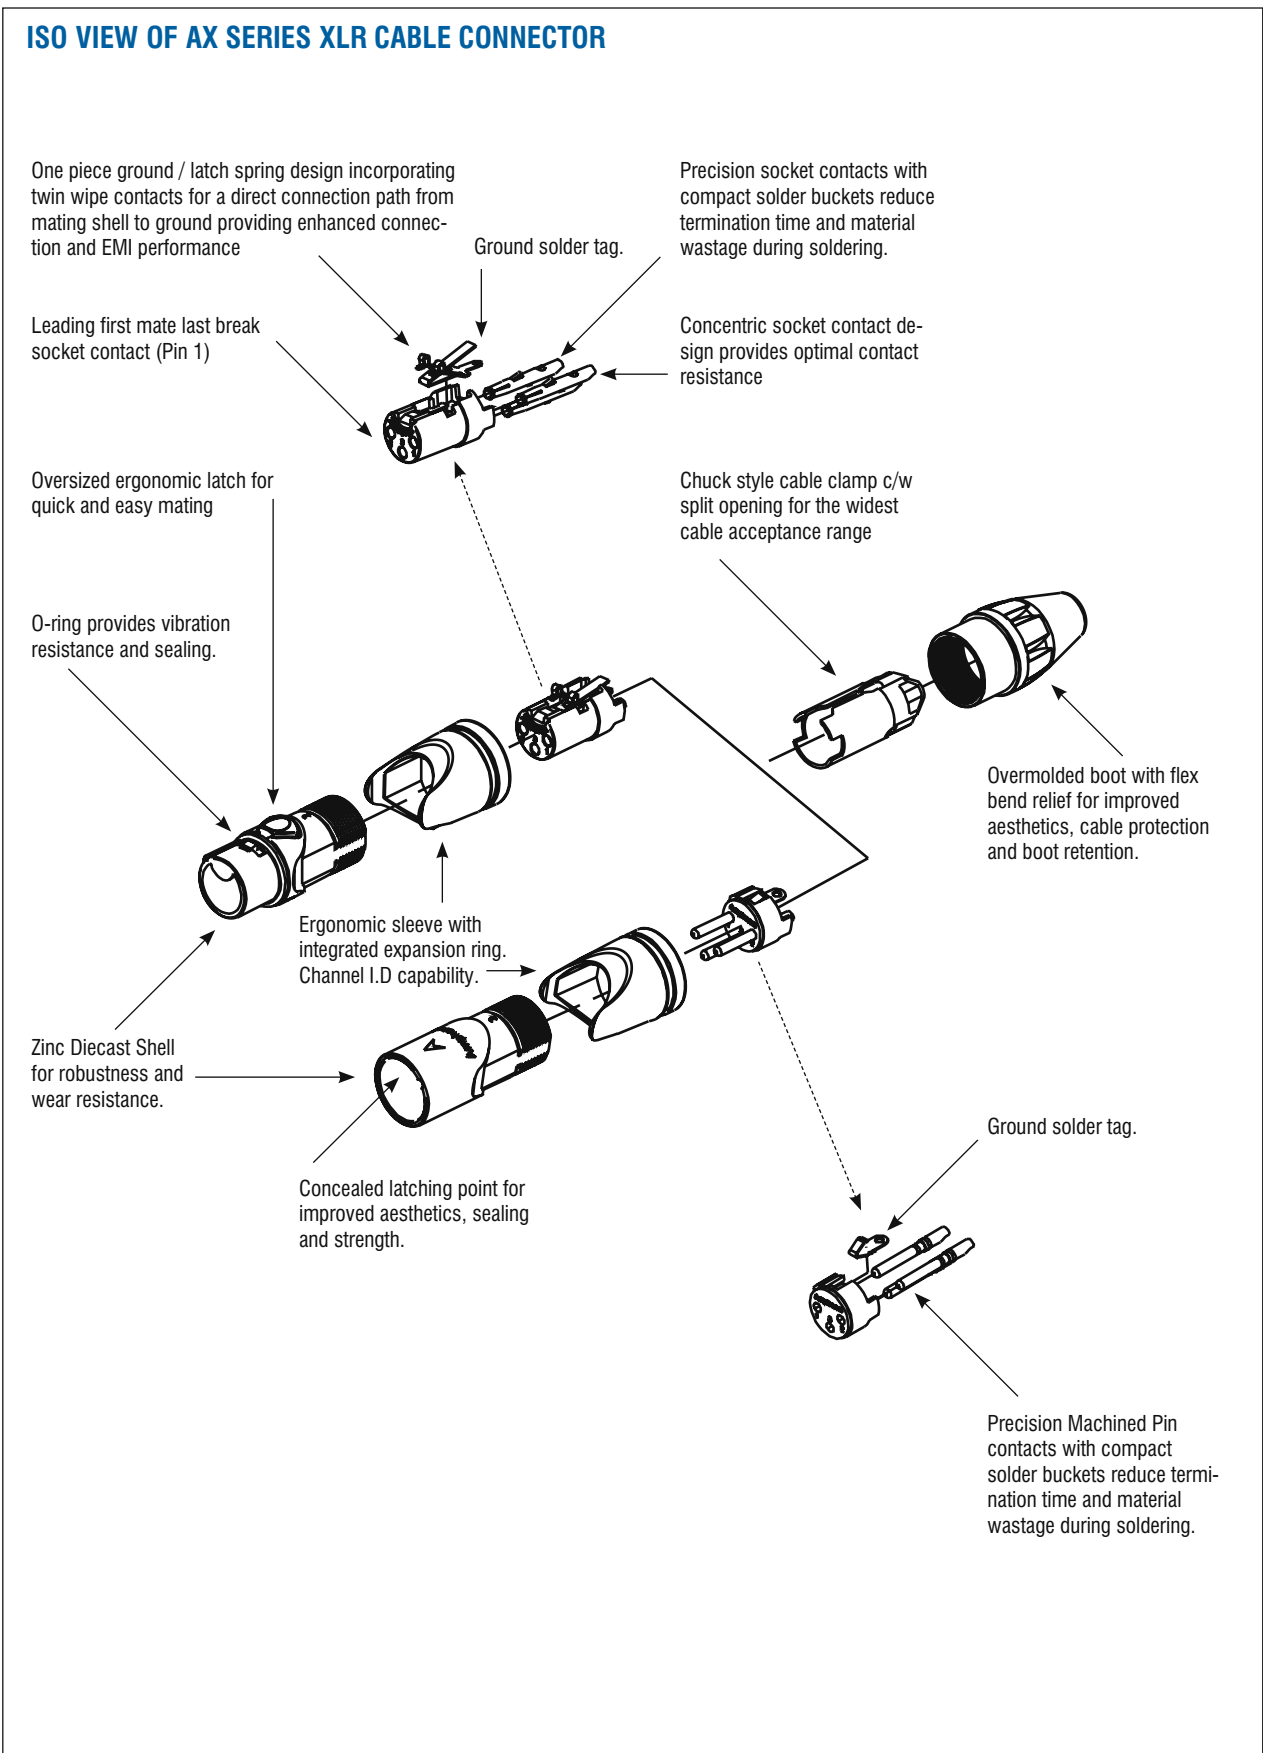



The revolutionary AX series of XLR connectors introduce an exciting contemporary look and feel to the professional audio interconnect market. They are designed to complement modern audio architecture and truly "fit" within their environment. An impressive list of features guarantees pure sound performance in the most demanding applications providing unrivalled value.

## Features

- Unique Australian designed shell and housing.
- One piece ground / latch spring design incorporating twin wipe contacts for a direct connection path from mating shell to ground providing enhanced connection and EMI performance.
- Ergonomic sleeve design for improved grip.
- Channel I.D capability with coloured sleeves.
- Oversized ergonomic latch for quick and easy mating.
- Leading first mate last break pin 1 on socket connectors.
- Chuck style cable clamp to suit 3mm - 8mm (0.118" - 0.314") cable O.D. with integrated split to allow inclusion after soldering.
- Concealed latching point for improved aesthetics, sealing and strength.
- Overmolded boot with flex bend relief for improved aesthetics, cable protection and boot retention.
- Concentric socket contact design provides optimal contact resistance
- Precision machined pin contacts as standard.
- Compact solder buckets to reduce termination time and material wastage during the soldering process.
- Zinc diecast shell housing for robustness and wear with Satin nickel or Black finish.
- Available in 3,4 and 5 contact arrangements.

## Options

- Coloured I.D sleeves.
- Satin nickel or Black shell finish.
- Single or Bulk packaging.
- Gold plated contacts.

## Ordering Codes

We have listed the more common ordering codes in each section. For further options please refer to the part number breakdown charts. Please contact us if you need any further assistance.

## AX SERIES XLR CABLE CONNECTORS



### Simple steps to guide you in using this catalogue

- 1) Identify the product group listed in Contents on page 1 and go directly to that page number.
- 2) Each product group cover page then details information and options available.
- 3) Refer to the product detail pages and identify the product you require pictorially.
- 4) Read the product description column for the products standard features.
- 5) Use variations column to determine your choice.
- 6) Identify part number.
- 7) In the event the particular option you require is not listed please refer to the part number breakdown page at the end of each section.
- 8) Please contact us directly if you have any further problems.



**Features:**

- Unique Australian designed shell and housing.
- Ergonomic stylish sleeve design for improved grip.
- Oversized latch lever preserves your thumb.
- Leading first mate last break pin 1 on socket connectors.
- Chuck style cable clamp to suit 3mm - 8mm (0.118" - 0.314") cable O.D. with integrated split to allow inclusion after soldering.
- Overmolded cable support boot.
- New socket contact design for improved contact resistance.
- Precision machined pin contacts as standard.
- Compact solder buckets to reduce soldering time and wastage.
- Zinc diecast shell housing with Satin nickel or Matt black finish.
- Available in 3,4 and 5 contact arrangements.

**Options:**

- Coloured I.D sleeves.
- Clear I.D Sleeve for connector marking.
- Satin nickel or Matt black shell finish.
- Single or Bulk packaging.

**Part Number Breakdown: page 6**

**Specifications: page 7**

**Assembly Instructions: PI538\***

| PRODUCT - FIGURE | DRAWING<br>Dimensions in mm (inches) | DESCRIPTION  | VARIATIONS                                    | PART NUMBER                     |
|------------------|--------------------------------------|--|---|---------------------------------|
|                  |                                      | XLR 3 pole male<br>Machined contacts<br>Nickel Finish  | Standard<br>Gold Plated Contacts<br>Bulk Pack | AX3M<br>AX3M-AU<br>AX3M BULK    |
|                  |                                      | XLR 3 pole male<br>Machined contacts<br>Black Finish   | Standard<br>Gold Plated Contacts<br>Bulk Pack | AX3MB<br>AX3MB-AU<br>AX3MB BULK |
|                  |                                      | XLR 3 pole female<br>Stamped contacts<br>Nickel Finish | Standard<br>Gold Plated Contacts<br>Bulk Pack | AX3F<br>AX3F-AU<br>AX3F BULK    |
|                  |                                      | XLR 3 pole female<br>Stamped contacts<br>Black Finish  | Standard<br>Gold Plated Contacts<br>Bulk Pack | AX3FB<br>AX3FB-AU<br>AX3FB BULK |
|                  |                                      | XLR 4 pole male<br>Machined contacts<br>Nickel Finish  | Standard<br>Gold Plated Contacts<br>Bulk Pack | AX4M<br>AX4M-AU<br>AX4M BULK    |

\*PI538 is available for download at [www.amphenolaudio.com](http://www.amphenolaudio.com)



| PRODUCT - FIGURE | DRAWING<br>Dimensions in mm (inches) | DESCRIPTION   | VARIATIONS           | PART NUMBER |
|------------------|--------------------------------------|---|----------------------|-------------|
|                  |                                      | XLR 4 pole male<br>Machined contacts<br>Black Finish    | Standard             | AX4MB       |
|                  |                                      |   | Gold Plated Contacts | AX4MB-AU    |
|                  |                                      |   | Bulk Pack            | AX4MB BULK  |
|                  |                                      | XLR 4 pole female<br>Machined contacts<br>Nickel Finish | Standard             | AX4F        |
|                  |                                      |   | Gold Plated Contacts | AX4F-AU     |
|                  |                                      |   | Bulk Pack            | AX4F BULK   |
|                  |                                      | XLR 4 pole female<br>Machined contacts<br>Black Finish  | Standard             | AX4FB       |
|                  |                                      |   | Gold Plated Contacts | AX4FB-AU    |
|                  |                                      |   | Bulk Pack            | AX4FB BULK  |
|                  |                                      | XLR 5 pole male<br>Machined contacts<br>Nickel Finish   | Standard             | AX5M        |
|                  |                                      |   | Gold Plated Contacts | AX5M-AU     |
|                  |                                      |   | Bulk Pack            | AX5M BULK   |
|                  |                                      | XLR 5 pole male<br>Machined contacts<br>Black Finish    | Standard             | AX5MB       |
|                  |                                      |   | Gold Plated Contacts | AX5MB-AU    |
|                  |                                      |   | Bulk Pack            | AX5MB BULK  |
|                  |                                      | XLR 5 pole female<br>Machined contacts<br>Nickel Finish | Standard             | AX5F        |
|                  |                                      |   | Gold Plated Contacts | AX5F-AU     |
|                  |                                      |   | Bulk Pack            | AX5F BULK   |
|                  |                                      | XLR 5 pole female<br>Machined contacts<br>Black Finish  | Standard             | AX5FB       |
|                  |                                      |   | Gold Plated Contacts | AX5FB-AU    |
|                  |                                      |   | Bulk Pack            | AX5FB BULK  |




## PART NUMBER BREAKDOWN

### METAL SHELL TYPE - SOLDER

E. G. **AX3MB2-AU BULK**  
**AX** (Series Prefix), **3** contacts, **M**ale, **B**lack Finish,  
**2** (Red Sleeve)- **AU** (Gold Plated Contacts), **BULK** Packaged.




|                        |       |   |   |
|------------------------|-------|---|---|
| <b>SERIES PREFIX</b>   | AX    | = | Series Prefix   |
| <b>CONTACT LAYOUTS</b> | 3     | = | 3 Contacts  |
|                        | 4     | = | 4 Contacts  |
|                        | 5     | = | 5 Contacts  |
| <b>GENDER</b>          | F     | = | Female Socket Contacts                                      |
|                        | M     | = | Male Pin Contacts   |
| <b>SHELL FINISH</b>    | Blank | = | Nickel Plated Finish  |
|                        | B     | = | Black Finish  |
| <b>SLEEVE OPTION</b>   | 1     | = | Brown   |
|                        | 2     | = | Red   |
|                        | 3     | = | Orange  |
|                        | 4     | = | Yellow  |
|                        | 5     | = | Green   |
|                        | 6     | = | Blue  |
|                        | 7     | = | Violet  |
|                        | 8     | = | Grey  |
|                        | 9     | = | White   |
|                        | C     | = | Clear   |
| <b>CONTACT PLATING</b> | Blank | = | Standard Plating ( Silver or Tin - Refer to Standard Data.) |
|                        | AU    | = | Gold Plated   |
| <b>PACKAGING</b>       | Blank | = | Individual Bags   |
|                        | BULK  | = | Bulk Packed   |

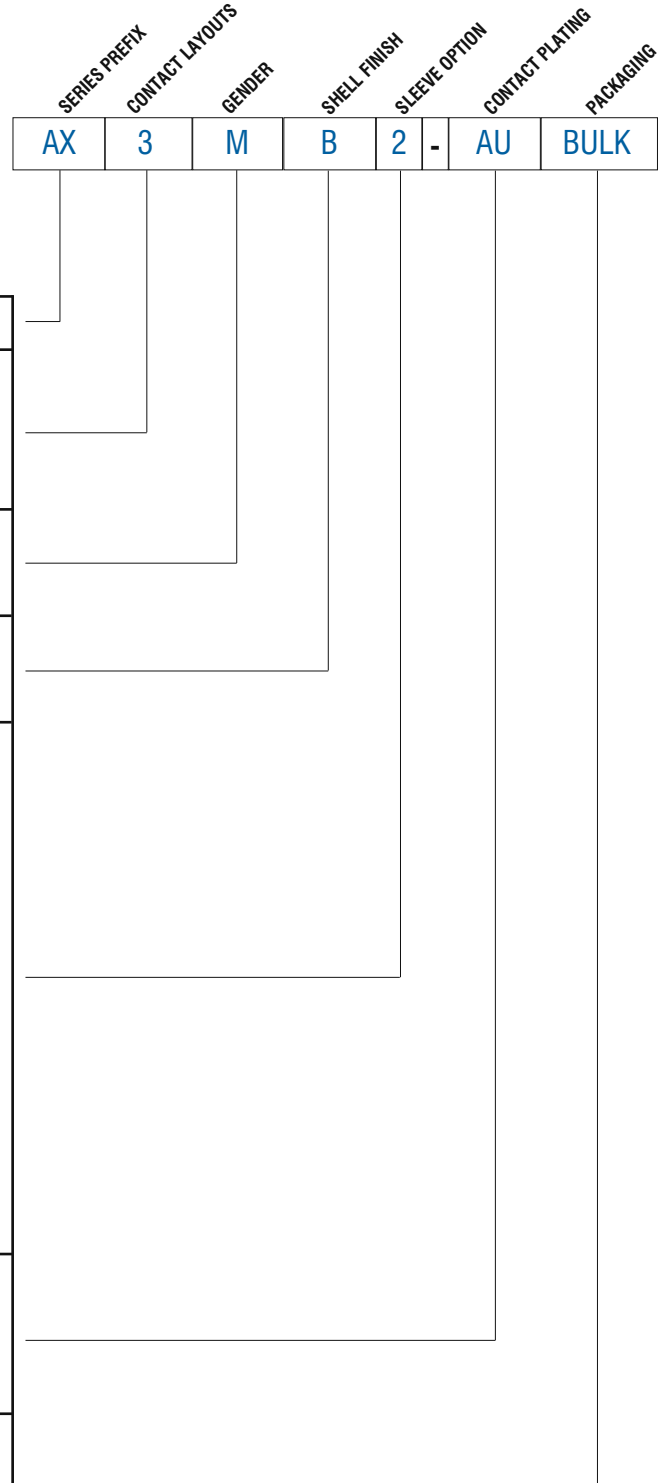





## STANDARD DATA AX SERIES CABLE CONNECTORS

|                                   |  | VALUE   |   |   |
|-----------------------------------|--|---|---|---|
| <b>GENERAL CHARACTERISTICS</b>    | Number of contacts   | 3   | 4   | 5   |
|                                   | AX Series Contact Arrangements (Front view of pin inserts) |  |  |  |
|                                   | Termination  | SOLDER  |   |   |
|                                   | Max. Wire Gauge - Stranded wire: Solder                    | 14AWG   | 16AWG   | 18AWG   |
|                                   | Flammability rating of insulator plastics and housings     | UL94V-0   |   |   |
| Environmental                     | Complies with EU RoHS 2 Directive 2011/65/EU               |   |   |   |
| <b>ELECTRICAL CHARACTERISTICS</b> | Service Voltage RMS  | 133V <sup>1)</sup>  |   |   |
|                                   | Test Voltage AC RMS  | 1400V   |   |   |
|                                   | Current carrying capacity: Solder                          | 15A   | 10A   | 7.5A  |
|                                   | Typical Contact Resistance                                 | ≤3m Ω   |   |   |
|                                   | Insulation Resistance                                      | ≥1G Ω   |   |   |
| <b>CLIMATIC CHARACTERISTICS</b>   | Protection Class   | IP40  |   |   |
|                                   | Operating Temperature                                      | -25 °C to +75 °C (-13°F to +167°F)  |   |   |
| <b>MECHANICAL CHARACTERISTICS</b> | Insertion and Withdrawal force                             | ≥10N - ≤30N   |   |   |
|                                   | Weight <sup>2)</sup>                                       | 31g<br>(0.068lb)  | 33g<br>(0.073lb)  | 33g<br>(0.073lb)  |
|                                   | Typical Cable retention force                              | 22Kg to 44Kg (50lb to 100lb) - Dependent on cable material and diameter.          |   |   |
|                                   | Cable O.D. range   | 3mm to 8mm (0.118" to 0.314")   |   |   |
|                                   | Mechanical Operations                                      | 1000 mating cycles  |   |   |
| <b>MATERIALS</b>                  | Connector shell - Metal<br>Shell finish                    | Diecast Zinc Alloy<br>Satin nickel or Black                                       |   |   |
|                                   | Insulators   | UL94V-0 PA66, 30% Glass Filled  |   |   |
|                                   | Boot / Backshell<br>Finish                                 | UL94V-0 Noryl N190 / Santoprene<br>Black, other colours available - see page 80   |   |   |
|                                   | Cable clamp  | Noryl N190  |   |   |
|                                   | Sleeve   | Noryl N190  |   |   |
|                                   | Male Contact<br>Machined - Solder / Plating                | Brass / Silver or Gold (Optional)   |   |   |
|                                   | Female Contact<br>Stamped - Solder / Plating               | Phosphor Bronze / Tin or Gold (Optional)  |   |   |


Rev 3 - 03/2013

<sup>1)</sup> Not suitable for domestic applications above 50V


<sup>2)</sup> Approximate weight only, does not include packaging. Please contact us for exact weight for shipping purposes.

# Amphenol

## ISO VIEW OF AC3MM

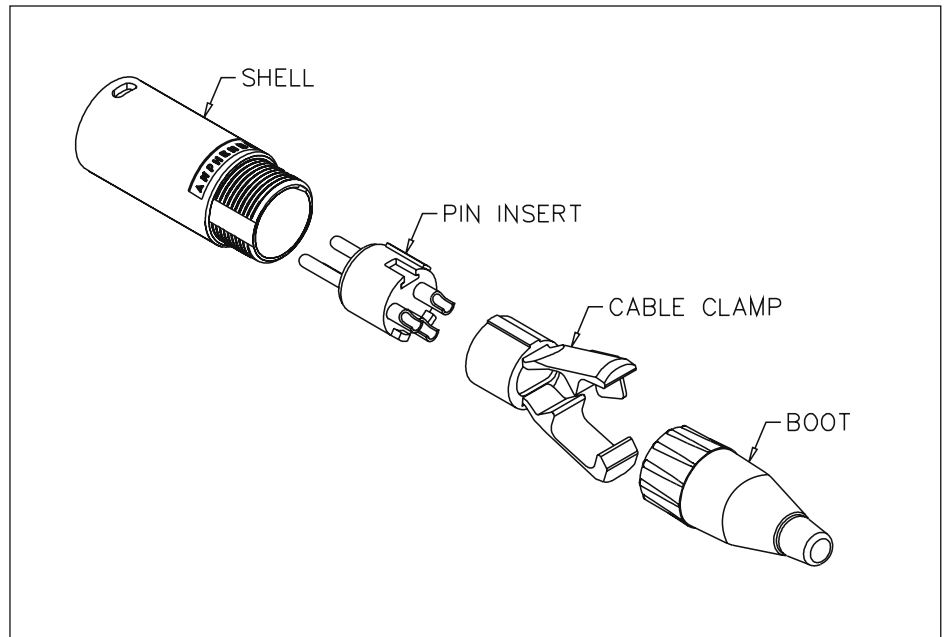

## ISO VIEW OF AC3FI

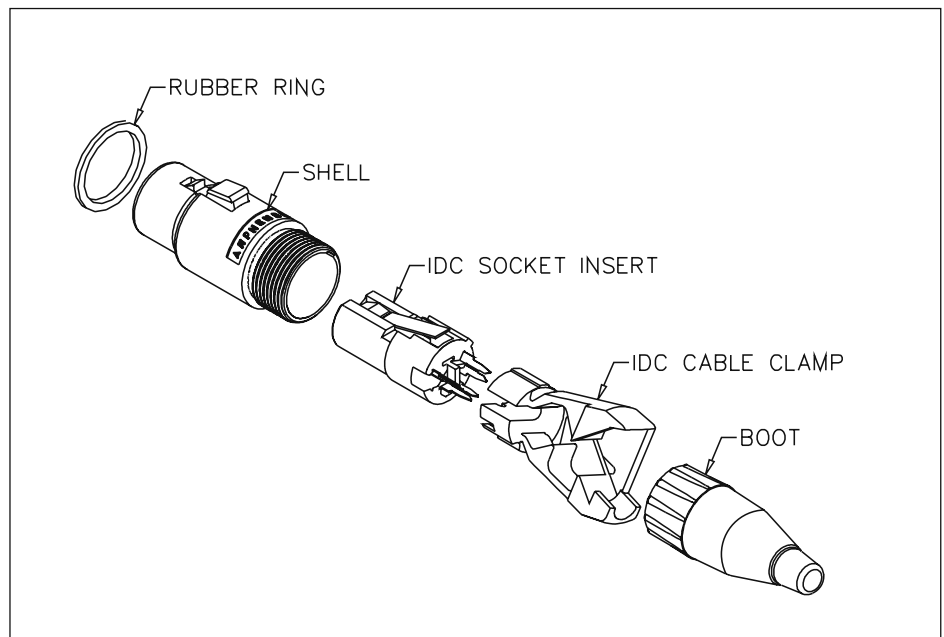

**AMPHENOL AUSTRALIA WEBSITE**

[www.amphenolaudio.com](http://www.amphenolaudio.com)

**AMPHENOL WORLD HEADQUARTERS WEBSITE**

[www.amphenol.com](http://www.amphenol.com)

# Amphenol



## AC SERIES XLR CABLE CONNECTORS



Amphenol Australia have been manufacturing and designing innovative XLR connectors since 1955 and were the first to offer the cost saving Insulation Displacement Contact (IDC) in an XLR connector. The IDC connector is ideal for Original Equipment Manufacturers and end users alike and offers an alternative to our standard solder connector. The AC series cable connector range complies with IEC268-12 and AES 14-1992 standards. CSA File Number 68598.

### Features

- AC series XLR connectors feature the unique Australian design and patented "Jaws" cable retention system for both standard Solder connectors and the Insulation Displacement Contact (IDC) connectors.
- A leading first mate last break socket contact is standard on all female connectors (Pin 1).
- The "Jaws" cable retention system provides up to 44kg (100lb) of strain.
- Solderless IDC technology offers savings of up to 60% in termination time.
- The AC series connector can be quickly and easily assembled without screws – by hand or portable termination tool. (Part number T2860)
- Available in 3, 4, 5, 6A and 7 contact arrangements.
- Compatible with all other XLR brands.

### Options

- Solder Bucket termination
- Insulation Displacement Contact (IDC)
- Thermoplastic shell
- Zinc Diecast shell - Satin Nickel Finish
- Zinc Diecast shell - Black Polyester Finish
- Gold, Silver or Tin Plated contacts
- Bulk Style Packaging
- Single Bag packs
- Precision machined contacts
- Cost effective stamped contacts on 3 pole

### Options (Cont'd)

- Standard Jaws cable clamp, Cable O.D 3mm to 6.5mm (0.118" to 0.255")
- Large Jaws cable clamp, Cable O.D 6.5mm to 8mm (0.255" to 0.314")
- IDC Jaws cable clamp, Max. Cable O.D 5.85mm (0.23")
- Metal Boots / Backshells
- Coloured Boots / Backshells
- Coloured Identification rings
- Termination / Assembly tooling

### Jaws Cable Clamp Options



Standard Jaws cable clamp (Black), Cable O.D 3mm to 6.5mm (0.118" to 0.255")



Large Jaws cable clamp (Purple), Cable O.D 6.5mm to 8mm (0.255" to 0.314")

### Ordering Codes

We have listed the more common ordering codes in each section. For further options please refer to the part number breakdown charts. Please contact us if you need any further assistance.

### Simple steps to guide you in using this catalogue

- 1) Identify the product group listed in Contents on page 1 and go directly to that page number.
- 2) Each product group cover page then details information and options available.
- 3) Refer to the product detail pages and identify the product you require pictorially.
- 4) Read the product description column for the products standard features.
- 5) Use variations column to determine your choice.
- 6) Identify part number.
- 7) In the event the particular option you require is not listed please refer to the part number breakdown page at the end of each section.
- 8) Please contact us directly if you have any further problems.

# Amphenol


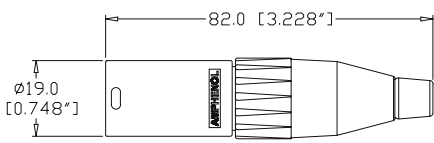

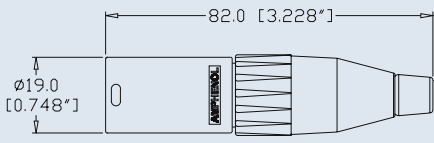

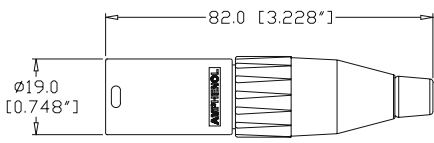

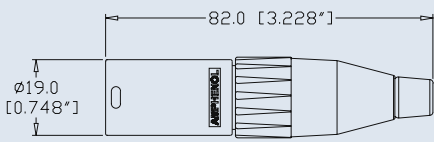

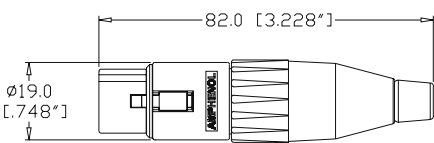

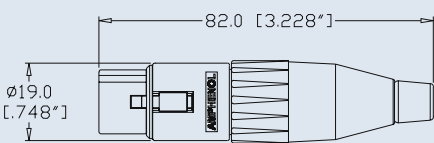

**Features:**

- Zinc Diecast Shell.
- Solder Bucket connections.
- "Jaws" Cable Retention System.
- Contact layouts in 3, 4, 5, 6A and 7.
- Precision machined or Stamped contacts.
- Leading first mate last break socket contact.
- Quick and easy assembly without screws – by hand or portable termination tool. (Part number T2860.)


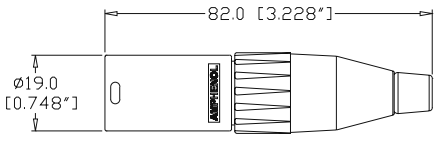

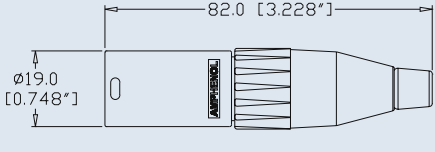

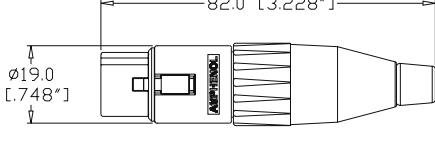

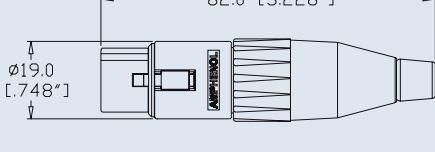
**Options:** Stamped Contacts (3 contact only), Gold plated contacts, Large or Small Jaws Cable Clamp, Black Finish Shell, Bulk Pack, Coloured Boots / Backshells

**Part Number Breakdown:** [page 13](#)

**Specifications:** [page 20](#)




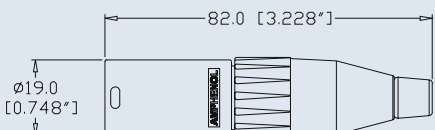

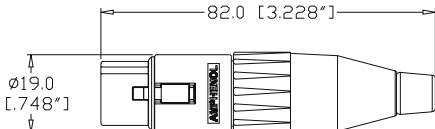



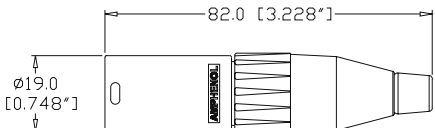

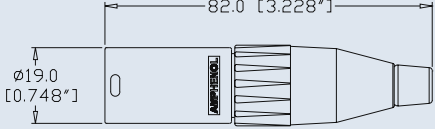

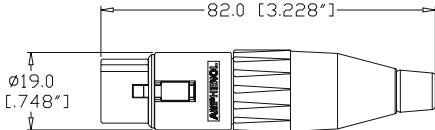

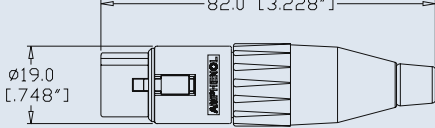
| PRODUCT - FIGURE  | DRAWING   | DESCRIPTION  | VARIATIONS   | PART NUMBER   |
|---|---|--|--|---|
|    |  <p>Dimensions in mm (inches)</p> <p>82.0 [3.228"]</p> <p>∅19.0 [0.748"]</p>   | XLR 3 pole male, Machined contacts, Nickel Finish, Jaws cable clamp  | <a href="#">Standard</a><br><a href="#">Gold Plated Contacts</a><br><a href="#">Large Cable Clamp</a><br><a href="#">Bulk Pack</a> | <a href="#">AC3MM</a><br><a href="#">AC3MM-AU</a><br><a href="#">AC3MMJ</a><br><a href="#">AC3MM BULK</a>     |
|  |  <p>Dimensions in mm (inches)</p> <p>82.0 [3.228"]</p> <p>∅19.0 [0.748"]</p> | XLR 3 pole male, Machined contacts, Black Finish, Jaws cable clamp   | <a href="#">Standard</a><br><a href="#">Gold Plated Contacts</a><br><a href="#">Large Cable Clamp</a><br><a href="#">Bulk Pack</a> | <a href="#">AC3MMB</a><br><a href="#">AC3MMB-AU</a><br><a href="#">AC3MMBJ</a><br><a href="#">AC3MMB BULK</a> |
|  |  <p>Dimensions in mm (inches)</p> <p>82.0 [3.228"]</p> <p>∅19.0 [0.748"]</p> | XLR 3 pole male, Stamped contacts, Nickel Finish, Jaws cable clamp   | <a href="#">Standard</a><br><a href="#">Gold Plated Contacts</a><br><a href="#">Large Cable Clamp</a><br><a href="#">Bulk Pack</a> | <a href="#">AC3M</a><br><a href="#">AC3M-AU</a><br><a href="#">AC3MJ</a><br><a href="#">AC3M BULK</a>         |
|  |  <p>Dimensions in mm (inches)</p> <p>82.0 [3.228"]</p> <p>∅19.0 [0.748"]</p> | XLR 3 pole male, Stamped contacts, Black Finish, Jaws cable clamp    | <a href="#">Standard</a><br><a href="#">Gold Plated Contacts</a><br><a href="#">Large Cable Clamp</a><br><a href="#">Bulk Pack</a> | <a href="#">AC3MB</a><br><a href="#">AC3MB-AU</a><br><a href="#">AC3MBJ</a><br><a href="#">AC3MB BULK</a>     |
|  |  <p>Dimensions in mm (inches)</p> <p>82.0 [3.228"]</p> <p>∅19.0 [0.748"]</p> | XLR 3 pole female, Stamped contacts, Nickel Finish, Jaws cable clamp | <a href="#">Standard</a><br><a href="#">Gold Plated Contacts</a><br><a href="#">Large Cable Clamp</a><br><a href="#">Bulk Pack</a> | <a href="#">AC3F</a><br><a href="#">AC3F-AU</a><br><a href="#">AC3FJ</a><br><a href="#">AC3F BULK</a>         |
|  |  <p>Dimensions in mm (inches)</p> <p>82.0 [3.228"]</p> <p>∅19.0 [0.748"]</p> | XLR 3 pole female, Stamped contacts, Black Finish, Jaws cable clamp  | <a href="#">Standard</a><br><a href="#">Gold Plated Contacts</a><br><a href="#">Large Cable Clamp</a><br><a href="#">Bulk Pack</a> | <a href="#">AC3FB</a><br><a href="#">AC3FB-AU</a><br><a href="#">AC3FBJ</a><br><a href="#">AC3FB BULK</a>     |

# Amphenol

| PRODUCT - FIGURE  | DRAWING<br>Dimensions in mm (inches) | DESCRIPTION  | VARIATIONS           | PART NUMBER |
|---|--------------------------------------|--|----------------------|-------------|
|    |                                      | XLR 4 pole male,<br>Machined contacts,<br>Nickel Finish,<br>Jaws cable clamp   | Standard             | AC4M        |
|   |                                      |  | Gold Plated Contacts | AC4M-AU     |
|   |                                      |  | Large Cable Clamp    | AC4MJ       |
|   |                                      |  | Bulk Pack            | AC4M BULK   |
|    |                                      | XLR 4 pole male,<br>Machined contacts,<br>Black Finish,<br>Jaws cable clamp    | Standard             | AC4MB       |
|   |                                      |  | Gold Plated Contacts | AC4MB-AU    |
|   |                                      |  | Large Cable Clamp    | AC4MBJ      |
|   |                                      |  | Bulk Pack            | AC4MB BULK  |
|    |                                      | XLR 4 pole female,<br>Machined contacts,<br>Nickel Finish,<br>Jaws cable clamp | Standard             | AC4F        |
|   |                                      |  | Gold Plated Contacts | AC4F-AU     |
|   |                                      |  | Large Cable Clamp    | AC4FJ       |
|   |                                      |  | Bulk Pack            | AC4F BULK   |
|  |                                      | XLR 4 pole female,<br>Machined contacts,<br>Black Finish,<br>Jaws cable clamp  | Standard             | AC4FB       |
|   |                                      |  | Gold Plated Contacts | AC4FB-AU    |
|   |                                      |  | Large Cable Clamp    | AC4FBJ      |
|   |                                      |  | Bulk Pack            | AC4FB BULK  |
|  |                                      | XLR 5 pole male,<br>Machined contacts,<br>Nickel Finish,<br>Jaws cable clamp   | Standard             | AC5M        |
|   |                                      |  | Gold Plated Contacts | AC5M-AU     |
|   |                                      |  | Large Cable Clamp    | AC5MJ       |
|   |                                      |  | Bulk Pack            | AC5M BULK   |
|  |                                      | XLR 5 pole male,<br>Machined contacts,<br>Black Finish,<br>Jaws cable clamp    | Standard             | AC5MB       |
|   |                                      |  | Gold Plated Contacts | AC5MB-AU    |
|   |                                      |  | Large Cable Clamp    | AC5MBJ      |
|   |                                      |  | Bulk Pack            | AC5MB BULK  |
|  |                                      | XLR 5 pole female,<br>Machined contacts,<br>Nickel Finish,<br>Jaws cable clamp | Standard             | AC5F        |
|   |                                      |  | Gold Plated Contacts | AC5F-AU     |
|   |                                      |  | Large Cable Clamp    | AC5FJ       |
|   |                                      |  | Bulk Pack            | AC5F BULK   |
|  |                                      | XLR 5 pole female,<br>Machined contacts,<br>Black Finish,<br>Jaws cable clamp  | Standard             | AC5FB       |
|   |                                      |  | Gold Plated Contacts | AC5FB-AU    |
|   |                                      |  | Large Cable Clamp    | AC5FBJ      |
|   |                                      |  | Bulk Pack            | AC5FB BULK  |



# Amphenol

| PRODUCT - FIGURE  | DRAWING<br>Dimensions in mm (inches)  | DESCRIPTION   | VARIATIONS           | PART NUMBER |
|---|---|---|----------------------|-------------|
|    |    | XLR 6A pole male,<br>Machined contacts,<br>Nickel Finish,<br>Jaws cable clamp                 | Standard             | AC6AM       |
|   |   |   | Gold Plated Contacts | AC6AM-AU    |
|   |   |   | Large Cable Clamp    | AC6AMJ      |
|   |   |   | Bulk Pack            | AC6AM BULK  |
|    |    | XLR 6A pole male,<br>Machined contacts,<br>Black Finish,<br>Jaws cable clamp                  | Standard             | AC6AMB      |
|   |   |   | Gold Plated Contacts | AC6AMB-AU   |
|   |   |   | Large Cable Clamp    | AC6AMBJ     |
|   |   |   | Bulk Pack            | AC6AMB BULK |
|    |    | XLR 6A pole female,<br>Machined contacts,<br>Nickel Finish,<br>Jaws cable clamp               | Standard             | AC6AF       |
|   |   |   | Gold Plated Contacts | AC6AF-AU    |
|   |   |   | Large Cable Clamp    | AC6AFJ      |
|   |   |   | Bulk Pack            | AC6AF BULK  |
|  |  | XLR 6A pole female,<br>Machined contacts,<br>Black Finish,<br>Jaws cable clamp                | Standard             | AC6AFB      |
|   |   |   | Gold Plated Contacts | AC6AFB-AU   |
|   |   |   | Large Cable Clamp    | AC6AFBJ     |
|   |   |   | Bulk Pack            | AC6AFB BULK |
|  |  | XLR 7 pole male,<br>Gold plated<br>Machined contacts,<br>Nickel Finish,<br>Jaws cable clamp   | Standard             | AC7M        |
|   |   |   | Large Cable Clamp    | AC7MJ       |
|   |   |   | Bulk Pack            | AC7M BULK   |
|  |  | XLR 7 pole male,<br>Gold plated<br>Machined contacts,<br>Black Finish,<br>Jaws cable clamp    | Standard             | AC7MB       |
|   |   |   | Large Cable Clamp    | AC7MBJ      |
|   |   |   | Bulk Pack            | AC7MB BULK  |
|  |  | XLR 7 pole female,<br>Gold plated<br>Machined contacts,<br>Nickel Finish,<br>Jaws cable clamp | Standard             | AC7F        |
|   |   |   | Large Cable Clamp    | AC7FJ       |
|   |   |   | Bulk Pack            | AC7F BULK   |
|  |  | XLR 7 pole female,<br>Gold plated<br>Machined contacts,<br>Black Finish,<br>Jaws cable clamp  | Standard             | AC7FB       |
|   |   |   | Large Cable Clamp    | AC7FBJ      |
|   |   |   | Bulk Pack            | AC7FB BULK  |


# Amphenol

## PART NUMBER BREAKDOWN

### METAL SHELL TYPE - SOLDER



E. G. **AC3MMBJ-AU BULK**  
**AC** (Series Prefix), **3** contacts, **Male**, **M** Machined Contacts, **Black** Polyester Finish,  
**J** (Large Jaws), - **AU** (Gold Plated Contacts), **Bulk** Packaged.

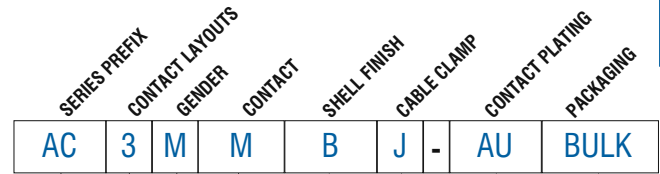

|                                    |       |   |   |
|------------------------------------|-------|---|---|
| <b>SERIES PREFIX</b>               | AC    | = | Series Prefix   |
| <b>CONTACT LAYOUTS</b>             | 3     | = | 3 Contacts  |
|                                    | 4     | = | 4 Contacts  |
|                                    | 5     | = | 5 Contacts  |
|                                    | 6A    | = | 6 Contacts  |
|                                    | 7     | = | 7 Contacts  |
| <b>GENDER</b>                      | F     | = | Female Socket Contacts  |
|                                    | M     | = | Male Pin Contacts   |
| <b>CONTACT<sup>1</sup></b>         | Blank | = | Stamped Contacts  |
|                                    | M     | = | Machined Contacts   |
|                                    | G     | = | Stamped Contacts, Ground Tag  |
|                                    | MG    | = | Machined Contacts, Ground Tag<br>(Applicable 3 male pin contacts, option M and MG only) |
| <b>SHELL FINISH<sup>2</sup></b>    | Blank | = | Nickel Plated Finish  |
|                                    | B     | = | Black Polyester Finish  |
| <b>CABLE CLAMP</b>                 | Blank | = | Standard Jaws 3 mm - 6.5 mm<br>cable O.D. (0.118" to 0.255")                            |
|                                    | J     | = | Large Jaws 6.5mm - 8mm<br>cable O.D. (0.255" to 0.314")                                 |
| <b>CONTACT PLATING<sup>3</sup></b> | Blank | = | Standard Plating ( Silver or Tin -<br>Refer to Standard Data.)                          |
|                                    | AU    | = | Gold Plated   |
| <b>PACKAGING</b>                   | Blank | = | Individual Bags   |
|                                    | BULK  | = | Bulk Packed   |

#### Note:

<sup>1</sup> 4 - 7 contact connectors have machined contacts and grounding as standard.

<sup>2</sup> Ground contacts are not supplied with the black polyester finish shell option.

<sup>3</sup> 7 Contact is gold plated as standard.

<sup>4</sup> All AC Series Connectors are available with optional colour coded boot / backshell.  
 Refer to page 137 and simply add colour to end of part number. Example: AC3MM - RED



**Features:**

- Thermoplastic Shell.
- Solder Bucket Connections.
- “Jaws” Cable Retention System.
- Stamped or Machined Contacts.
- Leading first mate last break socket contact.
- Quick and easy assembly without screws – by hand or portable termination tool. (Part number T2860.)


**Options:** Gold Plated Contacts, Stamped Contacts (3 Contact only), Bulk Pack, Coloured Boots / Backshells  
3, 4, 5, 6A and 7 Contacts.

**Specifications:** page 20

| PRODUCT - FIGURE | DRAWING | DESCRIPTION   | VARIATIONS           | PART NUMBER  |
|------------------|---------|---|----------------------|--------------|
|                  |         | XLR 3 pole male,<br>Machined contacts,<br>Thermoplastic shell,<br>Jaws cable clamp  | Standard             | AC3MMCP      |
|                  |         |   | Gold Plated Contacts | AC3MMCP-AU   |
|                  |         |   | Large Cable Clamp    | AC3MMCPJ     |
|                  |         |   | Bulk Pack            | AC3MMCP BULK |
|                  |         | XLR 3 pole male,<br>Stamped contacts,<br>Thermoplastic shell,<br>Jaws cable clamp   | Standard             | AC3MCP       |
|                  |         |   | Gold Plated Contacts | AC3MCP-AU    |
|                  |         |   | Large Cable Clamp    | AC3MCPJ      |
|                  |         |   | Bulk Pack            | AC3MCP BULK  |
|                  |         | XLR 3 pole female,<br>Stamped contacts,<br>Thermoplastic shell,<br>Jaws cable clamp | Standard             | AC3FCP       |
|                  |         |   | Gold Plated Contacts | AC3FCP-AU    |
|                  |         |   | Large Cable Clamp    | AC3FCPJ      |
|                  |         |   | Bulk Pack            | AC3FCP BULK  |

**Note:** Thermoplastic shell connectors are also available in 4 - 7 contact arrangements, please contact us for ordering code.

**ISO VIEW OF AC3MM**

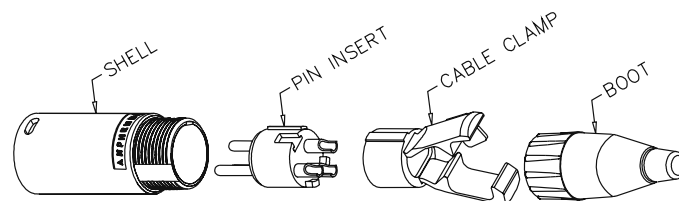



**METAL SHELL TYPE  
RIGHT ANGLE - SOLDER**



**Features:**

- XLR 90° right angle
- Metal or Thermoplastic connector shell
- Thermoplastic 90° right angle backshell
- Solder bucket connections
- "Jaws"™ Cable Retention System
- Contact Layouts in 3, 4, 5, 6A and 7
- Precision machined pin contacts
- Leading first mate last break socket contact

**Specifications: page 20**

**Assembly Tooling: page 137**

**NOTE\*** Connector assembly requires the use of assembly tool T2880. Please refer to assembly instruction PI540\* for details. The connector is non-servicable once assembled.



| PRODUCT - FIGURE | DRAWING | DESCRIPTION  | VARIATIONS | PART NUMBER |
|------------------|---------|--|------------|-------------|
|                  |         | XLR 90° right angle female, Metal shell, Nickel Finish, Jaws cable clamp | 3 pole     | AC3FR       |
|                  |         |  | 4 pole     | AC4FR       |
|                  |         |  | 5 pole     | AC5FR       |
|                  |         |  | 6A pole    | AC6AFR      |
|                  |         |  | 7 pole     | AC7FR       |
|                  |         | XLR 90° right angle male, Metal shell, Nickel Finish, Jaws cable clamp   | 3 pole     | AC3MMR      |
|                  |         |  | 4 pole     | AC4MR       |
|                  |         |  | 5 pole     | AC5MR       |
|                  |         |  | 6A pole    | AC6AMR      |
|                  |         |  | 7 pole     | AC7MR       |

\*PI540 is available for download at [www.amphenolaudio.com](http://www.amphenolaudio.com)

# Amphenol

## METAL SHELL TYPE - IDC (SOLDERLESS)



The Insulation Displacement Contact (IDC) connector is ideal for Original Equipment Manufacturers and end users alike and offers an alternative to our standard solder connector. Connectors can be quickly and easily assembled without screws or a soldering iron – by hand or portable termination tool. (Part number T2860.)

Labour savings of up to 60% in termination time can be achieved.

**Recommended Cable Dimensions: page 21**


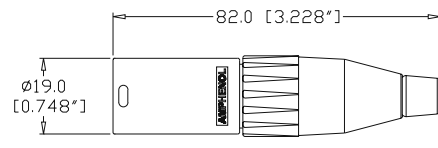

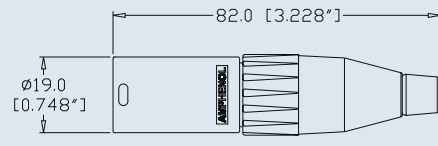

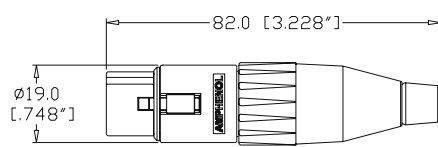


**Features:**

- Zinc Diecast Shell
- Available in 3 Contact only.
- Insulation Displacement Contacts (IDC - Solderless).
- “Jaws” Cable Retention System.
- Leading first mate last break socket contact.

**Options:** Gold plated contacts, Black Finish Shell, Bulk Pack, Coloured Boots / Backshells.


**Specifications: page 20**

**Assembly Instructions: page 19**

| PRODUCT - FIGURE  | DRAWING   | DESCRIPTION  | VARIATIONS  | PART NUMBER  |
|---|---|--|---|--|
|    |    | XLR 3 pole male, IDC contacts, Nickel Finish, IDC Jaws cable clamp   | <a href="#">Standard</a><br><a href="#">Gold Plated Contacts</a><br><a href="#">Bulk Pack</a> | <a href="#">AC3MI</a><br><a href="#">AC3MI-AU</a><br><a href="#">AC3MI BULK</a>    |
|  |  | XLR 3 pole male, IDC contacts, Black Finish, IDC Jaws cable clamp    | <a href="#">Standard</a><br><a href="#">Gold Plated Contacts</a><br><a href="#">Bulk Pack</a> | <a href="#">AC3MIB</a><br><a href="#">AC3MIB-AU</a><br><a href="#">AC3MIB BULK</a> |
|  |  | XLR 3 pole female, IDC contacts, Nickel Finish, IDC Jaws cable clamp | <a href="#">Standard</a><br><a href="#">Gold Plated Contacts</a><br><a href="#">Bulk Pack</a> | <a href="#">AC3FI</a><br><a href="#">AC3FI-AU</a><br><a href="#">AC3FI BULK</a>    |
|  |  | XLR 3 pole female, IDC contacts, Black Finish, IDC Jaws cable clamp  | <a href="#">Standard</a><br><a href="#">Gold Plated Contacts</a><br><a href="#">Bulk Pack</a> | <a href="#">AC3FIB</a><br><a href="#">AC3FIB-AU</a><br><a href="#">AC3FIB BULK</a> |

**Note:** Amphenol can not guarantee the termination performance unless the recommended cable dimensions listed on page 21 are followed.

### ISO VIEW OF AC3FI

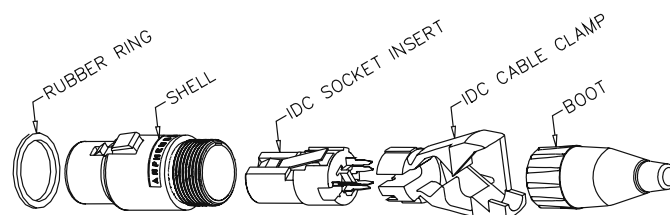



METAL SHELL TYPE - IDC (SOLDERLESS)

# Amphenol


## PART NUMBER BREAKDOWN

### METAL SHELL TYPE - IDC



E. G . **AC3MIB-AU BULK**  
**AC** (Series Prefix), **3** contacts, **M**ale, IDC Contacts, **B**lack Polyester Finish,  
- **AU** (Gold Plated Contacts), **BULK** Packaged.

|                           |       |   |  |
|---------------------------|-------|---|--|
| <b>SERIES PREFIX</b>      | AC    | = | Series Prefix  |
| <b>CONTACT LAYOUT</b>     | 3     | = | 3 Contact only   |
| <b>GENDER</b>             | F     | = | Female Socket Contacts                                     |
|                           | M     | = | Male Pin Contacts  |
| <b>TERMINATION METHOD</b> | I     | = | IDC Contacts   |
| <b>SHELL FINISH</b>       | Blank | = | Nickel Plated Finish                                       |
|                           | B     | = | Black Polyester Finish                                     |
| <b>CONTACT PLATING</b>    | Blank | = | Standard Plating (Silver or Tin - Refer to Standard Data.) |
|                           | AU    | = | Gold Plated  |
| <b>PACKAGING</b>          | Blank | = | Individual Bags  |
|                           | BULK  | = | Bulk Packed  |

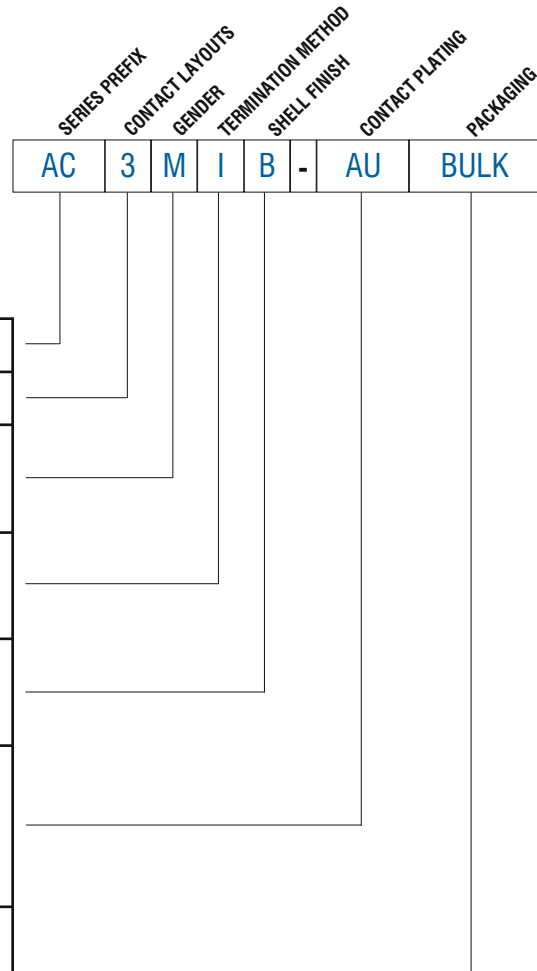

**Note:** All AC Series Connectors are available with optional colour coded boot / backshell. Refer to page 80 and simply add colour to end of part number. Example: AC3MI - RED



The Insulation Displacement Contact (IDC) connector is ideal for Original Equipment Manufacturers and end users alike and offers an alternative to our standard solder connector. Connectors can be quickly and easily assembled without screws or a soldering iron – by hand or portable termination tool. Labour savings of up to 60% in termination time can be achieved.

**Recommended Cable Dimensions: page 21**

**Features:**

- Thermoplastic Shell
- Insulation Displacement Contacts (IDC - Solderless).
- “Jaws” Cable Retention System.
- Leading first mate last break socket contact.
- Quick and easy assembly without screws – by hand or portable termination tool. (Part number T2860.)

**Options:** Gold plated contacts, Bulk Pack, Coloured Boots / Backshells  
**Specifications: page 20**

| PRODUCT - FIGURE | DRAWING | DESCRIPTION  | VARIATIONS           | PART NUMBER  |
|------------------|---------|--|----------------------|--------------|
|                  |         | XLR 3 pole male, IDC contacts, Thermoplastic shell, IDC Jaws cable clamp   | Standard             | AC3MCPI      |
|                  |         |  | Gold Plated Contacts | AC3MCPI-AU   |
|                  |         |  | Bulk Pack            | AC3MCPI BULK |
|                  |         | XLR 3 pole female, IDC contacts, Thermoplastic shell, IDC Jaws cable clamp | Standard             | AC3FCPI      |
|                  |         |  | Gold Plated Contacts | AC3FCPI-AU   |
|                  |         |  | Bulk Pack            | AC3FCPI BULK |


**Note:** Amphenol can not guarantee the termination performance unless the recommended cable dimensions listed on page 21 are followed.

## PART NUMBER BREAKDOWN

### IDC THERMOPLASTIC SHELL TYPE


E. G. **AC3MCPI-AU BULK**  
 AC (Series Prefix), 3 contacts, Male, CP (Thermoplastic Shell), IDC Contacts, - AU (Gold Plated Contacts), Bulk Packaged.

|                           |       |   |   |
|---------------------------|-------|---|---|
| <b>SERIES PREFIX</b>      | AC    | = | Series Prefix   |
| <b>CONTACT LAYOUT</b>     | 3     | = | 3 Contacts only   |
| <b>GENDER</b>             | F     | = | Female Socket Contacts                                      |
|                           | M     | = | Male Pin Contacts   |
| <b>SHELL MATERIAL</b>     | CP    | = | Thermoplastic Shell   |
| <b>TERMINATION METHOD</b> | I     | = | IDC Contacts  |
| <b>CONTACT PLATING</b>    | Blank | = | Standard Plating ( Silver or Tin - Refer to Standard Data.) |
|                           | AU    | = | Gold Plated   |
| <b>PACKAGING</b>          | Blank | = | Individual Bags   |
|                           | BULK  | = | Bulk Packed   |

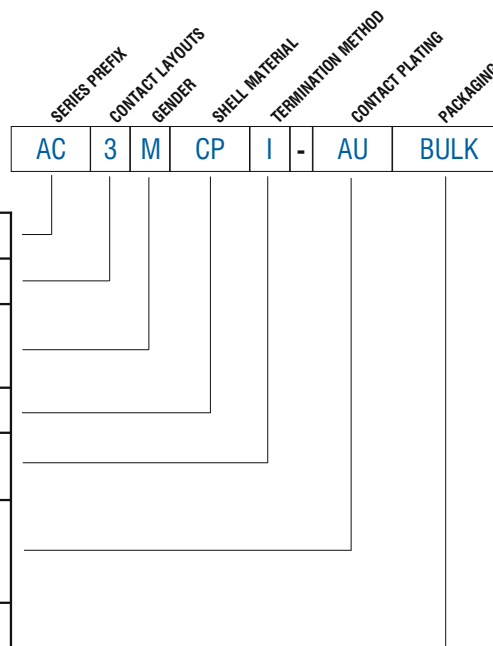


**Note:** All AC Series Connectors are available with optional colour coded boot / backshell. Refer to page 80 and simply add colour to end of part number. Example: AC3MCPI - RED

## AC IDC SERIES CABLE ASSEMBLY INSTRUCTIONS

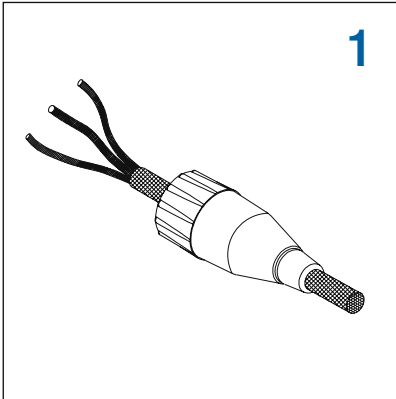


1

Push the cable through the boot assembly and strip the cable back 35 to 40 mm. Twist the shield wire.

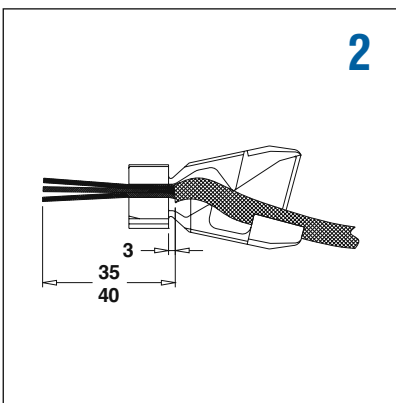


2

Fit the cable into the 'Jaws' cable clamp ensuring that the cable is pushed up to the neck of the clamp within 3mm.

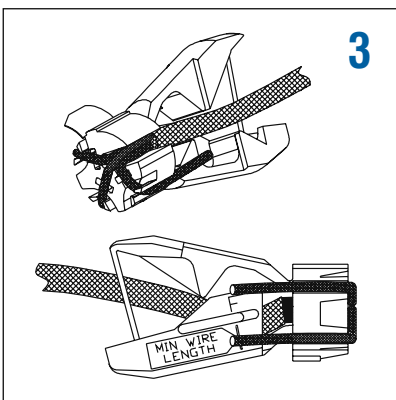


3

Pull back the conductors into their individual wire guidetracks. Note: Two spring fingers in the clamp will hold the conductors in position during subsequent operations. The ends of the two insulated wires must be on or past the minimum wire length mark.

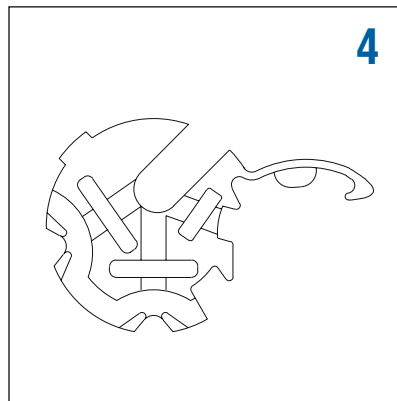


4

For ground protection the twisted shield wire is clipped in place with the ground protect flap.

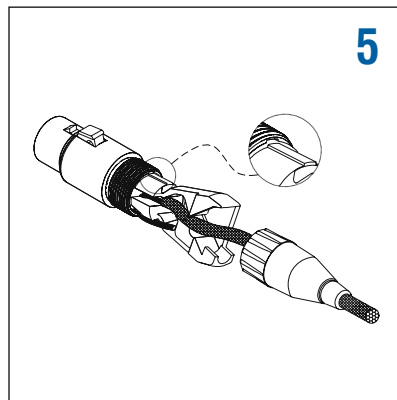


5

Trim back the shield wire, so there are no wires coming out of the flap and fit the 'Jaws' cable clamp into the shell assembly, ensuring the keyways are aligned.

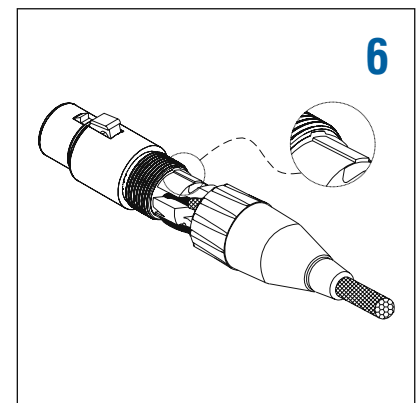

6

Close the cable clamp slightly and push the boot over the clamp ensuring the wires fit inside the boot.

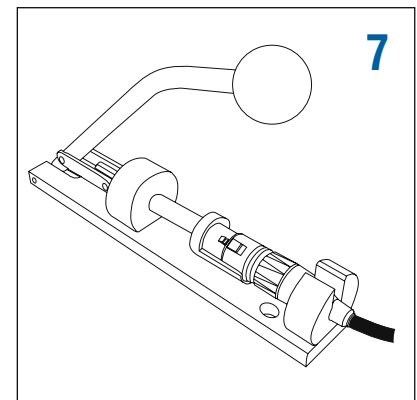







7

Final assembly can be achieved either by manually screwing the boot on, or by using an Amphenol Australia T2860 termination tool.

# Amphenol

## STANDARD DATA AC CABLE CONNECTORS



|                                   |   | VALUE   |   |   |   |   |
|-----------------------------------|---|---|---|---|---|---|
| <b>GENERAL CHARACTERISTICS</b>    | Number of contacts  | 3   | 4   | 5   | 6A  | 7   |
|                                   | AC Series Contact Arrangements<br>(Front view of pin inserts) |  |  |  |  |  |
|                                   | Termination   | IDC / SOLDER  | SOLDER  | SOLDER  | SOLDER  | SOLDER  |
|                                   | Max. Wire Gauge - Stranded wire:                              |   |   |   |   |   |
|                                   | IDC   | 24AWG   | N/A   | N/A   | N/A   | N/A   |
|                                   | Solder  | 14AWG   | 16AWG   | 18AWG   | 18AWG   | 20AWG   |
|                                   | Flammability rating of insulator plastics and housings        | UL94V-0   |   |   |   |   |
| Environmental                     | Complies with EU RoHS 2 Directive 2011/65/EU                  |   |   |   |   |   |
| <b>ELECTRICAL CHARACTERISTICS</b> | Service Voltage RMS   | 133V <sup>1)</sup>  |   |   |   |   |
|                                   | Test Voltage AC RMS   | 1400V   |   |   |   |   |
|                                   | Current carrying capacity:                                    |   |   |   |   |   |
|                                   | IDC   | 1A  | N/A   | N/A   | N/A   | N/A   |
|                                   | Solder  | 15A   | 10A   | 7.5A  | 7.5A  | 5A  |
|                                   | Typical Contact Resistance                                    | ≤3mΩ  |   |   |   |   |
| Insulation Resistance             | ≥1GΩ  |   |   |   |   |   |
| <b>CLIMATIC CHARACTERISTICS</b>   | Protection Class  | IP40  |   |   |   |   |
|                                   | Operating Temperature   | -25°C to +75°C (-13°F to +167°F)  |   |   |   |   |
| <b>MECHANICAL CHARACTERISTICS</b> | Insertion and Withdrawal force                                | ≥10N - ≤30N   |   |   |   |   |
|                                   | Weight - Metal <sup>2)</sup>                                  | 36g<br>(0.080lb)  | 37g<br>(0.081lb)  | 38g<br>(0.083lb)  | 38g<br>(0.083lb)  | 38g<br>(0.083lb)  |
|                                   | Weight - Thermoplastic <sup>2)</sup>                          | 18g<br>(0.039lb)  | 19g<br>(0.041lb)  | 20g<br>(0.044lb)  | 20g<br>(0.044lb)  | 20g<br>(0.044lb)  |
|                                   | Typical Cable retention force                                 | 22Kg to 44Kg (50lb to 100lb) - Dependent on cable material and diameter.          |   |   |   |   |
|                                   | Cable O.D. range - JAWS clamp                                 |   |   |   |   |   |
|                                   | IDC   | Max. Cable O.D. 5.85mm (0.23")  |   |   |   |   |
|                                   | Standard solder   | 3mm to 6.5mm (0.118" to 0.255")   |   |   |   |   |
|                                   | Large Solder  | 6.5mm to 8mm (0.255" to 0.314")   |   |   |   |   |
| Mechanical Operations             | 1000 mating cycles  |   |   |   |   |   |


Rev 5 - 03/2013

<sup>1)</sup> Not suitable for domestic applications above 50V

<sup>2)</sup> Approximate weight only, does not include packaging. Please contact us for exact weight for shipping purposes.


# Amphenol

## STANDARD DATA AC CABLE CONNECTORS
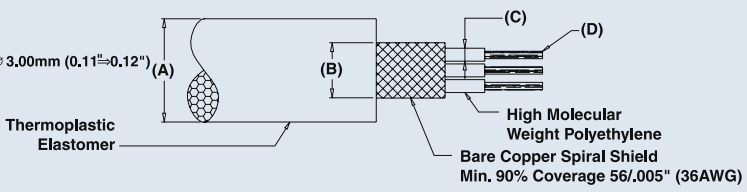
|   |  | DETAILS                                      |
|---|--|--|
| <b>MATERIALS</b>                        | Connector shell - Metal  | Diecast Zinc Alloy                           |
|   | Shell finish   | Satin nickel or Black polyester              |
|   | Connector shell - Thermoplastic  | Thermoplastic, UL94V-0 Modified PPE Resin    |
|   | Shell finish   | Black  |
|   | Insulators   | UL94V-0 PBT Resin or Modified PPE Resin      |
|   | Boot / Backshell   | UL94V-0 Modified PPE Resin or Machined Brass |
|   | Finish   | Black, other colours available - see page 80 |
|   | Cable clamp  |  |
|   | IDC Socket JAWS  | UL94V-0 Modified PPO Resin (Pink)            |
|   | IDC Pin JAWS   | UL94V-0 Modified PPO Resin (Blue)            |
|   | Standard Solder JAWS   | UL94V-0 Modified PPO Resin (Black)           |
|   | Large Solder JAWS  | UL94V-0 Modified PPO Resin (Purple)          |
|   | Cable Bushing  | Santoprene                                   |
|   | Male Contact   | Thermoplastic Polyurethane                   |
|   | Stamped - IDC / Plating  | Phosphor Bronze / Silver or Gold (Optional)  |
|   | Stamped - Solder / Plating   | Phosphor Bronze / Silver or Gold (Optional)  |
| Machined - Solder / Plating             | Brass / Silver or Gold (Optional)  |  |
| Female Contact                          |  |  |
| Stamped - IDC / Plating                 | Phosphor Bronze / Tin or Gold (Optional)   |  |
| Stamped - Solder / Plating              | Phosphor Bronze / Tin or Gold (Optional)   |  |
| Machined - Solder / Plating             | Brass / Silver or Gold (Optional)  |  |
| <b>IDC RECOMMENDED CABLE DIMENSIONS</b> |  <p>                     A - Cable O.D.: Max. <math>\varnothing</math> 5.85mm (0.23").<br/>                     B - Bare Copper Spiral Shield OD <math>\varnothing</math> 2.75 <math>\Rightarrow</math> <math>\varnothing</math> 3.00mm (0.11" <math>\Rightarrow</math> 0.12")<br/>                     C - OD <math>\varnothing</math> 1.30 <math>\Rightarrow</math> <math>\varnothing</math> 1.50mm (0.05" <math>\Rightarrow</math> 0.06")<br/>                     D - 16/.005" (24 AWG stranded wire)                 </p> <p>                     Thermoplastic Elastomer<br/>                     High Molecular Weight Polyethylene<br/>                     Bare Copper Spiral Shield<br/>                     Min. 90% Coverage 56/.005" (36AWG)                 </p> |  |



Rev 4 - 03/2013

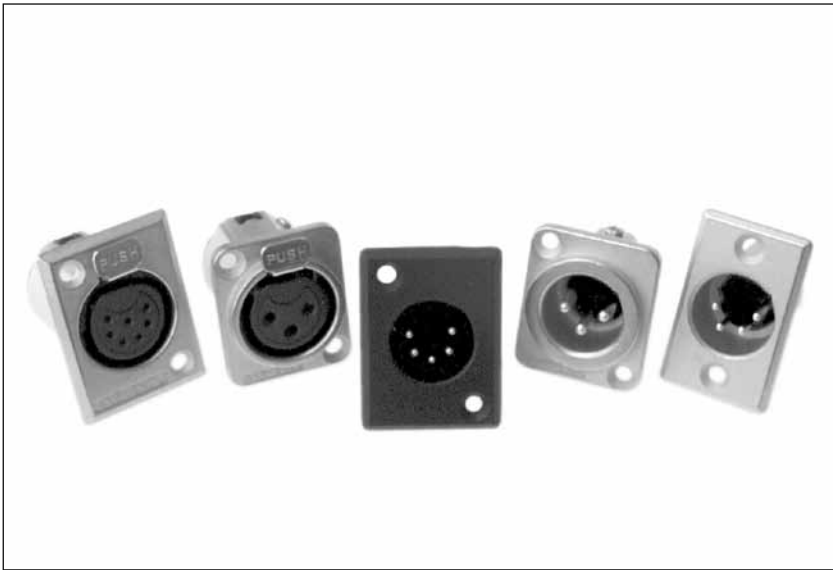

## AC “Z” SERIES XLR METAL CHASSIS MOUNT CONNECTORS

The metal chassis mount “Z” series connectors are designed for the audio user where durability, reliability and strength across a wide range of applications are important. All AC products are manufactured to the highest quality standards and will withstand the harshest environments. This range complies with IEC268-12 and AES 14-1992 standards. CSA File Number 68598

### Features

- The “D” size housing can be either front or rear mounted using the same panel cutout.
- The “P” size housing is the original wide flange front mounting XLR connector. “PN” is the original narrow flange front mounting male connector.
- A leading first mate last break socket contact is standard on all female connectors (Pin 1).
- Solder cup or Vertical PCB versions.
- Connectors are fitted with a grounding system for RFI shielding applications.
- Available in 3, 4, 5, 6A and 7 contact arrangements.
- Compatible with all other XLR brands.

### Options

- Solder Bucket termination
- Vertical PCB contacts
- Zinc Diecast Shell - Satin Nickel Finish
- Zinc Diecast Shell - Black Polyester Finish
- Gold, Silver or Tin Plated Contacts
- Bulk Packaging
- Single Bag packs
- Precision machined contacts
- Cost effective stamped contacts on 3 pole
- Latchless versions (Non-Latching) (Female only)

**Note:** A ground tag is standard on all AC “Z” series connectors. Although the ground tag is intended for RFI shielding applications, Amphenol cannot guarantee its effectiveness in all cases.

The non-conductive Black polyester finish insulates the ground tag from the shell and should not be used in applications requiring ground contact to the shell.

### Ordering Codes

We have listed the more common ordering codes in each section. For further options please refer to the part number breakdown charts. Please contact us if you need any further assistance.

### Simple steps to guide you in using this catalogue

- 1) Identify the product group listed in Contents on page 1 and go directly to that page number.
- 2) Each product group cover page then details information and options available.
- 3) Refer to the product detail pages and identify the product you require pictorially.
- 4) Read the product description column for the products standard features.
- 5) Use variations column to determine your choice.
- 6) Identify part number.
- 7) In the event the particular option you require is not listed please refer to the part number breakdown page at the end of each section.
- 8) Please contact us directly if you have any further problems.



## METAL D TYPE FLANGE - SOLDER AND PCB



### Features:

- Zinc Diecast Shell.
- D size housing can be front or rear mounted using the same panel cutout.
- Solder Bucket connections.
- Vertical PCB mounting (not available in 4 contact female).
- Precision machined or Stamped contacts (3 pin only).
- Leading first mate last break socket contact.
- Positive latch lock system.

**Options:** Stamped contacts (3 contact only), Gold plated contacts, Vertical PCB contacts, Black finish, Non-Latching (Female only), Bulk Pack.

**Part Number Breakdown:** [page 31](#)

**Specifications:** [page 32](#)

**PCB Footprints:** [page 33](#)

**Panel Cutouts:** [page 33](#)



| PRODUCT - FIGURE | DRAWING | Dimensions in mm (inches)                 | DESCRIPTION  | VARIATIONS   | PART NUMBER |
|------------------|---------|---|--|--------------|-------------|
|                  |         | <p>SOLDER CONTACTS: 2.7 [.106\"/&gt; </p> | XLR 3 pole male, D Flange, Machined contacts, Nickel Finish  | Standard     | AC3MMDZ     |
|                  |         |   | Gold Plated Contacts   | AC3MMDZ-AU   |             |
|                  |         | <p>PCB CONTACTS: 27.5 [1.082\"/&gt; </p>  | XLR 3 pole male, D Flange, Machined contacts, Black Finish   | Standard     | AC3MMDZB    |
|                  |         |   | Gold Plated Contacts   | AC3MMDZB-AU  |             |
|                  |         | <p>SOLDER CONTACTS: 2.7 [.106\"/&gt; </p> | XLR 3 pole male, D Flange, Stamped contacts, Nickel Finish   | Standard     | AC3MDZ      |
|                  |         |   | Gold Plated Contacts   | AC3MDZ-AU    |             |
|                  |         | <p>PCB CONTACTS: 27.5 [1.082\"/&gt; </p>  | XLR 3 pole male, D Flange, Stamped contacts, Black Finish    | Standard     | AC3MDZB     |
|                  |         |   | Gold Plated Contacts   | AC3MDZB-AU   |             |
|                  |         | <p>SOLDER CONTACTS: 6.5 [.256\"/&gt; </p> | XLR 3 pole female, D Flange, Stamped contacts, Nickel Finish | Standard     | AC3FDZ      |
|                  |         |   | Gold Plated Contacts   | AC3FDZ-AU    |             |
|                  |         | <p>PCB CONTACTS: 23.0 [.907\"/&gt; </p>   | XLR 3 pole female, D Flange, Stamped contacts, Black Finish  | Standard     | AC3FDZB     |
|                  |         |   | Gold Plated Contacts   | AC3FDZB-AU   |             |
|                  |         | <p>PCB CONTACTS: 23.0 [.907\"/&gt; </p>   | XLR 3 pole female, D Flange, Stamped contacts, Black Finish  | Vertical PCB | AC3FDZVB    |
|                  |         |   | Bulk Pack  | AC3FDZB BULK |             |

| PRODUCT - FIGURE | DRAWING | Dimensions in mm (inches) | DESCRIPTION   | VARIATIONS           | PART NUMBER  |
|------------------|---------|---------------------------|---|----------------------|--------------|
|                  |         |                           | XLR 4 pole male, D Flange, Machined contacts, Nickel Finish   | Standard             | AC4MDZ       |
|                  |         |                           |   | Gold Plated Contacts | AC4MDZ-AU    |
|                  |         |                           | XLR 4 pole male, D Flange, Machined contacts, Black Finish    | Vertical PCB         | AC4MDZV      |
|                  |         |                           |   | Bulk Pack            | AC4MDZ BULK  |
|                  |         |                           | XLR 4 pole male, D Flange, Machined contacts, Black Finish    | Standard             | AC4MDZB      |
|                  |         |                           |   | Gold Plated Contacts | AC4MDZB-AU   |
|                  |         |                           | XLR 4 pole male, D Flange, Machined contacts, Black Finish    | Vertical PCB         | AC4MDZVB     |
|                  |         |                           |   | Bulk Pack            | AC4MDZB BULK |
|                  |         |                           | XLR 4 pole female, D Flange, Machined contacts, Nickel Finish | Standard             | AC4FDZ       |
|                  |         |                           |   | Gold Plated Contacts | AC4FDZ-AU    |
|                  |         |                           | XLR 4 pole female, D Flange, Machined contacts, Black Finish  | Vertical PCB         | AC4FDZV      |
|                  |         |                           |   | Bulk Pack            | AC4FDZ BULK  |
|                  |         |                           | XLR 4 pole female, D Flange, Machined contacts, Black Finish  | Standard             | AC4FDZB      |
|                  |         |                           |   | Gold Plated Contacts | AC4FDZB-AU   |
|                  |         |                           | XLR 4 pole female, D Flange, Machined contacts, Black Finish  | Vertical PCB         | AC4FDZVB     |
|                  |         |                           |   | Bulk Pack            | AC4FDZB BULK |
|                  |         |                           | XLR 5 pole male, D Flange, Machined contacts, Nickel Finish   | Standard             | AC5MDZ       |
|                  |         |                           |   | Gold Plated Contacts | AC5MDZ-AU    |
|                  |         |                           | XLR 5 pole male, D Flange, Machined contacts, Black Finish    | Vertical PCB         | AC5MDZV      |
|                  |         |                           |   | Bulk Pack            | AC5MDZ BULK  |
|                  |         |                           | XLR 5 pole male, D Flange, Machined contacts, Black Finish    | Standard             | AC5MDZB      |
|                  |         |                           |   | Gold Plated Contacts | AC5MDZB-AU   |
|                  |         |                           | XLR 5 pole male, D Flange, Machined contacts, Black Finish    | Vertical PCB         | AC5MDZVB     |
|                  |         |                           |   | Bulk Pack            | AC5MDZB BULK |
|                  |         |                           | XLR 5 pole female, D Flange, Machined contacts, Nickel Finish | Standard             | AC5FDZ       |
|                  |         |                           |   | Gold Plated Contacts | AC5FDZ-AU    |
|                  |         |                           | XLR 5 pole female, D Flange, Machined contacts, Black Finish  | Vertical PCB         | AC5FDZV      |
|                  |         |                           |   | Bulk Pack            | AC5FDZ BULK  |
|                  |         |                           | XLR 5 pole female, D Flange, Machined contacts, Black Finish  | Standard             | AC5FDZB      |
|                  |         |                           |   | Gold Plated Contacts | AC5FDZB-AU   |
|                  |         |                           | XLR 5 pole female, D Flange, Machined contacts, Black Finish  | Vertical PCB         | AC5FDZVB     |
|                  |         |                           |   | Bulk Pack            | AC5FDZB BULK |

| PRODUCT - FIGURE | DRAWING      | DESCRIPTION   | VARIATIONS           | PART NUMBER   |
|------------------|--------------|---|----------------------|---------------|
|                  |              | XLR 6A pole male, D Flange, Machined contacts, Nickel Finish              | Standard             | AC6AMDZ       |
|                  |              |   | Gold Plated Contacts | AC6AMDZ-AU    |
|                  |              |   | Vertical PCB         | AC6AMDZV      |
|                  |              |   | Bulk Pack            | AC6AMDZ BULK  |
|                  |              | XLR 6A pole male, D Flange, Machined contacts, Black Finish               | Standard             | AC6AMDZB      |
|                  |              |   | Gold Plated Contacts | AC6AMDZB-AU   |
|                  |              |   | Vertical PCB         | AC6AMDZVB     |
|                  |              |   | Bulk Pack            | AC6AMDZB BULK |
|                  |              | XLR 6A pole female, D Flange, Machined contacts, Nickel Finish            | Standard             | AC6AFDZ       |
|                  |              |   | Gold Plated Contacts | AC6AFDZ-AU    |
|                  |              |   | Vertical PCB         | AC6AFDZV      |
|                  |              |   | Bulk Pack            | AC6AFDZ BULK  |
|                  |              | XLR 6A pole female, D Flange, Machined contacts, Black Finish             | Standard             | AC6AFDZB      |
|                  |              |   | Gold Plated Contacts | AC6AFDZB-AU   |
|                  |              |   | Vertical PCB         | AC6AFDZVB     |
|                  |              |   | Bulk Pack            | AC6AFDZB BULK |
|                  |              | XLR 7 pole male, D Flange, Gold Plated Machined contacts, Nickel Finish   | Standard             | AC7MDZ        |
|                  |              |   | Vertical PCB         | AC7MDZV       |
|                  |              |   | Bulk Pack            | AC7MDZ BULK   |
|                  |              |   |                      |               |
| Vertical PCB     | AC7MDZVB     |   |                      |               |
| Bulk Pack        | AC7MDZB BULK |   |                      |               |
|                  |              | XLR 7 pole female, D Flange, Gold Plated Machined contacts, Nickel Finish |                      |               |
|                  |              |   | Vertical PCB         | AC7FDZV       |
|                  |              |   | Bulk Pack            | AC7FDZ BULK   |
|                  |              |   |                      |               |
| Vertical PCB     | AC7FDZVB     |   |                      |               |
| Bulk Pack        | AC7FDZB BULK |   |                      |               |



## METAL P TYPE FLANGE - SOLDER AND PCB




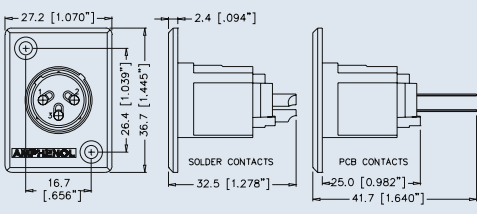

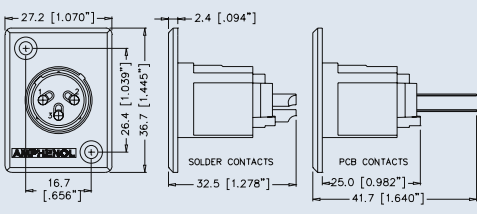

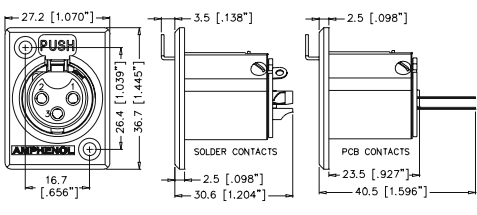

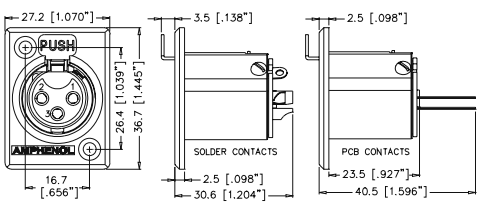

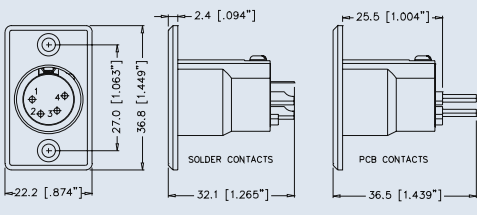

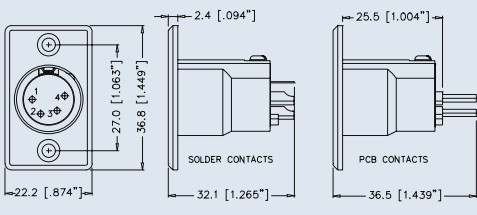

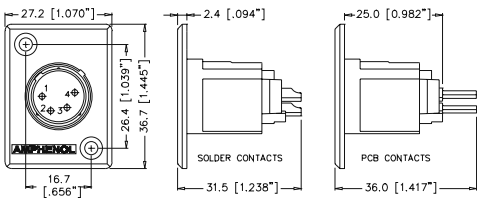

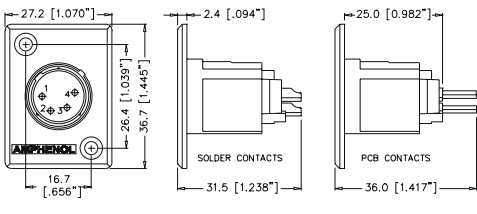
### Features:

- Zinc Diecast shell.
- The P size housing is the original wide flange front mounting XLR connector. PN is the original narrow, front mounting male connector.
- Solder Bucket connections.
- Vertical PCB mounting.
- Precision Machined or Stamped contacts (3 pin only).
- Leading first mate last break socket contact.
- Positive latch lock system.

**Options:** Stamped contacts (3 contact only), Gold plated contacts, Vertical PCB contacts, Black Finish, Non-Latching (Female only), Bulk Pack.


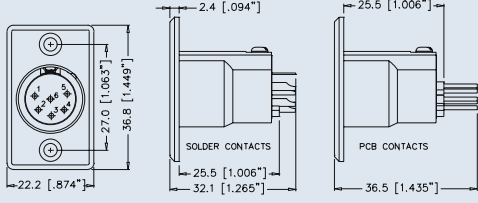

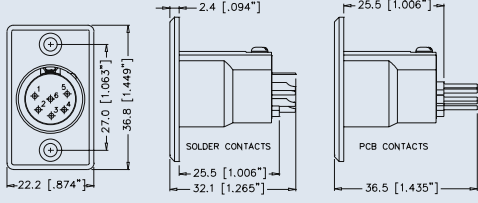

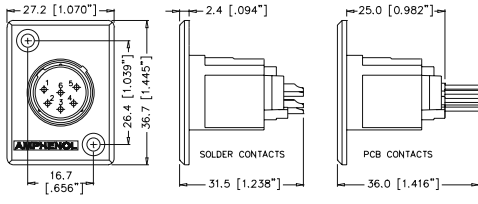

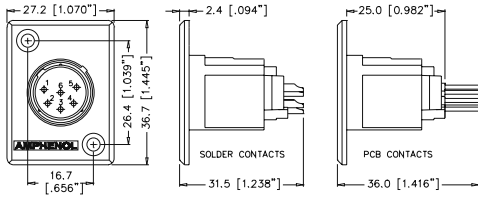

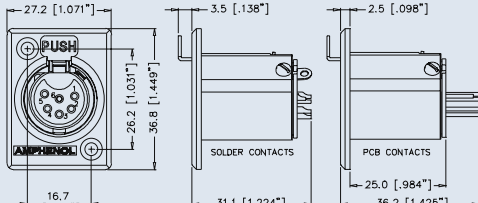

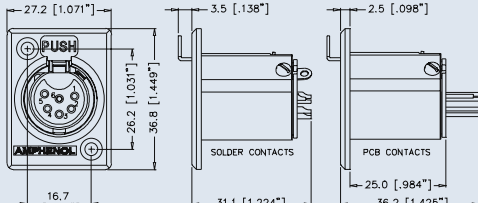

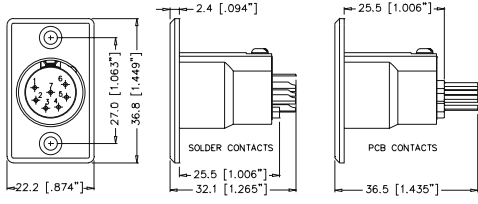

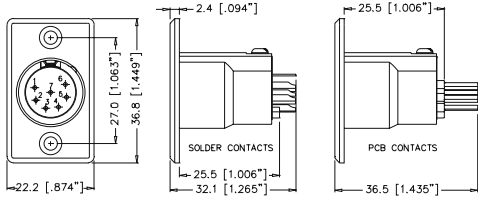
**Part Number Breakdown:** page 31    **Specifications:** page 32  
**PCB Footprints:** page 33    **Panel Cutouts:** page 33

| PRODUCT - FIGURE | DRAWING | Dimensions in mm (inches) | DESCRIPTION  | VARIATIONS           | PART NUMBER    |
|------------------|---------|---------------------------|--|----------------------|----------------|
|                  |         | <p>2.4 [.094\"/&gt; </p>  | XLR 3 pole male, Narrow flange, Machined contacts, Nickel Finish | Standard             | AC3MMPNZ       |
|                  |         |                           | XLR 3 pole male, Narrow flange, Machined contacts, Black Finish  | Gold Plated Contacts | AC3MMPNZ-AU    |
|                  |         | <p>2.4 [.094\"/&gt; </p>  | XLR 3 pole male, Narrow flange, Stamped contacts, Nickel Finish  | Vertical PCB         | AC3MMPNZV      |
|                  |         |                           | XLR 3 pole male, Narrow flange, Stamped contacts, Black Finish   | Bulk Pack            | AC3MMPNZ BULK  |
|                  |         | <p>2.4 [.094\"/&gt; </p>  | XLR 3 pole male, Wide flange, Machined contacts, Nickel Finish   | Standard             | AC3MMPNZB      |
|                  |         |                           | XLR 3 pole male, Wide flange, Machined contacts, Black Finish    | Gold Plated Contacts | AC3MMPNZB-AU   |
|                  |         | <p>2.4 [.094\"/&gt; </p>  | XLR 3 pole male, Narrow flange, Stamped contacts, Black Finish   | Vertical PCB         | AC3MMPNZVB     |
|                  |         |                           | XLR 3 pole male, Narrow flange, Stamped contacts, Black Finish   | Bulk Pack            | AC3MMPNZB BULK |
|                  |         | <p>2.4 [.094\"/&gt; </p>  | XLR 3 pole male, Wide flange, Machined contacts, Nickel Finish   | Standard             | AC3MMP         |
|                  |         |                           | XLR 3 pole male, Wide flange, Machined contacts, Black Finish    | Gold Plated Contacts | AC3MMP-AU      |
|                  |         | <p>2.4 [.094\"/&gt; </p>  | XLR 3 pole male, Wide flange, Machined contacts, Nickel Finish   | Vertical PCB         | AC3MMPV        |
|                  |         |                           | XLR 3 pole male, Wide flange, Machined contacts, Black Finish    | Bulk Pack            | AC3MMP BULK    |
|                  |         | <p>2.4 [.094\"/&gt; </p>  | XLR 3 pole male, Wide flange, Machined contacts, Black Finish    | Standard             | AC3MMPB        |
|                  |         |                           | XLR 3 pole male, Wide flange, Machined contacts, Black Finish    | Gold Plated Contacts | AC3MMPB-AU     |
|                  |         | <p>2.4 [.094\"/&gt; </p>  | XLR 3 pole male, Wide flange, Machined contacts, Black Finish    | Vertical PCB         | AC3MMPVB       |
|                  |         |                           | XLR 3 pole male, Wide flange, Machined contacts, Black Finish    | Bulk Pack            | AC3MMPB BULK   |





| PRODUCT - FIGURE  | DRAWING   | Dimensions in mm (inches)  | DESCRIPTION   | VARIATIONS           | PART NUMBER   |
|---|---|--|---|----------------------|---------------|
|    |    | <p>27.2 [1.070"]<br/>2.4 [0.094"]<br/>26.4 [1.039"]<br/>36.7 [1.445"]<br/>16.7 [0.656"]<br/>32.5 [1.278"]<br/>25.0 [0.982"]<br/>41.7 [1.640"]</p>                  | <p>XLR 3 pole male,<br/>Wide flange,<br/>Stamped contacts,<br/>Nickel Finish</p>      | Standard             | AC3MP         |
|   |   |  |   | Gold Plated Contacts | AC3MP-AU      |
|   |   |  |   | Vertical PCB         | AC3MPV        |
|   |   |  |   | Bulk Pack            | AC3MP BULK    |
|    |    | <p>27.2 [1.070"]<br/>2.4 [0.094"]<br/>26.4 [1.039"]<br/>36.7 [1.445"]<br/>16.7 [0.656"]<br/>32.5 [1.278"]<br/>25.0 [0.982"]<br/>41.7 [1.640"]</p>                  | <p>XLR 3 pole male,<br/>Wide flange,<br/>Stamped contacts,<br/>Black Finish</p>       | Standard             | AC3MPB        |
|   |   |  |   | Gold Plated Contacts | AC3MPB-AU     |
|   |   |  |   | Vertical PCB         | AC3MPVB       |
|   |   |  |   | Bulk Pack            | AC3MPB BULK   |
|    |   | <p>27.2 [1.070"]<br/>3.5 [0.138"]<br/>26.4 [1.039"]<br/>36.7 [1.445"]<br/>16.7 [0.656"]<br/>2.5 [0.098"]<br/>30.6 [1.204"]<br/>23.5 [0.927"]<br/>40.5 [1.596"]</p> | <p>XLR 3 pole female,<br/>Wide flange,<br/>Stamped contacts,<br/>Nickel Finish</p>    | Standard             | AC3FPZ        |
|   |   |  |   | Gold Plated Contacts | AC3FPZ-AU     |
|   |   |  |   | Vertical PCB         | AC3FPZV       |
|   |   |  |   | Bulk Pack            | AC3FPZ BULK   |
|  |   | <p>27.2 [1.070"]<br/>3.5 [0.138"]<br/>26.4 [1.039"]<br/>36.7 [1.445"]<br/>16.7 [0.656"]<br/>2.5 [0.098"]<br/>30.6 [1.204"]<br/>23.5 [0.927"]<br/>40.5 [1.596"]</p> | <p>XLR 3 pole female,<br/>Wide flange,<br/>Stamped contacts,<br/>Black Finish</p>     | Standard             | AC3FPZB       |
|   |   |  |   | Gold Plated Contacts | AC3FPZB-AU    |
|   |   |  |   | Vertical PCB         | AC3FPZVB      |
|   |   |  |   | Bulk Pack            | AC3FPZB BULK  |
|  |  | <p>27.2 [1.070"]<br/>2.4 [0.094"]<br/>27.0 [1.063"]<br/>36.8 [1.449"]<br/>22.2 [0.874"]<br/>32.1 [1.265"]<br/>25.5 [1.004"]<br/>36.5 [1.439"]</p>                  | <p>XLR 4 pole male, Nar-<br/>row flange,<br/>Machined contacts,<br/>Nickel Finish</p> | Standard             | AC4MPNZ       |
|   |   |  |   | Gold Plated Contacts | AC4MPNZ-AU    |
|   |   |  |   | Vertical PCB         | AC4MPNZV      |
|   |   |  |   | Bulk Pack            | AC4MPNZ BULK  |
|  |  | <p>27.2 [1.070"]<br/>2.4 [0.094"]<br/>27.0 [1.063"]<br/>36.8 [1.449"]<br/>22.2 [0.874"]<br/>32.1 [1.265"]<br/>25.5 [1.004"]<br/>36.5 [1.439"]</p>                  | <p>XLR 4 pole male, Nar-<br/>row flange,<br/>Machined contacts,<br/>Black Finish</p>  | Standard             | AC4MPNZB      |
|   |   |  |   | Gold Plated Contacts | AC4MPNZB-AU   |
|   |   |  |   | Vertical PCB         | AC4MPNZVB     |
|   |   |  |   | Bulk Pack            | AC4MPNZB BULK |
|  |  | <p>27.2 [1.070"]<br/>2.4 [0.094"]<br/>26.4 [1.039"]<br/>36.7 [1.445"]<br/>16.7 [0.656"]<br/>31.5 [1.238"]<br/>25.0 [0.982"]<br/>36.0 [1.417"]</p>                  | <p>XLR 4 pole male,<br/>Wide flange,<br/>Machined contacts,<br/>Nickel Finish</p>     | Standard             | AC4MP         |
|   |   |  |   | Gold Plated Contacts | AC4MP-AU      |
|   |   |  |   | Vertical PCB         | AC4MPV        |
|   |   |  |   | Bulk Pack            | AC4MP BULK    |
|  |  | <p>27.2 [1.070"]<br/>2.4 [0.094"]<br/>26.4 [1.039"]<br/>36.7 [1.445"]<br/>16.7 [0.656"]<br/>31.5 [1.238"]<br/>25.0 [0.982"]<br/>36.0 [1.417"]</p>                  | <p>XLR 4 pole male,<br/>Wide flange,<br/>Machined contacts,<br/>Black Finish</p>      | Standard             | AC4MPB        |
|   |   |  |   | Gold Plated Contacts | AC4MPB-AU     |
|   |   |  |   | Vertical PCB         | AC4MPVB       |
|   |   |  |   | Bulk Pack            | AC4MPB BULK   |



| PRODUCT - FIGURE | DRAWING | DESCRIPTION  | VARIATIONS           | PART NUMBER   |
|------------------|---------|--|----------------------|---------------|
|                  |         | XLR 4 pole female, Wide flange, Machined contacts, Nickel Finish | Standard             | AC4FPZ        |
|                  |         |  | Gold Plated Contacts | AC4FPZ-AU     |
|                  |         | XLR 4 pole female, Wide flange, Machined contacts, Black Finish  | Vertical PCB         | AC4FPZV       |
|                  |         |  | Bulk Pack            | AC4FPZ BULK   |
|                  |         | XLR 4 pole female, Wide flange, Machined contacts, Black Finish  | Standard             | AC4FPZB       |
|                  |         |  | Gold Plated Contacts | AC4FPZB-AU    |
|                  |         | XLR 4 pole female, Wide flange, Machined contacts, Black Finish  | Vertical PCB         | AC4FPZVB      |
|                  |         |  | Bulk Pack            | AC4FPZB BULK  |
|                  |         | XLR 5 pole male, Narrow flange, Machined contacts, Nickel Finish | Standard             | AC5MPNZ       |
|                  |         |  | Gold Plated Contacts | AC5MPNZ-AU    |
|                  |         | XLR 5 pole male, Narrow flange, Machined contacts, Black Finish  | Vertical PCB         | AC5MPNZV      |
|                  |         |  | Bulk Pack            | AC5MPNZ BULK  |
|                  |         | XLR 5 pole male, Narrow flange, Machined contacts, Black Finish  | Standard             | AC5MPNZB      |
|                  |         |  | Gold Plated Contacts | AC5MPNZB-AU   |
|                  |         | XLR 5 pole male, Narrow flange, Machined contacts, Black Finish  | Vertical PCB         | AC5MPNZVB     |
|                  |         |  | Bulk Pack            | AC5MPNZB BULK |
|                  |         | XLR 5 pole male, Wide flange, Machined contacts, Nickel Finish   | Standard             | AC5MP         |
|                  |         |  | Gold Plated Contacts | AC5MP-AU      |
|                  |         | XLR 5 pole male, Wide flange, Machined contacts, Black Finish    | Vertical PCB         | AC5MPV        |
|                  |         |  | Bulk Pack            | AC5MP BULK    |
|                  |         | XLR 5 pole male, Wide flange, Machined contacts, Black Finish    | Standard             | AC5MPB        |
|                  |         |  | Gold Plated Contacts | AC5MPB-AU     |
|                  |         | XLR 5 pole male, Wide flange, Machined contacts, Black Finish    | Vertical PCB         | AC5MPVB       |
|                  |         |  | Bulk Pack            | AC5MPB BULK   |
|                  |         | XLR 5 pole female, Wide flange, Machined contacts, Nickel Finish | Standard             | AC5FPZ        |
|                  |         |  | Gold Plated Contacts | AC5FPZ-AU     |
|                  |         | XLR 5 pole female, Wide flange, Machined contacts, Black Finish  | Vertical PCB         | AC5FPZV       |
|                  |         |  | Bulk Pack            | AC5FPZ BULK   |
|                  |         | XLR 5 pole female, Wide flange, Machined contacts, Black Finish  | Standard             | AC5FPZB       |
|                  |         |  | Gold Plated Contacts | AC5FPZB-AU    |
|                  |         | XLR 5 pole female, Wide flange, Machined contacts, Black Finish  | Vertical PCB         | AC5FPZVB      |
|                  |         |  | Bulk Pack            | AC5FPZB BULK  |

| PRODUCT - FIGURE  | DRAWING   | Dimensions in mm (inches)  | DESCRIPTION   | VARIATIONS  | PART NUMBER  |
|---|---|--|---|---|--|
|    |    | <p>2.4 [.094"]</p> <p>25.5 [1.006"]</p> <p>27.0 [1.063"]</p> <p>36.8 [1.449"]</p> <p>22.2 [.874"]</p> <p>25.5 [1.006"]</p> <p>32.1 [1.265"]</p> <p>36.5 [1.435"]</p> | <p>XLR 6A pole male, Narrow flange, Machined contacts, Nickel Finish</p>            | Standard  | AC6AMPNZ   |
| Gold Plated Contacts  |   |  |   | AC6AMPNZ-AU   |  |
| Vertical PCB  |   |  |   | AC6AMPNZV   |  |
| Bulk Pack   |   |  |   | AC6AMPNZ BULK   |  |
|    |    | <p>2.4 [.094"]</p> <p>25.5 [1.006"]</p> <p>27.0 [1.063"]</p> <p>36.8 [1.449"]</p> <p>22.2 [.874"]</p> <p>25.5 [1.006"]</p> <p>32.1 [1.265"]</p> <p>36.5 [1.435"]</p> | <p>XLR 6A pole male, Narrow flange, Machined contacts, Black Finish</p>             | Standard  | AC6AMPNZB  |
| Gold Plated Contacts  |   |  |   | AC6AMPNZB-AU  |  |
| Vertical PCB  |   |  |   | AC6AMPNZVB  |  |
| Bulk Pack   |   |  |   | AC6AMPNZB BULK  |  |
|    |   | <p>2.4 [.094"]</p> <p>25.0 [0.982"]</p> <p>27.2 [1.070"]</p> <p>36.7 [1.445"]</p> <p>26.4 [1.039"]</p> <p>16.7 [.656"]</p> <p>31.5 [1.238"]</p> <p>36.0 [1.416"]</p> | <p>XLR 6A pole male, Wide flange, Machined contacts, Nickel Finish</p>              | Standard  | AC6AMP   |
| Gold Plated Contacts  |   |  |   | AC6AMP-AU   |  |
| Vertical PCB  |   |  |   | AC6AMPV   |  |
| Bulk Pack   |   |  |   | AC6AMP BULK   |  |
|   |   | <p>2.4 [.094"]</p> <p>25.0 [0.982"]</p> <p>27.2 [1.070"]</p> <p>36.7 [1.445"]</p> <p>26.4 [1.039"]</p> <p>16.7 [.656"]</p> <p>31.5 [1.238"]</p> <p>36.0 [1.416"]</p> | <p>XLR 6A pole male, Wide flange, Machined contacts, Black Finish</p>               | Standard  | AC6AMPB  |
| Gold Plated Contacts  |   |  |   | AC6AMPB-AU  |  |
| Vertical PCB  |   |  |   | AC6AMPVB  |  |
| Bulk Pack   |   |  |   | AC6AMPB BULK  |  |
|  |  | <p>3.5 [.136"]</p> <p>2.5 [.098"]</p> <p>27.2 [1.071"]</p> <p>36.8 [1.449"]</p> <p>26.2 [1.031"]</p> <p>16.7 [.656"]</p> <p>31.1 [1.224"]</p> <p>36.2 [1.425"]</p>   | <p>XLR 6A pole female, Wide flange, Machined contacts, Nickel Finish</p>            | Standard  | AC6AFPZ  |
| Gold Plated Contacts  |   |  |   | AC6AFPZ-AU  |  |
| Vertical PCB  |   |  |   | AC6AFPZV  |  |
| Bulk Pack   |   |  |   | AC6AFPZ BULK  |  |
|  |  | <p>3.5 [.136"]</p> <p>2.5 [.098"]</p> <p>27.2 [1.071"]</p> <p>36.8 [1.449"]</p> <p>26.2 [1.031"]</p> <p>16.7 [.656"]</p> <p>31.1 [1.224"]</p> <p>36.2 [1.425"]</p>   | <p>XLR 6A pole female, Wide flange, Machined contacts, Black Finish</p>             | Standard  | AC6AFPZB   |
| Gold Plated Contacts  |   |  |   | AC6AFPZB-AU   |  |
| Vertical PCB  |   |  |   | AC6AFPZVB   |  |
| Bulk Pack   |   |  |   | AC6AFPZB BULK   |  |
|  |  | <p>2.4 [.094"]</p> <p>25.5 [1.006"]</p> <p>27.0 [1.063"]</p> <p>36.8 [1.449"]</p> <p>22.2 [.874"]</p> <p>25.5 [1.006"]</p> <p>32.1 [1.265"]</p> <p>36.5 [1.435"]</p> | <p>XLR 7 pole male, Narrow flange, Gold Plated Machined contacts, Nickel Finish</p> | Standard  | AC7MPNZ  |
| Vertical PCB  |   |  |   | AC7MPNZV  |  |
| Bulk Pack   |   |  |   | AC7MPNZ BULK  |  |
|  |   |  |   |  | <p>2.4 [.094"]</p> <p>25.5 [1.006"]</p> <p>27.0 [1.063"]</p> <p>36.8 [1.449"]</p> <p>22.2 [.874"]</p> <p>25.5 [1.006"]</p> <p>32.1 [1.265"]</p> <p>36.5 [1.435"]</p> |
| Vertical PCB  | AC7MPNZVB   |  |   |   |  |
| Bulk Pack   | AC7MPNZB BULK   |  |   |   |  |



| PRODUCT - FIGURE   | DRAWING | DESCRIPTION  | VARIATIONS   | PART NUMBER  |
|--|---------|--|--------------|--------------|
|   |         | XLR 7 pole male,<br>Wide flange,<br>Gold Plated<br>Machined contacts,<br>Nickel Finish   | Standard     | AC7MP        |
|  |         |  | Vertical PCB | AC7MPV       |
|  |         |  | Bulk Pack    | AC7MP BULK   |
|   |         | XLR 7 pole male,<br>Wide flange,<br>Gold Plated<br>Machined contacts,<br>Black Finish    | Standard     | AC7MPB       |
|  |         |  | Vertical PCB | AC7MPBV      |
|  |         |  | Bulk Pack    | AC7MPB BULK  |
|   |         | XLR 7 pole female,<br>Wide flange,<br>Gold Plated<br>Machined contacts,<br>Nickel Finish | Standard     | AC7FPZ       |
|  |         |  | Vertical PCB | AC7FPZV      |
|  |         |  | Bulk Pack    | AC7FPZ BULK  |
|  |         | XLR 7 pole female,<br>Wide flange,<br>Gold Plated<br>Machined contacts,<br>Black Finish  | Standard     | AC7FPZB      |
|  |         |  | Vertical PCB | AC7FPZVB     |
|  |         |  | Bulk Pack    | AC7FPZB BULK |




## PART NUMBER BREAKDOWN

### METAL TYPE FLANGE

E. G . **AC3MMPNZVB-AU BULK**  
**AC** (Series Prefix), **3** contacts, **M**ale, **M**achined Contacts, **PN** (Narrow Flange),  
**Z** (Metal Chassis Series), **V**ertical Printed Circuit Board, **B**lack Polyester Finish,  
**AU** (Gold Plated Contacts), **BULK** Packaged.

|                                      |       |   |  |
|--------------------------------------|-------|---|--|
| <b>SERIES PREFIX</b>                 | AC    | = | Series Prefix  |
| <b>CONTACT LAYOUTS</b>               | 3     | = | 3 Contacts   |
|                                      | 4     | = | 4 Contacts   |
|                                      | 5     | = | 5 Contacts   |
|                                      | 6A    | = | 6 Contacts   |
|                                      | 7     | = | 7 Contacts   |
| <b>GENDER</b>                        | F     | = | Female Socket Contacts   |
|                                      | M     | = | Male Pin Contacts  |
| <b>MACHINED CONTACTS<sup>1</sup></b> | Blank | = | Stamped Contacts   |
|                                      | M     | = | Machined Contacts<br>(Applicable 3 male pin contacts only)     |
| <b>SHELL STYLE</b>                   | D     | = | Small Flange (front or rear mounting)                          |
|                                      | P     | = | Large Shell with wide flange                                   |
|                                      | PN    | = | Large Shell with Narrow Flange<br>(male only)                  |
| <b>SHELL SERIES</b>                  | Blank | = | Male P Shell Style only  |
|                                      | Z     | = | Metal Chassis Series   |
| <b>TERMINATION</b>                   | Blank | = | Solder Buckets   |
|                                      | V     | = | Vertical Printed Circuit Board                                 |
| <b>SHELL FINISH<sup>2</sup></b>      | Blank | = | Nickel Plated Finish   |
|                                      | B     | = | Black Polyester Finish   |
| <b>CONTACT PLATING<sup>3</sup></b>   | Blank | = | Standard Plating ( Silver or Tin -<br>Refer to Standard Data.) |
|                                      | AU    | = | Gold Plated  |
| <b>PACKAGING</b>                     | Blank | = | Individual Bags  |
|                                      | BULK  | = | Bulk Packed  |

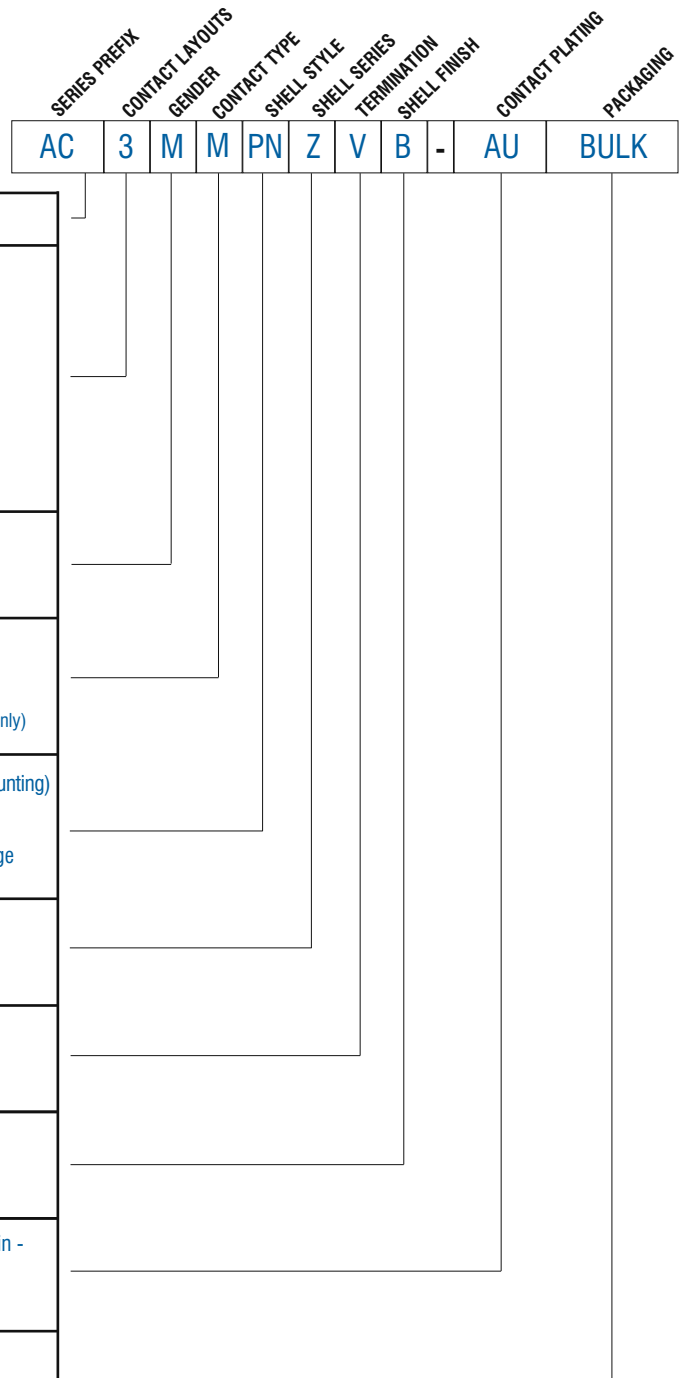

**Note:**






<sup>1</sup> 4 - 7 contact connectors have machined contacts and grounding as standard. They are not available in stamped contacts.

<sup>2</sup> Ground contacts are not supplied with the black polyester finish shell option.

<sup>3</sup> 7 Contact is gold plated as standard.

<sup>4</sup> Non-Latching Versions (Female) available - Please contact us for part number options.

## STANDARD DATA AC SERIES CHASSIS - METAL "Z"

|   |  | VALUE   |   |   |   |   |
|---|--|---|---|---|---|---|
| <b>GENERAL CHARACTERISTICS</b>            | Number of contacts                                 | 3   | 4   | 5   | 6A  | 7   |
|   | Contact Arrangement<br>(Front view of pin inserts) |  |  |  |  |  |
|   | Termination  | Solder Bucket / Printed Circuit Board (PCB)                                       |   |   |   |   |
|   | Max. Wire Gauge - Stranded wire:                   |   |   |   |   |   |
|   | Solder   | 14AWG   | 16AWG   | 18AWG   | 18AWG   | 20AWG   |
|   | Printed Circuit Board - PCB                        | N/A   | N/A   | N/A   | N/A   | N/A   |
| Flammability rating of plastics           | UL94V-0  |   |   |   |   |   |
| Environmental                             | Complies with EU RoHS 2 Directive 2011/65/EU       |   |   |   |   |   |
| <b>ELECTRICAL CHARACTERISTICS</b>         | Service Voltage RMS                                | 133V <sup>1)</sup>  |   |   |   |   |
|   | Test Voltage AC RMS                                | 1400V   |   |   |   |   |
|   | Current carrying capacity:                         |   |   |   |   |   |
|   | Solder   | 15A   | 10A   | 7.5A  | 7.5A  | 5A  |
|   | Printed Circuit Board (PCB)                        | 15A   | 10A   | 7.5A  | 7.5A  | 5A  |
|   | Typical Contact Resistance                         | ≤3mΩ  |   |   |   |   |
| Insulation Resistance                     | ≥1000MΩ  |   |   |   |   |   |
| <b>CLIMATIC CHARACTERISTICS</b>           | Protection Class                                   | IP40  |   |   |   |   |
|   | Operating Temperature                              | -25 °C to +75 °C (-13°F to +167°F)  |   |   |   |   |
| <b>MECHANICAL CHARACTERISTICS</b>         | Weight - Metal <sup>2)</sup>                       | 31g<br>(0.068lb)  | 32g<br>(0.070lb)  | 33g<br>(0.072lb)  | 33g<br>(0.072lb)  | 33g<br>(0.072lb)  |
|   | Mechanical Operations                              | 1000 mating cycles  |   |   |   |   |
| <b>MATERIALS</b>                          | Connector Shell                                    | Diecast Zinc Alloy  |   |   |   |   |
|   | Shell Finish                                       | Satin Nickel or Black Polyester   |   |   |   |   |
|   | Insulators   | UL94V-0 PBT Resin or Modified PPE Resin   |   |   |   |   |
|   | Male Contact                                       |   |   |   |   |   |
|   | Stamped Solder and PCB-(Material/Plating)          | Phosphor Bronze / Silver or Gold (optional)                                       |   |   |   |   |
|   | Machined Solder-(Material/Plating)                 | Brass / Silver or Gold (optional)   |   |   |   |   |
|   | Female Contact                                     |   |   |   |   |   |
| Stamped Solder and PCB-(Material/Plating) | Phosphor Bronze / Tin or Gold (optional)           |   |   |   |   |   |
| Machined Solder-(Material/Plating)        | Brass / Silver or Gold (Optional)                  |   |   |   |   |   |

Rev 3 - 03/2013


<sup>1)</sup> Not suitable for domestic applications above 50V

<sup>2)</sup> Approximate weight only, does not include packaging. Please contact us for exact weight for shipping purposes.

## AC SERIES CHASSIS METAL "Z"


### PCB FOOTPRINTS STRAIGHT (V)

#### CONNECTOR SIDE OF PCB




Ø1.2mm(.05")+Panel cutout CL

**AC3F\*ZV**




Ø1.2mm(.05")+Panel cutout CL

**AC3M\*ZV**




Ø1.2mm(.05")+Panel cutout CL

**AC3MM\*ZV**




Ø1.2mm(.05")+Panel cutout CL

**AC4F\*ZV**




Ø1.2mm(.05")+Panel cutout CL

**AC4M\*ZV**




Ø1.2mm(.05")+Panel cutout CL

**AC5F\*ZV**




Ø1.2mm(.05")+Panel cutout CL

**AC5M\*ZV**




Ø1.2mm(.05")+Panel cutout CL

**AC6AF\*ZV**




Ø1.2mm(.05")+Panel cutout CL

**AC6AM\*ZV**



Ø1.2mm(.05")+Panel cutout CL

**AC7F\*ZV**




Ø1.2mm(.05")+Panel cutout CL


**AC7M\*ZV**

### PANEL CUTOUT DIMENSIONS


#### FRONT VIEW




**AC\*FDZ**




**AC\*MDZ**



**AC\*FPZ**



**AC\*MP**



**AC\*MPNZ**



## AC SERIES XLR PCB CHASSIS MOUNT CONNECTORS

The AC series, A and B type XLR chassis receptacles have been designed and manufactured with the Original Equipment Manufacturers' (OEM) needs in mind. The compact shell design allows a significant space saving over the traditional 'D' type shell. Gold plated contacts improve the performance, ensuring a reliable contact and the unique grounding link options offer flexibility in design.

### Features

- A leading first mate last break socket contact is standard on all female connectors (Pin 1).
- Vertical and Horizontal PCB versions available.
- Latching and Non-latching versions available.
- A range of different grounding options are available including:
  - Mating connector shell to Pin 1
  - Mating connector shell to Chassis
  - Mating connector shell to pin 1 to Chassis
- A type is available in 3 or 5 contacts.
- B type is available in 3 contact only.
- Compatible with all other XLR brands.
- Metal Mounting Flange (B type)

### Options

- Vertical PCB contacts
- Horizontal PCB contacts
- Precision Machined Pin contacts
- Cost effective Stamped Socket contacts
- Gold Plated contacts (Standard)
- Silver Plated contacts (Optional)
- Bulk Packaging
- Integrated Switch

### Ordering Codes

We have listed the more common ordering codes in each section. For further options please refer to the part number breakdown charts. Please contact us if you need any further assistance.

### Simple steps to guide you in using this catalogue

- 1) Identify the product group listed in Contents on page 1 and go directly to that page number.
- 2) Each product group cover page then details information and options available.
- 3) Refer to the product detail pages and identify the product you require pictorially.
- 4) Read the product description column for the products standard features.
- 5) Use variations column to determine your choice.
- 6) Identify part number.
- 7) In the event the particular option you require is not listed please refer to the part number breakdown page at the end of each section.
- 8) Please contact us directly if you have any further problems.

## THERMOPLASTIC A - TYPE FLANGE 3 CONTACT



### Features:


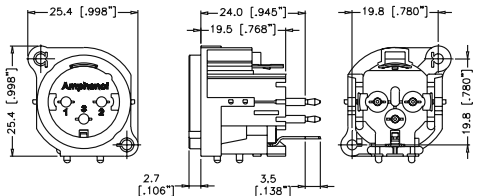

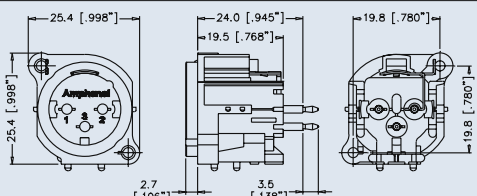

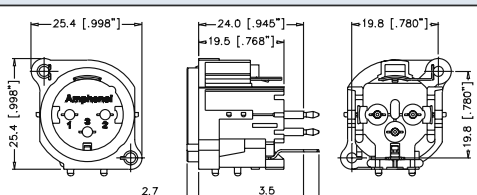

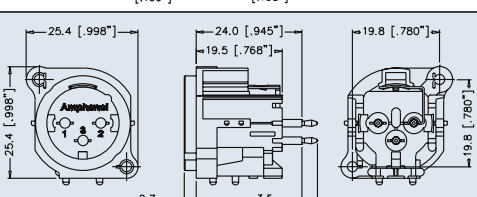

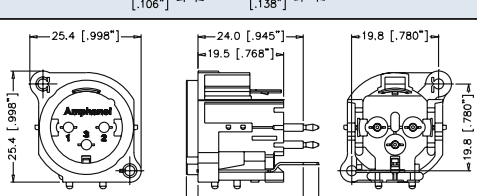

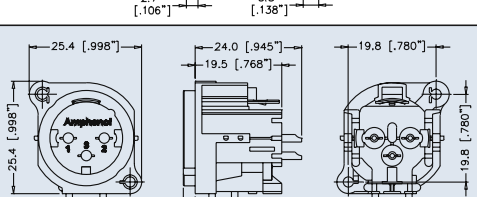

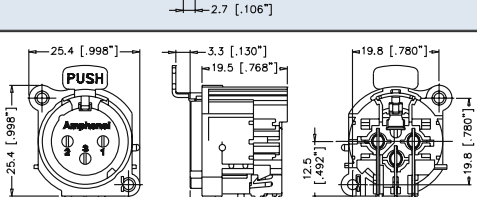

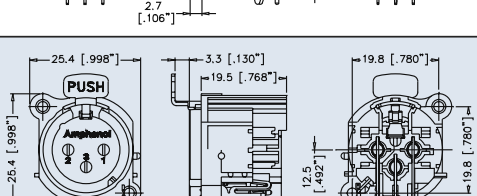
- Thermoplastic Shell
- Industry standard PCB footprints.
- Vertical or Horizontal PCB mounting.
- Precision machined pin contacts.
- Gold plated contacts.
- Leading first mate last break socket contact.
- Bulk packed in trays, 100 to a box as standard.
- Positive latch lock system.

**Options:** Silver plated contacts, Vertical or Horizontal PCB, Various grounding methods, Latching or Non-Latching.

**Part Number Breakdown:** [page 44](#) **Specifications:** [page 47](#)  
**PCB Footprints:** [page 48](#) **Panel Cutouts:** [page 49](#)  
**Recommended Fastener:** [page 137](#)


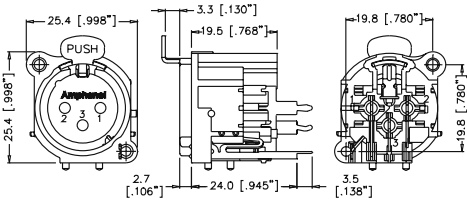

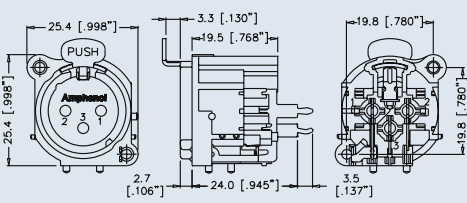

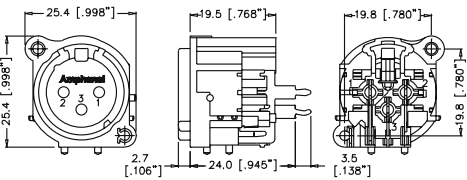

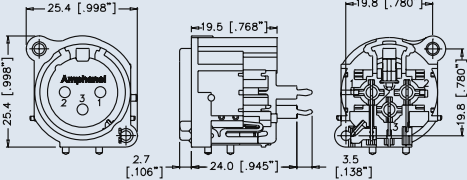

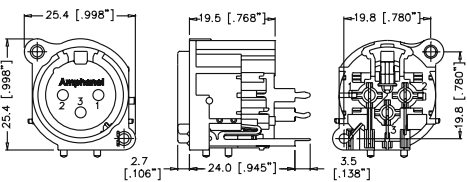

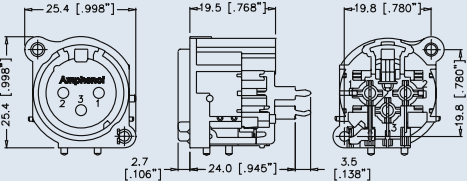


| PRODUCT - FIGURE | DRAWING | Dimensions in mm (inches) | DESCRIPTION   | GROUND LINK VARIATIONS                                      | PART NUMBER  |
|------------------|---------|---------------------------|---|---|--------------|
|                  |         |                           | XLR 3 pole male, Horizontal PCB, Gold Plated Contacts, Bulk Pack                        | No Ground Link  | AC3MAH-AU-B  |
|                  |         |                           | XLR 3 pole male, Horizontal PCB, Gold Plated Contacts, Bulk Pack                        | Pin 1 to Chassis to Mating connector shell                  | AC3MAH1-AU-B |
|                  |         |                           | XLR 3 pole male, Horizontal PCB, Gold Plated Contacts, Bulk Pack                        | Mating connector shell to Chassis - Pin 1 sep. Ground       | AC3MAH2-AU-B |
|                  |         |                           | XLR 3 pole male, Horizontal PCB, Gold Plated Contacts, Bulk Pack                        | Mating connector shell to Pin 1                             | AC3MAH3-AU-B |
|                  |         |                           | XLR 3 pole male, Horizontal PCB, Gold Plated Contacts, Bulk Pack                        | Mating connector shell to Chassis to PCB, Pin 1 sep. Ground | AC3MAH4-AU-B |
|                  |         |                           | XLR 3 pole male with integrated switch, Horizontal PCB, Gold Plated Contacts, Bulk Pack | Mating connector shell to Chassis to PCB, Pin 1 sep. Ground | AC3MAH4-SW-B |

| PRODUCT - FIGURE  | DRAWING   | Dimensions in mm (inches)  | DESCRIPTION   | GROUND LINK VARIATIONS                                      | PART NUMBER  |
|---|---|--|---|---|--------------|
|    |    | 25.4 [ .998" ]<br>24.0 [ .945" ]<br>19.5 [ .768" ]<br>19.8 [ .780" ]<br>2.7 [ .106" ]<br>3.5 [ .138" ]                   | XLR 3 pole male, Vertical PCB, Gold Plated Contacts, Bulk Pack                    | No Ground Link  | AC3MAV-AU-B  |
|    |    | 25.4 [ .998" ]<br>24.0 [ .945" ]<br>19.5 [ .768" ]<br>19.8 [ .780" ]<br>2.7 [ .106" ]<br>3.5 [ .138" ]                   | XLR 3 pole male, Vertical PCB, Gold Plated Contacts, Bulk Pack                    | Pin 1 to Chassis to Mating connector shell                  | AC3MAV1-AU-B |
|    |    | 25.4 [ .998" ]<br>24.0 [ .945" ]<br>19.5 [ .768" ]<br>19.8 [ .780" ]<br>2.7 [ .106" ]<br>3.5 [ .138" ]                   | XLR 3 pole male, Vertical PCB, Gold Plated Contacts, Bulk Pack                    | Mating connector shell to Chassis - Pin 1 sep. Ground       | AC3MAV2-AU-B |
|   |   | 25.4 [ .998" ]<br>24.0 [ .945" ]<br>19.5 [ .768" ]<br>19.8 [ .780" ]<br>2.7 [ .106" ]<br>3.5 [ .138" ]                   | XLR 3 pole male, Vertical PCB, Gold Plated Contacts, Bulk Pack                    | Mating connector shell to Pin 1                             | AC3MAV3-AU-B |
|  |  | 25.4 [ .998" ]<br>24.0 [ .945" ]<br>19.5 [ .768" ]<br>19.8 [ .780" ]<br>2.7 [ .106" ]<br>3.5 [ .138" ]                   | XLR 3 pole male, Vertical PCB, Gold Plated Contacts, Bulk Pack                    | Mating connector shell to Chassis to PCB, Pin 1 sep. ground | AC3MAV4-AU-B |
|  |  | 25.4 [ .998" ]<br>24.0 [ .945" ]<br>19.5 [ .768" ]<br>19.8 [ .780" ]<br>2.7 [ .106" ]                                    | XLR 3 pole male, Solder Buckets, Gold Plated Contacts, Bulk Pack                  | No Ground Link  | AC3MA-AU-B   |
|  |  | 25.4 [ .998" ]<br>24.0 [ .945" ]<br>19.5 [ .768" ]<br>19.8 [ .780" ]<br>2.7 [ .106" ]<br>3.3 [ .130" ]<br>12.5 [ .492" ] | XLR 3 pole female, Horizontal PCB, Latching Type, Gold Plated Contacts, Bulk Pack | No Ground Link  | AC3FAH-AU-B  |
|  |  | 25.4 [ .998" ]<br>24.0 [ .945" ]<br>19.5 [ .768" ]<br>19.8 [ .780" ]<br>2.7 [ .106" ]<br>3.3 [ .130" ]<br>12.5 [ .492" ] | XLR 3 pole female, Horizontal PCB, Latching Type, Gold Plated Contacts, Bulk Pack | Pin 1 to Chassis to Mating connector shell                  | AC3FAH1-AU-B |

| PRODUCT - FIGURE | DRAWING | Dimensions in mm (inches) | DESCRIPTION  | GROUND LINK VARIATIONS                                 | PART NUMBER   |
|------------------|---------|---------------------------|--|--|---------------|
|                  |         |                           | XLR 3 pole female, Horizontal PCB, Latching Type, Gold Plated Contacts, Bulk Pack    | Mating connector shell to Chassis - Pin 1 sep. Ground  | AC3FAH2-AU-B  |
|                  |         |                           | XLR 3 pole female, Horizontal PCB, Latching Type, Gold Plated Contacts, Bulk Pack    | Pin 1 to Chassis                                       | AC3FAH3-AU-B  |
|                  |         |                           | XLR 3 pole female, Horizontal PCB, Non-Latching Type Gold Plated Contacts, Bulk Pack | No Ground Link   | AC3FAHL-AU-B  |
|                  |         |                           | XLR 3 pole female, Horizontal PCB, Non-Latching Type Gold Plated Contacts, Bulk Pack | Pin 1 to Chassis to mating connector shell             | AC3FAHL1-AU-B |
|                  |         |                           | XLR 3 pole female, Horizontal PCB, Non-Latching Type Gold Plated Contacts, Bulk Pack | Mating connector shell to Chassis - Pin 1 sep. Ground. | AC3FAHL2-AU-B |
|                  |         |                           | XLR 3 pole female, Horizontal PCB, Non-Latching Type Gold Plated Contacts, Bulk Pack | Pin 1 to Chassis                                       | AC3FAHL3-AU-B |
|                  |         |                           | XLR 3 pole female, Vertical PCB, Latching Type, Gold Plated Contacts, Bulk Pack      | No Ground Link   | AC3FAV-AU-B   |
|                  |         |                           | XLR 3 pole female, Vertical PCB, Latching Type, Gold Plated Contacts, Bulk Pack      | Pin 1 to Chassis to mating connector shell             | AC3FAV1-AU-B  |



| PRODUCT - FIGURE  | DRAWING   | DESCRIPTION   | GROUND LINK VARIATIONS                                 | PART NUMBER   |
|---|---|---|--|---------------|
|    |    | XLR 3 pole female, Vertical PCB, Latching Type, Gold Plated Contacts, Bulk Pack     | Mating connector shell to Chassis - Pin 1 sep. Ground. | AC3FAV2-AU-B  |
|    |    | XLR 3 pole female, Vertical PCB, Latching Type, Gold Plated Contacts, Bulk Pack     | Pin 1 to Chassis                                       | AC3FAV3-AU-B  |
|    |    | XLR 3 pole female, Vertical PCB, Non-Latching Type, Gold Plated Contacts, Bulk Pack | No Ground Link   | AC3FAVL-AU-B  |
|  |   | XLR 3 pole female, Vertical PCB, Non-Latching Type, Gold Plated Contacts, Bulk Pack | Pin 1 to Chassis to Mating connector shell             | AC3FAVL1-AU-B |
|  |  | XLR 3 pole female, Vertical PCB, Non-Latching Type, Gold Plated Contacts, Bulk Pack | Mating connector shell to Chassis - Pin 1 sep. Ground. | AC3FAVL2-AU-B |
|  |  | XLR 3 pole female, Vertical PCB, Non-Latching Type, Gold Plated Contacts, Bulk Pack | Pin 1 to Chassis                                       | AC3FAVL3-AU-B |







**Features:**

- Thermoplastic Shell with Metal Mounting Flange.
- Industry standard PCB footprints.
- Improved grounding performance.
- Vertical or Horizontal PCB mounting.
- Precision machined pin contacts.
- Gold plated contacts.
- Leading first mate last break socket contact.
- Bulk packed in trays, 100 to a box as standard.
- Positive latch lock system.

**Options:** Silver plated contacts, Vertical or Horizontal PCB, Various grounding methods, Latching or Non-Latching.

**Part Number Breakdown:** page 45    **Specifications:** page 47  
**PCB Footprints:** page 48    **Panel Cutouts:** page 49  
**Recommended Fastener:** page 137




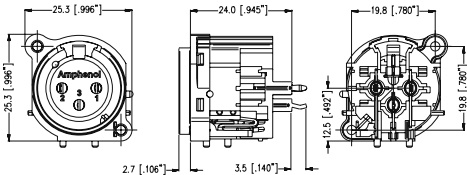

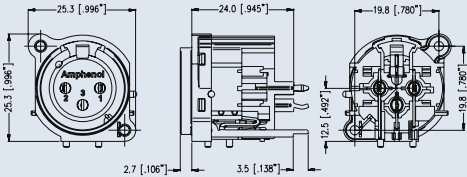

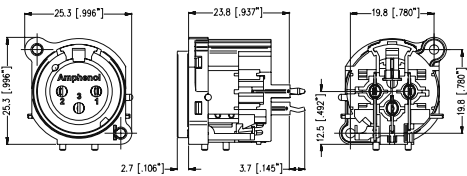
| PRODUCT - FIGURE | DRAWING | Dimensions in mm (inches)   | DESCRIPTION/<br>GROUND LINK   | MOUNTING FLANGE<br>VARIATIONS | PART NUMBER   |
|------------------|---------|---|---|-------------------------------|---------------|
|                  |         | 25.3 [996"]<br>25.3 [996"]<br>19.5 [768"]<br>2.7 [106"]<br>3.5 [139"]<br>19.8 [780"]<br>12.5 [492"]<br>19.8 [780"]                | XLR 3 pole male, Horizontal PCB, Gold Plated Contacts, Bulk Pack                    | Nickel Finish                 | AC3MBH-AU-B   |
|                  |         |   | No Ground Link  | Black Finish                  | AC3MBHB-AU-B  |
|                  |         | 25.3 [996"]<br>25.3 [996"]<br>19.5 [768"]<br>2.7 [106"]<br>3.5 [139"]<br>19.8 [780"]<br>12.7 [500"]<br>19.8 [780"]                | XLR 3 pole male, Horizontal PCB, Gold Plated Contacts, Bulk Pack                    | Nickel Finish                 | AC3MBH1-AU-B  |
|                  |         |   | Pin 1 to Chassis to Mating connector shell  | Black Finish                  | AC3MBHB1-AU-B |
|                  |         | 25.3 [996"]<br>25.3 [996"]<br>19.5 [768"]<br>2.7 [106"]<br>3.5 [136"]<br>19.8 [780"]<br>12.5 [492"]<br>19.8 [780"]                | XLR 3 pole male, Horizontal PCB, Gold Plated Contacts, Bulk Pack                    | Nickel Finish                 | AC3MBH2-AU-B  |
|                  |         |   | Mating connector shell to Chassis - Pin 1 sep. Ground                               | Black Finish                  | AC3MBHB2-AU-B |
|                  |         | 25.3 [996"]<br>25.3 [996"]<br>19.5 [768"]<br>2.7 [106"]<br>3.5 [139"]<br>19.8 [780"]<br>12.5 [492"]<br>19.8 [780"]                | XLR 3 pole male, Horizontal PCB, Gold Plated Contacts, Bulk Pack                    | Nickel Finish                 | AC3MBH3-AU-B  |
|                  |         |   | Mating connector shell to Pin 1   | Black Finish                  | AC3MBHB3-AU-B |
|                  |         | 25.3 [996"]<br>25.3 [996"]<br>19.5 [768"]<br>2.7 [106"]<br>3.5 [139"]<br>19.8 [780"]<br>12.5 [492"]<br>19.8 [780"]                | XLR 3 pole male, Horizontal PCB, Non-Latching Type, Gold Plated Contacts, Bulk Pack | Nickel Finish                 | AC3MBHL-AU-B  |
|                  |         |   | No Ground Link  | Black Finish                  | AC3MBHBL-AU-B |
|                  |         | 25.3 [996"]<br>25.3 [996"]<br>19.5 [768"]<br>2.7 [106"]<br>3.5 [138"]<br>24.0 [945"]<br>19.8 [780"]<br>12.5 [492"]<br>19.8 [780"] | XLR 3 pole male, Vertical PCB, Gold Plated Contacts, Bulk Pack                      | Nickel Finish                 | AC3MBV-AU-B   |
|                  |         |   | No Ground Link  | Black Finish                  | AC3MBVB-AU-B  |

| PRODUCT - FIGURE | DRAWING | Dimensions in mm (inches) | DESCRIPTION/<br>GROUND LINK  | MOUNTING FLANGE<br>VARIATIONS     | PART NUMBER                       |
|------------------|---------|---------------------------|--|-----------------------------------|-----------------------------------|
|                  |         |                           | XLR 3 pole male, Vertical PCB, Gold Plated Contacts, Bulk Pack<br><br>Pin 1 to Chassis to Mating connector shell                               | Nickel Finish<br><br>Black Finish | AC3MBV1-AU-B<br><br>AC3MBVB1-AU-B |
|                  |         |                           | XLR 3 pole male, Vertical PCB, Gold Plated Contacts, Bulk Pack<br><br>Mating connector shell to Chassis - Pin 1 sep. Ground                    | Nickel Finish<br><br>Black Finish | AC3MBV2-AU-B<br><br>AC3MBVB2-AU-B |
|                  |         |                           | XLR 3 pole male, Vertical PCB, Gold Plated Contacts, Bulk Pack<br><br>Mating connector shell to Pin 1  | Nickel Finish<br><br>Black Finish | AC3MBV3-AU-B<br><br>AC3MBVB3-AU-B |
|                  |         |                           | XLR 3 pole female, Horizontal PCB, Latching Type, Gold Plated Contacts, Bulk Pack<br><br>No Ground Link  | Nickel Finish<br><br>Black Finish | AC3FBH-AU-B<br><br>AC3FBHB-AU-B   |
|                  |         |                           | XLR 3 pole female, Horizontal PCB, Latching Type, Gold Plated Contacts, Bulk Pack<br><br>Pin 1 to Chassis to Mating connector shell            | Nickel Finish<br><br>Black Finish | AC3FBH1-AU-B<br><br>AC3FBHB1-AU-B |
|                  |         |                           | XLR 3 pole female, Horizontal PCB, Latching Type, Gold Plated Contacts, Bulk Pack<br><br>Mating connector shell to Chassis - Pin 1 sep. Ground | Nickel Finish<br><br>Black Finish | AC3FBH2-AU-B<br><br>AC3FBHB2-AU-B |
|                  |         |                           | XLR 3 pole female, Horizontal PCB, Latching Type, Gold Plated Contacts, Bulk Pack<br><br>Pin 1 to Chassis                                      | Nickel Finish<br><br>Black Finish | AC3FBH3-AU-B<br><br>AC3FBHB3-AU-B |
|                  |         |                           | XLR 3 pole female, Horizontal PCB, Non-Latching Type Gold Plated Contacts, Bulk Pack<br><br>No Ground Link                                     | Nickel Finish<br><br>Black Finish | AC3FBHL-AU-B<br><br>AC3FBHBL-AU-B |



| PRODUCT - FIGURE | DRAWING | Dimensions in mm (inches) | DESCRIPTION/<br>GROUND LINK   | MOUNTING FLANGE<br>VARIATIONS     | PART NUMBER                        |
|------------------|---------|---------------------------|---|-----------------------------------|------------------------------------|
|                  |         |                           | XLR 3 pole female,<br>Horizontal PCB,<br>Non-Latching Type<br>Gold Plated Contacts,<br>Bulk Pack<br><br>Pin 1 to Chassis to mat-<br>ing connector shell             | Nickel Finish<br><br>Black Finish | AC3FBHL1-AU-B<br><br>AC3FBHL1-AU-B |
|                  |         |                           | XLR 3 pole female,<br>Horizontal PCB, Non-<br>Latching Type, Gold Plated<br>Contacts, Bulk Pack<br><br>Mating connector<br>shell to Chassis -<br>Pin 1 sep. Ground. | Nickel Finish<br><br>Black Finish | AC3FBHL2-AU-B<br><br>AC3FBHL2-AU-B |
|                  |         |                           | XLR 3 pole female,<br>Horizontal PCB,<br>Non-Latching Type<br>Gold Plated Contacts,<br>Bulk Pack<br><br>Pin 1 to Chassis  | Nickel Finish<br><br>Black Finish | AC3FBHL3-AU-B<br><br>AC3FBHL3-AU-B |
|                  |         |                           | XLR 3 pole female,<br>Vertical PCB,<br>Latching Type,<br>Gold Plated Contacts,<br>Bulk Pack<br><br>No Ground Link   | Nickel Finish<br><br>Black Finish | AC3FBV-AU-B<br><br>AC3FBVB-AU-B    |
|                  |         |                           | XLR 3 pole female,<br>Vertical PCB,<br>Latching Type,<br>Gold Plated Contacts,<br>Bulk Pack<br><br>Pin 1 to Chassis to<br>mating connector shell                    | Nickel Finish<br><br>Black Finish | AC3FBV1-AU-B<br><br>AC3FBV1-AU-B   |
|                  |         |                           | XLR 3 pole female,<br>Vertical PCB, Latching<br>Type, Gold Plated<br>Contacts, Bulk Pack<br><br>Mating connector shell<br>to Chassis -<br>Pin 1 sep. Ground.        | Nickel Finish<br><br>Black Finish | AC3FBV2-AU-B<br><br>AC3FBV2-AU-B   |
|                  |         |                           | XLR 3 pole female,<br>Vertical PCB,<br>Latching Type,<br>Gold Plated Contacts,<br>Bulk Pack<br><br>Pin 1 to Chassis   | Nickel Finish<br><br>Black Finish | AC3FBV3-AU-B<br><br>AC3FBV3-AU-B   |
|                  |         |                           | XLR 3 pole female,<br>Vertical PCB,<br>Non-Latching Type,<br>Gold Plated Contacts,<br>Bulk Pack<br><br>No Ground Link   | Nickel Finish<br><br>Black Finish | AC3FBVL-AU-B<br><br>AC3FBVL-AU-B   |



| PRODUCT - FIGURE  | DRAWING   | Dimensions in mm (inches) | DESCRIPTION/<br>GROUND LINK  | MOUNTING FLANGE<br>VARIATIONS | PART NUMBER   |
|---|---|---------------------------|--|-------------------------------|---------------|
|  |  |                           | XLR 3 pole female,<br>Vertical PCB,<br>Non-Latching Type,<br>Gold Plated Contacts,<br>Bulk Pack<br><br>Pin 1 to Chassis to Mat-<br>ing connector shell         | Nickel Finish                 | AC3FBVL1-AU-B |
|   |   |                           |  | Black Finish                  | AC3FBVL1-AU-B |
|  |  |                           | XLR 3 pole female,<br>Vertical PCB,<br>Non-Latching Type,<br>Gold Plated Contacts,<br>Bulk Pack<br><br>Mating connector shell to<br>Chassis-Pin 1 sep. Ground. | Nickel Finish                 | AC3FBVL2-AU-B |
|   |   |                           |  | Black Finish                  | AC3FBVL2-AU-B |
|  |  |                           | XLR 3 pole female,<br>Vertical PCB,<br>Non-Latching Type,<br>Gold Plated Contacts,<br>Bulk Pack<br><br>Pin 1 to Chassis  | Nickel Finish                 | AC3FBVL3-AU-B |
|   |   |                           |  | Black Finish                  | AC3FBVL3-AU-B |



## THERMOPLASTIC A - TYPE FLANGE 5 CONTACT




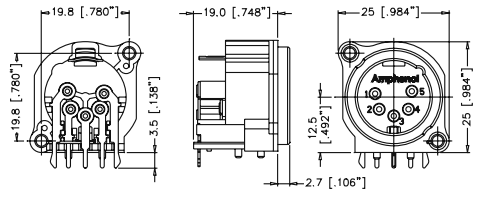

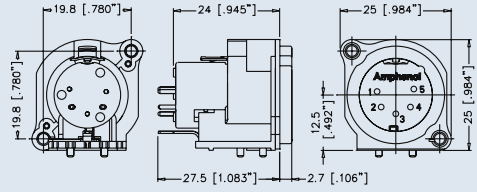

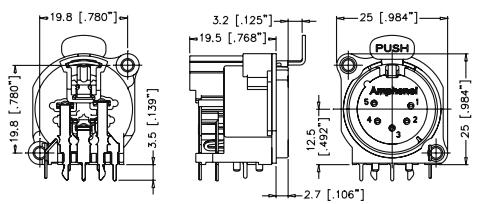

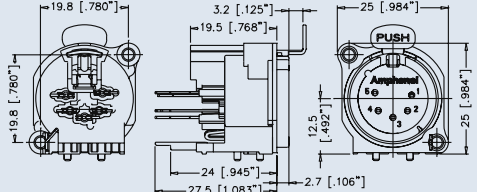
**Features:**

- 5 contacts.
- Thermoplastic Shell
- Industry standard PCB footprints.
- Vertical or Horizontal PCB mounting.
- Precision machined pin contacts.
- Gold plated contacts.
- Leading first mate last break socket contact.
- Bulk packed in trays, 100 to a box as standard.
- Positive latch lock system.

**Options:** Vertical or Horizontal PCB,

**Part Number Breakdown:** page 46    **Specifications:** page 47  
**PCB Footprints:** page 48    **Panel Cutouts:** page 49  
**Recommended Fastener:** page 137



| PRODUCT - FIGURE  | DRAWING   | Dimensions in mm (inches) | DESCRIPTION/<br>GROUND LINK   | MOUNTING FLANGE<br>VARIATIONS  | PART NUMBER |
|---|---|---------------------------|---|--|-------------|
|    |    |                           | XLR 5 pole male,<br>Horizontal PCB,<br>Gold Plated Contacts,<br>Bulk Pack   | Mating connector<br>shell to Chassis<br>to PCB, Pin 1 sep.<br>Ground | AC5MAH-AU-B |
|  |   |                           | XLR 5 pole male, Verti-<br>cal PCB,<br>Gold Plated Contacts,<br>Bulk Pack   | Mating connector<br>shell to Chassis<br>to PCB, Pin 1 sep.<br>Ground | AC5MAV-AU-B |
|  |  |                           | XLR 5 pole female,<br>Horizontal PCB,<br>Gold Plated Contacts,<br>Bulk Pack | Mating connector<br>shell to Chassis<br>to PCB, Pin 1 sep.<br>Ground | AC5FAH-AU-B |
|  |  |                           | XLR 5 pole female,<br>Vertical PCB,<br>Gold Plated Contacts,<br>Bulk Pack   | Mating connector<br>shell to Chassis<br>to PCB, Pin 1 sep.<br>Ground | AC5FAV-AU-B |


## PART NUMBER BREAKDOWN

### AC SERIES A AND B TYPE MALE - 3 CONTACT



E. G . **AC3MAVL3-AU B**

**AC** (series prefix), **3** contacts, **M**ale, **A** Type, **V**ertical Printed Circuit Board, **L**atchless, **3** (Mating Shell to Pin 1 Grounding), - **AU** (Gold Plated Contacts), **B**ulk Packaged.

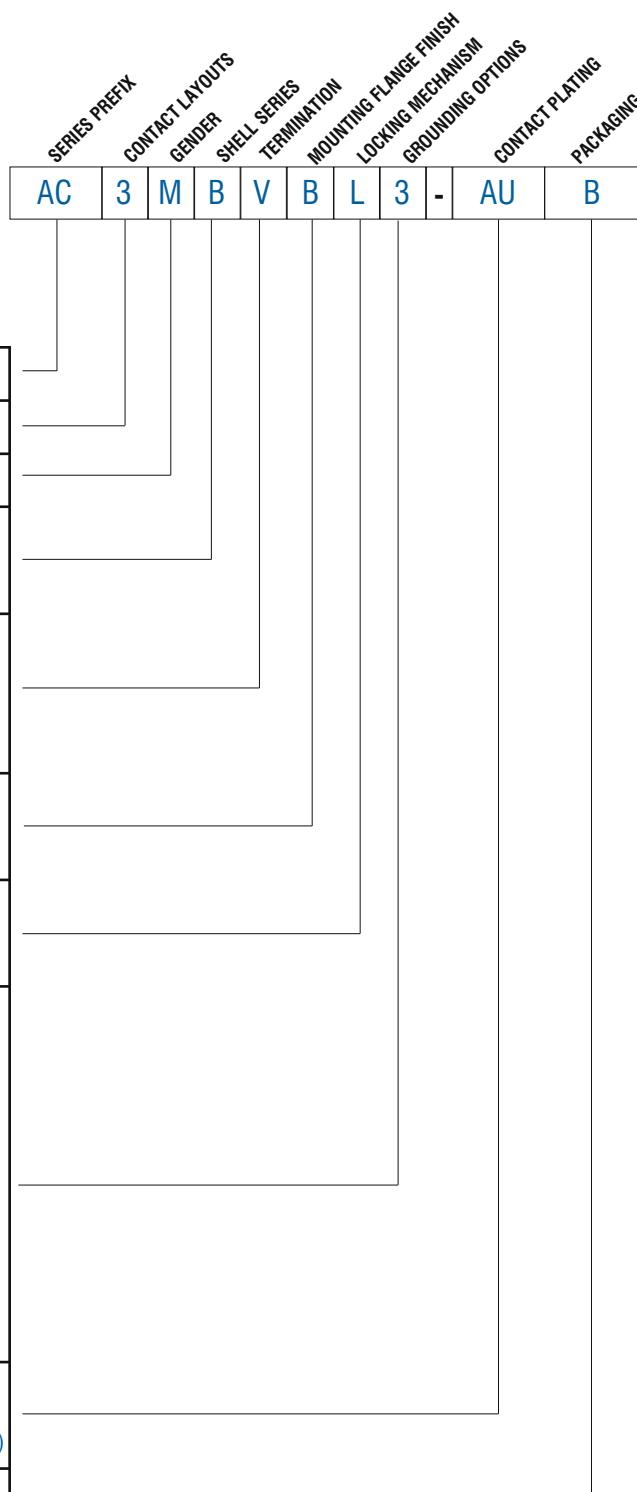

|   |       |   |   |
|---|-------|---|---|
| <b>SERIES PREFIX</b>                        | AC    | = | Series Prefix   |
| <b>CONTACT LAYOUT</b>                       | 3     | = | 3 Contacts only   |
| <b>GENDER</b>                               | M     | = | Male Pin Contacts   |
| <b>SHELL SERIES</b>                         | A     | = | A Type  |
|   | B     | = | B Type  |
| <b>TERMINATION</b>                          | H     | = | Horizontal Printed Circuit Board                          |
|   | V     | = | Vertical Printed Circuit Board                            |
|   | Blank | = | Solder Bucket Contacts                                    |
| <b>MOUNTING FLANGE FINISH (B TYPE ONLY)</b> | Blank | = | Nickel  |
|   | B     | = | Black   |
| <b>LOCKING MECHANISM</b>                    | Blank | = | Latching  |
|   | L     | = | Latchless   |
| <b>GROUNDING LINK OPTIONS</b>               | Blank | = | No Ground Link  |
|   | 1     | = | Pin 1 to Chassis to mating connector shell                |
|   | 2     | = | Mating connector shell to Chassis, Pin 1 separate ground. |
|   | 3     | = | Mating connector to Pin 1                                 |
| <b>CONTACT PLATING</b>                      | AU    | = | Gold Plated Contacts                                      |
|   | AG    | = | Silver Plated Contacts (Non-Standard)                     |
| <b>PACKAGING</b>                            | B     | = | Bulk Packed   |


## PART NUMBER BREAKDOWN

### AC SERIES A AND B TYPE FEMALE - 3 CONTACT

E. G. **AC3FAVL3-AU B**

**AC** (series prefix), **3** contacts, **F**emale, **A** Type, Vertical Printed Circuit Board, Latchless, **3** (Pin 1 to Chassis Grounding), - **AU** (Gold Plated Contacts), **B**ulk Packaged.

|   |       |   |   |
|---|-------|---|---|
| <b>SERIES PREFIX</b>                        | AC    | = | Series Prefix   |
| <b>CONTACT LAYOUT</b>                       | 3     | = | 3 Contacts only   |
| <b>GENDER</b>                               | F     | = | Female Socket Contacts                                    |
| <b>SHELL SERIES</b>                         | A     | = | A Type  |
|   | B     | = | B Type  |
| <b>TERMINATION</b>                          | H     | = | Horizontal Printed Circuit Board                          |
|   | V     | = | Vertical Printed Circuit Board                            |
| <b>MOUNTING FLANGE FINISH (B TYPE ONLY)</b> | Blank | = | Nickel  |
|   | B     | = | Black   |
| <b>LOCKING MECHANISM</b>                    | Blank | = | Latching  |
|   | L     | = | Latchless   |
| <b>GROUNDING LINK OPTIONS</b>               | Blank | = | No Ground Link  |
|   | 1     | = | Pin 1 to Chassis to mating connector shell                |
|   | 2     | = | Mating connector shell to Chassis, Pin 1 separate ground. |
|   | 3     | = | Pin 1 to Chassis  |
| <b>CONTACT PLATING</b>                      | AU    | = | Gold Plated Contacts                                      |
|   | AG    | = | Silver Plated Contacts (Non-Standard)                     |
| <b>PACKAGING</b>                            | B     | = | Bulk Packed   |

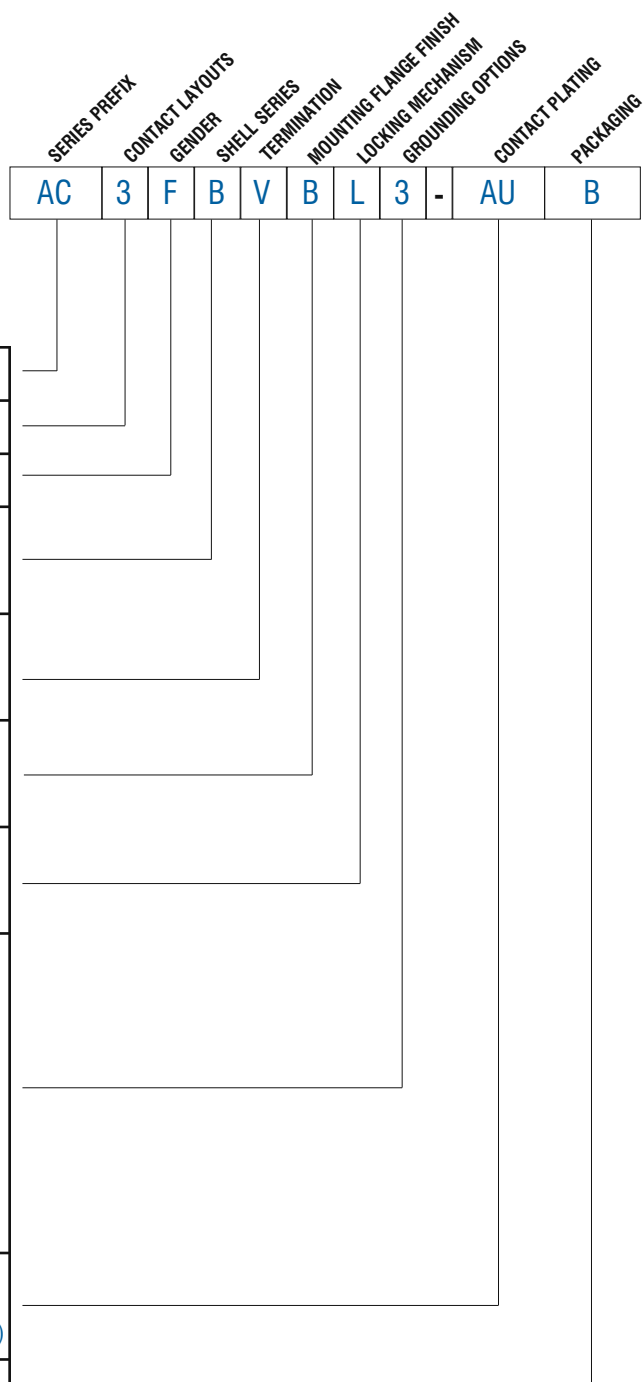


## PART NUMBER BREAKDOWN

AC SERIES A TYPE MALE AND FEMALE - 5 CONTACT





E. G . **AC5FAV-AU-B**  
**AC** (series prefix), **5** contacts, **F**emale, **A** Type, **V**ertical Printed Circuit Board,  
**AU** (Gold Plated Contacts) - **B**ulk Packaged.

|                        |    |   |                                  |
|------------------------|----|---|----------------------------------|
| <b>SERIES PREFIX</b>   | AC | = | Series Prefix                    |
| <b>CONTACT LAYOUT</b>  | 5  | = | 5 Contacts only                  |
| <b>GENDER</b>          | F  | = | Female Socket Contacts           |
|                        | M  | = | Male Pin Contacts                |
| <b>SHELL SERIES</b>    | A  | = | A Type                           |
| <b>TERMINATION</b>     | H  | = | Horizontal Printed Circuit Board |
|                        | V  | = | Vertical Printed Circuit Board   |
| <b>CONTACT PLATING</b> | AU | = | Gold Plated Contacts             |
| <b>PACKAGING</b>       | B  | = | Bulk Packed                      |

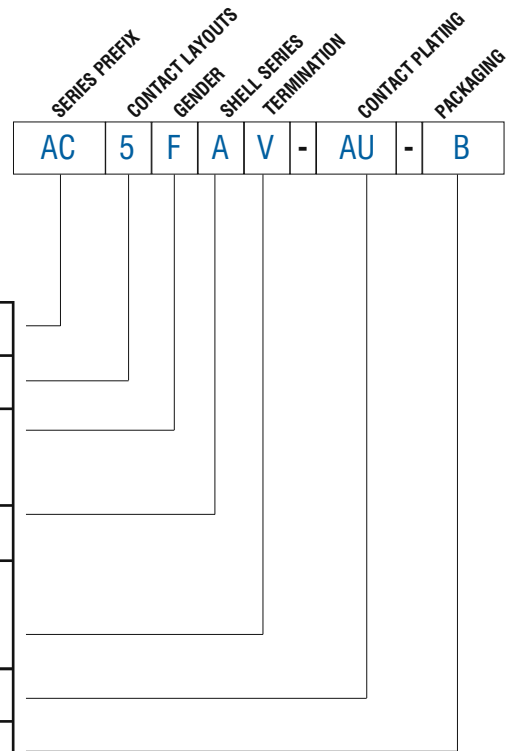



## STANDARD DATA AC SERIES A AND B TYPE CHASSIS

|                                   |  | VALUE   |   |
|-----------------------------------|--|---|---|
| <b>GENERAL CHARACTERISTICS</b>    | Number of contacts   | 3   | 5   |
|                                   | Contact Arrangements<br>(Front view of pin insert)                                     |                          |  |
|                                   | Termination  | Printed Circuit Board (PCB)   |   |
|                                   | Flammability rating of plastics  | UL94V-0   | UL94HB  |
|                                   | Environmental  | Complies with EU RoHS 2 Directive 2011/65/EU  |   |
| <b>ELECTRICAL CHARACTERISTICS</b> | Service Voltage RMS  | 133V <sup>1)</sup>  |   |
|                                   | Test Voltage AC RMS  | 1500V   |   |
|                                   | Current carrying capacity  | 6A  | 3A  |
|                                   | Typical Contact Resistance   | ≤5mΩ  |   |
|                                   | Insulation Resistance (initial)  | ≥2GΩ  |   |
|                                   | Insulation Resistance (after damp heat test)   | ≥1GΩ  |   |
| <b>CLIMATIC CHARACTERISTICS</b>   | Protection Class   | IP40  |   |
|                                   | Operating Temperature  | -25 °C to +75 °C (-13°F to +167°F)  |   |
| <b>MECHANICAL CHARACTERISTICS</b> | Weight <sup>2)</sup>   | 14g (0.030lb)   |   |
|                                   | Retention Spring separating force  | ≥20N  |   |
|                                   | Mounting Screw torque max.   | 1.5Nm   |   |
|                                   | Mechanical Operations  | 1500 mating cycles  |   |
|                                   | Fastening A Type Connectors <sup>3)</sup><br>Fastening B Type Connectors <sup>3)</sup> | Self-Tapping PT screw with thread 2.9 x 1.06 and of Tri-rondular configuration<br>Self-Tapping screw M2.5 |   |
| <b>MATERIALS</b>                  | Connector Flange - B-Type<br>Flange Finish - B-Type                                    | Diecast Zinc Alloy<br>Nickel or Black   |   |
|                                   | Insulators   | PA6.6+25% glass fibre reinforced, UL94V-0   | UL94HB  |
|                                   | Male Contact Material  | Brass   |   |
|                                   | Male Contact Plating   | 0.0762μm (3μ") gold over 0.762μm (30μ") nickel  |   |
|                                   | Female Contact Material  | Bronze  |   |
|                                   | Female Contact Plating   | 0.0762μm (3μ") gold over 0.762μm (30μ") nickel  |   |
|                                   | Latch lock and Spring  | Spring Steel  |   |
|                                   | Ground element   | Spring Steel  |   |

<sup>1)</sup> Not suitable for domestic applications above 50V


<sup>2)</sup> Approximate weight only, does not include packaging. Please contact us for exact weight for shipping purposes.

<sup>3)</sup> Refer to page 132




Rev 8 - 03/2013

## AC SERIES A AND B TYPE CHASSIS PCB FOOTPRINTS STRAIGHT (V) - CONNECTOR SIDE OF PCB




**AC3FAH2  
AC3FBH2  
AC3FBHB2**




**AC3FAH1  
AC3FAH3  
AC3FBH1  
AC3FBHB1  
AC3FBH3**


**AC3FBHB3  
AC3FAH  
AC3FBH  
AC3FBHB**



**AC3MAH4SWB**




**AC3FAV2  
AC3FBV2  
AC3FBVB2**




**AC3FAV1  
AC3FAV3  
AC3FBV1  
AC3FBVB1  
AC3FBV3**

**AC3FBVB3  
AC3FAV  
AC3FBV  
AC3FBVB**




**AC3MAH2  
AC3MAH4  
AC3MBH2  
AC3MBHB2**




**AC3MAH1  
AC3MAH3  
AC3MBH1  
AC3MBHB1  
AC3MBH3  
AC3MBHB3**

**AC3MAH  
AC3MBH  
AC3MBHB  
AC3MBHL  
AC3MBHBL**




**AC3MAV2  
AC3MAV4  
AC3MBV2  
AC3MBVB2**




**AC3MAV1  
AC3MAV3  
AC3MBV1  
AC3MBVB1  
AC3MBV3  
AC3MBVB3**

**AC3MBVB3  
AC3MAV  
AC3MBV  
AC3MBVB**


## AC SERIES 5 PIN PCB FOOTPRINTS STRAIGHT (V) - CONNECTOR SIDE OF PCB




**AC5FAH**



**AC5FAV**




**AC5MAH**




**AC5MAV**

## AC SERIES A AND B TYPE CHASSIS PANEL CUTOUT DIMENSIONS - FRONT VIEW


A TYPE

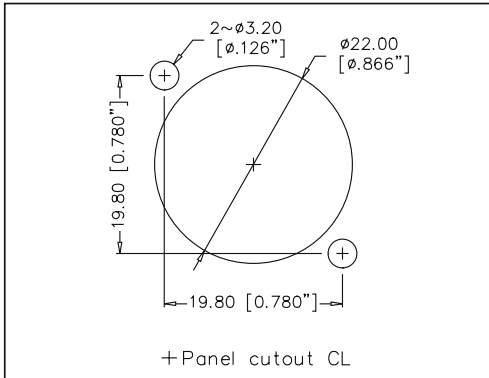


B TYPE

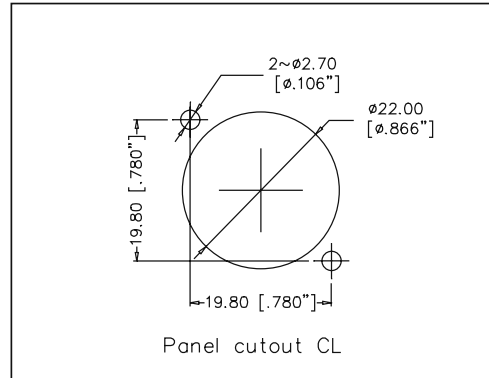

A AND B  
TYPE MALE  
MOUNTING  
PITCH

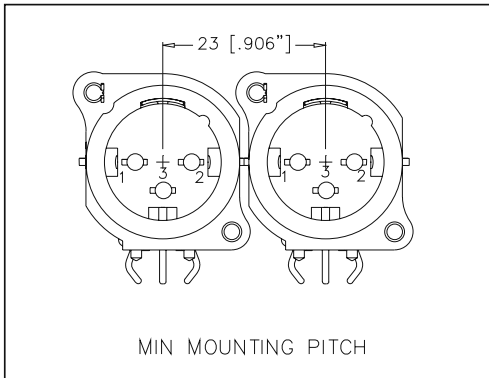

A AND  
B TYPE  
FEMALE  
MOUNTING  
PITCH

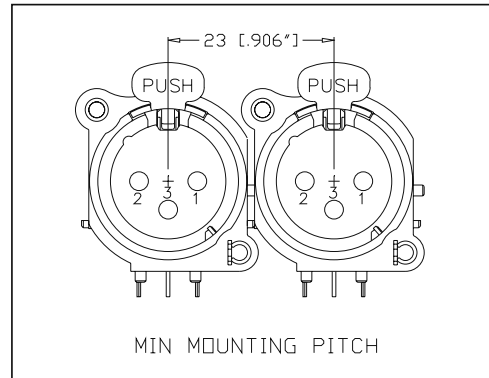





## AC3FA/BH/V SCHEMATIC CHART

AC3FA/BH/V3-AU  
AC3FA/BH/VL3-AU

AC3FA/BH/V2-AU  
AC3FA/BH/VL2-AU

AC3FA/BH/V1-AU  
AC3FA/BH/VL1-AU

AC3FA/BH/V-AU  
AC3FA/BH/VL-AU







AC3MA/BH/V3-AU  
AC3MA/BH/VL3-AU

AC3MA/BH/V2/4-AU  
AC3MA/BH/VL2/4-AU

AC3MA/BH/V1-AU  
AC3MA/BH/VL1-AU

AC3MA/BH/V-AU  
AC3MA/BH/VL-AU





## AC SERIES DUAL 1/4" (6.35mm) / XLR

The AC Series C type chassis receptacles feature two connectors in the one space saving housing. A combined XLR female receptacle together with a 6.35mm (1/4") phone jack give the designer more flexibility ensuring premium board space is saved. The new low profile high density C type offers a 15% space saving over the traditional C type. Various configurations are available in either stereo or mono layouts with Vertical, Horizontal Printed Circuit Board or Solder contacts.

### Features

- Standard or low profile / high density shell design
- Two connectors in the one housing.
- Industry standard PCB footprint layout on standard C type.
- Vertical or Horizontal PCB mounting.
- Bulk packed.
- Positive latch lock system (XLR).

### Options

- Solder contacts
- Vertical PCB contacts
- Horizontal PCB contacts
- Bulk Packaging
- Overmoldable connector housing

### Ordering Codes

We have listed the more common ordering codes in each section. For further options please refer to the part number breakdown charts. Please contact us if you need any further assistance.

### Simple steps to guide you in using this catalogue

- 1) Identify the product group listed in Contents on page 1 and go directly to that page number.
- 2) Each product group cover page then details information and options available.
- 3) Refer to the product detail pages and identify the product you require pictorially.
- 4) Read the product description column for the products standard features.
- 5) Use variations column to determine your choice.
- 6) Identify part number.
- 7) In the event the particular option you require is not listed please refer to the part number breakdown page at the end of each section.
- 8) Please contact us directly if you have any further problems.

# Amphenol

AC SERIES CHASSIS CONNECTORS

## C - TYPE LOW PROFILE DUAL JACK / XLR CONNECTORS



**Features:**

- Two connectors in the one housing.
- Low profile design offers a 15% space saving over the traditional design.
- Vertical or Horizontal PCB mounting.
- Bulk packed in trays, 100 to a box as standard.
- Positive latch lock system (XLR).

**Part Number Breakdown:** page 56

**Specifications:** page 58

**PCB Footprints:** page 57

**Recommended Fastener:** page 137

| PRODUCT - FIGURE | DRAWING | Dimensions in mm (inches)   | DESCRIPTION   | VARIATIONS                     | PART NUMBER   |
|------------------|---------|---|---|--------------------------------|---------------|
|                  |         | 19.80 [ 781]<br>27.5 [ 1082]<br>25.30 [ 996]<br>19.80 [ 781]<br>25.30 [ 996]<br>2.7 [ 106]<br>3.5 [ 138]  | Low Profile XLR 3 pole female receptacle with 1/4" stereo jack without switching contact, Horizontal PCB mount, Bulk Pack | Latching                       | ACJC6AH BULK  |
|                  |         | 19.80 [ 781]<br>27.5 [ 1082]<br>25.30 [ 996]<br>19.80 [ 781]<br>25.30 [ 996]<br>2.7 [ 106]<br>3.5 [ 138]  | Low Profile XLR 3 pole female receptacle with 1/4" stereo jack without switching contact, Horizontal PCB mount, Bulk Pack | Non-latching, Retention Spring | ACJC6AHL BULK |
|                  |         | 19.8 [ 781]<br>27.5 [ 1082]<br>25.3 [ 996]<br>19.8 [ 781]<br>25.3 [ 996]<br>2.7 [ 106]<br>3.7 [ 146]      | Low Profile XLR 3 pole female receptacle with 1/4" stereo jack without switching contact, Vertical PCB mount, Bulk Pack   | Latching                       | ACJC6AV BULK  |
|                  |         | 19.8 [ 781]<br>27.5 [ 1082]<br>25.3 [ 996]<br>19.8 [ 781]<br>25.3 [ 996]<br>2.7 [ 106]<br>3.7 [ 146]      | Low Profile XLR 3 pole female receptacle with 1/4" stereo jack without switching contact, Vertical PCB mount, Bulk Pack   | Non-latching, Retention Spring | ACJC6AVL BULK |
|                  |         | 19.80 [ 781]<br>27.5 [ 1082]<br>25.30 [ 996]<br>19.80 [ 781]<br>25.30 [ 996]<br>2.7 [ 106]<br>3.50 [ 138] | Low Profile XLR 3 pole female receptacle with 1/4" switching stereo jack, Horizontal PCB mount, Bulk Pack                 | Latching                       | ACJC9AH BULK  |
|                  |         | 19.80 [ 781]<br>27.5 [ 1082]<br>25.30 [ 996]<br>19.80 [ 781]<br>25.30 [ 996]<br>2.7 [ 106]<br>3.50 [ 138] | Low Profile XLR 3 pole female receptacle with 1/4" switching stereo jack, Horizontal PCB mount, Bulk Pack                 | Non-latching, Retention Spring | ACJC9AHL BULK |




# Amphenol

AC SERIES CHASSIS CONNECTORS

**THERMOPLASTIC C TYPE SERIES**

| PRODUCT - FIGURE | DRAWING | Dimensions in mm (inches) | DESCRIPTION  | VARIATIONS                     | PART NUMBER    |
|------------------|---------|---------------------------|--|--------------------------------|----------------|
|                  |         |                           | Low Profile XLR 3 pole female receptacle with 1/4" switching stereo jack, Vertical PCB mount, Bulk Pack                                | Latching                       | ACJC9AV BULK   |
|                  |         |                           | Low Profile XLR 3 pole female receptacle with 1/4" switching stereo jack, Vertical PCB mount, Bulk Pack                                | Non-latching, Retention Spring | ACJC9AVL BULK  |
|                  |         |                           | Low Profile XLR 3 pole female receptacle with 1/4" switching stereo jack and switching ground contact, Horizontal PCB mount, Bulk Pack | Latching                       | ACJC10AH BULK  |
|                  |         |                           | Low Profile XLR 3 pole female receptacle with 1/4" switching stereo jack and switching ground contact, Horizontal PCB mount, Bulk Pack | Non-latching, Retention Spring | ACJC10AHL BULK |
|                  |         |                           | Low Profile XLR 3 pole female receptacle with 1/4" switching stereo jack and switching ground contact, Vertical PCB mount, Bulk Pack   | Latching                       | ACJC10AV BULK  |
|                  |         |                           | Low Profile XLR 3 pole female receptacle with 1/4" switching stereo jack and switching ground contact, Vertical PCB mount, Bulk Pack   | Non-latching, Retention Spring | ACJC10AVL BULK |

## C - TYPE DUAL JACK / XLR CONNECTORS

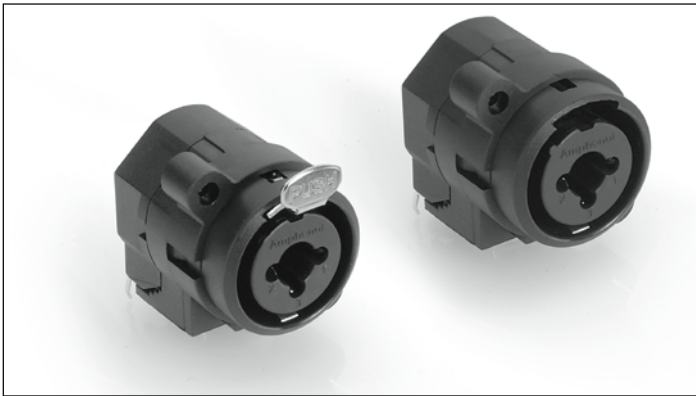

### Features:

- Two connectors in the one housing.
- Space saving design.
- Industry standard PCB footprint layout.
- Vertical or Horizontal PCB mounting.
- Bulk packed in trays, 100 to a box as standard.
- Positive latch lock system (XLR).

Part Number Breakdown: [page 56](#)

Specifications: [page 58](#)

PCB Footprints: [page 57](#)

Recommended Fastener: [page 137](#)

| PRODUCT - FIGURE | DRAWING | Dimensions in mm (inches)   | DESCRIPTION   | VARIATIONS                     | PART NUMBER  |
|------------------|---------|---|---|--------------------------------|--------------|
|                  |         | 27 [1.063"], 20 [0.787"], 30 [1.181"], 23 [0.906"], 10 [.394"], 12 [.472"], 24 [.945"], 10.6 [.417"], 23 [.921"], 7 [.276"]               | XLR 3 pole female receptacle with 1/4" mono jack without switching contact, Horizontal PCB mount, Bulk Pack | Latching                       | ACJC5H BULK  |
|                  |         | 27 [1.063"], 20 [0.787"], 30 [1.181"], 23 [0.906"], 10 [.394"], 12 [.472"], 24 [.945"], 10.6 [.417"], 23 [.921"], 7 [.276"]               | XLR 3 pole female receptacle with 1/4" mono jack without switching contact, Horizontal PCB mount, Bulk Pack | Non-latching, Retention Spring | ACJC5HL BULK |
|                  |         | 27 [1.063"], 20 [0.787"], 30 [1.181"], 23 [0.906"], 10 [.394"], 12 [.472"], 24 [.945"], 5.5 [0.217"], 10.6 [.417"], 23 [.921"], 7 [.276"] | XLR 3 pole female receptacle with 1/4" mono jack without switching contact, Vertical PCB mount, Bulk Pack   | Latching                       | ACJC5V BULK  |
|                  |         | 27 [1.063"], 20 [0.787"], 30 [1.181"], 23 [0.906"], 10 [.394"], 11.5 [.453"], 24 [.945"], 5.5 [0.217"], 23 [.921"], 7 [.276"]             | XLR 3 pole female receptacle with 1/4" mono jack without switching contact, Vertical PCB mount, Bulk Pack   | Non-latching, Retention Spring | ACJC5VL BULK |
|                  |         | 27 [1.063"], 20 [0.787"], 30 [1.181"], 23 [0.906"], 10 [.394"], 12 [.472"], 24 [.945"], 4.5 [0.177"], 10.6 [.417"], 23 [.921"], 7 [.276"] | XLR 3 pole female receptacle with 1/4" mono jack without switching contact, Solder Contacts, Bulk Pack      | Latching                       | ACJC5S BULK  |
|                  |         | 27 [1.063"], 20 [0.787"], 30 [1.181"], 23 [0.906"], 10 [.394"], 12 [.472"], 24 [.945"], 4.5 [0.177"], 23 [.921"], 7 [.276"]               | XLR 3 pole female receptacle with 1/4" mono jack without switching contact, Solder Contacts, Bulk Pack      | Non-latching, Retention Spring | ACJC5SL BULK |


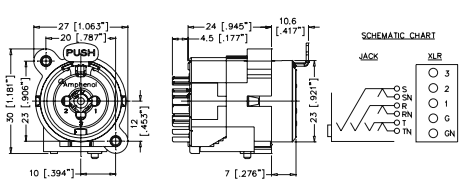

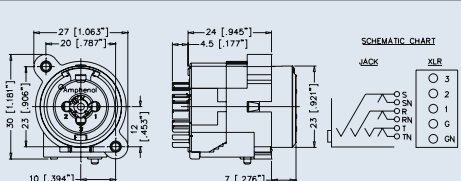

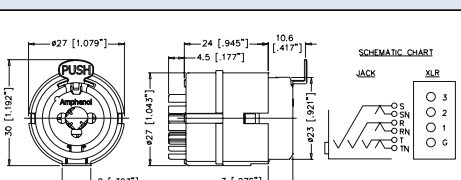


| PRODUCT - FIGURE | DRAWING | Dimensions in mm (inches) | DESCRIPTION   | VARIATIONS                     | PART NUMBER  |
|------------------|---------|---------------------------|---|--------------------------------|--------------|
|                  |         |                           | XLR 3 pole female receptacle with 1/4" stereo jack without switching contact, Horizontal PCB mount, Bulk Pack | Latching                       | ACJC6H BULK  |
|                  |         |                           | XLR 3 pole female receptacle with 1/4" stereo jack without switching contact, Horizontal PCB mount, Bulk Pack | Non-latching, Retention Spring | ACJC6HL BULK |
|                  |         |                           | XLR 3 pole female receptacle with 1/4" stereo jack without switching contact, Vertical PCB mount, Bulk Pack   | Latching                       | ACJC6V BULK  |
|                  |         |                           | XLR 3 pole female receptacle with 1/4" stereo jack without switching contact, Vertical PCB mount, Bulk Pack   | Non-latching, Retention Spring | ACJC6VL BULK |
|                  |         |                           | XLR 3 pole female receptacle with 1/4" stereo jack without switching contact, Solder Contacts, Bulk Pack      | Latching                       | ACJC6S BULK  |
|                  |         |                           | XLR 3 pole female receptacle with 1/4" stereo jack without switching contact, Solder Contacts, Bulk Pack      | Non-latching, Retention Spring | ACJC6SL BULK |
|                  |         |                           | XLR 3 pole female receptacle with 1/4" switching stereo jack, Horizontal PCB mount, Bulk Pack                 | Latching                       | ACJC9H BULK  |
|                  |         |                           | XLR 3 pole female receptacle with 1/4" switching stereo jack, Horizontal PCB mount, Bulk Pack                 | Non-latching, Retention Spring | ACJC9HL BULK |



| PRODUCT - FIGURE | DRAWING | Dimensions in mm (inches)  | DESCRIPTION  | VARIATIONS                     | PART NUMBER   |
|------------------|---------|--|--|--------------------------------|---------------|
|                  |         | 27 [1.063"]<br>20 [0.787"]<br>30 [1.181"]<br>23 [0.906"]<br>10 [.394"]<br>12 [.472"]<br>24 [.945"]<br>3.5 [.138"]<br>10.6 [.417"]<br>7 [.276"]<br>23 [.921"]               | XLR 3 pole female receptacle with 1/4" switching stereo jack, Vertical PCB mount, Bulk Pack                                | Latching                       | ACJC9V BULK   |
|                  |         | 27 [1.063"]<br>20 [0.787"]<br>30 [1.181"]<br>23 [0.906"]<br>10 [.394"]<br>12 [.472"]<br>24 [.945"]<br>3.5 [.138"]<br>7 [.276"]<br>23 [.921"]                               | XLR 3 pole female receptacle with 1/4" switching stereo jack, Vertical PCB mount, Bulk Pack                                | Non-latching, Retention Spring | ACJC9VL BULK  |
|                  |         | 27 [1.063"]<br>20 [0.787"]<br>30 [1.181"]<br>23 [0.906"]<br>10 [.394"]<br>12 [.472"]<br>24 [.945"]<br>4.5 [.177"]<br>7 [.276"]<br>23 [.921"]                               | XLR 3 pole female receptacle with 1/4" switching stereo jack, Solder Contacts, Bulk Pack                                   | Latching                       | ACJC9S BULK   |
|                  |         | 27 [1.063"]<br>20 [0.787"]<br>30 [1.181"]<br>23 [0.906"]<br>10 [.394"]<br>12 [.472"]<br>24 [.945"]<br>4.5 [.177"]<br>7 [.276"]<br>23 [.921"]                               | XLR 3 pole female receptacle with 1/4" switching stereo jack, Solder Contacts, Bulk Pack                                   | Non-latching, Retention Spring | ACJC9SL BULK  |
|                  |         | 27 [1.063"]<br>20 [0.787"]<br>30 [1.181"]<br>23 [0.906"]<br>10 [.394"]<br>12 [.472"]<br>24 [.945"]<br>3.5 [.138"]<br>10.6 [.417"]<br>7 [.276"]<br>23 [.921"]<br>15 [.591"] | XLR 3 pole female receptacle with 1/4" switching stereo jack and switching ground contact, Horizontal PCB mount, Bulk Pack | Latching                       | ACJC10H BULK  |
|                  |         | 27 [1.063"]<br>20 [0.787"]<br>30 [1.181"]<br>23 [0.906"]<br>10 [.394"]<br>12 [.472"]<br>24 [.945"]<br>3.5 [.138"]<br>7 [.276"]<br>23 [.921"]<br>15 [.591"]                 | XLR 3 pole female receptacle with 1/4" switching stereo jack and switching ground contact, Horizontal PCB mount, Bulk Pack | Non-latching, Retention Spring | ACJC10HL BULK |
|                  |         | 27 [1.063"]<br>20 [0.787"]<br>30 [1.181"]<br>23 [0.906"]<br>10 [.394"]<br>12 [.472"]<br>24 [.945"]<br>3.5 [.138"]<br>10.6 [.417"]<br>7 [.276"]<br>23 [.921"]               | XLR 3 pole female receptacle with 1/4" switching stereo jack and switching ground contact, Vertical PCB mount, Bulk Pack   | Latching                       | ACJC10V BULK  |
|                  |         | 27 [1.063"]<br>20 [0.787"]<br>30 [1.181"]<br>23 [0.906"]<br>10 [.394"]<br>12 [.472"]<br>24 [.945"]<br>4.5 [.177"]<br>7 [.276"]<br>23 [.921"]                               | XLR 3 pole female receptacle with 1/4" switching stereo jack and switching ground contact, Vertical PCB mount, Bulk Pack   | Non-latching, Retention Spring | ACJC10VL BULK |




| PRODUCT - FIGURE  | DRAWING   | Dimensions in mm (inches) | DESCRIPTION   | VARIATIONS                                  | PART NUMBER   |
|---|---|---------------------------|---|---|---------------|
|  |  |                           | XLR 3 pole female receptacle with 1/4" switching stereo jack and switching ground contact, Solder Contacts, Bulk Pack | Latching                                    | ACJC10S BULK  |
|  |  |                           | XLR 3 pole female receptacle with 1/4" switching stereo jack and switching ground contact, Solder Contacts, Bulk Pack | Non-latching, Retention Spring              | ACJC10SL BULK |
|  |  |                           | XLR 3 pole female receptacle with 1/4" jack, Solder Contacts, Overmoldable Connector Housing                          | Latching and Non-latching options available | ACJC9M BULK   |

## PART NUMBER BREAKDOWN


### AC SERIES THERMOPLASTIC C TYPE

E. G. **ACJC5HL BULK**  
**AC** (Series Prefix), **JC** Jack/Connector XLR, **5** Mono, **H**orizontal Printed Circuit Board, **L**atchless, **BULK** Packaged.


|                          |       |   |   |
|--------------------------|-------|---|---|
| <b>SERIES PREFIX</b>     | AC    | = | Series Prefix                             |
| <b>CONNECTOR TYPE</b>    | JC    | = | Jack / Connector XLR                      |
| <b>CONTACT OPTIONS</b>   | 5     | = | Mono, Non Switching, XLR Grounded         |
|                          | 6     | = | Stereo, Non Switching, XLR Grounded       |
|                          | 9     | = | Stereo, Switching, XLR Grounded           |
|                          | 10    | = | Stereo, Switching, XLR with Ground Switch |
| <b>HOUSING TYPE</b>      | Blank | = | Standard                                  |
|                          | A     | = | Low Profile / High Density                |
|                          | M     | = | Overmold Housing                          |
| <b>CONTACT TYPE</b>      | V     | = | Vertical Printed Circuit Board            |
|                          | H     | = | Horizontal Printed Circuit Board          |
|                          | S     | = | Solder Contacts                           |
| <b>LOCKING MECHANISM</b> | Blank | = | Latching                                  |
|                          | L     | = | Latchless                                 |
| <b>PACKAGING</b>         | Blank | = | Individual Bags                           |
|                          | BULK  | = | Bulk Packed                               |

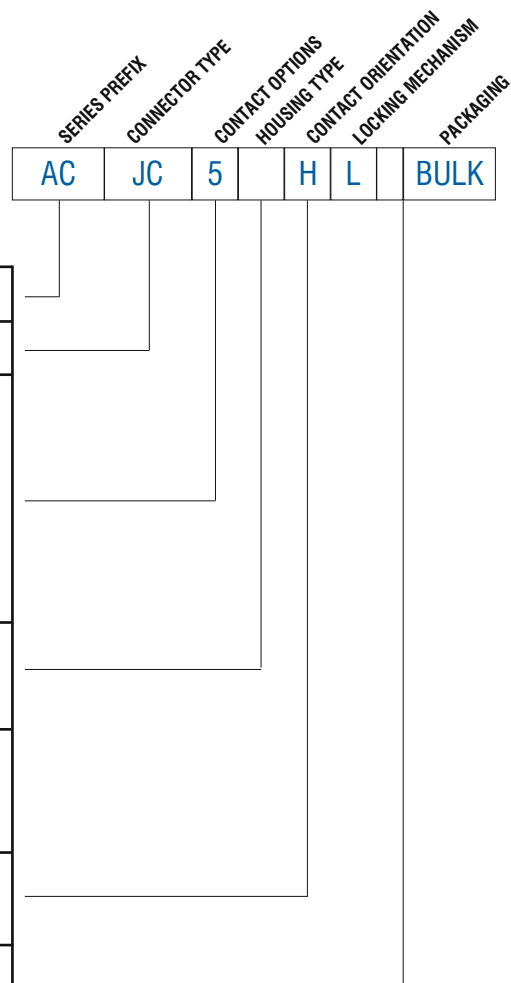


## AC SERIES C TYPE SERIES




**ACJC5H & ACJC5HL**




**ACJC5V & ACJC5VL**




**ACJC6H & ACJC6HL**




**ACJC6V & ACJC6VL**




**ACJC9H & ACJC9HL**




**ACJC9V & ACJC9VL**




**ACJC10H & ACJC10HL**




**ACJC10V & ACJC10VL**




**ACJC6AH & ACJC6AHL**




**ACJC6AV & ACJC6AVL**




**ACJC9AH & ACJC9AHL**




**ACJC9AV & ACJC9AVL**




**ACJC10AH & ACJC10AHL**




**ACJC10AV & ACJC10AVL**




**C TYPE PANEL CUTOUT**



**C TYPE MOUNTING PITCH**



**C TYPE LOW PROFILE PANEL CUTOUT**



**C TYPE LOW PROFILE MOUNTING PITCH**



## STANDARD DATA C TYPE CHASSIS RECEPTACLES

|                                   |  | VALUE  |  |
|-----------------------------------|--|--|--|
|                                   |  | LOW PROFILE TYPE   | STANDARD C TYPE                              |
| <b>GENERAL CHARACTERISTICS</b>    | Number of contacts                           | 5, 6, 9 or 10  |  |
|                                   | Termination                                  | Printed Circuit Board (PCB)  | Printed Circuit Board (PCB) or Solder Bucket |
|                                   | Flammability                                 | UL 94HB  |  |
|                                   | Environmental                                | Complies with EU RoHS 2 Directive 2011/65/EU                                   |  |
| <b>ELECTRICAL CHARACTERISTICS</b> | Service Voltage RMS                          | 50V  |  |
|                                   | Test Voltage AC RMS                          | 1500V  |  |
|                                   | Current carrying capacity                    | 7.5A   |  |
|                                   | Typical Contact Resistance                   | ≤50mΩ  |  |
|                                   | Insulation Resistance (initial)              | > 0.5GΩ  |  |
|                                   | Insulation Resistance (after damp heat test) | > 0.2GΩ  |  |
| <b>CLIMATIC CHARACTERISTICS</b>   | Protection Class                             | IP40   |  |
|                                   | Operating Temperature                        | -25 °C to +70 °C   |  |
| <b>MECHANICAL CHARACTERISTICS</b> | Weight**                                     | 9.2g (0.02lb)  | 14g (0.030lb)                                |
|                                   | Retention Spring separating force            | ≥20N   |  |
|                                   | Mounting Screw torque max.                   | 1.5Nm  |  |
|                                   | Mechanical Operations                        | 1500 mating cycles   |  |
|                                   | Fastening***                                 | Self-Tapping PT screw with thread 2.9 x 1.06 and of Tri-rondular configuration |  |
| <b>MATERIALS</b>                  | Connector Shell                              | PA6.6 + 30% glass fibre reinforced, UL94HB                                     | PA6.6 + 20% glass fibre reinforced, UL94HB   |
|                                   | Shell Finish                                 |  | Black  |
|                                   | Insulators                                   | PA6.6 glass fibre reinforced, UL94HB   | PA6.6 + 20% glass fibre reinforced, UL94HB   |
|                                   | XLR Contact                                  |  |  |
|                                   | Material                                     | Bronze   |  |
|                                   | Plating                                      | Gold over Nickel plated  |  |
|                                   | Jack Contact                                 |  |  |
|                                   | Material                                     | Bronze   | Brass  |
| Plating                           | Gold over Nickel plated                      | Silver over Copper plated  |  |
| Latch lock and Spring             | Nickel Plated                                |  |  |
| Ground element                    | Nickel Plated                                | Silver over Copper plated  |  |

\*\*Approximate weight in grams not including packaging. Please contact us for exact weight for shipping purposes.

\*\*\*Refer to page 137

Rev 6 - 03/2013



This receptacle is manufactured from glass filled UL94V-0 PBT Resin, and provides a lower cost alternative to the 'Z' series metal shell. A positive latch lock system secures the mating cable connector. Manufactured to comply with IEC 268-12 and AES 14-1992 standards. CSA File Number 68598

## Features

- Thermoplastic Shell.
- The "D" size housing can be either front or rear mounted using the same panel cutout.
- A leading first mate last break socket contact is standard on all female connectors (Pin 1).
- Solder cup or Insulation Displacement Contact (IDC) as well as Vertical or Horizontal PCB versions are available.
- Latching and Non-latching versions available.
- Available in 3 contact arrangements only.
- Compatible with all other XLR brands.

## Options

- Solder Bucket termination
- Insulation Displacement Contacts (IDC)
- Vertical PCB contacts
- Horizontal PCB contacts
- Bulk Packaging
- Single Bag packs
- Cost effective stamped contacts
- Latching or Non-latching.

## Ordering Codes

We have listed the more common ordering codes in each section. For further options please refer to the part number breakdown charts. Please contact us if you need any further assistance.

## AC SERIES XLR THERMOPLASTIC CHASSIS MOUNT CONNECTORS

### Simple steps to guide you in using this catalogue

- 1) Identify the product group listed in Contents on page 1 and go directly to that page number.
- 2) Each product group cover page then details information and options available.
- 3) Refer to the product detail pages and identify the product you require pictorially.
- 4) Read the product description column for the products standard features.
- 5) Use variations column to determine your choice.
- 6) Identify part number.
- 7) In the event the particular option you require is not listed please refer to the part number breakdown page at the end of each section.
- 8) Please contact us directly if you have any further problems.





**Features:**

- Thermoplastic shell.
- D type Flange.
- Solder Bucket connections.
- Vertical or Horizontal PCB mounting.
- Stamped contacts.
- Leading first mate last break socket contact.
- Positive latch lock system.
- Coloured housings available as specials.

**Options:** Solder Buckets, Vertical or Horizontal PCB, Bulk Pack, Latching or Non-latching, Gold Plated Contacts, Machined Contacts.

**Specifications: 64**  
**PCB Footprints: 65**

**Part Number Breakdown: 61**  
**Panel Cutouts: 65**


| PRODUCT - FIGURE | DRAWING | Dimensions in mm (inches) | DESCRIPTION  | VARIATIONS   | PART NUMBER  |
|------------------|---------|---------------------------|--|--|--|
|                  |         |                           | XLR 3 pole male, D Flange, Thermoplastic shell, Solder Buckets                             | Standard<br>Bulk Pack<br>Non-Latching<br>Non-Latching Bulk | AC3MDP<br>AC3MDP BULK<br>AC3MDPL<br>AC3MDPL BULK     |
|                  |         |                           | XLR 3 pole male, D Flange, Airtight Thermoplastic shell, Machined Contacts, Solder Buckets | Standard<br>Bulk Pack<br>Non-Latching<br>Non-Latching Bulk | AC3MMDP<br>AC3MMDP BULK<br>AC3MMDPL<br>AC3MMDPL BULK |
|                  |         |                           | XLR 3 pole female, D Flange, Thermoplastic shell, Solder Buckets                           | Standard<br>Bulk Pack<br>Non-Latching<br>Non-Latching Bulk | AC3FDP<br>AC3FDP BULK<br>AC3FDPL<br>AC3FDPL BULK     |
|                  |         |                           | XLR 3 pole male, D Flange, Thermoplastic shell, Horizontal PCB mount                       | Standard<br>Bulk Pack<br>Non-Latching<br>Non-Latching Bulk | AC3MDPH<br>AC3MDPH BULK<br>AC3MDPHL<br>AC3MDPHL BULK |
|                  |         |                           | XLR 3 pole female, D Flange, Thermoplastic shell, Horizontal PCB mount                     | Standard<br>Bulk Pack<br>Non-Latching<br>Non-Latching Bulk | AC3FDPH<br>AC3FDPH BULK<br>AC3FDPHL<br>AC3FDPHL BULK |
|                  |         |                           | XLR 3 pole male, D Flange, Thermoplastic shell, Vertical PCB mount                         | Standard<br>Bulk Pack<br>Non-Latching<br>Non-Latching Bulk | AC3MDPV<br>AC3MDPV BULK<br>AC3MDPVL<br>AC3MDPVL BULK |
|                  |         |                           | XLR 3 pole female, D Flange, Thermoplastic shell, Vertical PCB mount                       | Standard<br>Bulk Pack<br>Non-Latching<br>Non-Latching Bulk | AC3FDPV<br>AC3FDPV BULK<br>AC3FDPVL<br>AC3FDPVL BULK |

## PART NUMBER BREAKDOWN

### THERMOPLASTIC D TYPE FLANGE

E. G. **AC3MDPVL-AU BULK**  
**AC** (Series Prefix), **3** contacts, **Male**, **D** (Small Shell), **P** (Thermoplastic Chassis series) Vertical Printed Circuit Board, **Latchless** - **AU** (Gold Plated Contacts), **Bulk** Packaged.

|                          |       |   |  |
|--------------------------|-------|---|--|
| <b>SERIES PREFIX</b>     | AC    | = | Series Prefix  |
| <b>CONTACT LAYOUT</b>    | 3     | = | 3 Contacts only  |
| <b>GENDER</b>            | F     | = | Female Socket Contacts                                     |
|                          | M     | = | Male Pin Contacts  |
|                          | MM    | = | Male Machined Contacts                                     |
| <b>SHELL STYLE</b>       | D     | = | Small Shell  |
| <b>SHELL SERIES</b>      | P     | = | Thermoplastic Chassis Series                               |
| <b>TERMINATION</b>       | Blank | = | Solder Buckets   |
|                          | V     | = | Vertical Printed Circuit Board                             |
|                          | H     | = | Horizontal Printed Circuit Board                           |
| <b>LOCKING MECHANISM</b> | Blank | = | Latching   |
|                          | L     | = | Latchless (Non-Latching)                                   |
| <b>CONTACT PLATING</b>   | Blank | = | Standard Plating (Silver or Tin - Refer to Standard Data.) |
|                          | AU    | = | Gold Plated Contacts                                       |
| <b>PACKAGING</b>         | Blank | = | Individual Bags  |
|                          | BULK  | = | Bulk Packed  |

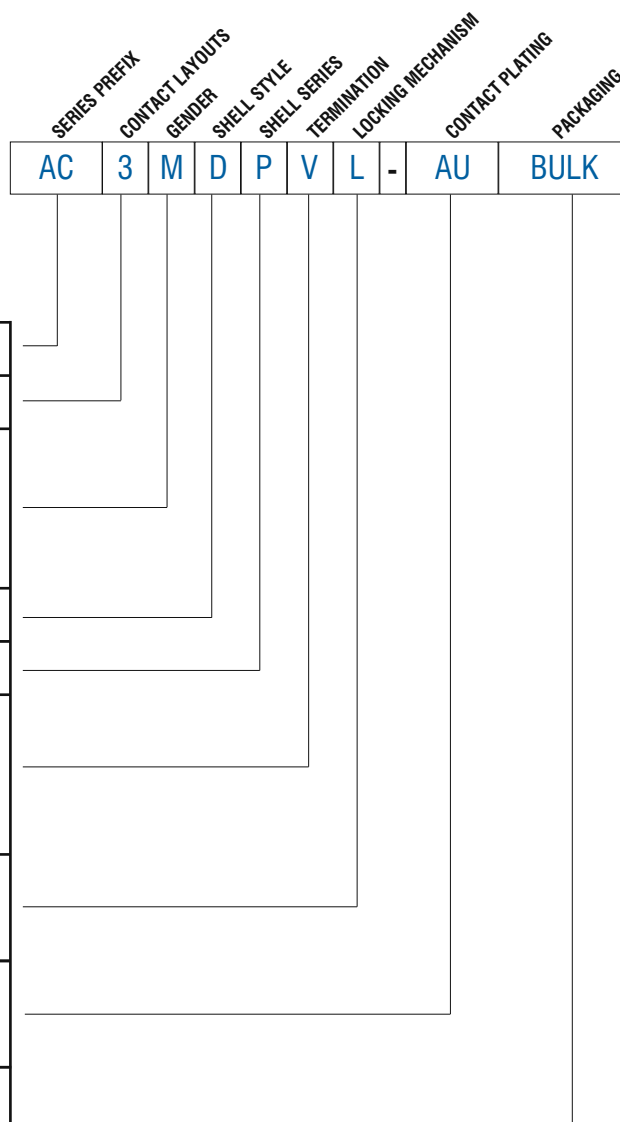

## THERMOPLASTIC TYPE - IDC (SOLDERLESS)



The Insulation Displacement Contact (IDC) connector is ideal for Original Equipment Manufacturers and end users alike and offers an alternative to our standard solder connector. Connectors can be quickly and easily assembled without screws or a soldering iron – by hand. Labour savings of up to 60% in termination time can be achieved.

**Recommended Cable Specifications: page 64**

**Features:**

- Thermoplastic Shell.
- Optional “D”, “P” or Dual Housing flange sizes.
- Insulation Displacement Contacts (IDC)
- Stamped contacts.
- Leading first mate last break socket contact.
- Positive latch lock system.
- Coloured housings available as specials.

**Options:** Gold plated contacts, Bulk Pack, Latching or Non-latching  
**Part Number Breakdown: page 63 Specifications: page 64**  
**Assembly Instructions: page 66 Panel Cutouts: page 65**

| PRODUCT - FIGURE | DRAWING | Dimensions in mm (inches) | DESCRIPTION   | VARIATIONS        | PART NUMBER    |
|------------------|---------|---------------------------|---|-------------------|----------------|
|                  |         |                           | XLR 3 pole male, D Flange, IDC contacts, Thermoplastic shell      | Standard          | AC3MDPI        |
|                  |         |                           |   | Bulk Pack         | AC3MDPI BULK   |
|                  |         |                           |   | Non-Latching      | AC3MDPIL       |
|                  |         |                           |   | Non-Latching Bulk | AC3MDPIL BULK  |
|                  |         |                           | XLR 3 pole female, D Flange, IDC contacts, Thermoplastic shell    | Standard          | AC3FDPI        |
|                  |         |                           |   | Bulk Pack         | AC3FDPI BULK   |
|                  |         |                           |   | Non-Latching      | AC3FDPIL       |
|                  |         |                           |   | Non-Latching Bulk | AC3FDPIL BULK  |
|                  |         |                           | XLR 3 pole male, Wide Flange, IDC contacts, Thermoplastic shell   | Standard          | AC3MPPI        |
|                  |         |                           |   | Bulk Pack         | AC3MPPI BULK   |
|                  |         |                           |   | Non-Latching      | AC3MPPI L      |
|                  |         |                           |   | Non-Latching Bulk | AC3MPPI L BULK |
|                  |         |                           | XLR 3 pole female, Wide Flange, IDC contacts, Thermoplastic shell | Standard          | AC3FPPI        |
|                  |         |                           |   | Bulk Pack         | AC3FPPI BULK   |
|                  |         |                           |   | Non-Latching      | AC3FPPI L      |
|                  |         |                           |   | Non-Latching Bulk | AC3FPPI L BULK |




## PART NUMBER BREAKDOWN


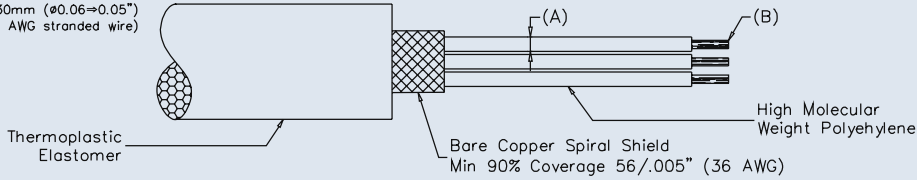
### IDC D AND P THERMOPLASTIC CHASSIS TYPE

E. G. **AC3MDPIL-AU BULK**  
**AC** (series prefix), **3** contacts, **Male**, **D** Flange, Plastic Shell, IDC, Latchless,  
**AU** (Gold Plated Contacts), **Bulk** Packaged.

|                          |       |   |  |
|--------------------------|-------|---|--|
| <b>SERIES PREFIX</b>     | AC    | = | Series Prefix  |
| <b>CONTACT LAYOUT</b>    | 3     | = | 3 Contacts only  |
| <b>GENDER</b>            | F     | = | Female Socket Contacts                                     |
|                          | M     | = | Male Pin Contacts  |
| <b>SHELL STYLE</b>       | D     | = | D Flange   |
| <b>SHELL SERIES</b>      | P     | = | Thermoplastic Chassis Series                               |
| <b>TERMINATION</b>       | I     | = | IDC Termination  |
| <b>LOCKING MECHANISM</b> | Blank | = | Latching   |
|                          | L     | = | Latchless  |
| <b>CONTACT PLATING</b>   | Blank | = | Standard Plating (Silver or Tin - Refer to Standard Data.) |
|                          | AU    | = | Gold Plated Contacts                                       |
| <b>PACKAGING</b>         | Blank | = | Individual Bags  |
|                          | BULK  | = | Bulk Packed  |

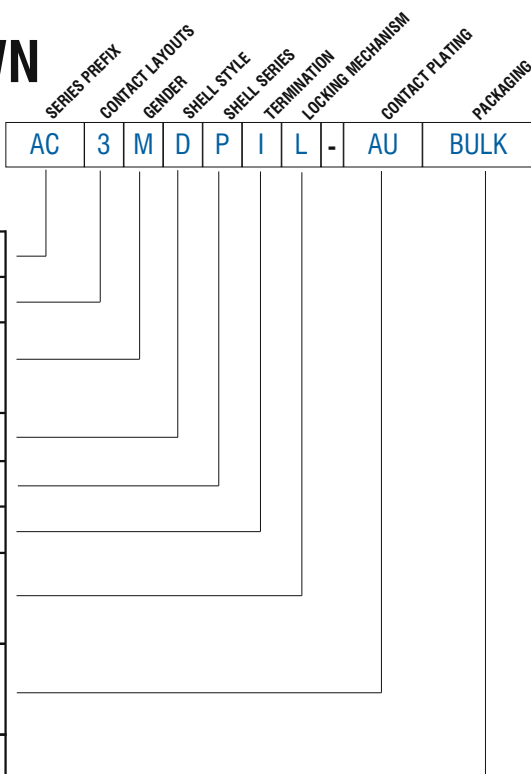

## STANDARD DATA AC CHASSIS - THERMOPLASTIC


|   |  | VALUE   |
|---|--|---|
| <b>GENERAL CHARACTERISTICS</b>          | Number of contacts   | 3   |
|   | AC Series Contact Arrangements (Front view of pin inserts)   |    |
|   | Termination  | Solder / IDC / Printed Circuit Board (PCB)  |
|   | Wire Gauge - Stranded wire:  |   |
|   | IDC  | 24AWG   |
|   | Solder   | 12AWG   |
|   | Printed Circuit Board (PCB)  | N/A   |
|   | Flammability   | UL94V-0   |
| Environmental                           | Complies with EU RoHS 2 Directive 2011/65/EU   |   |
| <b>ELECTRICAL CHARACTERISTICS</b>       | Service Voltage RMS  | 133V <sup>1)</sup>  |
|   | Test Voltage AC RMS  | 1400V   |
|   | Current carrying capacity:   |   |
|   | IDC  | 1A  |
|   | Solder   | 15A   |
|   | Printed Circuit Board (PCB)  | 15A   |
|   | Typical Contact Resistance   | ≤3mΩ  |
| Insulation Resistance                   | ≥1000MΩ  |   |
| <b>CLIMATIC CHARACTERISTICS</b>         | Protection Class   | IP40  |
|   | Operating Temperature  | -25 °C to +75 °C (-13°F to +167°F)  |
| <b>MECHANICAL CHARACTERISTICS</b>       | Weight <sup>2)</sup>   | 14g - (0.030lb)   |
|   | Mechanical Operations  | 1000 mating cycles  |
| <b>MATERIALS</b>                        | Connector Shell - Thermoplastic  | Thermoplastic, ULV94V-0 Modified PPE Resin  |
|   | Shell Finish   | Black, other colours available - contact factory  |
|   | Insulators   | ULV94V-0 PBT Resin or Modified PPE Resin  |
|   | Male Contact   |   |
|   | Stamped IDC-Material/Plating   | Phosphor Bronze / Silver or Gold (optional)   |
|   | Stamped Solder and PCB-Material/Plating  | Phosphor Bronze / Silver or Gold (optional)   |
| Female Contact                          |  |   |
| Stamped IDC-Material/Plating            | Phosphor Bronze / Tin or Gold (optional)   |   |
| Stamped Solder and PCB-Material/Plating | Phosphor Bronze / Tin or Gold (optional)   |   |
| <b>IDC RECOMMENDED CABLE DIMENSIONS</b> | A - OD $\phi 1.50 \pm 0.130\text{mm}$ ( $\phi 0.06 \pm 0.05$ "<br>B - $16/.005$ " (24 AWG stranded wire) |   |
|   |  | Thermoplastic Elastomer<br>Bare Copper Spiral Shield<br>Min 90% Coverage $56/.005$ " (36 AWG)<br>High Molecular Weight Polyethylene |

<sup>1)</sup> Not suitable for domestic applications above 50V



<sup>2)</sup> Approximate weight in grams does not include packaging. Please contact us for exact weight for shipping purposes.

## AC SERIES RECEPTACLES THERMOPLASTIC


### MOUNTING INFORMATION




'D' SERIES  
90° PCB (H)




'D' SERIES  
STRAIGHT PCB (V)




### PCB FOOTPRINT - CONNECTOR SIDE OF PCB




AC3FDPH



AC3MDPH




AC3FDPV



AC3MDPV


### PANEL CUTOUT DIMENSIONS - FRONT VIEW




AC3FDP / AC3MDP




## AC IDC SERIES CHASSIS ASSEMBLY INSTRUCTIONS

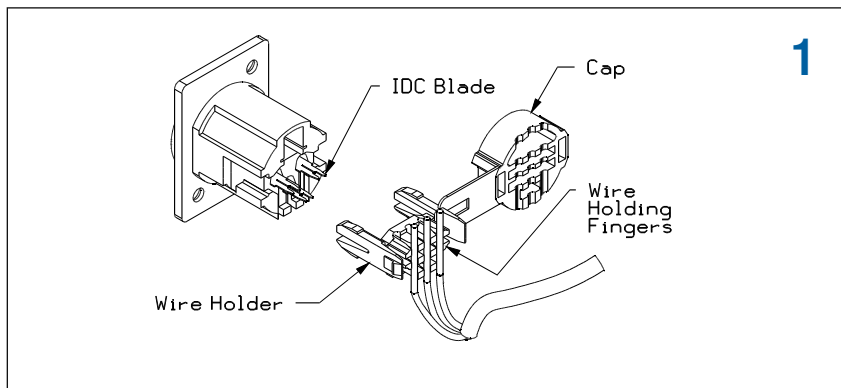


Lay the insulated conductors between the wire holding fingers. The fingers will retain the wire if it is inserted sufficiently.

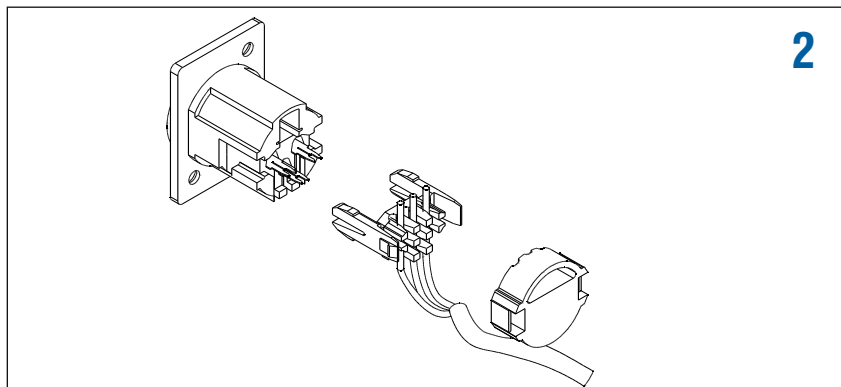

Break the strap off from the wire holder and the cap. Assemble the cap to the wire holder as shown. Push it home until the second snap operates.

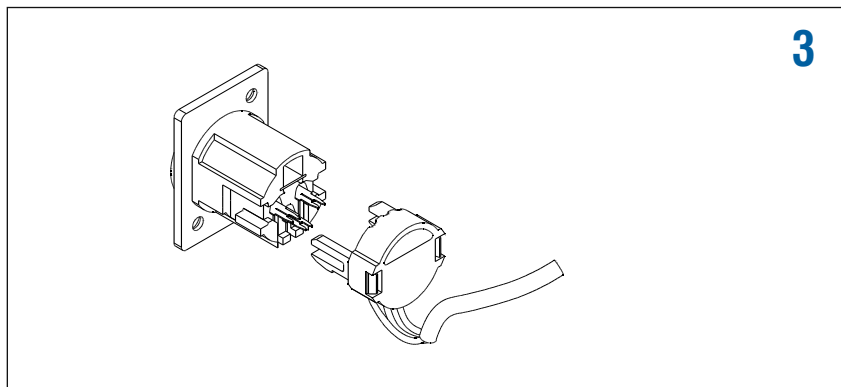

Align the wire holder and cap assembly with the slots down the side of the connector body. Push together, being careful not to damage the IDC blades through misalignment.

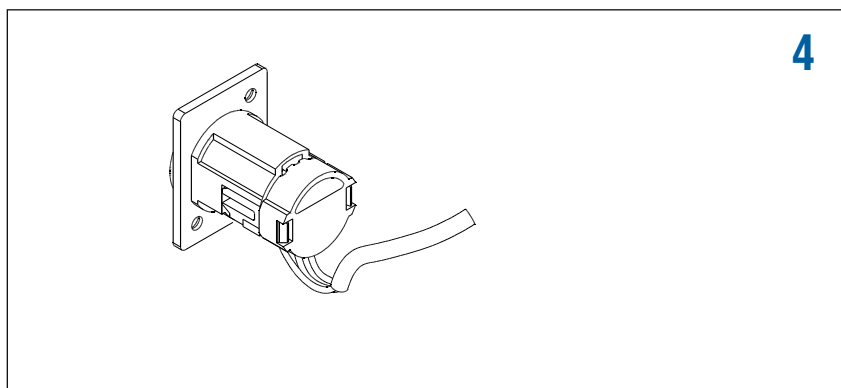

Ensure wire holder snaps into the body.



## SP/EP/AP SERIES HIGH POWER / LOUDSPEAKER CONNECTORS

The SP Series are available in 2 or 4 pole chassis mount connectors. The durable thermoplastic housings are fitted with high power contacts to ensure optimal current carrying capacity. Completely intermatable with industry standard loudspeaker connections.

The EP Series incorporates a rugged zinc diecast shell to give it maximum durability when used in demanding situations. The EP cable connector cable flex relief design minimises cable bend stress at point of entry into the connector housing.

The AP Series Shell is manufactured from tough, durable thermoplastic, and ideal for fixed indoor installations. Both the EP and AP Series utilise the same contact and insulator components.

### Features

- High current contacts for distortion free signal.
- Tough, durable zinc diecast shell for the EP series.
- Cost effective durable thermoplastic shell for the AP and SP series.
- EP series available in 3, 4, 5, 6 and 8 contact arrangements
- AP series available in 4, 5, 6, and 8 contact arrangements.
- SP series available in 2 and 4 contact arrangements.
- SP Series with overmolded cable support boot or PG gland with or without cable support strain relief.

- EP series cable clamp capable of supporting cables from 9mm (0.35") to 16mm (0.63") in diameter.

- Quick release, vibration resistant latch lock.

- AP & EP series are completely intermatable.

### Options

- Solder termination / Tab or Printed Circuit Board versions, Screw Terminals (SP Series)
- Nickel Plated Zinc Alloy shell (EP/SP Series)
- Black finished Zinc Alloy shell (EP/SP Series)
- Precision machined contacts
- Thermoplastic shell (AP/SP Series)

### Ordering Codes

We have listed the more common ordering codes in each section. Please contact us if you need any further assistance.

### Simple steps to guide you in using this catalogue

- 1) Identify the product group listed in Contents on page 1 and go directly to that page number.
- 2) Each product group cover page then details information and options available.
- 3) Refer to the product detail pages and identify the product you require pictorially.
- 4) Read the product description column for the products standard features.
- 5) Use variations column to determine your choice.
- 6) Identify part number.
- 7) In the event the particular option you require is not listed please refer to the part number breakdown page at the end of each section.
- 8) Please contact us directly if you have any further problems.



## SP SERIES LOUDSPEAKER CONNECTORS




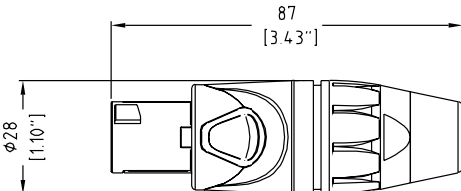

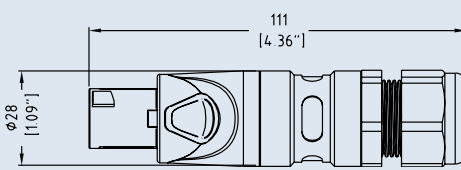

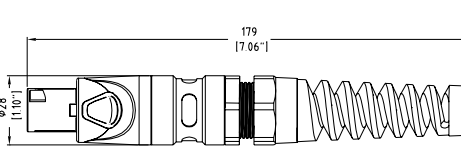

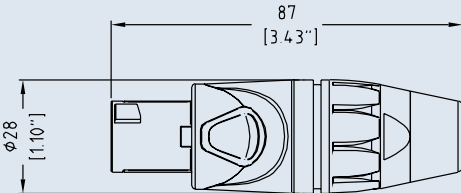

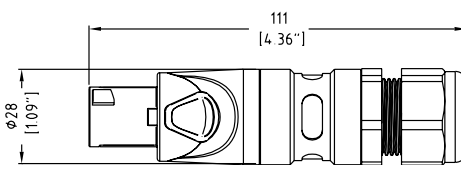

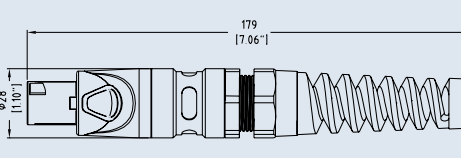
Amphenol's range of loudspeaker connectors have been further enhanced with the introduction of the SP Series. Designed to complement the popular EP/AP Series, we now offer a range of loudspeaker connectors to suit most applications. SP Series chassis connectors are available in industry standard PCB footprints with solder tabs. SP Series cable plugs are available with screw or solder terminals.

### Features:

- Quick release, vibration resistant latch lock
- 2 or 4 pole
- Solder tabs, PCB Contacts, Solder or Screw Terminals
- Chuck type or PG Gland cable clamp
- Various mounting hole options
- 30A Current rating
- Thermoplastic or Metal housing (Cable Plugs)
- Industry standard mating

**Part Number Breakdown:** [page 72](#)   **Specifications:** [page 75](#)  
**PCB Footprints:** [page 74](#)


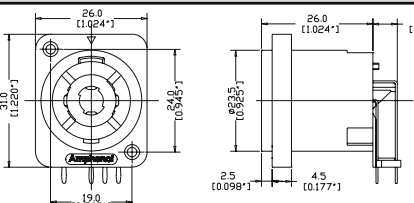

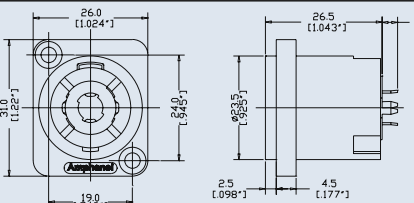

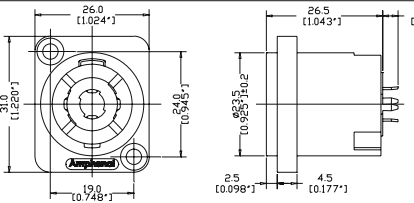

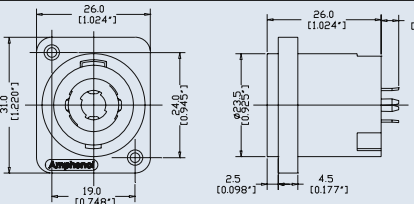

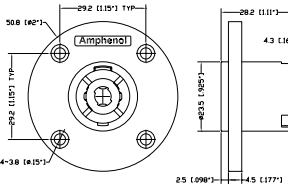
| PRODUCT - FIGURE | DRAWING | Dimensions in mm (inches) | DESCRIPTION   | CONTACT TYPE | SHELL COLOUR | PART NUMBER |
|------------------|---------|---------------------------|---|--------------|--------------|-------------|
|                  |         |                           | 2 pole, Cable connector, Thermoplastic shell, Blue sleeve                         | Screw        | Black        | SP-2-F      |
|                  |         |                           |   | Solder       | Black        | SP-2-FS     |
|                  |         |                           | 2 pole, Cable connector, Thermoplastic shell, Blue sleeve, PG Gland               | Screw        | Black        | SP-2-FG     |
|                  |         |                           |   | Solder       | Black        | SP-2-FSG    |
|                  |         |                           | 2 pole, Cable connector, Thermoplastic shell, Blue sleeve, PG Gland strain relief | Screw        | Black        | SP-2-FL     |
|                  |         |                           |   | Solder       | Black        | SP-2-FSL    |
|                  |         |                           | 2 pole, Cable connector, Metal shell, Blue sleeve                                 | Screw        | Nickel       | SP-2-FN     |
|                  |         |                           |   | Solder       | Nickel       | SP-2-FNS    |
|                  |         |                           |   | Screw        | Black        | SP-2-FB     |
|                  |         |                           |   | Solder       | Black        | SP-2-FBS    |
|                  |         |                           | 2 pole, Cable connector, Metal shell, Blue sleeve, PG Gland                       | Screw        | Nickel       | SP-2-FNG    |
|                  |         |                           |   | Solder       | Nickel       | SP-2-FNSG   |
|                  |         |                           |   | Screw        | Black        | SP-2-FBG    |
|                  |         |                           |   | Solder       | Black        | SP-2-FBSG   |
|                  |         |                           | 2 pole, Cable connector, Metal shell, Blue sleeve, PG Gland strain relief         | Screw        | Nickel       | SP-2-FNL    |
|                  |         |                           |   | Solder       | Nickel       | SP-2-FNSL   |
|                  |         |                           |   | Screw        | Black        | SP-2-FBL    |
|                  |         |                           |   | Solder       | Black        | SP-2-FBSL   |

| PRODUCT - FIGURE  | DRAWING   | DESCRIPTION   | CONTACT TYPE | SHELL COLOUR | PART NUMBER |
|---|---|---|--------------|--------------|-------------|
|    |    | 4 pole, Cable connector, Thermoplastic black shell, Blue sleeve                         | Screw        | Black        | SP-4-F      |
|   |   |   | Solder       | Black        | SP-4-FS     |
|    |    | 4 pole, Cable connector, Thermoplastic black shell, Blue sleeve, PG Gland               | Screw        | Black        | SP-4-FG     |
|   |   |   | Solder       | Black        | SP-4-FSG    |
|    |    | 4 pole, Cable connector, Thermoplastic black shell, Blue sleeve, PG Gland strain relief | Screw        | Black        | SP-4-FL     |
|   |   |   | Solder       | Black        | SP-4-FSL    |
|  |   | 4 pole, Cable connector, Metal shell, Blue sleeve                                       | Screw        | Nickel       | SP-4-FN     |
|   |   |   | Solder       | Nickel       | SP-4-FNS    |
|   |   |   | Screw        | Black        | SP-4-FB     |
|   |   |   | Solder       | Black        | SP-4-FBS    |
|  |  | 4 pole, Cable connector, Metal shell, Blue sleeve, PG Gland                             | Screw        | Nickel       | SP-4-FNG    |
|   |   |   | Solder       | Nickel       | SP-4-FNSG   |
|   |   |   | Screw        | Black        | SP-4-FBG    |
|   |   |   | Solder       | Black        | SP-4-FBSG   |
|  |  | 4 pole, Cable connector, Metal shell, Blue sleeve, PG Gland strain relief               | Screw        | Nickel       | SP-4-FNL    |
|   |   |   | Solder       | Nickel       | SP-4-FNSL   |
|   |   |   | Screw        | Black        | SP-4-FBL    |
|   |   |   | Solder       | Black        | SP-4-FBSL   |



| PRODUCT - FIGURE | DRAWING | Dimensions in mm (inches) | DESCRIPTION   | VARIATIONS | PART NUMBER |
|------------------|---------|---------------------------|---|------------|-------------|
|                  |         |                           | 2 pole, D flange,<br>Thru holes,<br>Solder tabs 3/16"         | Black      | SP-2-MD     |
|                  |         |                           | 2 pole, D flange,<br>Thru holes,<br>Horizontal PCB            | Black      | SP-2-MDH    |
|                  |         |                           | 2 pole, D flange,<br>Thru holes,<br>Vertical PCB              | Black      | SP-2-MDV    |
|                  |         |                           | 4 pole, D flange,<br>Thru holes,<br>Solder tabs 3/16"         | Black      | SP-4-MD     |
|                  |         |                           | 4 pole, D flange,<br>Thru holes,<br>Solder tabs 3/16"         | Grey       | SP-4-MD-8   |
|                  |         |                           | 4 pole, D flange,<br>Self Tapping holes,<br>Solder tabs 3/16" | Black      | SP-4-MDT    |
|                  |         |                           | 4 pole, D flange,<br>Thru holes,<br>Horizontal PCB            | Black      | SP-4-MDH    |
|                  |         |                           | 4 pole, D flange,<br>Self Tapping holes,<br>Horizontal PCB    | Grey       | SP-4-MDHT-8 |




| PRODUCT - FIGURE  |   | DESCRIPTION  | VARIATIONS | PART NUMBER |
|---|---|--|------------|-------------|
|    |    | 4 pole, D flange,<br>Self Tapping holes,<br>Horizontal PCB | Black      | SP-4-MDHT   |
|    |    | 4 pole, D flange,<br>Thru holes,<br>Vertical PCB           | Black      | SP-4-MDV    |
|    |    | 4 pole, D flange,<br>Thru holes,<br>Vertical PCB           | Red        | SP-4-MDV-2  |
|   |   | 4 pole, D flange,<br>Self Tapping holes,<br>Vertical PCB   | Grey       | SP-4-MDVT-8 |
|  |  | 4 pole, EP flange,<br>Thru holes,<br>Solder tabs 3/16"     | Black      | SP-4-MC     |



## PART NUMBER BREAKDOWN

### SP SERIES - CABLE CONNECTORS

E. G . **SP-4-FNSG**  
**SP** (Series Prefix), **4** contacts, **F** (Cable Connector), **N** (Metal Shell Nickel Finish),  
**S** (Solder Terminals), **G** (PG Gland)

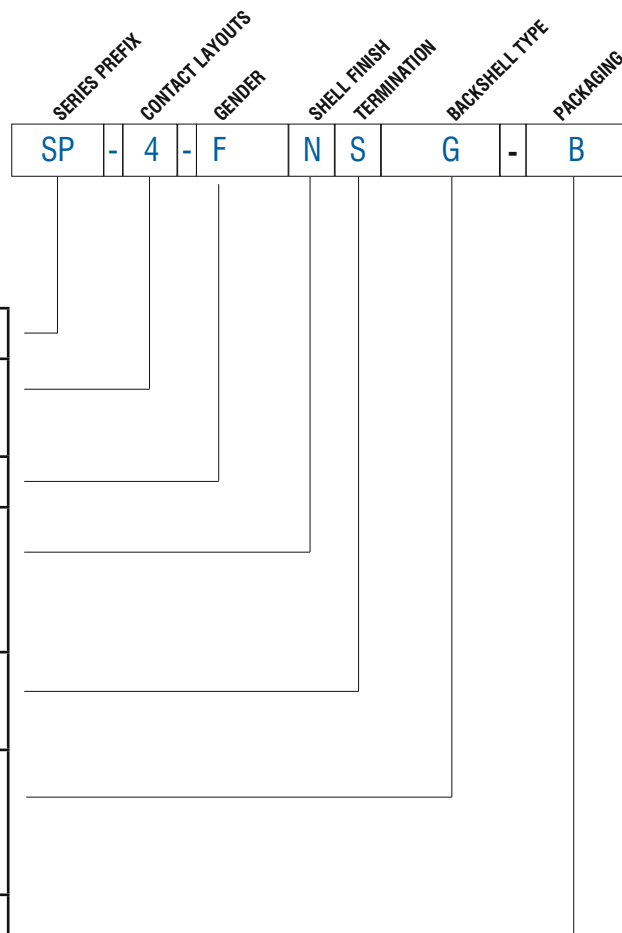

|                                    |       |   |                        |
|------------------------------------|-------|---|------------------------|
| <b>SERIES PREFIX</b>               | SP    | = | Series Prefix          |
| <b>CONTACT LAYOUT</b>              | 2     | = | 2 Contacts             |
|                                    | 4     | = | 4 Contacts             |
| <b>GENDER</b>                      | F     | = | Cable Connector        |
| <b>SHELL FINISH</b>                | Blank | = | Thermoplastic - Black  |
|                                    | N     | = | Metal - Nickel Finish  |
|                                    | B     | = | Metal - Black Finish   |
| <b>TERMINATION</b>                 | Blank | = | Screw Terminals        |
|                                    | S     | = | Solder Terminals       |
| <b>BACKSHELL TYPE</b>              | Blank | = | Standard               |
|                                    | G     | = | PG Gland               |
|                                    | L     | = | PG Gland Strain Relief |
| <b>PACKAGING BACK-SHELL COLOUR</b> | 1     | = | Brown                  |
|                                    | 2     | = | Red                    |
|                                    | 3     | = | Orange                 |
|                                    | 4     | = | Yellow                 |
|                                    | 5     | = | Green                  |
|                                    | 6     | = | Blue                   |
|                                    | 7     | = | Violet                 |
|                                    | 8     | = | Grey                   |
|                                    | 9     | = | White                  |
| <b>PACKAGING</b>                   | Blank | = | Individual Bags        |
|                                    | B     | = | Bulk Packed            |




## PART NUMBER BREAKDOWN

### SP SERIES - CHASSIS CONNECTORS


E. G. **SP-4-MDHT-8B**  
**SP** (Series Prefix), **4** contacts, **M**(Chassis Connector), **D** (D Shell), **H**orizontal Printed Circuit Board, Self **T**apping mounting holes - **8** (Grey), **B**ulk Packaged.

|                       |       |   |                                  |
|-----------------------|-------|---|----------------------------------|
| <b>SERIES PREFIX</b>  | SP    | = | Series Prefix                    |
| <b>CONTACT LAYOUT</b> | 2     | = | 2 Contacts                       |
|                       | 4     | = | 4 Contacts                       |
| <b>GENDER</b>         | M     | = | Chassis Connector                |
| <b>SHELL STYLE</b>    | D     | = | Standard 'D' Type flange         |
|                       | C     | = | EP Series Circular flange        |
| <b>TERMINATION</b>    | Blank | = | Solder tabs - 3/16" terminals    |
|                       | V     | = | Vertical Printed Circuit Board   |
|                       | H     | = | Horizontal Printed Circuit Board |
| <b>MOUNTING HOLE</b>  | Blank | = | Thru Hole                        |
|                       | T     | = | Self Tapping                     |
| <b>SHELL COLOUR</b>   | Blank | = | Black                            |
|                       | 2     | = | Red                              |
|                       | 8     | = | Grey                             |
| <b>PACKAGING</b>      | Blank | = | Individual Bags                  |
|                       | B     | = | Bulk Packed                      |

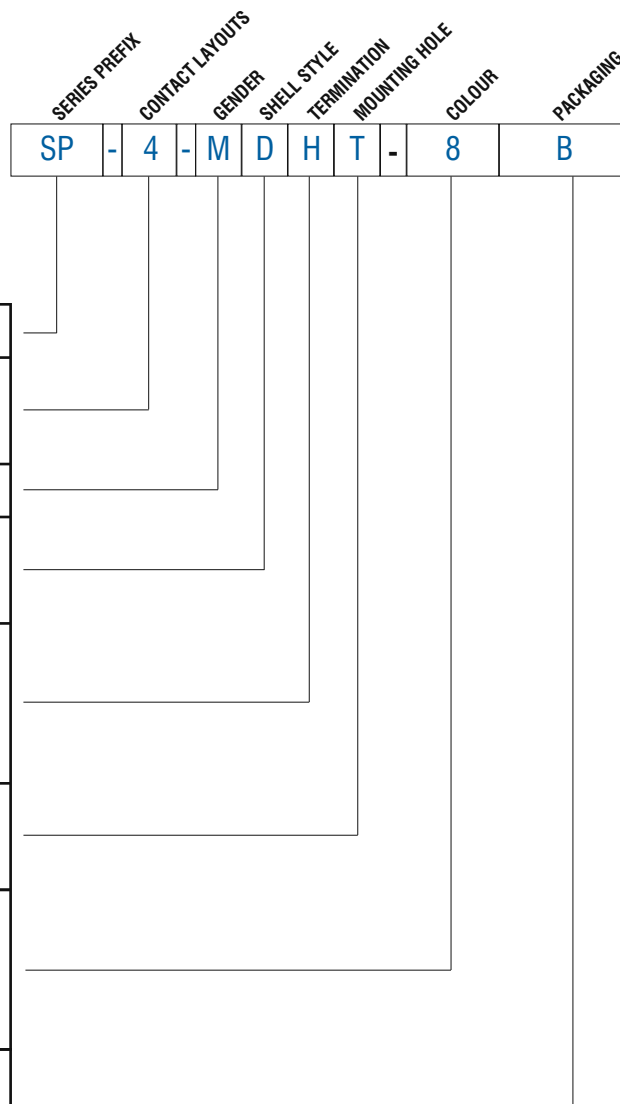


## SP SERIES


SP-2-MDH




SP-2-MDV



SP-4-MDH  
SP-4-MDHT-8  
SP-4-MDHT




SP-4-MDV  
SP-4-MDV-2  
SP-4-MDVT-8




## SP SERIES PANEL CUTOUT

SP-2-MD\*\* \*  
SP-4-MD\*\* \*  
\_



SP-4-MC



## STANDARD DATA SP SERIES CONNECTORS

|                                   |   | VALUE  |                                  |
|-----------------------------------|---|--|----------------------------------|
| <b>GENERAL CHARACTERISTICS</b>    | Number of contacts  | 2 or 4   |                                  |
|                                   | Termination (Chassis)   | Printed Circuit Board (PCB) or Solder Tabs 3/16"                               |                                  |
|                                   | Termination (Cable Plugs)   | Screw or Solder Terminals  |                                  |
|                                   | Flammability  | UL94HB   |                                  |
|                                   | Environmental   | Complies with EU RoHS 2 Directive 2011/65/EU                                   |                                  |
| <b>ELECTRICAL CHARACTERISTICS</b> | Service Voltage RMS   | 133V <sup>1)</sup>   |                                  |
|                                   | Test Voltage AC RMS   | 1500V  |                                  |
|                                   | Current carrying capacity   | 30A  |                                  |
|                                   | Typical Contact Resistance  | ≤3mΩ   |                                  |
|                                   | Insulation Resistance (initial)   | ≥2GΩ   |                                  |
|                                   | Insulation Resistance (after damp heat test)  | ≥1GΩ   |                                  |
| <b>CLIMATIC CHARACTERISTICS</b>   | Protection Class  | IP54   |                                  |
|                                   | Operating Temperature   | -25 °C to +75 °C (-13°F to +167°F)   |                                  |
| <b>MECHANICAL CHARACTERISTICS</b> | Weight** - Chassis Connectors   | 12g (0.026lb)  |                                  |
|                                   | Weight** - Cable Plug<br>- Thermoplastic<br>- Metal                                       | 44g (0.097lb)  |                                  |
|                                   |   | 65g (0.143lb)  |                                  |
|                                   | Weight** - Cable Plug PG<br>- Thermoplastic<br>- Metal                                    | 44g (0.097lb)  |                                  |
|                                   |   | 65g (0.143lb)  |                                  |
|                                   | Weight** - Cable Plug PG S/Relief<br>- Thermoplastic<br>- Metal                           | 68g (0.150lb)  |                                  |
|                                   |   | 89g (0.196lb)  |                                  |
|                                   | Typical Cable retention force   | 200N<br>(Subject to cable material and O.D.)                                   |                                  |
|                                   | Cable O.D range<br>- Chuck Clamp<br>- PG16 Gland<br>- PG16 Gland S/Relief                 | 2 pole<br>5-10mm (0.19" - 0.39")   | 4 pole<br>9-14mm (0.35" - 0.55") |
|                                   |   | 6-12mm (0.23" - 0.47")   | 8-14mm (0.31" - 0.55")           |
| 9-14mm (0.35" - 0.55")            |   | 9-14mm (0.35" - 0.55")   |                                  |
|                                   |   |  |                                  |
| Mechanical Operations             | 5000  |  |                                  |
| Fastening (Chassis Self Tapping)  | M3 screw  |  |                                  |
| <b>MATERIALS</b>                  | Connector Shell / Finish<br>- Chassis<br>- Cable Plug Thermoplastic<br>- Cable Plug Metal | PA66 GF20 / Black<br>PA66 GF30 / Black<br>Diecast Zinc Alloy / Nickel or Black |                                  |
|                                   | Insulators<br>- Chassis<br>- Cable Plugs  | PA66 GF20<br>PA66 GF30   |                                  |
|                                   | Cable Boot / Backshell  | Santoprene / PA6 GF 15   |                                  |
|                                   | Cable Clamp (Chuck)   | P.O.M  |                                  |
|                                   | Cable Clamp (PG)  | Polyamide / EPDM   |                                  |
|                                   | Sleeve  | PBT  |                                  |
|                                   | Contact Chassis<br>- Material / Plating<br>Contact Cable Plug<br>- Material / Plating     | Phosphor Bronze / Silver<br>Brass / Silver                                     |                                  |

<sup>1)</sup>Not suitable for domestic applications above 50V






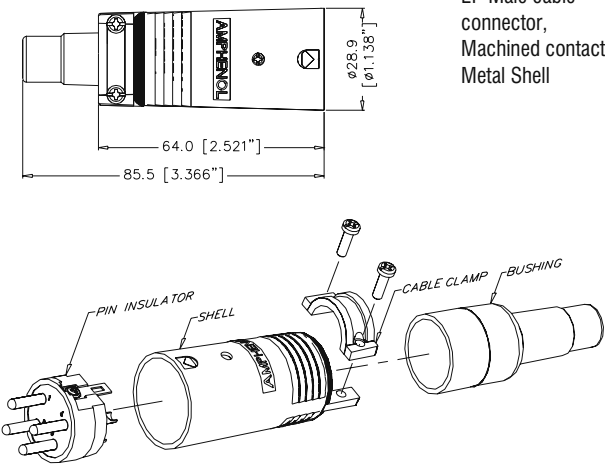

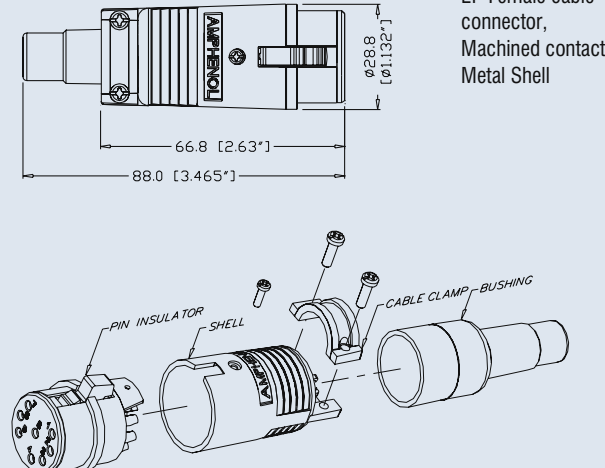
The EP Series has set the standard in high performance speaker connectors. Apart from its durability and strength, it offers consistent superior power handling capabilities.

**Features:**


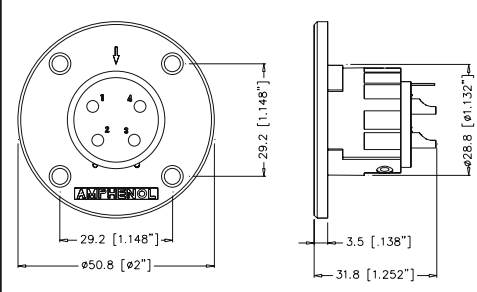

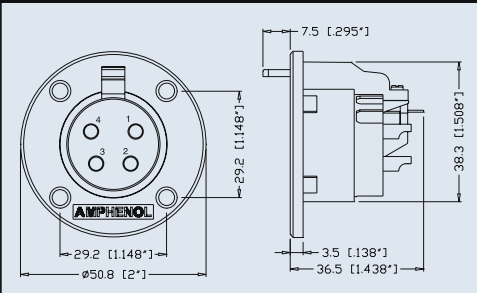
- Solder Bucket connections.
- Precision machined contacts.
- Diecast Metal Housings
- High current contacts
- Male and female cable and chassis connectors available.

**Options:** Black Finish Shell  
**Panel Cutouts:** page 80

**Specifications:** page 79

| PRODUCT - FIGURE  | DRAWING  | DESCRIPTION  | VARIATIONS           | PART NUMBER |
|---|--|--|----------------------|-------------|
|  <p><b>ISO ASSEMBLY OF EP MALE</b></p>    | <p>Dimensions in mm (inches)</p>  | <p>EP Male cable connector, Machined contacts, Metal Shell</p>   | 3 pole nickel finish | EP-3-12     |
|   |  |  | 3 pole black finish  | EP-3-12B    |
|   |  |  | 4 pole nickel finish | EP-4-12     |
|   |  |  | 4 pole black finish  | EP-4-12B    |
|   |  |  | 5 pole nickel finish | EP-5-12     |
|   |  |  | 5 pole black finish  | EP-5-12B    |
|   |  |  | 6 pole nickel finish | EP-6-12     |
|   |  |  | 6 pole black finish  | EP-6-12B    |
|   |  |  | 8 pole nickel finish | EP-8-12     |
| 8 pole black finish   | EP-8-12B   |  |                      |             |
|  <p><b>ISO ASSEMBLY OF EP FEMALE</b></p> |                                  | <p>EP Female cable connector, Machined contacts, Metal Shell</p> | 3 pole nickel finish | EP-3-11P    |
|   |  |  | 3 pole black finish  | EP-3-11PB   |
|   |  |  | 4 pole nickel finish | EP-4-11P    |
|   |  |  | 4 pole black finish  | EP-4-11PB   |
|   |  |  | 5 pole nickel finish | EP-5-11P    |
|   |  |  | 5 pole black finish  | EP-5-11PB   |
|   |  |  | 6 pole nickel finish | EP-6-11P    |
|   |  |  | 6 pole black finish  | EP-6-11PB   |
|   |  |  | 8 pole nickel finish | EP-8-11P    |
| 8 pole black finish   | EP-8-11PB  |  |                      |             |



| PRODUCT - FIGURE  | DRAWING  | DESCRIPTION  | VARIATIONS           | PART NUMBER |
|---|--|--|----------------------|-------------|
|    | <p style="text-align: center;">Dimensions in mm (inches)</p>  | <p>EP Male chassis mount, Round Flange, Machined contacts, Metal Shell</p>   | 3 pole nickel finish | EP-3-14     |
|   |  |  | 3 pole black finish  | EP-3-14B    |
|   |  |  | 4 pole nickel finish | EP-4-14     |
|   |  |  | 4 pole black finish  | EP-4-14B    |
|   |  |  | 5 pole nickel finish | EP-5-14     |
|   |  |  | 5 pole black finish  | EP-5-14B    |
|   |  |  | 6 pole nickel finish | EP-6-14     |
|   |  |  | 6 pole black finish  | EP-6-14B    |
|   |  |  | 8 pole nickel finish | EP-8-14     |
|   |  |  | 8 pole black finish  | EP-8-14B    |
|  |    | <p>EP Female chassis mount, Round Flange, Machined contacts, Metal Shell</p> | 3 pole nickel finish | EP-3-13P    |
|   |  |  | 3 pole black finish  | EP-3-13PB   |
|   |  |  | 4 pole nickel finish | EP-4-13P    |
|   |  |  | 4 pole black finish  | EP-4-13PB   |
|   |  |  | 5 pole nickel finish | EP-5-13P    |
|   |  |  | 5 pole black finish  | EP-5-13PB   |
|   |  |  | 6 pole nickel finish | EP-6-13P    |
|   |  |  | 6 pole black finish  | EP-6-13PB   |
|   |  |  | 8 pole nickel finish | EP-8-13P    |
|   |  |  | 8 pole black finish  | EP-8-13PB   |





The AP Series provides the same power handling performance as the EP Series in a cost effective, yet durable Thermoplastic housing.

**Features:**

- Solder Bucket connections.
- Precision machined contacts.
- Thermoplastic Housings
- High current contacts
- Male & Female Cable and Chassis connectors available.

**Specifications: page 79**






**Panel Cutouts: page 80**

| PRODUCT - FIGURE | DRAWING | Dimensions in mm (inches)   | DESCRIPTION  | VARIATIONS                           | PART NUMBER                              |
|------------------|---------|---|--|--------------------------------------|--|
|                  |         | 28.8 [1.135"]<br>100.0 [3.937"]   | AP Male cable connector, Machined contacts, Thermoplastic Black shell.                     | 4 pole<br>5 pole<br>6 pole<br>8 pole | AP-4-12<br>AP-5-12<br>AP-6-12<br>AP-8-12 |
|                  |         | 28.8 [1.132"]<br>98.7 [3.886"]  | AP Female cable connector, Machined contacts, Thermoplastic Black shell.                   | 4 pole<br>5 pole<br>6 pole<br>8 pole | AP-4-11<br>AP-5-11<br>AP-6-11<br>AP-8-11 |
|                  |         | 29.2 [1.15"]<br>29.2 [1.15"]<br>432.4 [16.276"]<br>30.6 [1.204"]<br>2.8 [0.11"]<br>6.2 [0.244"]<br>31.8 [1.252"]                    | AP Male chassis mount, Round Flange, Machined contacts, Thermoplastic Black shell.         | 4 pole<br>5 pole<br>6 pole<br>8 pole | AP-4-14<br>AP-5-14<br>AP-6-14<br>AP-8-14 |
|                  |         | 29.2 [1.148"]<br>29.2 [1.148"]<br>432.4 [16.276"]<br>38.3 [1.508"]<br>2.8 [0.11"]<br>6.2 [0.244"]<br>36.5 [1.438"]                  | AP Female chassis mount, Round Flange, Machined contacts, Thermoplastic Black shell.       | 4 pole<br>5 pole<br>6 pole<br>8 pole | AP-4-13<br>AP-5-13<br>AP-6-13<br>AP-8-13 |
|                  |         | 29.2 [1.148"]<br>29.2 [1.148"]<br>50.0 [1.969"]<br>432.4 [16.276"]<br>30.6 [1.204"]<br>2.8 [0.11"]<br>6.2 [0.244"]<br>31.8 [1.252"] | AP Male chassis mount, Rectangular Flange, Machined contacts, Thermoplastic Black shell.   | 4 pole<br>5 pole<br>6 pole<br>8 pole | AP-4-22<br>AP-5-22<br>AP-6-22<br>AP-8-22 |
|                  |         | 29.2 [1.148"]<br>29.2 [1.148"]<br>50.0 [1.969"]<br>432.4 [16.276"]<br>38.3 [1.508"]<br>2.8 [0.11"]<br>6.2 [0.244"]<br>36.5 [1.438"] | AP Female chassis mount, Rectangular Flange, Machined contacts, Thermoplastic Black shell. | 4 pole<br>5 pole<br>6 pole<br>8 pole | AP-4-21<br>AP-5-21<br>AP-6-21<br>AP-8-21 |





## STANDARD DATA EP/AP

|                                   |  | VALUE   |   |   |   |   |
|-----------------------------------|--|---|---|---|---|---|
| <b>GENERAL CHARACTERISTICS</b>    | Number of contacts                                 | 3   | 4   | 5   | 6   | 8   |
|                                   | Contact Arrangements<br>(Front view of pin insert) |  |  |  |  |  |
|                                   | Termination  | SOLDER  |   |   |   |   |
|                                   | Wire Gauge - Stranded wire:                        | 12AWG   | 12AWG   | 12AWG   | 12AWG   | 14AWG   |
|                                   | Flammability                                       | UL94V-0   |   |   |   |   |
|                                   | Environmental                                      | Complies with EU RoHS 2 Directive 2011/65/EU                                      |   |   |   |   |
| <b>ELECTRICAL CHARACTERISTICS</b> | Service Voltage RMS <sup>1)</sup>                  | 460V  | 660V  | 200V  | 200V  | 100V  |
|                                   | Test Voltage AC RMS                                | 2400V   | 3000V   | 1600V   | 1600V   | 1300V   |
|                                   | Current carrying capacity                          | 20A   | 20A   | 20A   | 20A   | 15A   |
|                                   | Typical Contact Resistance                         | ≤3mΩ  |   |   |   |   |
|                                   | Insulation Resistance                              | ≥1000MΩ   |   |   |   |   |
| <b>CLIMATIC CHARACTERISTICS</b>   | Protection Class                                   | IP40  |   |   |   |   |
|                                   | Operating Temperature                              | -25 °C to +75 °C (-13°F to +167°F)  |   |   |   |   |
| <b>MECHANICAL CHARACTERISTICS</b> | Weight - EP 11 & 12 <sup>2)</sup>                  | 80g<br>(0.176lb)  | 84g<br>(0.185lb)  | 86g<br>(0.189lb)  | 86g<br>(0.189lb)  | 86g<br>(0.189lb)  |
|                                   | Weight - EP 13 & 14 <sup>2)</sup>                  | 48g<br>(0.105lb)  | 50g<br>(0.110lb)  | 54g<br>(0.119lb)  | 54g<br>(0.119lb)  | 54g<br>(0.119lb)  |
|                                   | Weight - AP 11 & 12 <sup>2)</sup>                  | N/A   | 42g<br>(0.092lb)  | 44g<br>(0.097lb)  | 44g<br>(0.097lb)  | 44g<br>(0.097lb)  |
|                                   | Weight - AP 13, 14, 21 & 22 <sup>2)</sup>          | N/A   | 26g<br>(0.057lb)  | 30g<br>(0.066lb)  | 30g<br>(0.066lb)  | 28g<br>(0.061lb)  |
|                                   | Typical Cable retention force                      | 22Kg to 44Kg (50lb to 100lb) - Dependant on cable material and diameter           |   |   |   |   |
|                                   | Mechanical operations                              | 1000 mating cycles  |   |   |   |   |

<sup>1)</sup> Not suitable for domestic applications above 50V

<sup>2)</sup> Approximate weight only, does not include packaging. Please contact us for exact weight for shipping purposes.




## STANDARD DATA EP/AP (CONT'D)

|                          |                                  | DETAILS                          |                                 |
|--------------------------|----------------------------------|----------------------------------|---------------------------------|
| MATERIALS                | TYPE                             | AP                               | EP                              |
|                          | Connector shell                  | Modified PPE Resin               | Diecast Zinc Alloy              |
|                          | Shell finish                     | Black                            | Satin Nickel or Black           |
|                          | Insulators                       | UL94V-0 PBT Resin                |                                 |
|                          | Cable Bushing                    | Silicon Rubber                   | UL94 HB Thermoplastic Elastomer |
|                          | Male contact Machined - Solder   | Brass / Bright Tin               |                                 |
|                          | Material / Plating               |                                  |                                 |
|                          | Female contact Machined - Solder | Brass / Bright Tin               |                                 |
|                          | Material / Plating               |                                  |                                 |
| CLAMPING CHARACTERISTICS | Cable OD Range                   | 11mm to 17mm<br>(0.43" to 0.67") | 9mm to 16mm<br>(0.35" to 0.63") |
|                          | Retention Method                 | Two opposing plastic screws      | Metal saddle clamp              |


Rev 3 - 03/2013

## EP/AP SERIES PANEL CUTOUT DATA - FRONT VIEW

EP 13/AP 13/AP 21

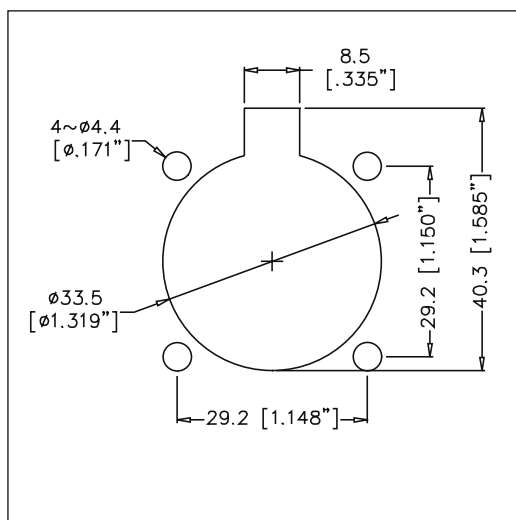

EP 14/AP 14/AP 22

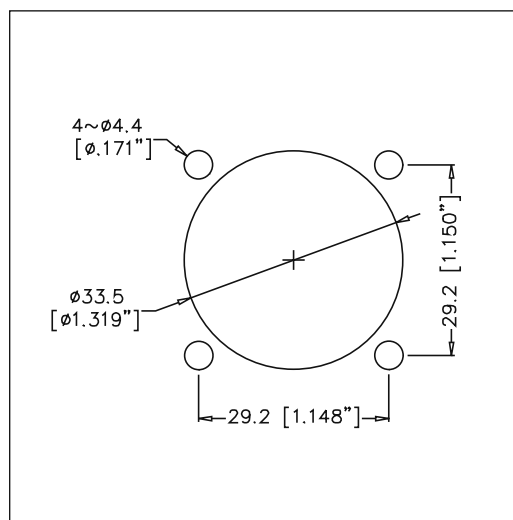

# Amphenol

XLrnet CABLE CONNECTORS

METAL SHELL TYPE



## XLRnet SERIES

**Features/Benefits:**

- XLR RJ45 Cable plug housing.
- Designed for pre-assembled RJ45 cables.
- Quick and simple installation.
- Cost effective method for harsh environments.
- No cabling in field required.
- No tools required for installation.
- Available in Nickel or Black housings.
- Coloured boots / Backshells

Specifications: page 82


Part Number Breakdown : page 82

Assembly Instructions: page 83

**NOTE\***RJ45 preassembled cable sold separately and is not included with the XLRnet connector.


| PRODUCT - FIGURE | DRAWING                          | DESCRIPTION  | VARIATIONS                       | PART NUMBER                      |
|------------------|----------------------------------|--|----------------------------------|----------------------------------|
|                  | <p>Dimensions in mm (inches)</p> | XLRnet, XLR cable plug housing to suit preassembled RJ45 cables, Nickel Finish | <p>Standard</p> <p>Bulk Pack</p> | <p>RJX8M</p> <p>RJX8M BULK</p>   |
|                  |                                  | XLRnet, XLR cable plug housing to suit preassembled RJ45 cables, Black Finish  | <p>Standard</p> <p>Bulk Pack</p> | <p>RJX8MB</p> <p>RJX8MB BULK</p> |

## ISO VIEW OF RJX8M

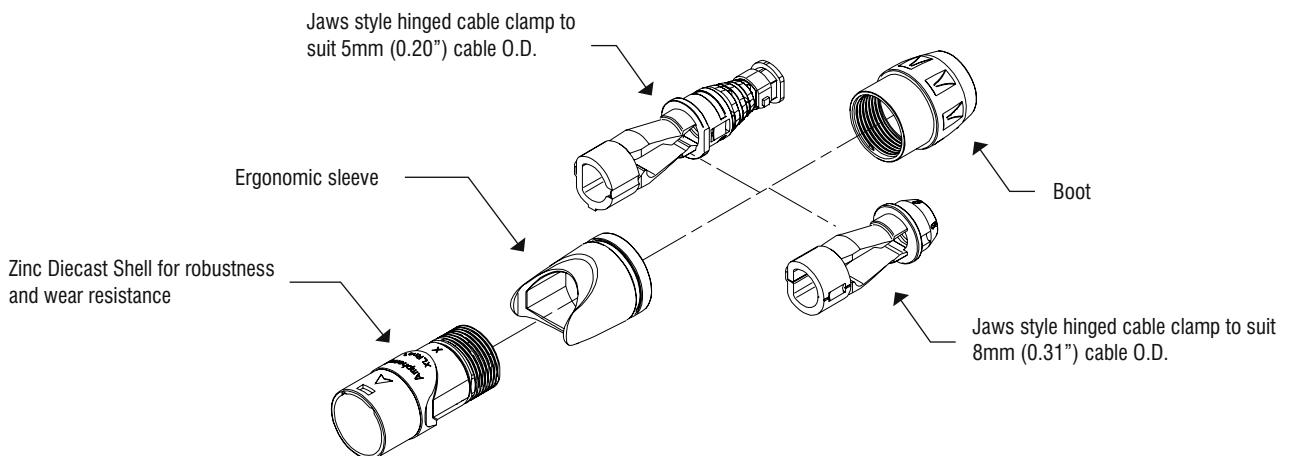


## PART NUMBER BREAKDOWN

### XLRnet SERIES

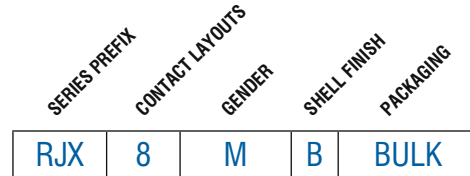

E. G. **RJX8MB BULK**  
**RJX** (Series Prefix), **8** contacts, **M** (Cable Connector), **B** (Black Finish),  
**Bulk** Packaged

|                       |       |   |                      |
|-----------------------|-------|---|----------------------|
| <b>SERIES PREFIX</b>  | RJX   | = | Series Prefix        |
| <b>CONTACT LAYOUT</b> | 8     | = | RJ45 Cable Housing   |
| <b>GENDER</b>         | M     | = | Male Cable Plug      |
| <b>SHELL FINISH</b>   | Blank | = | Nickel Plated Finish |
|                       | B     | = | Metal - Black Finish |
| <b>PACKAGING</b>      | Blank | = | Individual Bags      |
|                       | BULK  | = | Bulk Packed          |




## STANDARD DATA XLRnet SERIES

|                                   |   | VALUE  |
|-----------------------------------|---|--|
| <b>GENERAL CHARACTERISTICS</b>    | Termination                             | Preassembled RJ45 Cable (Not supplied)       |
|                                   | Environmental                           | Complies with EU RoHS 2 Directive 2011/65/EU |
| <b>CLIMATIC CHARACTERISTICS</b>   | Protection Class                        | IP40   |
|                                   | Operating Temperature                   | -25 °C to +75 °C (-13°F to +167°F)           |
| <b>MECHANICAL CHARACTERISTICS</b> | Insertion and Withdrawal force          | ≥10N - ≤20N                                  |
|                                   | Weight <sup>2)</sup>                    | 26g (0.057lb)                                |
|                                   | Cable O.D. range                        | 5 or 8mm (0.20" or 0.31")                    |
|                                   | Mechanical Operations                   | 1000 mating cycles                           |
| <b>MATERIALS</b>                  | Connector shell - Metal<br>Shell finish | Diecast Zinc Alloy<br>Satin nickel or Black  |
|                                   | Boot / Backshell<br>Finish              | UL94V-0 Noryl N190 / Valox<br>Black          |
|                                   | Cable clamp                             | PA6  |
|                                   | Sleeve                                  | Valox  |


<sup>2)</sup> Approximate weight only, does not include packaging. Please contact us for exact weight for shipping purposes.

## XLrnet SERIES CABLE ASSEMBLY INSTRUCTIONS

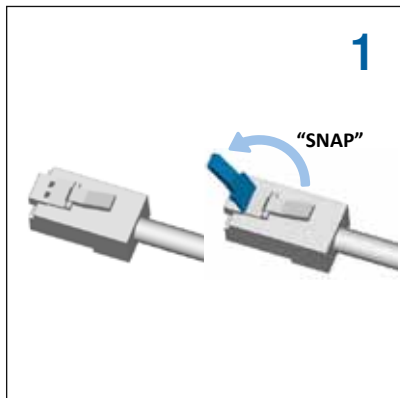


Snap or cut off release tab of the RJ45 plug.

⚠ Failure to remove the RJ45's Release Tab will make the XLrnet assembly permanently latching. The XLrnet series has an independent panel side latching system.

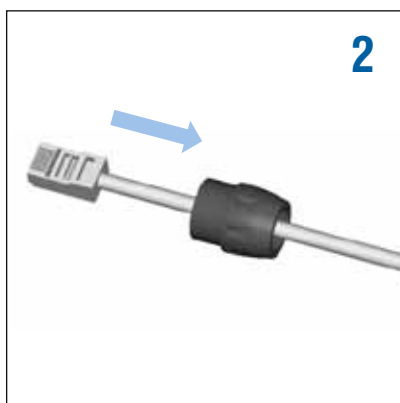

Slide the nut (backshell) onto the cable.

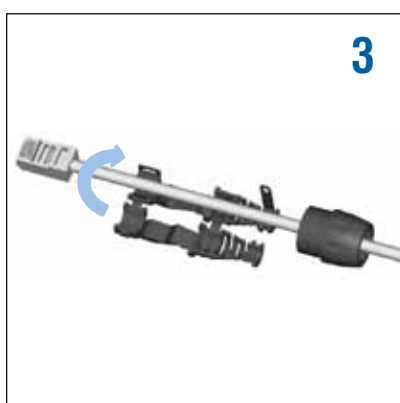


Install the cable clamp-boot.



Close clamp-boot, fasten the two tabs together to lock.



Push clamp-boot & cable together into the shell

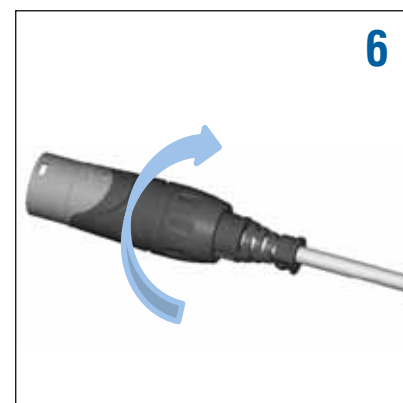

Thread the nut (backshell) onto the shell (torque 0.8nM-1.2nM) to close the connector assembly.





## XLRnet CONNECTORS

XLRnet was designed in conjunction with the Amphenol Data / Telecom product group of Amphenol Canada Corp., a subsidiary of Amphenol Corporation. Utilising our combined expertise and knowledge of the professional audio and high-speed data markets we are proud to offer the XLRnet series. Featuring Class D or CAT 5E performance in A or B type housings with integrated LED's and complete shielding options we have your high-speed data requirements covered.

### Features

- Class D or CAT 5E ethernet performance
- A or B type chassis housings
- Shielded or non-shielded
- LED indicators in a variety of colours.
- Compact design
- Cable plug housings
- Quick and simple installation

### Options

- Horizontal PCB contacts
- Bulk Packaging
- LED colour - Red, Green, Yellow or Blue combinations

### Ordering Codes

We have listed the more common ordering codes in each section. Please contact us if you need any further assistance.

### Simple steps to guide you in using this catalogue

- 1) Identify the product group listed in Contents on page 1 and go directly to that page number.
- 2) Each product group cover page then details information and options available.
- 3) Refer to the product detail pages and identify the product you require pictorially.
- 4) Read the product description column for the products standard features.
- 5) Use variations column to determine your choice.
- 6) Identify part number.
- 7) In the event the particular option you require is not listed please refer to the part number breakdown page at the end of each section.
- 8) Please contact us directly if you have any further problems.



**Features:**

- RJ45 Class D or CAT 5e performance
- A or B type chassis housings
- Shielded or non-shielded
- LED indicators in a variety of colours.
- Horizontal PCB
- Mates with XLrnet cable plugs or standard RJ45 plug.

**Part Number Breakdown: Page 86**

**Specifications: Page 88**

**PCB Footprints: Page 87**

**Recommended Fastener: Page 134**

| PRODUCT - FIGURE | DRAWING | Dimensions in mm (inches) | DESCRIPTION  | PACK      | LED*<br>LHD/RHD |              | PART NUMBER  |
|------------------|---------|---------------------------|--|-----------|-----------------|--------------|--------------|
|                  |         |                           |  |           |                 |              |              |
|                  |         |                           | XLrnet chassis, Class D, A type, Horizontal PCB                                  | Bulk Pack | -               | -            | RJX8FA3HB    |
|                  |         |                           | XLrnet chassis CAT 5e, B type, Horizontal PCB                                    | Bulk Pack | -               | -            | RJX8FB5HB    |
|                  |         |                           | XLrnet chassis, CAT 5e, B type, LEDs, Horizontal PCB, Bulk packed                | Bulk Pack | R               | G            | RJX8FB5HRGB  |
|                  |         |                           |  |           | R               | Y            | RJX8FB5HRYB  |
|                  |         |                           |  |           | R               | R            | RJX8FB5HRRB  |
|                  |         |                           |  |           | G               | R            | RJX8FB5HGRB  |
|                  |         |                           |  |           | G               | Y            | RJX8FB5HGYB  |
|                  |         |                           |  | U         | U               | RJX8FB5HUUB  |              |
|                  |         |                           | XLrnet chassis, CAT 5e, B type, Shielded Hood, Horizontal PCB, Bulk packed       | Bulk Pack | -               | -            | RJX8FB5HEB   |
|                  |         |                           | XLrnet chassis, CAT 5e, B type, Shielded Hood, LEDs, Horizontal PCB, Bulk packed | Bulk Pack | R               | G            | RJX8FB5HRGEB |
|                  |         |                           |  |           | R               | Y            | RJX8FB5HRYEB |
|                  |         |                           |  |           | R               | R            | RJX8FB5HRRB  |
|                  |         |                           |  |           | G               | R            | RJX8FB5HGREB |
|                  |         |                           |  |           | G               | Y            | RJX8FB5HGYEB |
|                  |         |                           |  | U         | U               | RJX8FB5HUUEB |              |

\*Note: LED colours are denoted left to right from the panel side front view. Refer page 87  
R = Red, G = Green, Y = Yellow, U = Blue




## PART NUMBER BREAKDOWN

XLRnet A AND B TYPE

E. G. **RJX8FB5HLRREB**

**RJX** (Series Prefix), **8** (Contacts), **F**emale **B** type, **H**orizontal, **L**atchless, **R**ed - Red LEDs, **E**MI / RFI Hood, **B**ulk Packaged.

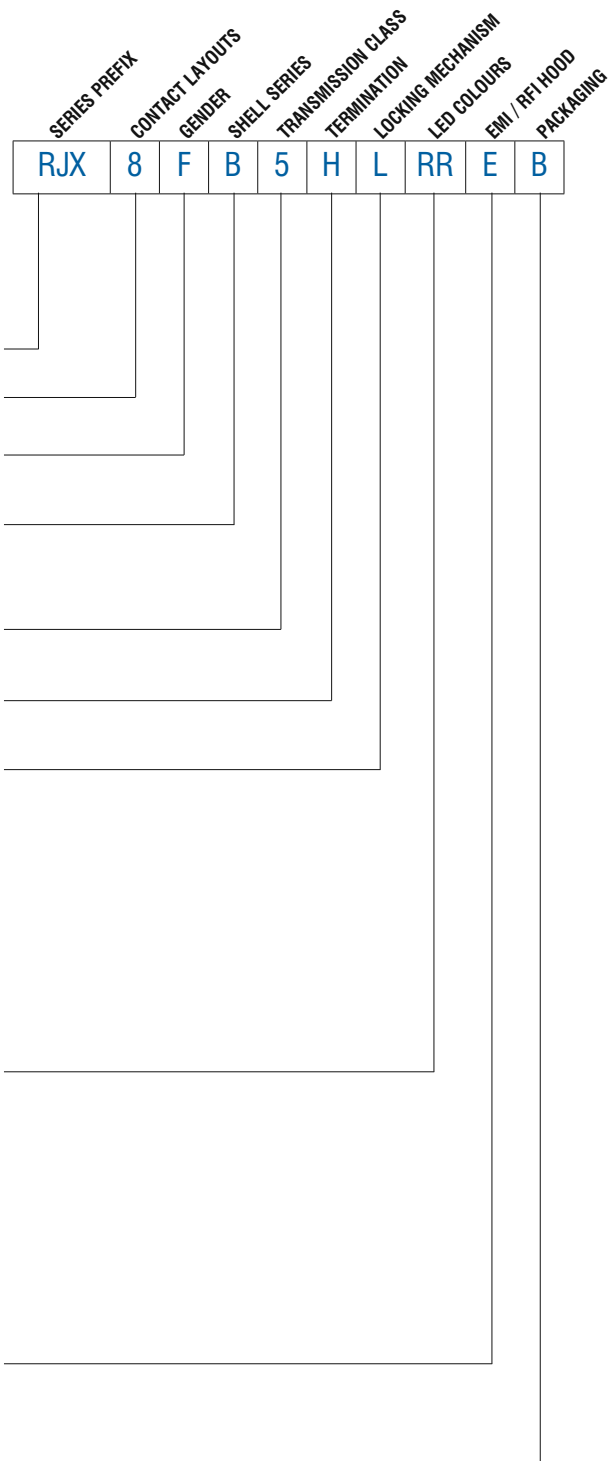


|                                 |       |   |                                  |
|---------------------------------|-------|---|----------------------------------|
| <b>SERIES PREFIX</b>            | RJX   | = | Series Prefix                    |
| <b>CONTACT LAYOUT</b>           | 8     | = | RJ45 type                        |
| <b>GENDER</b>                   | F     | = | Receptacle housing               |
| <b>SHELL SERIES</b>             | A     | = | A Type                           |
|                                 | B     | = | B Type                           |
| <b>TRANSMISSION CLASS</b>       | 3     | = | Class D                          |
|                                 | 5     | = | CAT 5e                           |
| <b>TERMINATION</b>              | H     | = | Horizontal Printed Circuit Board |
| <b>LOCKING MECHANISM</b>        | Blank | = | Latching                         |
|                                 | L     | = | Latchless                        |
| <b>LED COLOUR SEQUENCE*</b>     | Blank | = | No LEDs                          |
|                                 | RG    | = | Red / Green                      |
|                                 | RY    | = | Red / Yellow                     |
|                                 | RR    | = | Red / Red                        |
|                                 | GR    | = | Green / Red                      |
|                                 | GY    | = | Green / Yellow                   |
|                                 | GG    | = | Green / Green                    |
|                                 | YR    | = | Yellow / Red                     |
|                                 | YY    | = | Yellow / Yellow                  |
|                                 | YG    | = | Yellow / Green                   |
|                                 | UU    | = | Blue / Blue                      |
| <b>EMI / RFI SHIELDING HOOD</b> | Blank | = | No shield hood                   |
|                                 | E     | = | EMI / RFI shield hood            |
| <b>PACKAGING</b>                | Blank | = | Individual                       |
|                                 | B     | = | Bulk packed                      |

\*Note: LED colours are denoted left to right from the panel side front view. Refer page 87




## XLRNET A AND B TYPE SERIES


RJX8FA3H  
RJX8FA3HB




RJX8FB5H  
RJX8FB5HB





RJX8FB5HRGB  
RJX8FB5HRYB  
RJX8FB5HRRB  
RJX8FB5HGRB  
RJX8FB5HGYP  
RJX8FB5HGGB



RJX8FB5HEB  
RJX8FB5HEB  
RJX8FB5HEB  
RJX8FB5HEB  
RJX8FB5HEB  
RJX8FB5HEB





RJX8FB5HRGEB  
RJX8FB5HRYEB  
RJX8FB5HRREB  
RJX8FB5HGREB  
RJX8FB5HGYEB  
RJX8FB5HGGEB



LED Arrangement  
(Front view)

XLrnet  
PANEL CUTOUT



XLrnet MOUNTING  
PITCH

XLrnet PoE +  
PSE Pinout Alternatives

| CONDUCTOR | Alternative-A (MDI-X) | Alternative-A (MDI) | Alternative-A (All) |
|-----------|-----------------------|---------------------|---------------------|
| 1         | Negative $V_{PSE}$    | Positive $V_{PSE}$  |                     |
| 2         | Negative $V_{PSE}$    | Positive $V_{PSE}$  |                     |
| 3         | Positive $V_{PSE}$    | Negative $V_{PSE}$  |                     |
| 4         |                       |                     | Positive $V_{PSE}$  |
| 5         |                       |                     | Positive $V_{PSE}$  |
| 6         | Positive $V_{PSE}$    | Negative $V_{PSE}$  |                     |
| 7         |                       |                     | Negative $V_{PSE}$  |
| 8         |                       |                     | Negative $V_{PSE}$  |



## STANDARD DATA XLrnet CHASSIS RECEPTACLES

|                                   |                                    | VALUE - Class D                                      | VALUE - CAT 5e |
|-----------------------------------|------------------------------------|--|----------------|
| <b>GENERAL CHARACTERISTICS</b>    | Number of contacts                 | 8  |                |
|                                   | Contact Arrangement                | RJ45   |                |
|                                   | Termination                        | Printed Circuit Board (PCB) - through hole           |                |
|                                   | Flammability                       | UL94V-0  |                |
|                                   | Environmental                      | Complies with EU RoHS 2 Directive 2011/65/EU         |                |
|                                   | Solderability                      | MIL-STD 202, Method 208                              |                |
| <b>ELECTRICAL CHARACTERISTICS</b> | Rated current per contact          | 1.5 A  |                |
|                                   | Rated Voltage                      | 125V AC  |                |
|                                   | Typical Contact Resistance         | 20mΩ   |                |
|                                   | Insulation Resistance              | > 500MΩ  |                |
|                                   | Dielectric Strength                | 1000 VAC, 60 secs                                    |                |
|                                   | Frequency Bandwidth                | 1 - 100Mhz   | 1 - 250Mhz     |
|                                   | Transmission Specification / Class | 10/100 Base-T  | 1000 Base-T    |
|                                   | PoE+                               | 802.3at Type 2                                       |                |
|                                   | LED Type                           | Round, single pole, indicator                        |                |
| <b>CLIMATIC CHARACTERISTICS</b>   | Protection Class                   | IP40 (with EMI/RFI shield)                           |                |
|                                   | Operating Temperature              | -40°C to +85°C                                       |                |
| <b>MECHANICAL CHARACTERISTICS</b> | Weight** - A & B Housing           | 11g (0.024lb)  |                |
|                                   | - Shielded Housing                 | 17g (0.037lb)  |                |
|                                   | Mechanical Operations              | 1000   |                |
|                                   | Insertion and Withdrawal Force     | ≤ 21N  |                |
|                                   | Latch                              | Spring Steel   |                |
|                                   | Panel Thickness                    | 3mm  |                |
|                                   | Mounting screw torque max.         | 1.5Nm  |                |
|                                   | Fastener                           | Self-Tapping screw M2.5                              |                |
| <b>MATERIALS</b>                  | Connector Shell / Housing          | Thermoplastic, DSM Stanyl UL94V-0, 30% GF            |                |
|                                   | Flange (A type)                    | Thermoplastic, DSM Stanyl UL94V-0, 30% GF            |                |
|                                   | Flange (B type)                    | Diecast Zinc Alloy 3                                 |                |
|                                   | Flange Finish (B type)             | Satin Nickel   |                |
|                                   | Contact                            | Phosphor Bronze                                      |                |
|                                   | Contact Finish                     | 0.38μm Au over 1.27μm Ni or 1.27μm Au over 1.27μm Ni |                |
|                                   | Metal Hood Shield EMI/RFI          | Brass, nickel plated                                 |                |
|                                   | Latch lock and Spring              | Spring steel   |                |

\*\*Approximate weight in grams not including packaging. Please contact us for exact weight for shipping purposes.

Rev 1 - 03/2013



## BNC 75 RF CONNECTORS

Amphenol offers a complete range of high-performance BNC plugs for use in digital/HD video applications. Amphenol's True 75 Ohm BNC connectors perform well up to and beyond 3GHz and are designed to terminate to a variety of popular coaxial cable types. We can also offer custom connectors to suit non-standard cables on request. Plugs feature a precision machined brass body and coupling nut plated with cost effective nickel plating.

### Applications

- Broadcast
- High bandwidth video equipment
- D1/D2 serial digital
- Graphic work stations
- Telephony / Workstations

### Options

- Crimp Plugs
- Jack to Jack adapters
- Patch Panels
- 'D' Shell Jacks
- Plug to Plug U-Link connectors
- Crimp Tools

### Ordering Codes

We have listed the more common ordering codes in each section. Amphenol offer an extensive range of RF connectors for most applications.

Please visit [www.amphenolconnex.com](http://www.amphenolconnex.com) for further information. Please contact us if you need any further assistance.

### Simple steps to guide you in using this catalogue


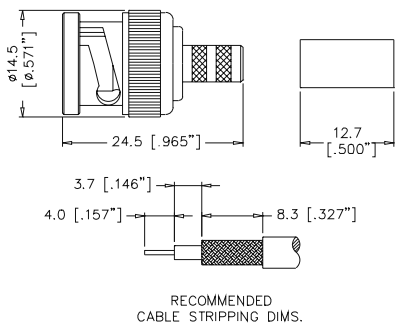

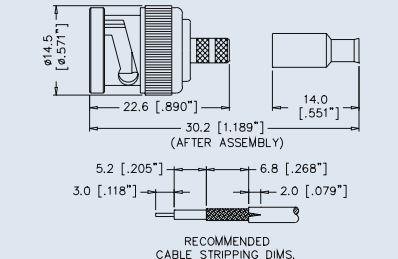
- 1) Identify the product group listed in Contents on page 1 and go directly to that page number.
- 2) Each product group cover page then details information and options available.
- 3) Refer to the product detail pages and identify the product you require pictorially.
- 4) Read the product description column for the products standard features.
- 5) Use variations column to determine your choice.
- 6) Identify part number.
- 7) In the event the particular option you require is not listed please refer to the part number breakdown page at the end of each section.
- 8) Please contact us directly if you have any further problems.




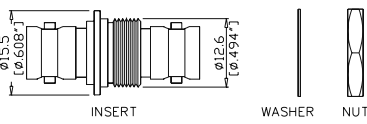

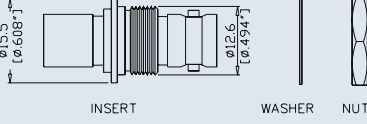

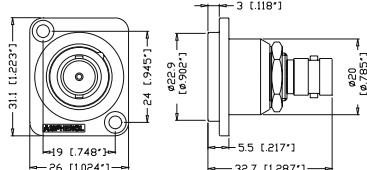

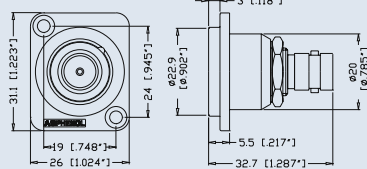

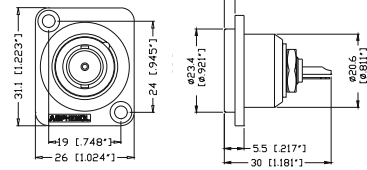

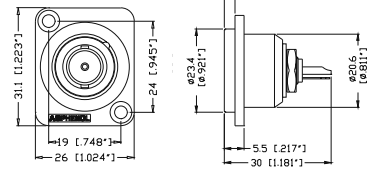

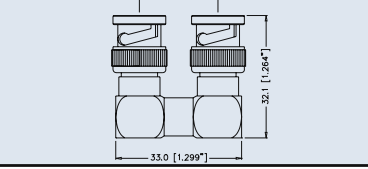




Amphenol manufactures a large range of connectors to suit cables other than those listed below, for example Belden YR23769 and 46899, please contact us to discuss your specific requirements.


The complete Amphenol Connex catalogue featuring a wide range of RF connector products is available on request. Item code CAT-CONNEX-01.

| PRODUCT - FIGURE   | DRAWING<br>Dimensions in mm (inches)  | CABLE TYPE RG-/U | INSULATION                               | CRIMP TOOL | PART NUMBER |         |
|--|---|------------------|--|------------|-------------|---------|
| <br><br>RECOMMENDED<br>CABLE STRIPPING DIMS.    | Straight Crimp Plug - Captive Contact- Standard Cable   | 59/ 62/ 140/ 210 | Delrin                                   | A          | 112119      |         |
|  |   |                  | Teflon                                   | E          | 112952*     |         |
|  |   |                  | 59/ U-20AWG                              | Delrin     | A           | 112507  |
|  |   |                  |  | Teflon     | E           | 112956* |
|  |   |                  | 11/ U-14AWG/ B8213/ B9292/ B7731/ B1859A | Teflon     | D           | 112606  |
|  |   |                  | 6/ 143/ 212                              | Delrin     | E           | 112508  |
|  |   |                  | B1694A/ B9248                            | Delrin     | E           | 112565  |
|  |   |                  |  | Teflon     | E           | 112957* |
|  |   |                  | 6 PLENUM/ B1695A                         | Delrin     | E           | 112519  |
|  |   |                  | B8281/ B9231/ B9141                      | Delrin     | E           | 112509  |
|  |   |                  |  | Teflon     | E           | 112953* |
|  |   |                  | B1505A                                   | Teflon     | E           | 112951* |
|  |   | B735A1           | Teflon                                   | F          | 112950*     |         |
| <br><br>RECOMMENDED<br>CABLE STRIPPING DIMS. | Straight Crimp Plug-Captive Contact-Miniature Cable (Remark: With Teflon sleeve / Hex crimp size .178") | 179/ 187/ B9221  | Delrin                                   | B          | 112133      |         |
|  |   |                  | 180/ 195/ 122/ B8218/ B1865A/ B1855      | Delrin     | B           | 112521  |
|  |   |                  |  | Teflon     | F           | 112955* |

Note: \*True 75 ohm.


| PRODUCT - FIGURE  | DRAWING<br>Dimensions in mm (inches)  | DESCRIPTION &<br>CABLE TYPE RG-/U   | INSULATION | CRIMP<br>TOOL | PART NUMBER     |
|---|---|---|------------|---------------|-----------------|
|    |   | <b>Bulkhead Adapter -Isolated</b><br>Jack to Jack - Straight Bayonet Lock to Bayonet Lock                         | Teflon     | N/A           | AC-BNC-JJA-75T* |
|    |   | <b>Bulkhead Adapter -Isolated</b><br>Jack to Jack - Straight Push on to Bayonet Lock                              | Teflon     | N/A           | AC-BNC-PJA-75T* |
|    |    | <b>Bulkhead Adapter -Isolated, 'D' Shell Housing</b><br>Jack to Jack, Bayonet Lock to Bayonet Lock, Nickel Finish | Teflon     | N/A           | AC-BNC-JJ-75*   |
|   |   | <b>Bulkhead Adapter -Isolated, 'D' Shell Housing</b><br>Jack to Jack, Push on to Bayonet Lock, Nickel Finish      | Teflon     | N/A           | AC-BNC-PJ-75*   |
|  |  | <b>Bulkhead Adapter -Isolated, 'D' Shell Housing</b><br>Jack to Jack, Push on to Bayonet Lock, Black Finish       | Teflon     | N/A           | AC-BNC-PJ-75B*  |
|  |  | <b>Bulkhead Receptacle -Isolated, 'D' Shell Housing</b><br>Jack to Solder Bucket with Ground Tag, Nickel Finish   | Nylon      | N/A           | AC-BNC-JS-75    |
|  |  | <b>Bulkhead Receptacle -Isolated, 'D' Shell Housing</b><br>Jack to Solder Bucket with Ground Tag, Black Finish    | Nylon      | N/A           | AC-BNC-JS-75B   |
|  |    | <b>U - Link</b><br>Centre to Centre - 20.6 mm<br><br><b>Note:</b> Custom Sizes available please contact factory.  | Teflon     | N/A           | BNC-U-LINK 75*1 |

## BNC 75 RF ACCESSORIES AND TOOLING

| PRODUCT - FIGURE  | DESCRIPTION             | DIE CAVITIES              | CABLE TYPE RG-/U         | CONNECTOR GUIDE | PART NUMBER |
|---|-------------------------|---------------------------|--------------------------|-----------------|-------------|
|  | Crimp tool with Die Set | .255 / .213 / .068        | 59 / 62                  | A               | 47-10070    |
|   |                         | .178 / .128 / .068        | 179 / 187 / 180 / 195    | B               | 47-10150    |
|   |                         | .429 / .100 / .080        | 11                       | D               | 47-10090    |
|   |                         | .324 / .255 / .068 / .042 | 6 / 59 / B8281           | E               | 47-10110    |
|   |                         | .213 / .178 / .068 / .042 | AT&T 735A, B1855A, B8218 | F               | 47-10120    |

Note: \*True 75 ohm.

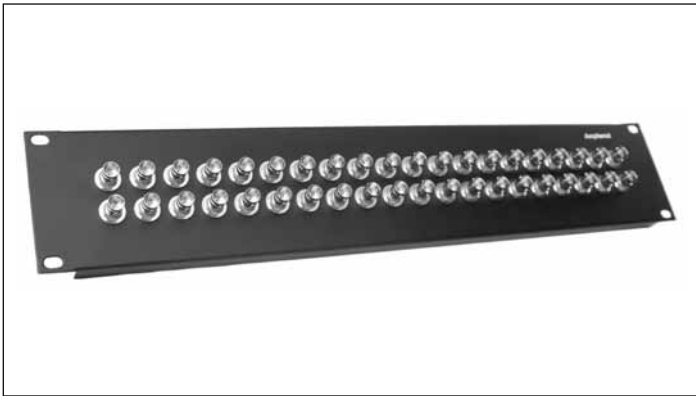


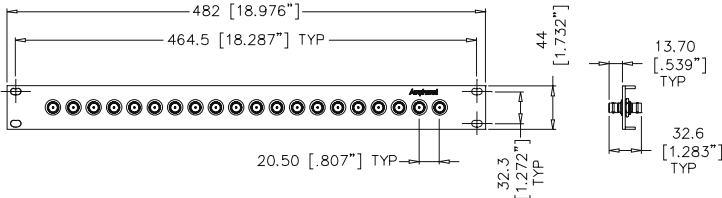

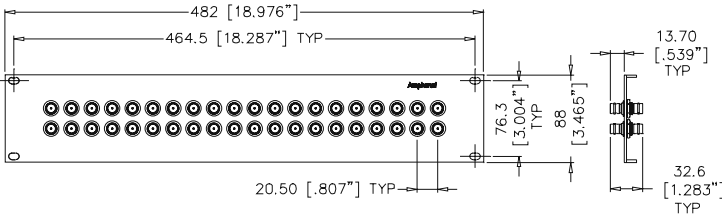


**Features:**

- Amphenol True 75 Ohm Connectors
- Bayonet lock or Push-on types
- Supplied with adhesive strip ID labels

**Options:**


- 1RU, 20 BNC connectors or 2RU, 40 BNC connectors
- Aluminium in Clear or Black anodised
- Steel in Black powder coat
- Customised versions available on request

| PRODUCT - FIGURE DRAWING   | Dimensions in mm (inches)   | DESCRIPTION  | MATERIAL / FINISH | LOADED WITH<br><small>(refer to page 84 for specifications)</small> | PART NUMBER  |
|--|---|--|-------------------|---|--------------|
| <br>   | 482 [18.976"]<br>464.5 [18.287"] TYP<br>20.50 [.807"] TYP<br>44 [1.732"]<br>32.3 [1.272"] TYP<br>13.70 [.539"] TYP<br>32.6 [1.283"] TYP | 1RU 1X20 Patch Panel,<br>Supplied with 1 ID label  | Steel / Black     | Empty Panel   | AC-BNC20M    |
|  |   | Steel / Black                                      | AC-BNC-JJA-75     | AC-BNC20MJ75  |              |
|  |   | Steel / Black                                      | AC-BNC-PJA-75     | AC-BNC20MP75  |              |
|  |   | Aluminium / Clear                                  | Empty Panel       | AC-BNC20A   |              |
|  |   | Aluminium / Clear                                  | AC-BNC-JJA-75     | AC-BNC20AJ75  |              |
|  |   | Aluminium / Clear                                  | AC-BNC-PJA-75     | AC-BNC20AP75  |              |
|  |   | Aluminium / Black                                  | Empty Panel       | AC-BNC20B   |              |
|  |   | Aluminium / Black                                  | AC-BNC-JJA-75     | AC-BNC20BJ75  |              |
|  |   | Aluminium / Black                                  | AC-BNC-PJA-75     | AC-BNC20BP75  |              |
| <br> | 482 [18.976"]<br>464.5 [18.287"] TYP<br>20.50 [.807"] TYP<br>76.3 [3.004"] TYP<br>88 [3.465"]<br>13.70 [.539"] TYP<br>32.6 [1.283"] TYP | 2RU 2X20 Patch Panel,<br>Supplied with 2 ID labels | Steel / Black     | Empty Panel   | AC-BNC40M    |
|  |   | Steel / Black                                      | AC-BNC-JJA-75     | AC-BNC40MJ75  |              |
|  |   | Steel / Black                                      | AC-BNC-PJA-75     | AC-BNC40MP75  |              |
|  |   | Aluminium / Clear                                  | Empty Panel       | AC-BNC40A   |              |
|  |   | Aluminium / Clear                                  | AC-BNC-JJA-75     | AC-BNC40AJ75  |              |
|  |   | Aluminium / Clear                                  | AC-BNC-PJA-75     | AC-BNC40AP75  |              |
|  |   | Aluminium / Black                                  | Empty Panel       | AC-BNC40B   |              |
|  |   | Aluminium / Black                                  | AC-BNC-JJA-75     | AC-BNC40BJ75  |              |
|  |   | Aluminium / Black                                  | AC-BNC-PJA-75     | AC-BNC40BP75  |              |
| Panel ID label   |   |  | Plastic           | Not Applicable  | AC-BNC-LABEL |


## BNC 75 RF ASSEMBLY INSTRUCTIONS

### ASSEMBLY A


#### STEP 1

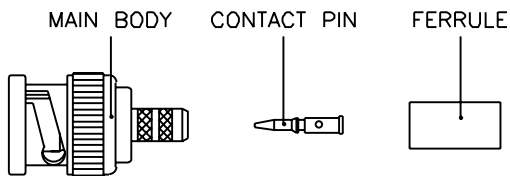


#### STEP 2




#### STEP 3



#### STEP 4



#### STEP 5

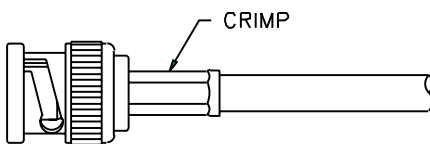

STEP 1. All parts of the connector are shown. A crimp tool is necessary to complete the connection.

STEP 2. Strip the cable inner conductor, dielectric, braid, and jacket as per "RECOMMENDED CABLE STRIPPING DIM'S" in catalogue.


STEP 3. Insert inner conductor into the CONTACT PIN, crimp it with the crimp tool as shown. Then slide the FERRULE onto cable.

STEP 4. Insert the MAIN BODY into braid and dielectric.


STEP 5. Slide the FERRULE over braid, crimp it with the crimp tool as shown.

### ASSEMBLY B


#### STEP 1

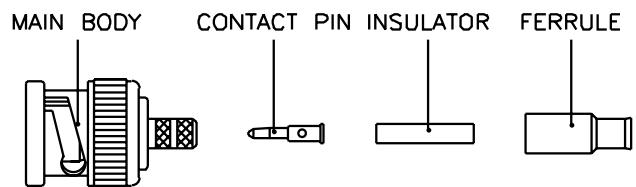


#### STEP 2




#### STEP 3



#### STEP 4

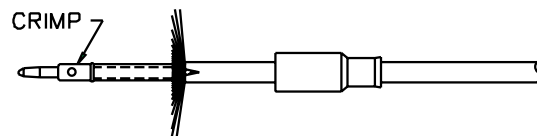

#### STEP 5

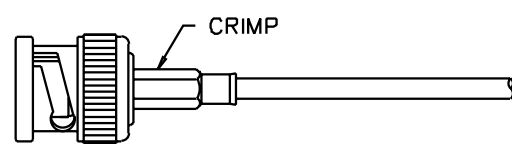

STEP 1. All parts of the connector are shown. A crimp tool is necessary to complete the connection.

STEP 2. Strip the inner conductor, dielectric, and jacket as per "RECOMMENDED CABLE STRIPPING DIM'S" in catalogue.

STEP 3. Slide the FERRULE on to cable, then fold back braid wire and slide the INSULATOR on to dielectric as shown.

STEP 4. Insert inner conductor into the CONTACT PIN, crimp it with crimp tool as shown.

STEP 5. Push cable and parts into the MAIN BODY until it stops. Then slide the FERRULE over braid wire and against the MAIN BODY, crimp it with the crimp tool as shown.




## STANDARD DATA BNC 75 RF CONNECTORS

|                                   |                                 | VALUE  |                                 |
|-----------------------------------|---------------------------------|--|---------------------------------|
| <b>GENERAL CHARACTERISTICS</b>    | Mating                          | Bayonet Lock                                 |                                 |
|                                   | Cable Attachment                | Crimp - Crimp                                |                                 |
|                                   | Environmental                   | Complies with EU RoHS 2 Directive 2011/65/EU |                                 |
| <b>ELECTRICAL CHARACTERISTICS</b> | Impedance                       | 75Ω  |                                 |
|                                   | Frequency Range - Standard      | 0 - 1 GHz                                    |                                 |
|                                   | - True 75 Ohm                   | 0 - 4 GHz                                    |                                 |
|                                   | Voltage Rating                  | 500V RMS                                     |                                 |
|                                   | Dielectric withstanding voltage | 1500 Volts RMS                               |                                 |
|                                   | VSWR - Standard                 | 1.05+0.1f(GHz) DC to 1 GHz                   |                                 |
|                                   | - True 75 Ohm                   | 1.5+0.1f(GHz) DC to 4 GHz                    |                                 |
|                                   | Contact Resistance              |  |                                 |
| Centre Contact                    | 1.5 milliohm                    |  |                                 |
| Outer Contact                     | 1.0 milliohm                    |  |                                 |
| Insulation Resistance             | 5000 MΩ (min.)                  |  |                                 |
| <b>MATERIALS</b>                  | <b>Part</b>                     | <b>Material</b>                              | <b>Finish</b>                   |
|                                   | Body, Coupling sleeves          | Brass  | Nickel                          |
|                                   | Crimp Ferrule                   | Annealed Copper                              | Nickel                          |
|                                   | Male Contact                    | Brass  | Gold                            |
|                                   | Female Contact                  | Beryllium Copper or Phosphor Bronze          | Gold                            |
|                                   | XLR Housing                     | Diecast Zinc Alloy                           | Satin Nickel or Black Polyester |
|                                   | Insulators                      | Teflon or Delrin                             | Natural                         |


**NOTE:** These characteristics are typical and may not apply to all connectors.

## PANEL CUTOUTS - FRONT VIEW

AC-BNC-PJ-75  
AC-BNC-JJ-75



AC-BNC-PJA-75  
AC-BNC-JJA-75



Rev 4 - 03/2013





## 1/4" PHONE CONNECTORS

Amphenol offers two ranges of 1/4" Phone plug connectors to satisfy the needs of the manufacturer and the end user. The PRO – a heavy duty on-road plug and the MUSICIAN - a solid performing general use plug. Both series offer different features and benefits and the most suitable type will be determined by application, budget and personal choice.

### Applications

- Audio Cables and Snakes
- Amplifiers
- Speakers
- Mixing desks
- Rack mount equipment
- Patch panel

### Features / Options – PRO RANGE 1/4" Phone Plug T-Series.

- Mono or Stereo (TRS)
- Switching Plugs
- Stylised shell design with Ergonomic grip
- Nickel or Gold contact plating
- Straight or Right Angle
- Keyed Shell
- Optional heavy duty metal backshell / boot
- Great solderability
- Increased solder area on ground contact
- "Jaws" Cable Clamp
- Precision machined contacts
- Coloured Grommet
- JUMBO Series Plugs

### Features / Options – MUSICIAN RANGE 1/4" Phone Plug

- Mono or Stereo (TRS)
- Compact Shell
- Straight or Right angle
- Stylish shell design
- Flexible grommet cable protection
- Nickel or Gold contact plating
- Satin Nickel or Black finish
- Diecast shell
- Coloured Grommet

### Jaws Cable Clamp Options for T-Series\*



Standard Jaws cable clamp (Black), Cable O.D 3mm to 6mm (0.118" to 0.236")



Large Jaws cable clamp (Purple), Cable O.D 6mm to 7mm (0.236" to 0.275")

\*Note: Applicable to T-Series straight cable connectors only. Refer to page 98 for right angle connector Jaws cable clamp specifications.

### Musician Range Cable Clamp Options



M-Series, Cable O.D 3mm to 6.5mm (0.118" to 0.256")



M-Series II, Cable O.D 6.5mm to 8mm (0.256" to 0.315")

### Ordering Codes

We have listed the more common ordering codes in each section. Refer to our 1/4" plug product feature matrix found on the next page for assistance on selecting the right plug for your application.

### Simple steps to guide you in using this catalogue

- 1) Identify the product group listed in Contents on page 1 and go directly to that page number.
- 2) Each product group cover page then details information and options available.
- 3) Refer to the product detail pages and identify the product you require pictorially.
- 4) Read the product description column for the products standard features.
- 5) Use variations column to determine your choice.
- 6) Identify part number.
- 7) In the event the particular option you require is not listed please refer to the part number breakdown page at the end of each section.
- 8) Please contact us directly if you have any further problems.



## 1/4" PLUG FEATURE MATRIX

| FEATURES                                    |                                   | T SERIES (STRAIGHT) | T SERIES (RIGHT ANGLE) | JUMBO T SERIES | SWITCHPLUG T SERIES (STRAIGHT) | SWITCHPLUG T SERIES (RIGHT ANGLE) | M SERIES | M SERIES II | CUSTOM SERIES <sup>1</sup> |
|---|-----------------------------------|---------------------|------------------------|----------------|--------------------------------|-----------------------------------|----------|-------------|----------------------------|
| <b>PRECISION MACHINED CONTACTS</b>          |                                   | X                   | X                      | X              | X                              | X                                 | X        | X           | X                          |
| <b>CENTER CONTACT</b>                       | 1 pc. Center Contact              | X                   | X                      | X              | X                              | X                                 |          |             | X*                         |
|   | 2 pc Press Fit Tip/Center Contact |                     |                        |                |                                | X                                 | X        |             | X*                         |
| <b>BARREL:</b>                              | Machined Tube                     | X                   | X                      | X              | X                              | X                                 |          |             |                            |
|   | Precision Extruded Tube           |                     |                        |                |                                | X                                 | X        |             | X                          |
| <b>JAWS CABLE CLAMP</b>                     |                                   | X                   | X                      |                | X                              | X                                 |          |             |                            |
| <b>MIN. CABLE OD</b>                        | Black Jaw: 3mm/0.118"             | X                   | X                      |                | X                              | X                                 |          |             |                            |
|   | Purple Jaw: 6mm/0.236"            | X                   |                        |                | X                              |                                   |          |             |                            |
|   | Purple Jaw: 5.5mm/0.216"          |                     | X                      |                |                                | X                                 |          |             |                            |
| <b>MAX. CABLE OD</b>                        | Black Jaw: 6mm/0.236"             | X                   |                        |                | X                              |                                   |          |             |                            |
|   | Black Jaw: 5.5mm/0.216"           |                     | X                      |                |                                | X                                 |          |             |                            |
|   | Purple Jaw: 7.5mm/0.295"          | X                   |                        |                | X                              |                                   |          |             |                            |
|   | Purple Jaw: 6.5mm/0.255"          |                     | X                      |                |                                | X                                 |          |             |                            |
| <b>STANDARD CABLE CLAMP</b>                 |                                   |                     |                        | X              |                                |                                   | X        | X           | X                          |
| <b>MIN. CABLE OD</b>                        | 7.5mm/0.295"                      |                     |                        | X              |                                |                                   |          |             |                            |
| <b>MAX. CABLE OD</b>                        | 6mm/0.236"                        |                     |                        |                |                                | X                                 |          |             |                            |
|   | 8mm/0.315"                        |                     |                        |                |                                |                                   | X        |             |                            |
|   | 8.8mm/0.345"                      |                     |                        |                |                                |                                   |          |             | X                          |
|   | 10.5mm/0.413"                     |                     |                        | X              |                                |                                   |          |             |                            |
| <b>BACKSHELL FINISH</b>                     | Satin Nickel                      | X                   | X                      | X              | X                              | X                                 | X        | X           |                            |
|   | Black                             | X                   | X                      | X              | X                              | X                                 | X        | X           |                            |
|   | Bright Nickel                     |                     |                        |                |                                |                                   |          |             | X                          |
|   | Bright Gold                       |                     |                        |                |                                |                                   |          |             | X                          |
| <b>CONTACT MATERIAL/<br/>FINISH OPTIONS</b> | Brass/Nickel (Ni)                 | X                   | X                      | X              | X                              | X                                 | X        | X           | X                          |
|   | Brass/Gold over 2µm (Ni)          | X                   | X                      | X              | X                              | X                                 | X        | X           | X                          |

<sup>1</sup>Custom Series - Minimum order quantities apply. Contact us for further details.

# Amphenol



1/4" PHONE PLUGS

T-SERIES



**Features:**

- Mono or Stereo (TRS).
- Stylised shell design with Ergonomic grip.
- Straight or Right Angle.
- Robust diecast shell in Satin nickel or Black finish.
- Nickel or Gold contact plating.
- Keyed shell.
- Optional heavy duty metal backshell / boot.
- Great solderability.
- Increased solder area on ground contact.
- "Jaws" Cable Clamp.
- Precision machined contacts.
- Quick and easy assembly.

**Options:** Gold Contacts, Large or Small Jaws Cable Clamp, Black Shell, Metal Backshell / Boot, Bulk Pack. Coloured grommets (ordered separately)

**Part Number Breakdown: Page 97 Specifications: Page 98**

| PRODUCT - FIGURE | DRAWING | DESCRIPTION   | VARIATIONS   | PART NUMBER                               |
|------------------|---------|---|--|---|
|                  |         | 1/4" (6.35mm $\varnothing$ ) Mono Phone plug, Jaws cable clamp, Thermoplastic back-shell, Satin finish.   | Standard<br>Gold Plated Contacts<br>Large Cable Clamp<br>Bulk Pack | TM2P<br>TM2P-AU<br>TM2PJ<br>TM2P BULK     |
|                  |         | 1/4" (6.35mm $\varnothing$ ) Mono Phone plug, Jaws cable clamp, Thermoplastic back-shell, Black finish.   | Standard<br>Gold Plated Contacts<br>Large Cable Clamp<br>Bulk Pack | TM2PB<br>TM2PB-AU<br>TM2PBJ<br>TM2PB BULK |
|                  |         | 1/4" (6.35mm $\varnothing$ ) Stereo Phone plug, Jaws cable clamp, Thermoplastic back-shell, Satin finish. | Standard<br>Gold Plated Contacts<br>Large Cable Clamp<br>Bulk Pack | TS3P<br>TS3P-AU<br>TS3PJ<br>TS3P BULK     |
|                  |         | 1/4" (6.35mm $\varnothing$ ) Stereo Phone plug, Jaws cable clamp, Thermoplastic back-shell, Black finish. | Standard<br>Gold Plated Contacts<br>Large Cable Clamp<br>Bulk Pack | TS3PB<br>TS3PB-AU<br>TS3PBJ<br>TS3PB BULK |



# Amphenol

| PRODUCT - FIGURE | DRAWING | DESCRIPTION  | VARIATIONS   | PART NUMBER                                   |
|------------------|---------|--|--|---|
|                  |         | 1/4" (6.35mm $\varnothing$ ) Mono Phone plug, Jaws cable clamp, Metal backshell, Satin finish.                         | Standard<br>Gold Plated Contacts<br>Large Cable Clamp<br>Bulk Pack | TM2PN<br>TM2PN-AU<br>TM2PNJ<br>TM2PN BULK     |
|                  |         | 1/4" (6.35mm $\varnothing$ ) Mono Phone plug, Jaws cable clamp, Metal backshell, Black finish.                         | Standard<br>Gold Plated Contacts<br>Large Cable Clamp<br>Bulk Pack | TM2PBM<br>TM2PBM-AU<br>TM2PBMJ<br>TM2PBM BULK |
|                  |         | 1/4" (6.35mm $\varnothing$ ) Stereo Phone plug, Jaws cable clamp, Metal backshell, Satin finish.                       | Standard<br>Gold Plated Contacts<br>Large Cable Clamp<br>Bulk Pack | TS3PN<br>TS3PN-AU<br>TS3PNJ<br>TS3PN BULK     |
|                  |         | 1/4" (6.35mm $\varnothing$ ) Stereo Phone plug, Jaws cable clamp, Metal backshell, Black finish.                       | Standard<br>Gold Plated Contacts<br>Large Cable Clamp<br>Bulk Pack | TS3PBM<br>TS3PBM-AU<br>TS3PBMJ<br>TS3PBM BULK |
|                  |         | 1/4" (6.35mm $\varnothing$ ) Mono Phone plug, Right angle, Jaws cable clamp*, Thermoplastic backshell, Satin finish.   | Standard<br>Gold Plated Contacts<br>Small Cable Clamp<br>Bulk Pack | TM2RJ<br>TM2RJ-AU<br>TM2R<br>TM2RJ BULK       |
|                  |         | 1/4" (6.35mm $\varnothing$ ) Mono Phone plug, Right angle, Jaws cable clamp*, Thermoplastic backshell, Black finish.   | Standard<br>Gold Plated Contacts<br>Small Cable Clamp<br>Bulk Pack | TM2RBJ<br>TM2RBJ-AU<br>TM2RB<br>TM2RBJ BULK   |
|                  |         | 1/4" (6.35mm $\varnothing$ ) Stereo Phone plug, Right angle, Jaws cable clamp*, Thermoplastic backshell, Satin finish. | Standard<br>Gold Plated Contacts<br>Small Cable Clamp<br>Bulk Pack | TS3RJ<br>TS3RJ-AU<br>TS3R<br>TS3RJ BULK       |
|                  |         | 1/4" (6.35mm $\varnothing$ ) Stereo Phone plug, Right angle, Jaws cable clamp*, Thermoplastic backshell, Black finish. | Standard<br>Gold Plated Contacts<br>Small Cable Clamp<br>Bulk Pack | TS3RBJ<br>TS3RBJ-AU<br>TS3RB<br>TS3RBJ BULK   |

\*NOTE: Refer to page 98 for Jaws cable clamp specifications applicable to right angle connectors.



# Amphenol

SwitchPlug



1/4" PHONE PLUGS

T-SERIES SWITCHPLUG


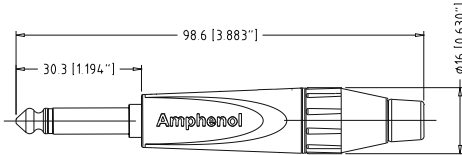

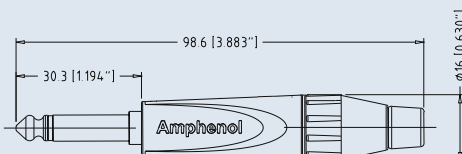

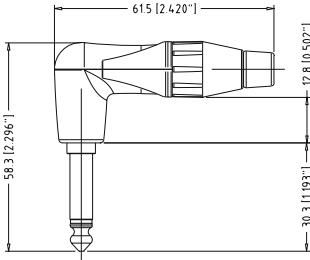

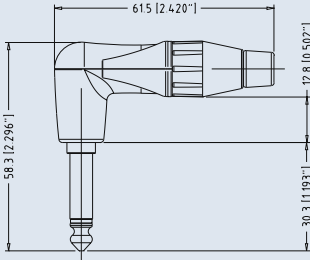


The Amphenol T series SwitchPlug uses a unique 360 degree precision sliding helical spring contact design to quietly and accurately switch the signal circuit safely to ground during instrument changes under load, thereby avoiding annoying thumps, pops and squeals. The sliding ring contact self-cleans every time the plug is connected preventing excessive build up of oxidization and contamination. Activation is directly off the jacks full front face assuring a positive reference point every time, and as it works instantaneously on the main circuits there is no need for the use of magnets or other elaborate switching mechanisms.

**WARNING!**  
For use with  
instrument (guitar)  
applications only.

**Part Number Breakdown: page 102**  
**Specifications: page 103**

US Patent No.8,162,697



| PRODUCT - FIGURE  | DRAWING   | DESCRIPTION  | VARIATIONS   | PART NUMBER                               |
|---|---|--|--|---|
|   |   | 1/4" (6.35mmø)<br>Switch Phone plug,<br>Jaws cable clamp,<br>Thermoplastic back-<br>shell,<br>Satin finish.                  | Standard<br>Gold Plated Contacts<br>Large Cable Clamp<br>Bulk Pack | TM1P<br>TM1P-AU<br>TM1PJ<br>TM1P BULK     |
|  |  | 1/4" (6.35mmø)<br>Switch Phone plug,<br>Jaws cable clamp,<br>Thermoplastic back-<br>shell,<br>Black finish.                  | Standard<br>Gold Plated Contacts<br>Large Cable Clamp<br>Bulk Pack | TM1PB<br>TM1PB-AU<br>TM1PBJ<br>TM1PB BULK |
|  |  | 1/4" (6.35mmø)<br>Switch Phone plug,<br>Right angle,<br>Jaws cable clamp*,<br>Thermoplastic back-<br>shell,<br>Satin Finish. | Standard<br>Gold Plated Contacts<br>Bulk Pack                      | TM1RJ*<br>TM1RJ-AU*<br>TM1RJ BULK*        |
|  |  | 1/4" (6.35mmø)<br>Switch Phone plug,<br>Right angle,<br>Jaws cable clamp*,<br>Thermoplastic back-<br>shell,<br>Black Finish. | Standard<br>Gold Plated Contacts<br>Bulk Pack                      | TM1RBJ*<br>TM1RBJ-AU*<br>TM1RBJ BULK*     |

\*NOTE: Refer to page 98 for Jaws cable clamp specifications applicable to right angle connectors.





## SwitchPlug - User Instruction

**CAUTION!** Use with instrument (guitar) cables only. DO NOT connect to amplifier output. Equipment damage may result from incorrect use.

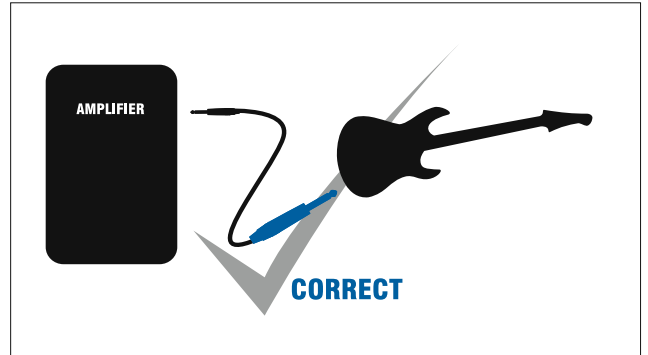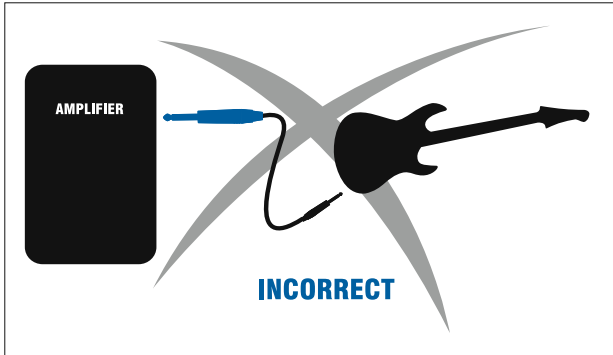

## SwitchPlug - Technology\*

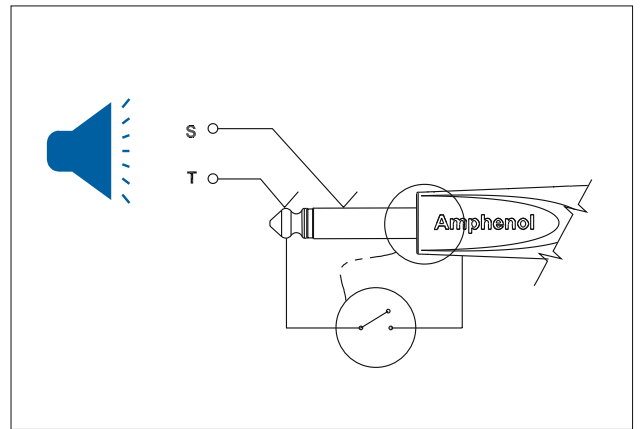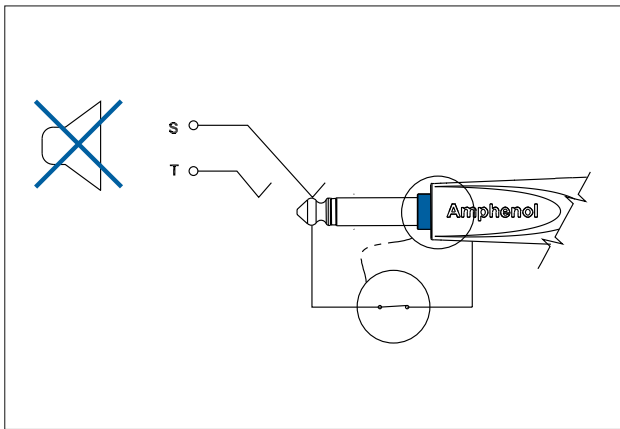

\*US Patent No. 8,162,697


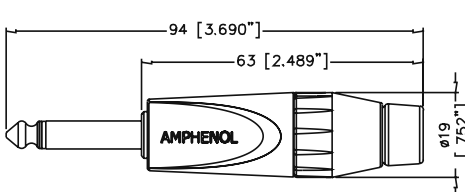

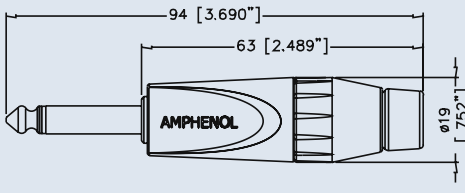

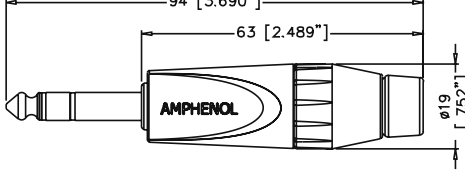

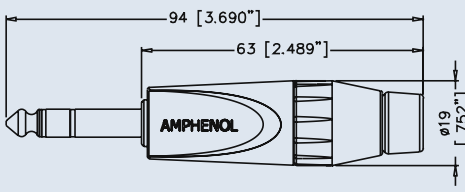


**Features:**

- JUMBO Cable clamping capacity
- Suits Cable OD 7.5mm (0.295") to 10.5mm (0.413")
- Mono or Stereo (TRS).
- Stylised shell design with Ergonomic grip.
- Robust diecast shell in Satin nickel or Black finish.
- Nickel or Gold contact plating.
- Keyed shell.
- Great solderability.
- Increased solder area on ground contact.
- Precision machined contacts.
- Quick and easy assembly.

**Options:** Gold Contacts, Bulk Pack.

**Specifications:** page 103

| PRODUCT - FIGURE  | DRAWING   | DESCRIPTION   | VARIATIONS                                    | PART NUMBER                     |
|---|---|---|---|---------------------------------|
|   |   | 1/4" (6.35mm $\varnothing$ )<br>JUMBO Mono<br>Phone plug,<br>Thermoplastic back-<br>shell,<br>Satin finish.   | Standard<br>Gold Plated Contacts<br>Bulk Pack | JM2P<br>JM2P-AU<br>JM2P BULK    |
|  |  | 1/4" (6.35mm $\varnothing$ )<br>JUMBO Mono<br>Phone plug,<br>Thermoplastic back-<br>shell,<br>Black finish.   | Standard<br>Gold Plated Contacts<br>Bulk Pack | JM2PB<br>JM2PB-AU<br>JM2PB BULK |
|  |  | 1/4" (6.35mm $\varnothing$ )<br>JUMBO Stereo<br>Phone plug,<br>Thermoplastic back-<br>shell,<br>Satin finish. | Standard<br>Gold Plated Contacts<br>Bulk Pack | JS3P<br>JS3P-AU<br>JS3P BULK    |
|  |  | 1/4" (6.35mm $\varnothing$ )<br>JUMBO Stereo<br>Phone plug,<br>Thermoplastic back-<br>shell,<br>Black finish. | Standard<br>Gold Plated Contacts<br>Bulk Pack | JS3PB<br>JS3PB-AU<br>JS3P BULK  |


NOTE: Contact factory for availability of metal backshells.



## PART NUMBER BREAKDOWN


### T-SERIES (PRO RANGE)

E. G. **TS3PBMJ-AU BULK**  
**T** (Series Prefix), **S3** (Stereo), **P** (Plug Black), **M** (Metal Nut (Black)), **J** (Large Jaws),  
**- AU** (Gold Plated Contacts), **BULK** Packaged.

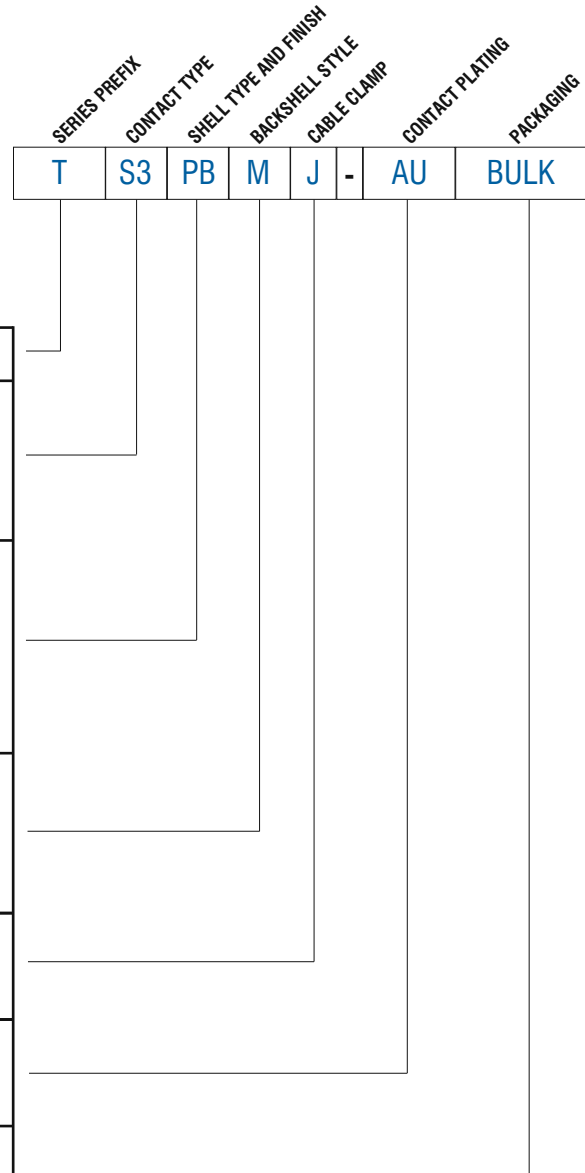

|                              |       |   |                                   |
|------------------------------|-------|---|-----------------------------------|
| <b>SERIES PREFIX</b>         | T     | = | Series Prefix                     |
| <b>CONTACT TYPE</b>          | M1    | = | Switch Plug                       |
|                              | M2    | = | 2 Pole (mono)                     |
|                              | S3    | = | 3 Pole, tip/ring/sleeve (stereo)  |
| <b>SHELL TYPE AND FINISH</b> | P     | = | Plug Satin Nickel                 |
|                              | PB    | = | Plug Matt Black                   |
|                              | R     | = | Right Angle Plug Satin Nickel     |
|                              | RB    | = | Right Angle Plug Matt Black       |
| <b>BACKSHELL TYPE</b>        | Blank | = | Plastic Nut                       |
|                              | M     | = | Metal Nut - Black                 |
|                              | N     | = | Metal Nut - Satin Nickel          |
| <b>CABLE CLAMP</b>           | Blank | = | Small Jaws                        |
|                              | J     | = | Large Jaws                        |
| <b>CONTACT PLATING</b>       | Blank | = | Nickel Plated Contacts (Standard) |
|                              | AU    | = | Gold Plated Contacts              |
| <b>PACKAGING</b>             | Blank | = | Individual Bags                   |
|                              | BULK  | = | Bulk Packed                       |

### ISO VIEW OF TM2P

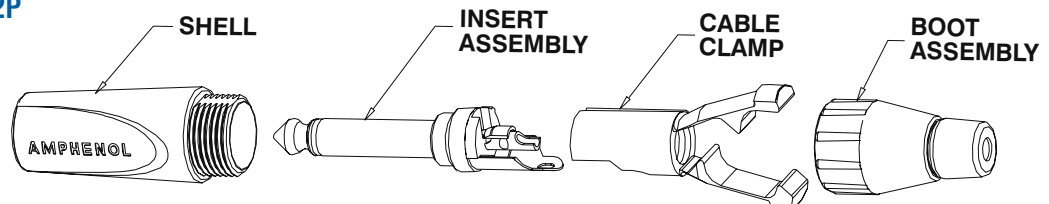



## 1/4" PHONE PLUG TECHNICAL DATA

|                                   |  | VALUE  |                                      |                                       |
|-----------------------------------|--|--|--------------------------------------|---------------------------------------|
|                                   |  | Straight   | Right Angle                          | Jumbo                                 |
| <b>GENERAL CHARACTERISTICS</b>    | Number of Contacts                             | 3 Pole Tip Ring Sleeve (Stereo)  |                                      |                                       |
|                                   | Termination                                    | Solder   |                                      |                                       |
|                                   | Max. Wire Gauge - Stranded Wire                | 2 Pole (Mono): AWG 16 - 1.5mm <sup>2</sup><br>3 Pole (Stereo): AWG 18 - 1mm <sup>2</sup>     |                                      |                                       |
|                                   | Flammability rating of insulating plastics     | UL94V-0  |                                      |                                       |
|                                   | Solderability, complies with                   | IEC 68-2-20  |                                      |                                       |
|                                   | Environmental                                  | Complies with EU RoHS 2 Directive 2011/65/EU   |                                      |                                       |
| <b>ELECTRICAL CHARACTERISTICS</b> | Current Carrying Capacity                      | 10A (Depends on Mating Connector and Cable)  |                                      |                                       |
|                                   | Typical Contact Resistance                     | Depends on Mating Connector  |                                      |                                       |
|                                   | Insulation resistance (initial)                | >2GΩ   |                                      |                                       |
|                                   | After Damp Heat Test                           | ≥1GΩ   |                                      |                                       |
|                                   | Dielectric Withstand Voltage                   | 2 Pole : 1.5 kV dc<br>3 Pole : 1 kV dc   |                                      |                                       |
| <b>CLIMATIC CHARACTERISTICS</b>   | Protection Class                               | IP40   |                                      |                                       |
|                                   | Operating Temperature                          | -25°C to +75°C (-13°F to + 167°F)  |                                      |                                       |
| <b>MECHANICAL CHARACTERISTICS</b> | Insertion and Withdrawal Force                 | ≥10N - ≤30N  |                                      |                                       |
|                                   | Weight <sup>1)</sup> - Thermoplastic Backshell | 28g (0.061lb)  |                                      |                                       |
|                                   | Weight <sup>1)</sup> - Metal Backshell         | 35g (0.077lb)  |                                      |                                       |
|                                   | Typical Cable Retention Force                  | 22kg to 44kg (50lb to 100lb) - Dependent on cable material and diameter.                     |                                      |                                       |
|                                   | Cable O.D. - Standard Jaw                      | 3mm to 6mm<br>(0.118" to 0.236")   | 3mm to 5.5mm<br>(0.118" to 0.216")   | NA                                    |
|                                   | Cable O.D. - Large Jaw                         | 6mm to 7mm<br>(0.236" to 0.275")   | 5.5mm to 6.5mm<br>(0.216" to 0.255") | NA                                    |
|                                   | Cable O.D. - Jumbo                             | NA   | NA                                   | 7.5mm to 10.5mm<br>(0.295" to 0.413") |
|                                   | Mechanical Operations                          | 1000   |                                      |                                       |
| <b>MATERIALS</b>                  | Connector Shell Material                       | Diecast Zinc Alloy EZDA No.3   |                                      |                                       |
|                                   | Shell Finish                                   | Satin Nickel or Black Polyester  |                                      |                                       |
|                                   | Insulators                                     | UL94 V-0 PBT Resin or Modified PPE Resin - Black   |                                      |                                       |
|                                   | Boot / Backshell                               | UL94 V-0 PBT Resin or Modified PPE Resin - Black or Metal CuZn <sup>39</sup> Pb <sup>3</sup> |                                      |                                       |
|                                   | Cable Clamp                                    | UL94 V-0 PBT Modified PPO Resin - Black  |                                      |                                       |
|                                   | Cable Bushing                                  | Santoprene   |                                      |                                       |
|                                   | Contacts / Plating                             | Brass/Ni or Au over 2μm Ni   |                                      |                                       |

Rev 5 - 03/2013

<sup>1)</sup> Approximate weight only, does not include packaging. Please contact us for exact weight for shipping purposes.




**Features:**

- Mono or Stereo (TRS).
- AX Series inspired shell design.
- Large cable O.D. Entry to 8mm (0.315")
- Robust diecast shell in Satin nickel or Black finish.
- Nickel or Gold contact plating.
- Flexible grommet cable protection.
- Improved solderability.
- Precision machined contacts.
- Standard or Bulk packaging.

**Clamp Info:**



Cable O.D 6.5mm to 8mm (0.256" to 0.315")

**Options:** Black Shell, Gold contacts. Coloured grommets (ordered separately)

**Specifications:** Page 112









| PRODUCT - FIGURE | DRAWING | DESCRIPTION  | VARIATIONS           | PART NUMBER  |
|------------------|---------|--|----------------------|--------------|
|                  |         | 1/4" (6.35mmø) Mono Phone plug, Diecast Shell, Satin finish, Flexible grommet.   | Standard             | ACPM-KN      |
|                  |         |  | Gold Plated Contacts | ACPM-KN-AU   |
|                  |         |  | Bulk Pack            | ACPM-KN-BULK |
|                  |         | 1/4" (6.35mmø) Mono Phone plug, Diecast Shell, Black finish, Flexible grommet.   | Standard             | ACPM-KB      |
|                  |         |  | Gold Plated Contacts | ACPM-KB-AU   |
|                  |         |  | Bulk Pack            | ACPM-KB BULK |
|                  |         | 1/4" (6.35mmø) Stereo Phone plug, Diecast Shell, Satin finish, Flexible grommet. | Standard             | ACPS-KN      |
|                  |         |  | Gold Plated Contacts | ACPS-KN-AU   |
|                  |         |  | Bulk Pack            | ACPS-KN BULK |
|                  |         | 1/4" (6.35mmø) Stereo Phone plug, Diecast Shell, Black finish, Flexible grommet. | Standard             | ACPS-KB      |
|                  |         |  | Gold Plated Contacts | ACPS-KB-AU   |
|                  |         |  | Bulk Pack            | ACPS-KB BULK |



# Amphenol

1/4" PHONE PLUGS

M SERIES II (MUSICIAN RANGE)

| PRODUCT - FIGURE   | DRAWING  | DESCRIPTION   | TYPE          | PART NUMBER                  |
|--|--|---|---------------|------------------------------|
|   |   | 1/4" (6.35mmø) Mono Phone plug, Right angle, Diecast Shell, Satin finish, Flexible grommet.   | Standard      | <a href="#">ACPM-TN</a>      |
|  |  |   | Gold contacts | <a href="#">ACPM-TN-AU</a>   |
|  |  |   | Bulk Pack     | <a href="#">ACPM-TN BULK</a> |
|   |   | 1/4" (6.35mmø) Mono Phone plug, Right angle, Diecast Shell, Black finish, Flexible grommet.   | Standard      | <a href="#">ACPM-TB</a>      |
|  |  |   | Gold contacts | <a href="#">ACPM-TB-AU</a>   |
|  |  |   | Bulk Pack     | <a href="#">ACPM-TB BULK</a> |
|   |   | 1/4" (6.35mmø) Stereo Phone plug, Right angle, Diecast Shell, Satin finish, Flexible grommet. | Standard      | <a href="#">ACPS-TN</a>      |
|  |  |   | Gold contacts | <a href="#">ACPS-TN-AU</a>   |
|  |  |   | Bulk Pack     | <a href="#">ACPS-TN BULK</a> |
|  |  | 1/4" (6.35mmø) Stereo Phone plug, Right angle, Diecast Shell, Black finish, Flexible grommet. | Standard      | <a href="#">ACPS-TB</a>      |
|  |  |   | Gold contacts | <a href="#">ACPS-TB-AU</a>   |
|  |  |   | Bulk Pack     | <a href="#">ACPS-TB BULK</a> |





**Features:**

- Mono or Stereo (TRS).
- Stylish shell design.
- Robust diecast shell in Satin nickel or Black finish.
- Nickel or Gold contact plating.
- Flexible grommet cable protection.
- Improved solderability.
- Precision machined contacts.
- Standard or Bulk packaging.
- Cable OD Entry to 6.5mm (0.256")

**Clamp Info:**







Cable O.D 3mm to 6.5mm (0.118" to 0.256")

**Options:** Black Shell, Gold contacts. Coloured grommets (ordered separately)

**Specifications:** page 117

| PRODUCT - FIGURE | DRAWING                          | DESCRIPTION  | VARIATIONS           | PART NUMBER  |
|------------------|----------------------------------|--|----------------------|--------------|
|                  | <p>Dimensions in mm (inches)</p> | 1/4" (6.35mm $\varnothing$ ) Mono Phone plug, Diecast Shell, Satin finish, Flexible grommet.   | Standard             | ACPM-GN      |
|                  |                                  |  | Gold Plated Contacts | ACPM-GN-AU   |
|                  |                                  |  | Bulk Pack            | ACPM-GN BULK |
|                  |                                  | 1/4" (6.35mm $\varnothing$ ) Mono Phone plug, Diecast Shell, Black finish, Flexible grommet.   | Standard             | ACPM-GB      |
|                  |                                  |  | Gold Plated Contacts | ACPM-GB-AU   |
|                  |                                  |  | Bulk Pack            | ACPM-GB BULK |
|                  |                                  | 1/4" (6.35mm $\varnothing$ ) Stereo Phone plug, Diecast Shell, Satin finish, Flexible grommet. | Standard             | ACPS-GN      |
|                  |                                  |  | Gold Plated Contacts | ACPS-GN-AU   |
|                  |                                  |  | Bulk Pack            | ACPS-GN BULK |
|                  |                                  | 1/4" (6.35mm $\varnothing$ ) Stereo Phone plug, Diecast Shell, Black finish, Flexible grommet. | Standard             | ACPS-GB      |
|                  |                                  |  | Gold Plated Contacts | ACPS-GB-AU   |
|                  |                                  |  | Bulk Pack            | ACPS-GB BULK |

| PRODUCT - FIGURE   | DRAWING | DESCRIPTION  | TYPE          | PART NUMBER  |
|--|---------|--|---------------|--------------|
|   |         | <p>1/4" (6.35mmø) Mono Phone plug, Right angle, Diecast Shell, Satin finish, Flexible grommet.</p>   | Standard      | ACPM-RN      |
|  |         |  | Gold contacts | ACPM-RN-AU   |
|  |         |  | Bulk Pack     | ACPM-RN BULK |
|   |         | <p>1/4" (6.35mmø) Mono Phone plug, Right angle, Diecast Shell, Black finish, Flexible grommet.</p>   | Standard      | ACPM-RB      |
|  |         |  | Gold contacts | ACPM-RB-AU   |
|  |         |  | Bulk Pack     | ACPM-RB BULK |
|   |         | <p>1/4" (6.35mmø) Stereo Phone plug, Right angle, Diecast Shell, Satin finish, Flexible grommet.</p> | Standard      | ACPS-RN      |
|  |         |  | Gold contacts | ACPS-RN-AU   |
|  |         |  | Bulk Pack     | ACPS-RN BULK |
|  |         | <p>1/4" (6.35mmø) Stereo Phone plug, Right angle, Diecast Shell, Black finish, Flexible grommet.</p> | Standard      | ACPS-RB      |
|  |         |  | Gold contacts | ACPS-RB-AU   |
|  |         |  | Bulk Pack     | ACPS-RB BULK |




## PART NUMBER BREAKDOWN

M / M SERIES II (MUSICIAN RANGE)

E. G. **ACPM-GB-AU BULK**  
**ACP** (Series Prefix), **M**ale, **G**(Shell Type), **B**lack,  
 - **AU** (Gold Plated Contacts), **BULK** Packaged.

|                        |       |   |                                 |
|------------------------|-------|---|---------------------------------|
| <b>SERIES PREFIX</b>   | ACP   | = | Series Prefix                   |
| <b>CONTACT TYPE</b>    | M     | = | 2 pole (Mono)                   |
|                        | S     | = | 3 pole Tip/Ring/Sleeve (Stereo) |
| <b>SHELL TYPE</b>      | G     | = | M Series Straight               |
|                        | K     | = | M Series II Straight            |
|                        | R     | = | M Series Right Angle            |
|                        | T     | = | M Series II Right Angle         |
| <b>SHELL FINISH</b>    | N     | = | Satin Nickel                    |
|                        | B     | = | Matt Black                      |
| <b>CONTACT PLATING</b> | Blank | = | Nickel Plating                  |
|                        | AU    | = | Gold Plated                     |
| <b>PACKAGING</b>       | Blank | = | Individual Bags                 |
|                        | BULK  | = | Bulk Packed                     |

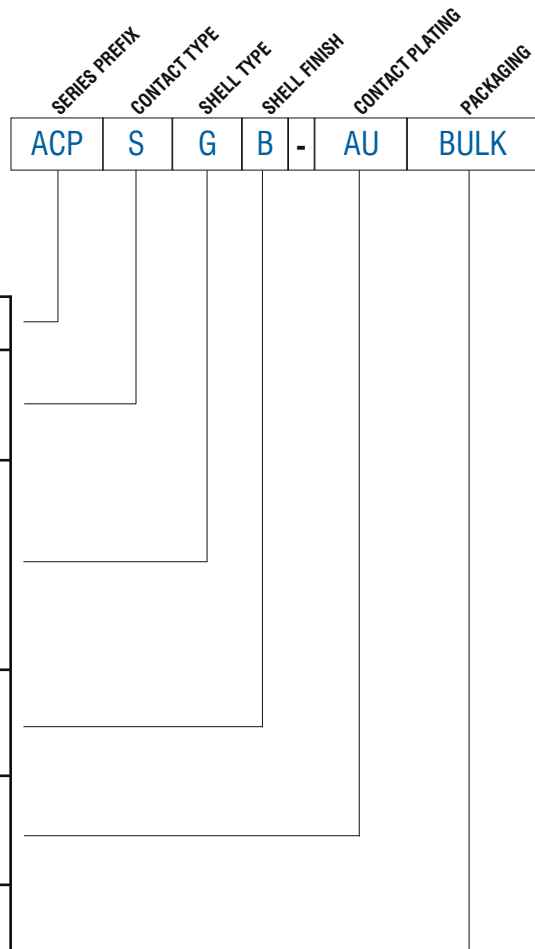



## 1/4" PHONE JACK CONNECTORS

Amphenol phone connectors are available in 1/4" (6.35mm) and 3.5mm jack sockets or dual jack socket versions featuring combinations of both sizes. The standard heavy duty contacts provide excellent signal performance and the rugged designs excel in professional audio applications. Our wide range of options ensures we have the connector to suit your specific requirements. Custom jacks can also be developed to suit unique applications on request.


### Applications

- Audio Cables and Snakes
- Amplifiers
- Speakers
- Mixing desks
- Rack mount equipment
- Patch panel


### Features / Options – OEM RANGE Phone Jack

- Mono or Stereo (TRS)
- Stackable (Piggy back) mounting
- Vertical or horizontal PCB mount
- Mono and Stereo switched contacts
- Solder contacts
- Combo Contacts
- Metal nut
- Plastic Nut
- 1/4" (6.35mm)
- 3.5mm
- Dual 1/4" (6.35mm) and 3.5mm
- EMI Shielding plates
- Metal Mounting threads
- Plastic Mounting threads
- Chassis Ground connections
- Half, Full or No threads
- Grounded or Isolated Jacks

### 1/4" Phone Jack Grounding/ Shielding Options



1/4" Gripper - Grounding points



1/4" Shielding Plate


### Ordering Codes

We have listed the more common ordering codes in each section. Please contact us if you need any further assistance.

### Simple steps to guide you in using this catalogue

- 1) Identify the product group listed in Contents on page 1 and go directly to that page number.
- 2) Each product group cover page then details information and options available.
- 3) Refer to the product detail pages and identify the product you require pictorially.
- 4) Read the product description column for the products standard features.
- 5) Use variations column to determine your choice.
- 6) Identify part number.
- 7) In the event the particular option you require is not listed please refer to the part number breakdown page at the end of each section.
- 8) Please contact us directly if you have any further problems.



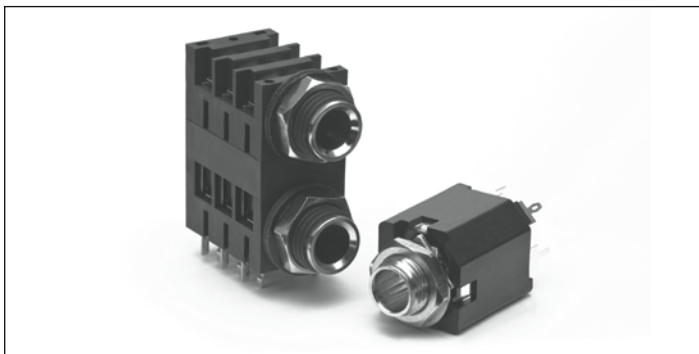

**Features:**

- 3.5mm and 6.35mm (1/4") options
- Mono or Stereo (TRS)
- Single or Dual mounting
- Vertical or Horizontal PCB mount
- Mono and Stereo with switching contacts
- Solder or Combo contacts
- Various mounting option

**Schematic Chart:** page 117  
**Panel Cutouts:** page 114  
**PCB Footprints:** page 116  
**Specifications:** page 117

| PRODUCT - FIGURE                   | DRAWING | DESCRIPTION  | VARIATIONS                           | PART NUMBER   |
|------------------------------------|---------|--|--------------------------------------|---|
| <b>3.5MM PHONE JACKS</b>           |         |  |                                      |   |
|                                    |         | 3.5mm Jack, Horizontal PCB, Plastic housing, Metal entry bore  | Mono                                 | ACJM-NH35   |
|                                    |         |  | Stereo                               | ACJS-NH35   |
|                                    |         | 3.5mm Jack, Vertical PCB mount, Needle eye contacts, Plastic housing, Metal entry bore   | Refer to Schematic Chart on Page 110 | ACJM-NV35-2<br>ACJM-NV35-2S<br>ACJS-NV35-3<br>ACJS-NV35-3S<br>ACJS-NV35-5           |
|                                    |         | 3.5mm Jack, Vertical PCB mount, Needle eye contacts, Plastic housing, Metal thread and entry bore                                      | Refer to Schematic Chart on Page 110 | ACJM-MV35-2<br>ACJM-MV35-2S<br>ACJS-MV35-3<br>ACJS-MV35-3S<br>ACJS-MV35-5           |
|                                    |         | 3.5mm / 1/4" (6.35mm) Dual Phone Jack, (Piggy-back), Horizontal PCB, Plastic housing, Metal nut and entry bore                         | Mono                                 | ACJM-MHD985   |
|                                    |         |  | Stereo                               | ACJS-MHD985   |
|                                    |         | 3.5mm / 1/4" (6.35mm) Dual Phone Jack, Vertical PCB mount, Needle eye contacts, Plastic housing, Metal nut and entry bore              | Refer to Schematic Chart on Page 110 | ACJM-MVD985-2<br>ACJM-MVD985-2S<br>ACJS-MVD985-3<br>ACJS-MVD985-3S<br>ACJS-MVD985-5 |
| <b>1/4" PHONE JACKS HORIZONTAL</b> |         |  |                                      |   |
|                                    |         | 1/4" (6.35mm) Phone Jack, Horizontal Snap-fit PCB, Plastic housing, Half thread, Metal entry bore. Supplied without mounting hardware. | Mono                                 | ACJM-HHDR   |
|                                    |         |  | Stereo                               | ACJS-HHDR   |




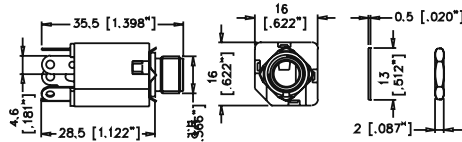
| PRODUCT - FIGURE | DRAWING | Dimensions in mm (inches) | DESCRIPTION  | VARIATIONS                           | PART NUMBER |
|------------------|---------|---------------------------|--|--------------------------------------|-------------|
|                  |         |                           | 1/4" (6.35mmø) Phone Jack, Horizontal Snap-fit PCB, Plastic housing, Metal nut and entry bore  | Mono                                 | ACJM-MHDR   |
|                  |         |                           |  | Stereo                               | ACJS-MHDR   |
|                  |         |                           | 1/4" (6.35mmø) Phone Jack, Horizontal Snap-fit PCB, Plastic housing, Metal thread, nut, washer and entry bore  | Mono                                 | ACJM-MHDRM  |
|                  |         |                           |  | Stereo                               | ACJS-MHDRM  |
|                  |         |                           | 1/4" (6.35mmø) Offset Jack, Horizontal PCB mount, Plastic housing and entry bore with Half thread. Supplied without mounting hardware.                   | Refer to Schematic Chart on Page 110 | ACJM-HHOP   |
|                  |         |                           |  |                                      | ACJS-HHOP   |
|                  |         |                           | 1/4" (6.35mmø) Offset Jack, Horizontal PCB mount, Plastic housing and entry bore with Half thread. Supplied without mounting hardware.                   | Refer to Schematic Chart on Page 110 | ACJM-HHOP-1 |
|                  |         |                           |  |                                      | ACJS-HHOP-1 |
|                  |         |                           | 1/4" (6.35mmø) Offset Jack, Horizontal PCB mount, Plastic housing, thread and entry bore   | Mono - Plastic Nut                   | ACJM-PHOP   |
|                  |         |                           |  | Mono - Metal Nut                     | ACJM-MHOP   |
|                  |         |                           |  | Stereo - Plastic Nut                 | ACJS-PHOP   |
|                  |         |                           |  | Stereo - Metal Nut                   | ACJS-MHOP   |
|                  |         |                           | 1/4" (6.35mmø) Offset Jack, Horizontal PCB mount, Plastic housing, thread and entry bore. Non-switching sleeve contact with separate grounding to panel. | Refer to Schematic Chart on Page 110 | ACJM-PHOP-1 |
|                  |         |                           |  | PHOP - Denotes Plastic Nut           | ACJM-MHOP-1 |
|                  |         |                           |  | MHOP - Denotes Metal Nut             | ACJS-PHOP-1 |
|                  |         |                           |  |                                      | ACJS-MHOP-1 |
|                  |         |                           | 1/4" (6.35mmø) Offset Jack, Horizontal PCB mount, Plastic housing, Metal thread and entry bore with Chassis ground connection                            | Mono - Metal Nut                     | ACJM-MHOM   |
|                  |         |                           |  | Stereo - Metal Nut                   | ACJS-MHOM   |
|                  |         |                           | 1/4" (6.35mmø) Jack, Horizontal PCB mount, Plastic housing with metal insert   | Mono - Plastic Nut                   | ACJM - PH   |
|                  |         |                           |  | Mono - Metal Nut                     | ACJM - MH   |



| PRODUCT - FIGURE                        | DRAWING    | Dimensions in mm (inches) | DESCRIPTION  | VARIATIONS           | PART NUMBER |
|---|------------|---------------------------|--|----------------------|-------------|
|   |            |                           | 1/4" (6.35mmø) Jack, Horizontal PCB mount, Plastic housing with metal insert   | Stereo - Plastic Nut | ACJS - PH   |
|   |            |                           |  | Stereo - Metal Nut   | ACJS - MH   |
|   |            |                           | 1/4" (6.35mmø) Jack, Horizontal Snap-fit PCB mount, Plastic housing with metal insert                                  | Mono - Plastic Nut   | ACJM-PHR    |
|   |            |                           |  | Mono - Metal Nut     | ACJM-MHR    |
|   |            |                           |  | Stereo - Plastic Nut | ACJS-PHR    |
|   |            |                           |  | Stereo - Metal Nut   | ACJS-MHR    |
|   |            |                           | 1/4" (6.35mmø) Jack, Combination Horizontal PCB mount and Solder lug, Plastic housing with metal insert                | Mono - Plastic Nut   | ACJM-PC     |
|   |            |                           |  | Mono - Metal Nut     | ACJM-MC     |
|   |            |                           |  | Stereo - Plastic Nut | ACJS-PC     |
|   |            |                           |  | Stereo - Metal Nut   | ACJS-MC     |
|   |            |                           | 1/4" (6.35mmø) Jack, Solder Lug, Plastic housing with metal insert   | Mono - Plastic Nut   | ACJM-PHS    |
|   |            |                           |  | Mono - Metal Nut     | ACJM-MHS    |
|   |            |                           |  | Stereo - Plastic Nut | ACJS-PHS    |
|   |            |                           |  | Stereo - Metal Nut   | ACJS-MHS    |
|   |            |                           | 1/4" (6.35mmø) Jack, Solder Lug, Plastic housing and Bezel with threaded Metal nut.                                    | Mono                 | ACJM-IHS    |
|   |            |                           |  | Stereo               | ACJS-IHS    |
|   |            |                           | 1/4" (6.35mmø) Jack, Horizontal PCB mount, Plastic housing and Bezel with threaded Metal nut.                          | Mono                 | ACJM-IH     |
|   |            |                           |  | Stereo               | ACJS-IH     |
| <b>1/4" PHONE JACKS HORIZONTAL DUAL</b> |            |                           | 1/4" (6.35mmø) Dual Phone Jack (Compact Piggyback), Horizontal Snap-fit PCB, Plastic housing, Metal nut and entry bore | Mono                 | ACJM-MHDC*  |
|   |            |                           |  | Stereo               | ACJS-MHDC*  |
|   |            |                           |  |                      |             |
| Stereo                                  | ACJS-MHDCM |                           |  |                      |             |


| PRODUCT - FIGURE                 | DRAWING     | DESCRIPTION  | VARIATIONS                           | PART NUMBER |
|----------------------------------|-------------|--|--------------------------------------|-------------|
|                                  |             | 1/4" (6.35mmØ) Dual Phone Jack (Piggyback) Horizontal Snap-fit PCB, Plastic housing, Metal nut and entry bore                          | Mono                                 | ACJM-MHD*   |
|                                  |             |  | Stereo                               | ACJS-MHD*   |
|                                  |             | 1/4" (6.35mmØ) Dual Phone Jack (Piggyback) Shielding plate, Horizontal Snap-fit PCB, Plastic housing, Metal nut and entry bore         | Mono                                 | ACJM-MHDE*  |
|                                  |             |  | Stereo                               | ACJS-MHDE*  |
|                                  |             | 1/4" (6.35mmØ) Dual Phone Jack (Piggyback), Horizontal Snap-fit PCB, Plastic housing, Metal thread, washer and entry bore              | Mono                                 | ACJM-MHDM*  |
|                                  |             |  | Stereo                               | ACJS-MHDM*  |
|                                  |             | 1/4" (6.35mmØ) Dual Phone Jack (Piggyback), Shielding plate Horizontal Snap-fit PCB, Plastic housing, Metal thread, nut and entry bore | Mono                                 | ACJM-MHDEM* |
|                                  |             |  | Stereo                               | ACJS-MHDEM* |
| <b>1/4" PHONE JACKS VERTICAL</b> |             | 1/4" (6.35mmØ) Jack, Vertical PCB mount, Plastic housing, nut and entry bore   | Refer to Schematic Chart on Page 110 | ACJM-PVB-2  |
|                                  | ACJM-PVB-2S |  |                                      |             |
|                                  | ACJS-PVB-3  |  |                                      |             |
|                                  | ACJS-PVB-3S |  |                                      |             |
|                                  | ACJS-PVB-5  |  |                                      |             |
|                                  |             | 1/4" (6.35mmØ) Jack, Vertical PCB mount, Needle eye contacts, Plastic thread, Metal nut and insert                                     | Refer to Schematic Chart on Page 110 | ACJM-MIV-2  |
|                                  |             |  |                                      | ACJM-MIV-2S |
|                                  |             |  |                                      | ACJS-MIV-3  |
|                                  |             |  |                                      | ACJS-MIV-3S |
|                                  |             |  |                                      | ACJS-MIV-5  |
|                                  |             | 1/4" (6.35mmØ) Jack, Vertical PCB mount, Needle eye contacts, Star washer, Metal nut and insert  | Refer to Schematic Chart on Page 110 | ACJM-MN-2   |
|                                  |             |  |                                      | ACJS-MN-3   |
|                                  |             |  |                                      | ACJM-MN-2S  |
|                                  |             |  |                                      | ACJS-MN-3S  |
|                                  |             |  |                                      | ACJS-MN-5   |
|                                  |             | 1/4" (6.35mmØ) Jack, Vertical PCB mount, Metal nut and insert  | Refer to Schematic Chart on Page 110 | ACJM-MV-2   |
|                                  |             |  |                                      | ACJM-MV-2S  |
|                                  |             |  |                                      | ACJS-MV-3   |
|                                  |             |  |                                      | ACJS-MV-3S  |
|                                  |             |  |                                      | ACJS-MV-5   |




| PRODUCT - FIGURE  | DRAWING  | DESCRIPTION  | VARIATIONS                           | PART NUMBER   |
|---|--|--|--------------------------------------|---|
|  |  <p>Dimensions in mm (inches)</p> | 1/4" (6.35mm) Jack, Solder Lug, Metal nut and insert | Refer to Schematic Chart on Page 110 | <p>ACJM-MVS-2</p> <p>ACJM-MVS-2S</p> <p>ACJS-MVS-3</p> <p>ACJS-MVS-3S</p> <p>ACJS-MVS-5</p> |

## PANEL CUTOUTS


-FRONT VIEW




ACJM-MV  
ACJS-MV  
ACJM-MN-2  
ACJS-MN-3  
ACJM-MN-2S  
ACJS-MN-3S  
ACJS-MN-5  
ACJM-MIV  
ACJS-MIV  
ACJM-MVS  
ACJS-MVS




ACJM/S-PH  
ACJM/S-MH  
ACJM/S-PC  
ACJM/S-MC  
ACJM/S-PHR  
ACJM/S-MHR  
ACJM/S-PHS  
ACJM/S-MHS




ACJM-MHD  
ACJS-MHD  
ACJM-MHDE  
ACJS-MHDE




ACJM-MHDR  
ACJS-MHDR  
ACJS-HHDR




ACJM-NH35  
ACJS-NH35




ACJM-NV35-2  
ACJM-NV35-2S  
ACJS-NV-35-3  
ACJS-NV-35-3S  
ACJS-NV-35-5  
ACJM-MV35-2  
ACJM-MV35-2S  
ACJS-MV-35-3  
ACJS-MV-35-3S  
ACJS-MV-35-5




ACJS-MHDC  
ACJM-MHDC




ACJS-IH  
ACJM-IH  
ACJS-IHS  
ACJM-IHS




ACJS-MHD985  
ACJM-MHD985




ACJS-MHOM  
ACJM-MHOM



ACJS-MHOP  
ACJS-PHOP  
ACJM-MHOP  
ACJM-PHOP  
ACJS-MHOP-1  
ACJS-HHOP-1  
ACJM-PHOP-1  
ACJM-MHOP-1  
ACJM-HHOP-1  
ACJM-HHOP  
ACJS-HHOP



ACJS-MVD985  
ACJM-MVD985



ACJM-PVB-2  
ACJM-PVB-2S  
ACJS-PVB-3  
ACJS-PVB-3S  
ACJS-PVB-5

## SCHEMATIC CHART

| PART NO.          | ACJM-MV35-2<br>ACJM-MN-2<br>ACJM-NV35-2<br>ACJM-PVB-2<br>ACJM-MV-2<br>ACJM-MVS-2<br>ACJM-MIV-2 | ACJM-MV35-2S<br>ACJM-MN-2S<br>ACJM-NV35-2S<br>ACJM-PVB-2S<br>ACJM-MV-2S<br>ACJM-MVS-2S<br>ACJM-MIV-2S | ACJS-MV35-3<br>ACJS-MN-3<br>ACJS-NV35-3<br>ACJS-PVB-3<br>ACJS-MV-3<br>ACJS-MVS-3<br>ACJS-MIV-3 | ACJS-MV35-3S<br>ACJS-MN-3S<br>ACJS-NV35-3S<br>ACJS-PVB-3S<br>ACJS-MV-3S<br>ACJS-MVS-3S<br>ACJS-MIV-3S | ACJS-MV35-5<br>ACJS-MN-5<br>ACJS-NV35-5<br>ACJS-PVB-5<br>ACJS-MV-5<br>ACJS-MVS-5<br>ACJS-MIV-5 |
|-------------------|--|---|--|---|--|
| GENERAL SCHEMATIC |  |   |  |   |  |

| PART NO.  | ACJM-MVD985-2 | ACJM-MVD985-2S | ACJS-MVD985-3 | ACJS-MVD985-3S | ACJS-MVD985-5 |
|-----------|---------------|----------------|---------------|----------------|---------------|
| SCHEMATIC |               |                |               |                |               |

| PART NO.          | ACJM-HHOP-1<br>ACJM-PHOP-1<br>ACJM-MHOP-1 | ACJS-HHOP-1<br>ACJS-PHOP-1<br>ACJS-MHOP-1 | ACJM-HHOP<br>ACJM-PHOP<br>CJM-MHOP | ACJS-HHOP<br>ACJS-PHOP<br>ACJS-MHOP |
|-------------------|---|---|------------------------------------|-------------------------------------|
| GENERAL SCHEMATIC |   |   |                                    |                                     |





## PLUG AND JACKS TECHNICAL DATA

|                                   |  | VALUE  |
|-----------------------------------|--|--|
| <b>GENERAL CHARACTERISTICS</b>    | Number of Contacts                                       | 2 Pole (Mono)<br>3 Pole Tip Ring Sleeve (Stereo)   |
|                                   | Termination  | Solder, PCB or Combo   |
|                                   | Max. Wire Gauge - Stranded Wire                          | 2 Pole (Mono): AWG 16 - 1.5mm <sup>2</sup><br>3 Pole (Stereo): AWG 18 - 1mm <sup>2</sup> |
|                                   | Flammability rating of insulating plastics               | UL94V-0  |
|                                   | Solderability, complies with                             | IEC 68-2-20  |
|                                   | Environmental  | Complies with EU RoHS 2 Directive 2011/65/EU   |
| <b>ELECTRICAL CHARACTERISTICS</b> | Current Carrying Capacity                                | 10A (Depends on Mating Connector and Cable)  |
|                                   | Typical Contact Resistance                               | Depends on Mating Connector  |
|                                   | Insulation resistance (initial)                          | >2GΩ   |
|                                   | After Damp Heat Test                                     | ≥1GΩ   |
|                                   | Dielectric Withstand Voltage                             | 2 Pole : 1.5 kV dc<br>3 Pole : 1 kV dc   |
| <b>CLIMATIC CHARACTERISTICS</b>   | Protection Class   | IP40   |
|                                   | Operating Temperature                                    | -25°C to +75°C (-13°F to + 167°F)  |
| <b>MECHANICAL CHARACTERISTICS</b> | Insertion and Withdrawal Force                           | ≥10N - ≤30N  |
|                                   | Cable O.D. (Plugs)                                       | 6mm (0.236")   |
| <b>MATERIALS</b>                  | Connector Shell Material (Plugs)                         | Diecast Zinc Alloy EZDA No.3   |
|                                   | Connector Shell Material (Jacks)                         | UL94 V-0 PBT Modified PPO Resin - Black  |
|                                   | Connector Shell Finish                                   | Satin Nickel, Nickel or Black Polyester  |
|                                   | Insulators   | UL94 V-0 PBT Resin or Modified PPE Resin and fibreglass laminate                         |
|                                   | Cable Bushing  | Santoprene   |
|                                   | Contacts / Plating (Plugs)<br>Contacts / Plating (Jacks) | Brass / Ni over Cu (Copper)<br>Brass / Sn (Tin) over Cu (Copper)                         |

Rev 3 - 03-2013

<sup>1)</sup> Approximate weight only, does not include packaging. Please contact us for exact weight for shipping purposes.





## PLUGS AND SOCKETS

Amphenol's plugs and sockets range continually expands to meet the needs of our customers. The success of the M-Series phone plugs led to the RCA series being developed. The Miniature XLR range was a natural progression from our standard XLR series as demand for smaller interconnects increased. The latest addition to the range is a professional grade 3.5mm phone plug designed for applications that require a robust interconnect.

### Applications

- Audio Cables and Snakes
- Amplifiers
- Speakers
- Mixing desks
- Rack mount equipment
- Patch panel

### Features / Options – RCA Plugs and Jacks

- Red, Black, White, Yellow, Blue or Green shell colours
- Stylish shell design
- Flexible grommet cable protection
- Gold Plated Contacts

### Features / Options – Miniature XLR

- 3,4,5, or 6 contacts
- Solder cup
- Printed Circuit Board
- Vertical or Horizontal mounting
- Positive locking latch
- Flexible cable clamp
- Metal cable clamp
- Locking rings
- Chassis front mount
- Chassis middle or rear mount (on request)
- Optional black finish (on request)


### Features / Options – 3.5mm Plugs Phone Jack

- Mono / Stereo TRS
- Solder contacts
- Suits cable O.D 2.5mm to 5mm
- Stylised shell design
- Flexible cable grommet
- Metal cable clamp
- Nickel or Gold contact plating
- Satin Nickel or Black finish

### Cable Clamp Options



RCA Cable Clamp - M-Series, Cable O.D 3mm to 6.5mm (0.118" to 0.256")



K-Series, Cable O.D 3mm to 5mm (0.118" to 0.196")

### Ordering Codes

We have listed the more common ordering codes in each section. Please contact us if you need any further assistance.

### Simple steps to guide you in using this catalogue

- 1) Identify the product group listed in Contents on page 1 and go directly to that page number.
- 2) Each product group cover page then details information and options available.
- 3) Refer to the product detail pages and identify the product you require pictorially.
- 4) Read the product description column for the products standard features.
- 5) Use variations column to determine your choice.
- 6) Identify part number.
- 7) In the event the particular option you require is not listed please refer to the part number breakdown page at the end of each section.
- 8) Please contact us directly if you have any further problems.





**Features:**

- Mono or TRS (Stereo).
- AX Series inspired shell design.
- Suits Cable O.D from 2.5mm to 5mm (0.098" to 0.196")
- Robust diecast shell in Satin nickel or Black finish.
- Nickel or Gold contact plating.
- Flexible grommet cable protection.
- Improved solderability.
- Precision machined contacts.
- Standard or Bulk packaging.

**Options:** Black Shell, Gold contacts.


| PRODUCT - FIGURE | DRAWING                          | DESCRIPTION   | VARIATIONS  | PART NUMBER   |
|------------------|----------------------------------|---|---|---|
|                  | <p>Dimensions in mm (inches)</p> | 3.5mm, Mono Phone plug, Diecast Shell, Satin finish, Flexible grommet.  | <a href="#">Standard</a><br><a href="#">Gold Plated Contacts</a><br><a href="#">Bulk Pack</a> | <a href="#">KM2P</a><br><a href="#">KM2P-AU</a><br><a href="#">KM2P BULK</a>    |
|                  |                                  | 3.5mm, Mono Phone plug, Diecast Shell, Black finish, Flexible grommet.  | <a href="#">Standard</a><br><a href="#">Gold Plated Contacts</a><br><a href="#">Bulk Pack</a> | <a href="#">KM2PB</a><br><a href="#">KM2PB-AU</a><br><a href="#">KM2PB BULK</a> |
|                  |                                  | 3.5mm, Stereo Phone plug, Diecast Shell, Satin finish, Flexible grommet.  | <a href="#">Standard</a><br><a href="#">Gold Plated Contacts</a><br><a href="#">Bulk Pack</a> | <a href="#">KS3P</a><br><a href="#">KS3P-AU</a><br><a href="#">KS3P BULK</a>    |
|                  |                                  | 3.5mm, Stereo Phone plug, Diecast Shell, Black finish, Flexible grommet.  | <a href="#">Standard</a><br><a href="#">Gold Plated Contacts</a><br><a href="#">Bulk Pack</a> | <a href="#">KS3PB</a><br><a href="#">KS3PB-AU</a><br><a href="#">KS3PB BULK</a> |
|                  |                                  | 3.5mm, Stereo Phone plug with extended shaft for mobile phones fitted with covers. Diecast Shell, Black Chrome finish, Flexible grommet | <a href="#">Standard</a><br><a href="#">Gold Plated Contacts</a>                              | <a href="#">KS3PC</a><br><a href="#">KS3PC-AU</a>                               |



## PART NUMBER BREAKDOWN


### K-SERIES

E. G. **KS3P-AU BULK**  
**K** (Series Prefix), **S3** (Stereo), Plug,  
**AU** (Gold Plated Contacts), **Bulk** Packaged.

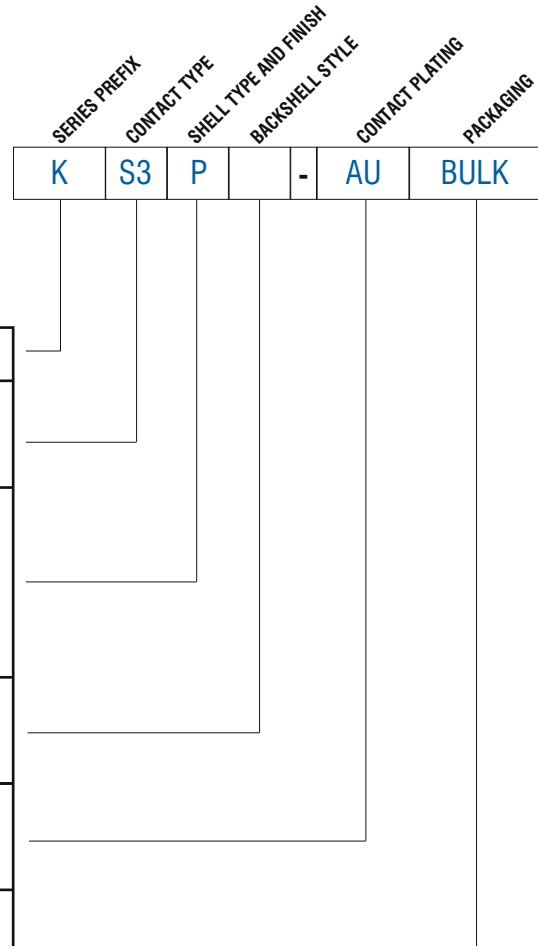

|                                       |       |   |  |
|---------------------------------------|-------|---|--|
| <b>SERIES PREFIX</b>                  | K     | = | Series Prefix  |
| <b>CONTACT TYPE</b>                   | M2    | = | 2 Pole (mono)  |
|                                       | S3    | = | 3 pole TRS (Stereo)  |
| <b>SHELL TYPE AND FINISH</b>          | P     | = | Plug Satin Nickel  |
|                                       | PB    | = | Plug Matt Black  |
|                                       | PC    | = | Plug Black Chrome  |
| <b>BACKSHELL TYPE AND CABLE CLAMP</b> | Blank | = | K Series to suit Cable O.D 2.5mm to 5mm (0.098" to 0.196") |
| <b>CONTACT PLATING</b>                | Blank | = | Nickel Plated Contacts (Standard)                          |
|                                       | AU    | = | Gold Plated Contacts                                       |
| <b>PACKAGING</b>                      | Blank | = | Individual Bags  |
|                                       | BULK  | = | Bulk Packed  |

### ISO VIEW OF KS3P

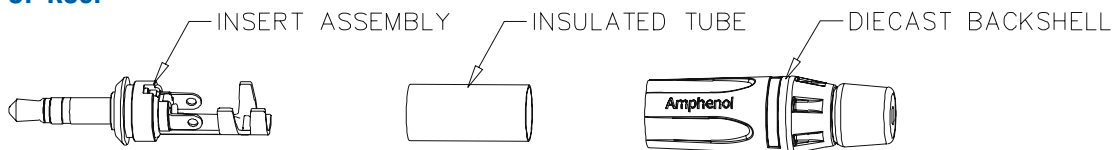

# Amphenol

PLUGS AND SOCKETS

## RCA SERIES



**Features:**


- Stylish design
- Flexible grommet cable protection
- Robust diecast shell
- Gold plated contacts
- Colour coded
- Good solderability
- Quick and easy assembly
- Panel mount utilises standard 'D' type housing

**Part Number Breakdown: page 122**

| PRODUCT - FIGURE | DRAWING | Dimensions in mm (inches)      | DESCRIPTION  | COLOUR         | PART NUMBER |
|------------------|---------|--------------------------------|--|----------------|-------------|
|                  |         | 62 [2.445"]<br>ø13.8 [.543"]   | RCA Plug, Diecast Shell, Gold plated contacts, Coloured finish, Flexible coloured grommet.               | Red            | ACPR-RED    |
|                  |         |                                |  | Black          | ACPR-BLK    |
|                  |         |                                |  | Yellow         | ACPR-YEL    |
|                  |         |                                |  | White          | ACPR-WHT    |
|                  |         |                                |  | Blue           | ACPR-BLU    |
|                  |         | 62 [2.445"]<br>ø13.8 [.543"]   | RCA Plug, Diecast Shell, Gold plated contacts, Satin finish, Flexible coloured grommet.                  | Satin / Red    | ACPR-SRD    |
|                  |         |                                |  | Satin / Black  | ACPR-SBK    |
|                  |         |                                |  | Satin / Yellow | ACPR-SYL    |
|                  |         |                                |  | Satin / White  | ACPR-SWH    |
|                  |         |                                |  | Satin / Blue   | ACPR-SBL    |
|                  |         | 54 [2.130"]<br>ø13.8 [.543"]   | RCA Jack, Diecast Shell, Gold plated contacts, Coloured finish, Flexible coloured grommet.               | Red            | ACJR-RED    |
|                  |         |                                |  | Black          | ACJR-BLK    |
|                  |         |                                |  | Yellow         | ACJR-YEL    |
|                  |         |                                |  | White          | ACJR-WHT    |
|                  |         |                                |  | Blue           | ACJR-BLU    |
|                  |         | 54 [2.130"]<br>ø13.8 [.543"]   | RCA Jack, Diecast Shell, Gold plated contacts, Satin finish, Flexible coloured grommet.                  | Satin / Red    | ACJR-SRD    |
|                  |         |                                |  | Satin / Black  | ACJR-SBK    |
|                  |         |                                |  | Satin / Yellow | ACJR-SYL    |
|                  |         |                                |  | Satin / White  | ACJR-SWH    |
|                  |         |                                |  | Satin / Blue   | ACJR-SBL    |
|                  |         | 50.5 [1.988"]<br>ø13.8 [.543"] | RCA Plug, Shortened Diecast Shell, Gold plated contacts, Black Chrome finish, Flexible coloured grommet. | Red            | ACPL-CRD    |
|                  |         |                                |  | Black          | ACPL-CBK    |
|                  |         |                                |  | Yellow         | ACPL-CYL    |
|                  |         |                                |  | White          | ACPL-CWH    |
|                  |         |                                |  | Blue           | ACPL-CBL    |
|                  |         |                                |  | Green          | ACPL-CGR    |

NOTE: RCA Series comply with EU RoHS 2 Directive 2011/65/EU



|   |  |  |        |          |
|---|--|--|--------|----------|
|  |  | <p>RCA Jack, Diecast Shell, Gold plated contacts, Nickel finish shell, coloured insulator.</p> | Red    | ACJD-RED |
|   |  |  | Black  | ACJD-BLK |
|   |  |  | Yellow | ACJD-YEL |
|   |  |  | White  | ACJD-WHT |
|   |  |  | Blue   | ACJD-BLU |
|   |  |  | Green  | ACJD-GRN |

NOTE: RCA Series comply with EU RoHS 2 Directive 2011/65/EU


## PART NUMBER BREAKDOWN

### M SERIES RCA

E. G. **ACPR-RED BULK**  
**AC** (Series Prefix), **P** (Plug), **R** (Shell type), **RED** (Shell and Grommet Colour), **Bulk** Packaged.

|                      |                     |                   |                     |                  |      |
|----------------------|---------------------|-------------------|---------------------|------------------|------|
| <b>SERIES PREFIX</b> | <b>CONTACT TYPE</b> | <b>SHELL TYPE</b> | <b>SHELL FINISH</b> | <b>PACKAGING</b> |      |
| AC                   | P                   | R                 | -                   | RED              | BULK |

|                                 |   |   |                              |
|---------------------------------|---|---|------------------------------|
| <b>SERIES PREFIX</b>            | AC  | = | Series Prefix                |
| <b>CONTACT TYPE</b>             | J   | = | RCA Female Jack              |
|                                 | P   | = | RCA Male Plug                |
| <b>SHELL TYPE</b>               | R   | = | Regular Shell Length         |
|                                 | L   | = | Short Shell Length           |
|                                 | D   | = | Chassis Jack 'D' Shell       |
| <b>SHELL AND GROMMET COLOUR</b> | RED   | = | Red, Red Grommet             |
|                                 | BLK   | = | Black, Black Grommet         |
|                                 | YEL   | = | Yellow, Yellow Grommet       |
|                                 | WHT   | = | White, White Grommet         |
|                                 | BLU   | = | Blue, Blue Grommet           |
|                                 | GRN   | = | Green, Green Grommet         |
|                                 | SRD   | = | Satin Nickel, Red Grommet    |
|                                 | CRD   | = | Black Chrome, Red Grommet    |
|                                 | SBK   | = | Satin Nickel, Black Grommet  |
|                                 | CBK   | = | Black Chrome, Black Grommet  |
|                                 | SYL   | = | Satin Nickel, Yellow Grommet |
|                                 | CYL   | = | Black Chrome, Yellow Grommet |
|                                 | SWH   | = | Satin Nickel, White Grommet  |
|                                 | CWH   | = | Black Chrome, White Grommet  |
|                                 | SBL   | = | Satin Nickel, Blue Grommet   |
|                                 | CBL   | = | Black Chrome, Blue Grommet   |
|                                 | SGR   | = | Satin Nickel, Green Grommet  |
|                                 | CGR   | = | Black Chrome, Green Grommet  |
|                                 | NOTE: Denotes colour of insulator only on shell type D, Chassis Jack 'D' Shell. Shell finish is Nickel. |   |                              |
| <b>PACKAGING</b>                | Blank   | = | Individual Bags              |
|                                 | BULK  | = | Bulk Packed                  |

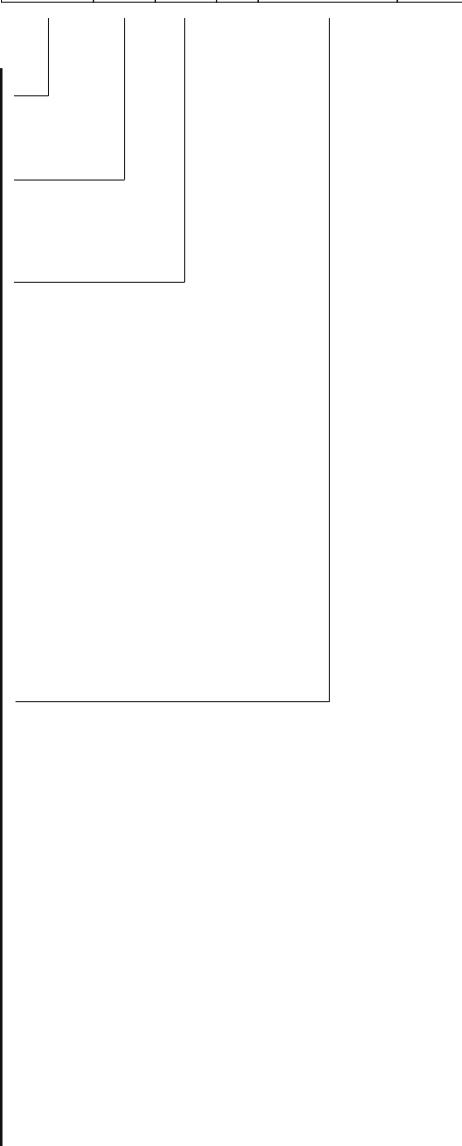



**Features:**



- Miniature version of the standard XLR series
- Diecast or Precision machined metal housings
- Metal cable clamp
- Precision machined pin contacts
- Stamped socket contacts
- Solder cup or Printed Circuit board contacts
- Available in 3, 4, 5 or 6 contacts
- Postive latchlock
- Flexible cable grommet

**Part Number Breakdown: page 124 Specifications: page 125**  
**PCB Footprints: page 126 Panel Cutouts: page 126**

| PRODUCT - FIGURE | DRAWING | DESCRIPTION  | VARIATIONS                           | PART NUMBER                              |
|------------------|---------|--|--------------------------------------|--|
|                  |         | Male cable connector, Machined contacts, Nickel Finish                     | 3 pole<br>4 pole<br>5 pole<br>6 pole | AG3M<br>AG4M<br>AG5M<br>AG6M             |
|                  |         | Female cable connector, Stamped contacts, Nickel Finish                    | 3 pole<br>4 pole<br>5 pole<br>6 pole | AG3F<br>AG4F<br>AG5F<br>AG6F             |
|                  |         | Female cable connector with locking ring, Stamped contacts, Nickel Finish. | 3 pole<br>4 pole<br>5 pole<br>6 pole | AG3FL<br>AG4FL<br>AG5FL<br>AG6FL         |
|                  |         | Male chassis connector, Machined contacts, Nickel Finish                   | 3 pole<br>4 pole<br>5 pole<br>6 pole | AG3MCC<br>AG4MCC<br>AG5MCC<br>AG6MCC     |
|                  |         | Female chassis connector, Stamped contacts, Nickel Finish                  | 3 pole<br>4 pole<br>5 pole<br>6 pole | AG3FCE<br>AG4FCE<br>AG5FCE<br>AG6FCE     |
|                  |         | Male chassis connector, Horizontal PCB, Machined contacts, Nickel Finish   | 3 pole<br>4 pole<br>5 pole<br>6 pole | AG3MCCH<br>AG4MCCH<br>AG5MCCH<br>AG6MCCH |
|                  |         | Female chassis connector, Horizontal PCB, Stamped contacts, Nickel Finish  | 3 pole<br>4 pole<br>5 pole<br>6 pole | AG3FCCH<br>AG4FCCH<br>AG5FCCH<br>AG6FCCH |




# Amphenol

|   |  |   |               |                |
|---|--|---|---------------|----------------|
|  |  | <p>Male chassis connector, Horizontal PCB, Machined contacts, Thermoplastic shell</p> | <p>4 pole</p> | <p>AG4MPCH</p> |
|  |  | <p>Female chassis connector, Stamped contacts, Nickel Finish</p>                      | <p>3 pole</p> | <p>AG3FCRV</p> |
|   |  |   | <p>4 pole</p> | <p>AG4FCRV</p> |
|   |  |   | <p>5 pole</p> | <p>AG5FCRV</p> |
|   |  |   | <p>6 pole</p> | <p>AG6FCRV</p> |


## PART NUMBER BREAKDOWN

### G TYPE CONNECTORS

E. G. **AG3MCCHB**  
**AG** (Series Prefix), **3** contacts, **Male**, **Chassis Connector**, **Horizontal PCB Contacts**, **Black** finish.

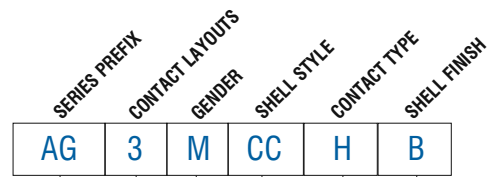

|                        |       |   |   |
|------------------------|-------|---|---|
| <b>SERIES PREFIX</b>   | AG    | = | Series Prefix   |
| <b>CONTACT LAYOUTS</b> | 3     | = | 3 Contacts  |
|                        | 4     | = | 4 Contacts  |
|                        | 5     | = | 5 Contacts  |
|                        | 6     | = | 6 Contacts  |
| <b>GENDER</b>          | F     | = | Female Socket Contacts  |
|                        | M     | = | Male Pin Contacts   |
|                        | Blank | = | Cable Connector Standard (Male or Female)                     |
| <b>SHELL STYLE</b>     | J     | = | Cable Connector Large Cable clamp / boot O.D (Male or Female) |
|                        | L     | = | Cable Connector with locking ring (Female)                    |
|                        | LL    | = | Latchless (Chassis Connector)                                 |
|                        | CC    | = | Chassis Connector Circular Metal (Male)                       |
|                        | CE    | = | Rear Mount (Chassis Connector)                                |
|                        | CM    | = | Mid Mount (Chassis Connector)                                 |
|                        | CR    | = | Chassis Connector Rectangular Metal (Female)                  |
|                        | PC    | = | Chassis Connector Plastic (Male)                              |
|                        | Blank | = | Solder Buckets (All styles except PC, CR)                     |
| <b>CONTACT TYPE</b>    | H     | = | Horizontal PCB (Style CC, PC only)                            |
|                        | V     | = | Vertical PCB (Style CR only)                                  |
|                        | Blank | = | Nickel Plated Finish  |
| <b>SHELL FINISH</b>    | B     | = | Black Finish  |

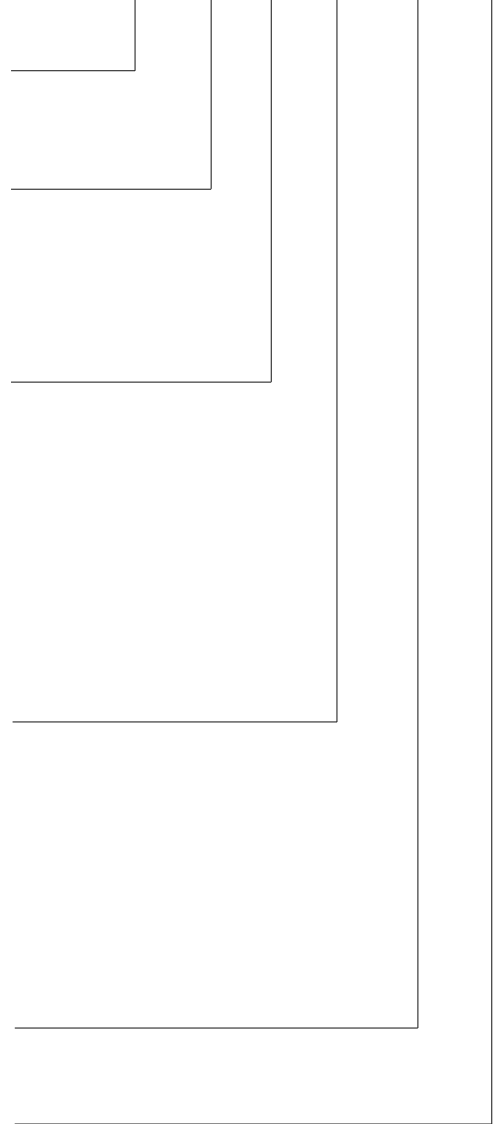


## STANDARD DATA G TYPE


|                                   |  | VALUE  |                    |                               |                    |
|-----------------------------------|--|--|--------------------|-------------------------------|--------------------|
| <b>GENERAL CHARACTERISTICS</b>    | Number of contacts                           | 3  | 4                  | 5                             | 6                  |
|                                   | Termination                                  | Printed Circuit Board (PCB) or Solder Bucket |                    |                               |                    |
|                                   | Flammability                                 | UL94V-0                                      |                    |                               |                    |
|                                   | Environmental                                | Complies with EU RoHS 2 Directive 2011/65/EU |                    |                               |                    |
| <b>ELECTRICAL CHARACTERISTICS</b> | Service Voltage RMS <sup>1)</sup>            | 1000V  | 1000V              | 1000V                         | 250V               |
|                                   | Test Voltage AC RMS                          | 125V AC                                      |                    |                               |                    |
|                                   | Current carrying capacity                    | 5A   | 5A                 | 4A                            | 1.2A               |
|                                   | Typical Contact Resistance                   | ≤10mΩ  |                    |                               |                    |
|                                   | Insulation Resistance (initial)              | ≥510MΩ                                       |                    |                               |                    |
|                                   | Insulation Resistance (After damp heat test) | ≥10MΩ  |                    |                               |                    |
| <b>CLIMATIC CHARACTERISTICS</b>   | Protection Class                             | IP00   |                    |                               |                    |
|                                   | Operating Temperature                        | -30 °C to +80 °C (-20F - +176F)              |                    |                               |                    |
| <b>MECHANICAL CHARACTERISTICS</b> | Weight **                                    | 13.5g<br>(0.029lb)                           |                    |                               |                    |
|                                   | Insertion Spring Separating Force            | ≥20N   |                    |                               |                    |
|                                   | Mechanical Operations                        | 5000 mating cycles                           | 5000 mating cycles | 5000 mating cycles            | 2000 mating cycles |
|                                   | Cable O.D. range                             | 2mm to 3.5mm (0.078" to 0.137")              |                    | 3mm to 5mm (0.118" to 0.196") |                    |
| <b>MATERIALS</b>                  | Connector Shell                              | Bronze & Zinc                                |                    |                               |                    |
|                                   | Shell Finish                                 | Nickel Plated                                |                    |                               |                    |
|                                   | Insulators                                   | PPS - Black                                  |                    |                               |                    |
|                                   | Male Contact - Material                      | Brass C3604                                  |                    |                               |                    |
|                                   | - Plating                                    | Gold over Silver plated                      |                    |                               |                    |
|                                   | Female Contact - Material                    | Brass C5210P                                 |                    |                               |                    |
|                                   | - Plating                                    | Gold over Silver plated                      |                    |                               |                    |
|                                   | Latch Lock and Spring                        | SUS (AISI - 301) - Nickel Plated             |                    |                               |                    |
|                                   | Adaptor                                      | PPS - Black                                  |                    |                               |                    |
|                                   | Cable Clamp                                  | Bronze - Nickel Plated                       |                    |                               |                    |
| Boot/Backshell                    | ABS - Black                                  |  |                    |                               |                    |
| Grommet                           | PU - Black                                   |  |                    |                               |                    |

\*\*Approximate weight in grams not include packaging. Please contact us for exact weight for shipping purposes.


## PANEL CUTOUTS - CONNECTOR SIDE OF PCB




**AG3MCC**




**AG4MCC**




**AG5MCC**




**AG6MCC**




**AG3MCCH  
AG3FCCH**




**AG4MCCH  
AG4FCCH**




**AG5MCCH  
AG5FCCH**




**AG6MCCH  
AG6FCCH**




**AG3FCRV**




**AG4FCRV**




**AG5FCRV**



**AG6FCRV**




**AG4MPCH**




**AG3FCE**


## PANEL CUTOUTS - FRONT VIEW



**AG3MCC  
AG4MCC  
AG5MCC  
AG6MCC**



**AG3MCCH  
AG4MCCH  
AG5MCCH  
AG6MCCH  
AG4MPCH**

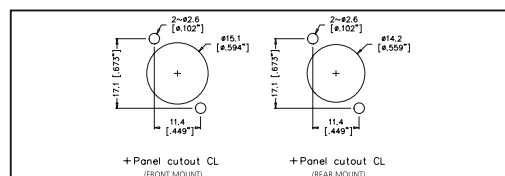

**AG3FCRV  
AG4FCRV  
AG5FCRV  
AG6FCRV**





## MULTIPIN CONNECTORS

Amphenol has an extensive range of circular and rectangular multi-pin connectors ideally suited to the entertainment industry. Featuring rugged housings and precision made contacts these connectors have proven themselves in the most demanding of applications. The extensive arrangement of different connector sizes and contact numbers ensure we can offer a solution to your multi-pin wiring applications.

### Applications

- Audio Cables and Snakes
- Lighting control
- Concert Touring Systems
- Outside Broadcast Systems

### Features / Options - MP-41 Series

- 13 to 85 pins with Crimp / Solder bucket contacts
- 150 pins with Crimp contacts only
- 4 to 48 channel
- Gold plated contacts
- Synthetic inserts
- Environmental resistant
- Positive Bayonet locking
- PG cable gland
- 2000 mating cycles
- Bayonet wear pins
- Extended coupling ring
- Metal Housings

### Features / Options - MP-62 Series

- 39 or 61 Solder bucket contacts
- Gold plated contacts
- Neoprene inserts
- Environmental resistant
- Positive Bayonet locking
- PG cable gland or NPT thread
- Metal Housings

### Ordering Codes

We have listed the more common ordering codes in each section. For further options please contact us.

### Simple steps to guide you in using this catalogue

- 1) Identify the product group listed in Contents on page 1 and go directly to that page number.
- 2) Each product group cover page then details information and options available.
- 3) Refer to the product detail pages and identify the product you require pictorially.
- 4) Read the product description column for the products standard features.
- 5) Use pins column to determine number of contacts.
- 6) Identify part number.
- 7) In the event the particular option you require is not listed please refer to the part number breakdown page at the end of each section.
- 8) Please contact us directly if you have any further problems.





Amphenol's MP-41 series of multipin connectors utilise the same design principals of the rugged Mil-C-5015 military connectors. They can withstand high shock and vibration environments and are ideal for tough on-road applications. Featuring a quick mating bayonet coupling with an audible full mating feature ensures a positive connection every time. Available from 13 to 150 pins with contacts supplied with each connector as standard.

**Features:**

- 13 to 85 pins with Crimp/Solder bucket contacts
- 150 pins with Crimp contacts only
- 4 to 48 channels
- Gold plated contacts
- Synthetic insert
- Protective dust caps
- Industry standard compatible
- 2000 mating cycles
- Black finish
- Positive bayonet locking
- PG cable glands
- IP67 rated
- Metal housings


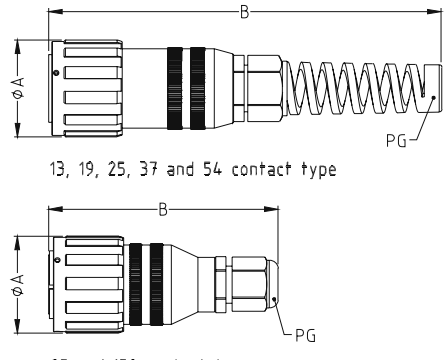

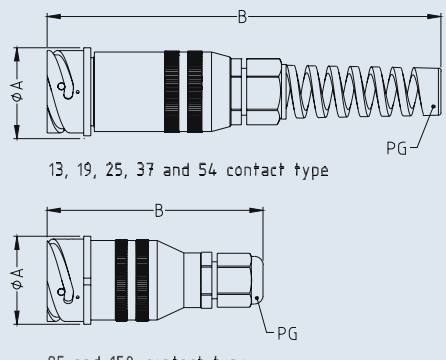
**Options:** NPT threaded backshells.

**Specifications:** page 132


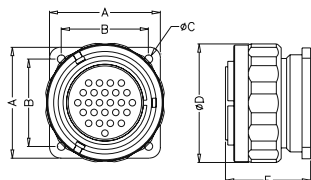

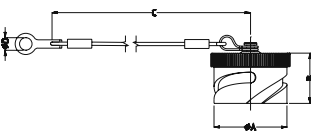
**Crimp Tooling:** page 131

**Part Number Breakdown:** page 131


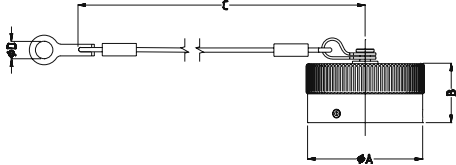

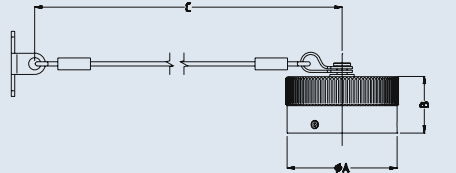
**Wiring Information:** 141

| PRODUCT - FIGURE  | Dimensions in mm (inches)<br><b>DRAWING</b>   | Dimensions in mm (inches) |               |      | PINS | PART NUMBER  | PART NUMBER<br>With Dustcap |
|---|---|---------------------------|---------------|------|------|--------------|-----------------------------|
|   |   | A                         | B             | PG   |      |              |                             |
|  <p>Straight cable plug with socket contacts, Black finish, supplied complete with contacts.</p> <p>13, 19, 25, 37 and 54 contact type</p> <p>85 and 150 contact type</p>       |   | 40.5<br>(1.60)            | 160<br>(6.30) | 11   | 13   | MP-4106-13S  | MP-4106-13S-C               |
|   |   | 44<br>(1.73)              | 171<br>(6.73) | 13.5 | 19   | MP-4106-19S  | MP-4106-19S-C               |
|   |   | 46.6<br>(1.83)            | 193<br>(7.60) | 16   | 25   | MP-4106-25S  | MP-4106-25S-C               |
|   |   | 54.3<br>(2.14)            | 210<br>(8.26) | 21   | 37   | MP-4106-37S  | MP-4106-37S-C               |
|   |   | 60.1<br>(2.36)            | 210<br>(8.26) | 21   | 54   | MP-4106-54S  | MP-4106-54S-C               |
|   |   | 73.3<br>(2.88)            | 137<br>(5.40) | 29   | 85   | MP-4106-85S  | MP-4106-85S-C               |
|   |   | 73.3<br>(2.88)            | 145<br>(5.70) | 36   | 150  | MP-4106-150S | MP-4106-150S-C              |
|  <p>Cable connecting receptacle with pin contacts, black finish, supplied complete with contacts.</p> <p>13, 19, 25, 37 and 54 contact type</p> <p>85 and 150 contact type</p> |  | 37.8<br>(1.49)            | 160<br>(6.30) | 11   | 13   | MP-4101-13P  | MP-4101-13P-C               |
|   |   | 41.1<br>(1.62)            | 171<br>(6.73) | 13.5 | 19   | MP-4101-19P  | MP-4101-19P-C               |
|   |   | 41.5<br>(1.63)            | 193<br>(7.60) | 16   | 25   | MP-4101-25P  | MP-4101-25P-C               |
|   |   | 51<br>(2.00)              | 210<br>(8.26) | 21   | 37   | MP-4101-37P  | MP-4101-37P-C               |
|   |   | 57.1<br>(2.25)            | 210<br>(8.26) | 21   | 54   | MP-4101-54P  | MP-4101-54P-C               |
|   |   | 70<br>(2.75)              | 137<br>(5.40) | 29   | 85   | MP-4101-85P  | MP-4101-85P-C               |
|   |   | 70<br>(2.75)              | 145<br>(5.70) | 36   | 150  | MP-4101-150P | MP-4101-150P-C              |

Note: NPT threaded backshells available on request. Please contact us.

| PRODUCT - FIGURE   | Dimensions in mm (inches)<br>DRAWING  | Dimensions in mm (inches) |                |                |                 |                |                | PINS           | PART NUMBER   | PART NUMBER<br>With Dustcap |
|--|---|---------------------------|----------------|----------------|-----------------|----------------|----------------|----------------|---------------|-----------------------------|
|  |   | A                         | B              | C              | D               | E              | F              |                |               |                             |
| <br>     | Panel plug with socket contacts, black finish, supplied complete with contacts. | 38<br>(1.49)              | 29.4<br>(1.15) | 3.2<br>(0.13)  | 40.5<br>(1.60)  | 38.8<br>(1.53) | N/A            | 13             | MP-4164-13S   | MP-4164-13S-C               |
|  |   | 41<br>(1.61)              | 31.8<br>(1.25) | 3.2<br>(0.13)  | 44<br>(1.73)    | 38.8<br>(1.53) | N/A            | 19             | MP-4164-19S   | MP-4164-19S-C               |
|  |   | 44.5<br>(1.75)            | 34.9<br>(1.37) | 3.73<br>(0.14) | 48.51<br>(1.91) | 40.6<br>(1.60) | N/A            | 25             | MP-4164-25S   | MP-4164-25S-C               |
|  |   | 50.8<br>(1.99)            | 39.7<br>(1.56) | 3.73<br>(0.14) | 54.3<br>(2.14)  | 42<br>(1.65)   | N/A            | 37             | MP-4164-37S   | MP-4164-37S-C               |
|  |   | 57<br>(2.24)              | 44.5<br>(1.75) | 4.39<br>(0.17) | 60.8<br>(2.40)  | 45<br>(1.77)   | N/A            | 54             | MP-4164-54S   | MP-4164-54S-C               |
|  |   | 69.8<br>(2.74)            | 55.5<br>(2.18) | 4.39<br>(0.17) | 73.3<br>(2.88)  | 45<br>(1.77)   | N/A            | 85             | MP-4164-85S   | MP-4164-85S-C               |
|  |   | 69.8<br>(2.74)            | 55.5<br>(2.18) | 4.39<br>(0.17) | 73.3<br>(2.88)  | 45<br>(1.77)   | N/A            | 150            | MP-4164-150S  | MP-4164-150S-C              |
|  |   | 38<br>(1.49)              | 29.4<br>(1.15) | 3.23<br>(0.13) | 34.2<br>(1.34)  | 34.5<br>(1.35) | 29<br>(1.14)   | 13             | MP-4102-13P   | MP-4102-13P-C               |
|  |   | 41<br>(1.61)              | 31.8<br>(1.25) | 3.23<br>(0.13) | 37.4<br>(1.47)  | 34.5<br>(1.35) | 32.2<br>(1.26) | 19             | MP-4102-19P   | MP-4102-19P-C               |
|  |   | 44.5<br>(1.75)            | 34.9<br>(1.37) | 3.73<br>(0.14) | 40.9<br>(1.61)  | 35.7<br>(1.40) | 35.3<br>(1.38) | 25             | MP-4102-25P   | MP-4102-25P-C               |
| 50.8<br>(1.99)   | 39.7<br>(1.56)  | 3.73<br>(0.14)            | 46.7<br>(1.83) | 36.5<br>(1.44) | 41.4<br>(1.62)  | 37             | MP-4102-37P    | MP-4102-37P-C  |               |                             |
| 57<br>(2.24)   | 44.5<br>(1.75)  | 4.30<br>(0.17)            | 53.4<br>(2.10) | 38.5<br>(1.52) | 47.8<br>(1.88)  | 54             | MP-4102-54P    | MP-4102-54P-C  |               |                             |
| 69.8<br>(2.74)   | 55.5<br>(2.18)  | 4.30<br>(0.17)            | 65.5<br>(2.57) | 38.5<br>(1.52) | 59<br>(2.32)    | 85             | MP-4102-85P    | MP-4102-85P-C  |               |                             |
| 69.8<br>(2.74)   | 55.5<br>(2.18)  | 4.30<br>(0.17)            | 65.5<br>(2.57) | 38.5<br>(1.52) | 59<br>(2.32)    | 150            | MP-4102-150P   | MP-4102-150P-C |               |                             |
| <br> | Plug protective dustcap to suit MP-4164 type.                                   | 34.16<br>(1.35)           | 31.5<br>(1.24) | 110<br>(4.33)  | 4.7<br>(0.18)   | -              | -              | 13             | MP-25042-13S  | -                           |
|  |   | 37.36<br>(1.47)           | 31.5<br>(1.24) | 110<br>(4.33)  | 4.7<br>(0.18)   | -              | -              | 19             | MP-25042-19S  | -                           |
|  |   | 40.87<br>(1.61)           | 31.5<br>(1.24) | 110<br>(4.33)  | 4.7<br>(0.18)   | -              | -              | 25             | MP-25042-25S  | -                           |
|  |   | 46.68<br>(1.84)           | 31.5<br>(1.24) | 110<br>(4.33)  | 4.7<br>(0.18)   | -              | -              | 37             | MP-25042-37S  | -                           |
|  |   | 53.36<br>(2.10)           | 31.5<br>(1.24) | 110<br>(4.33)  | 5.5<br>(0.22)   | -              | -              | 54             | MP-25042-54S  | -                           |
|  |   | 65.48<br>(2.58)           | 31.5<br>(1.24) | 110<br>(4.33)  | 5.5<br>(0.22)   | -              | -              | 85             | MP-25042-85S  | -                           |
|  |   | 65.48<br>(2.58)           | 31.5<br>(1.24) | 110<br>(4.33)  | 5.5<br>(0.22)   | -              | -              | 150            | MP-25042-150S | -                           |
|  |   | 38.8<br>(1.53)            | 20.7<br>(0.81) | 255<br>(8.07)  | -               | -              | -              | 13             | MP-25042-13L  | -                           |
| 41.6<br>(1.64)   | 20.7<br>(0.81)  | 255<br>(8.07)             | -              | -              | -               | 19             | MP-25042-19L   | -              |               |                             |
| 45.3<br>(1.78)   | 20.7<br>(0.81)  | 255<br>(8.07)             | -              | -              | -               | 25             | MP-25042-25L   | -              |               |                             |
| 52.15<br>(2.05)  | 20.7<br>(0.81)  | 255<br>(8.07)             | -              | -              | -               | 37             | MP-25042-37L   | -              |               |                             |
| 58.6<br>(2.30)   | 20.7<br>(0.81)  | 255<br>(8.07)             | -              | -              | -               | 54             | MP-25042-54L   | -              |               |                             |
| 70.7<br>(2.78)   | 20.7<br>(0.81)  | 255<br>(8.07)             | -              | -              | -               | 85             | MP-25042-85L   | -              |               |                             |
| 70.7<br>(2.78)   | 20.7<br>(0.81)  | 255<br>(8.07)             | -              | -              | -               | 150            | MP-25042-150L  | -              |               |                             |



| PRODUCT - FIGURE  | Dimensions in mm (inches)<br>DRAWING  | Dimensions in mm (inches)  |  |                |                |               |   | PINS | PART NUMBER   |
|---|---|--|--|----------------|----------------|---------------|---|------|---------------|
|   |   | A  | B  | C              | D              | E             | F |      |               |
|  | <p>Plug protective dustcap to suit MP-4102 types.</p>  | 34.16<br>(1.35)  | 31.5<br>(1.24)   | 110<br>(4.33)  | 4.7<br>(0.18)  | -             | - | 13   | MP-25043-13S  |
|   |   | 37.36<br>(1.47)  | 31.5<br>(1.24)   | 110<br>(4.33)  | 4.7<br>(0.18)  | -             | - | 19   | MP-25043-19S  |
|   |   | 40.87<br>(1.61)  | 31.5<br>(1.24)   | 110<br>(4.33)  | 4.7<br>(0.18)  | -             | - | 25   | MP-25043-25S  |
|   |   | 46.68<br>(1.84)  | 31.5<br>(1.24)   | 110<br>(4.33)  | 4.7<br>(0.18)  | -             | - | 37   | MP-25043-37S  |
|   |   | 53.36<br>(2.10)  | 31.5<br>(1.24)   | 110<br>(4.33)  | 5.5<br>(0.22)  | -             | - | 54   | MP-25043-54S  |
|   |   | 65.48<br>(2.58)  | 31.5<br>(1.24)   | 110<br>(4.33)  | 5.5<br>(0.22)  | -             | - | 85   | MP-25043-85S  |
|   |   | 65.48<br>(2.58)  | 31.5<br>(1.24)   | 110<br>(4.33)  | 5.5<br>(0.22)  | -             | - | 150  | MP-25043-150S |
|   |   |  | <p>Receptacle protective dustcap to suit MP-4101 types.</p>  | 38.8<br>(1.53) | 20.7<br>(0.81) | 255<br>(8.07) | - | -    | -             |
| 41.6<br>(1.64)  | 20.7<br>(0.81)  |  |  | 255<br>(8.07)  | -              | -             | - | 19   | MP-25043-19L  |
| 45.3<br>(1.78)  | 20.7<br>(0.81)  |  |  | 255<br>(8.07)  | -              | -             | - | 25   | MP-25043-25L  |
| 52.15<br>(2.05)   | 20.7<br>(0.81)  |  |  | 255<br>(8.07)  | -              | -             | - | 37   | MP-25043-37L  |
| 58.6<br>(2.30)  | 20.7<br>(0.81)  |  |  | 255<br>(8.07)  | -              | -             | - | 54   | MP-25043-54L  |
| 70.7<br>(2.78)  | 20.7<br>(0.81)  |  |  | 255<br>(8.07)  | -              | -             | - | 85   | MP-25043-85L  |
| 70.7<br>(2.78)  | 20.7<br>(0.81)  |  |  | 255<br>(8.07)  | -              | -             | - | 150  | MP-25043-150L |

| PRODUCT - FIGURE  | DRAWING | DESCRIPTION  | NO. OF PINS     | PART NUMBER  |
|---|---------|--|-----------------|--------------|
|    | N/A     | Crimp Tool   | All             | M22520/1-01  |
|    | N/A     | Positioner / Turret  | All             | TH29-1       |
|    | N/A     | Insertion tool   | 13-85           | MP-INS-16    |
|   |         |  | 150             | MP-INS-18    |
|    | N/A     | Extraction tool  | All             | MP-EXT-16/18 |
|    | N/A     | Contact Pilot Pin  | 13-85           | MP-GUIDE-16  |
|   |         |  | 150             | MP-GUIDE-18  |
|   | N/A     | Solder/Crimp Pin Contact   | 13-85 (Size 16) | MP-108400    |
|   |         | Crimp Pin Contact<br>(Soldering of this contact is not recommended)    | 150 (Size 18)   | MP-108300    |
|  | N/A     | Solder/Crimp Socket Contact  | 13-85 (Size 16) | MP-108600    |
|   |         | Crimp Socket Contact<br>(Soldering of this contact is not recommended) | 150 (Size 18)   | MP-108500    |


**NOTE:** Complete instructions for providing reliable crimped wire to contact terminations and inserting proprietary contacts in MP-41 Series connectors are available in publication PI523 located on our website [www.amphenolaudio.com](http://www.amphenolaudio.com).

## PART NUMBER BREAKDOWN MP-41 SERIES

### MULTIPIN CIRCULAR CONNECTORS

E. G. **MP-4106-85S**  
 Multipin, **4106** Cable Plug, **85** Contacts, **S** Female Socket Contacts,

|   |        |   |                                    |
|---|--------|---|------------------------------------|
| <b>SERIES PREFIX</b>                                    | MP     | = | Series Prefix                      |
| <b>HOUSING TYPE</b>                                     | 4101   | = | Inline cable connecting receptacle |
|   | 4102   | = | Panel receptacle                   |
|   | 4106   | = | Cable plug                         |
|   | 4164   | = | Panel plug                         |
|   | 25042S | = | Dustcap for panel plug             |
|   | 25042L | = | Dustcap for cable plug             |
|   | 25043S | = | Dustcap for panel receptacle       |
|   | 25043L | = | Dustcap for cable receptacle       |
| <b>NO. OF CONTACTS</b>                                  |        |   | 13, 19, 25, 37, 54, 85, 150        |
| <b>GENDER</b><br>*Not required for dustcap part numbers | P      | = | Male pin contacts                  |
|   | S      | = | Female socket contacts             |
| <b>OPTIONS</b>  | C      | = | Supplied with Dustcap              |

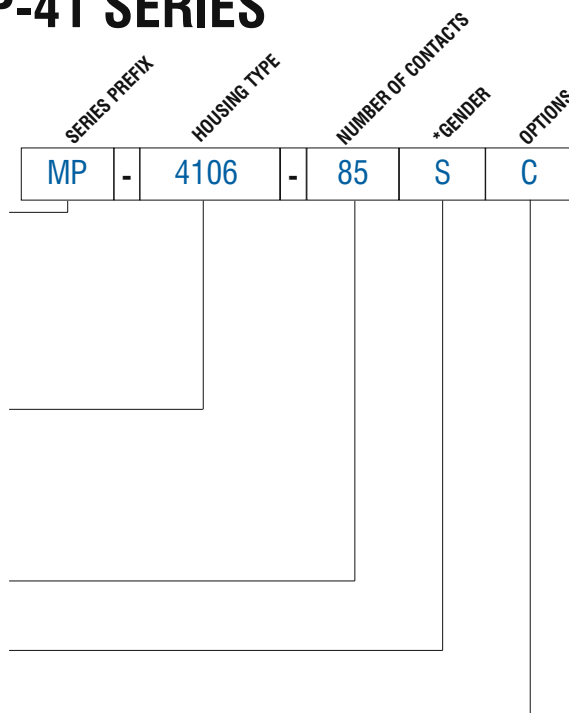

## STANDARD DATA MP-41 SERIES

|                                   |                                     | VALUE  |               |               |               |               |               |         |
|-----------------------------------|-------------------------------------|--|---------------|---------------|---------------|---------------|---------------|---------|
| <b>GENERAL CHARACTERISTICS</b>    | Number of contacts                  | 13   | 19            | 25            | 37            | 54            | 85            | 150     |
|                                   | Number of channels                  | 4  | 6             | 8             | 12            | 16            | 28            | 48      |
|                                   | Termination                         | Solder / Crimp "Combo"                       |               |               |               |               |               | Crimp   |
|                                   | Wire Gauge - Stranded Wire          | 16AWG - 20AWG                                |               |               |               |               |               | 18AWG   |
|                                   | Environmental                       | Complies with EU RoHS 2 Directive 2011/65/EU |               |               |               |               |               |         |
| <b>ELECTRICAL CHARACTERISTICS</b> | Operating Voltage at Sea level - DC | 250V*  |               |               |               |               |               | 250V*   |
|                                   | Operating Voltage at Sea level - AC | 200V*  |               |               |               |               |               | 200V*   |
|                                   | Test Voltage AC RMS                 | 1000V  |               |               |               |               |               | 1000V   |
|                                   | Current Carrying Capacity           | 13A  |               |               |               |               |               | 7.5A    |
|                                   | Typical Contact Resistance          | 3.46mΩ                                       |               |               |               |               |               | 11.25mΩ |
|                                   | Insulation Resistance               | 5000MΩ                                       |               |               |               |               |               |         |
| <b>CLIMATIC CHARACTERISTICS</b>   | Protection Class                    | IP67 (when mated)                            |               |               |               |               |               |         |
|                                   | Operating Temperature               | -55°C to +125°C (-67°F to +257°F)            |               |               |               |               |               |         |
| <b>MECHANICAL CHARACTERISTICS</b> | Cable Retention                     | PG Gland                                     |               |               |               |               |               |         |
|                                   | Mechanical Operations               | 2000 mating cycles                           |               |               |               |               |               |         |
| <b>MATERIALS</b>                  | Connector / Shell Finish            | Aluminium Alloy / Black                      |               |               |               |               |               |         |
|                                   | Insert                              | Synthetic Insert to MIL-R-3065               |               |               |               |               |               |         |
|                                   | Male pin contact / Plating          | Brass / Gold plated                          |               |               |               |               |               |         |
|                                   | Female socket contact / Plating     | Brass / Gold plated                          |               |               |               |               |               |         |
| <b>CLAMPING CHARACTERISTICS</b>   | PG Gland                            | 11   | 13.5          | 16            | 21            | 29            | 36            |         |
|                                   | Cable Clamping range                | mm   | 4-10          | 5-12          | 9-14          | 13-18         | 14-25         | 19-32   |
|                                   | (inches)                            | (0.15"-0.39")                                | (0.19"-0.47") | (0.35"-0.55") | (0.51"-0.70") | (0.55"-0.98") | (0.74"-1.25") |         |

\*Not suitable for domestic applications above 50V

Rev 2 - 03/2013




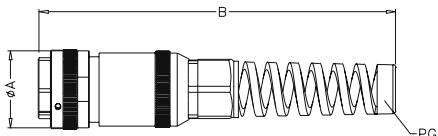



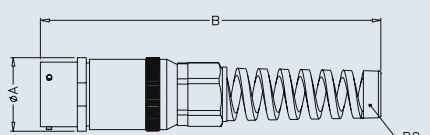



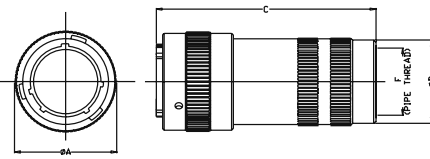



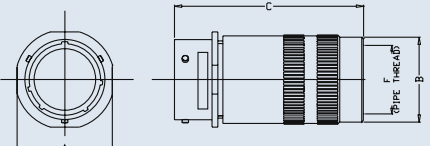




Amphenol's Multipin MP-62 series of circular connectors utilise the same design principles as the Mil-C-26482 military connectors. Featuring a three point quick mating bayonet coupling and five key polarisation ensuring a positive connection every time. Available in two contact pin layouts 39 and 61 with gold plated solder contacts fitted as standard.


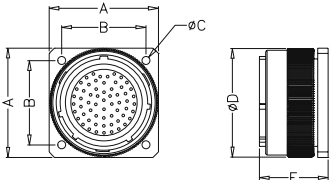

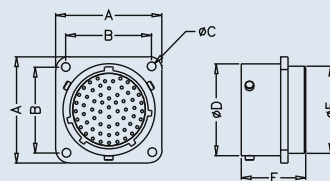

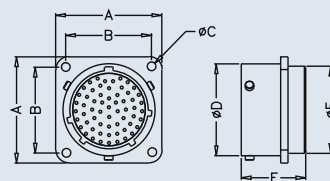

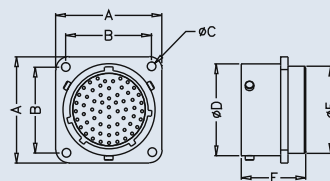
**Features:**


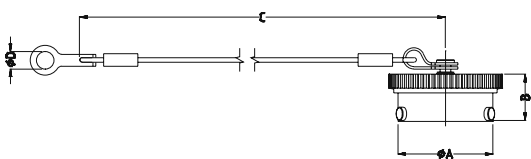

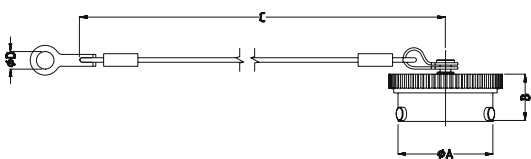

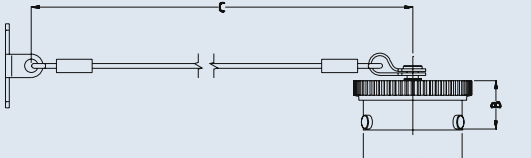

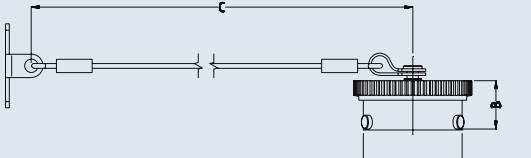

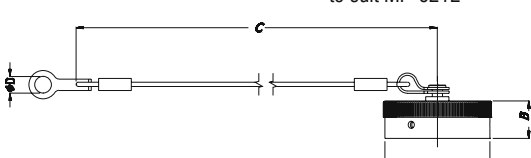

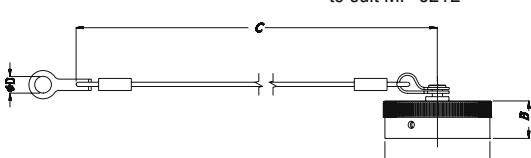

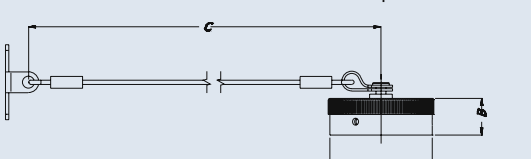

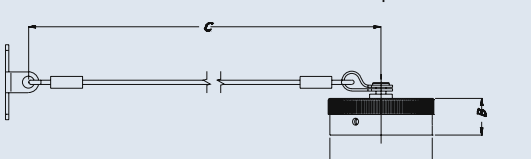
- 39 or 61 pins.
- Gold plated solder contacts.
- Neoprene insert.
- Protective dust caps
- Metal housings
- Environmental resistant.
- Black finish.
- Positive bayonet locking
- PG cable glands

**Specifications: page 135    Wiring Info: page 140**

| PRODUCT - FIGURE  | Dimensions in mm (inches)<br>DRAWING   | Dimensions in mm (inches) |        |      | PINS | PART NUMBER | PART NUMBER<br>With Dustcap |
|---|--|---------------------------|--------|------|------|-------------|-----------------------------|
|   |  | A                         | B      | PG   |      |             |                             |
|   | Straight cable plug with pin contacts, Black finish, Gold plated solder contacts.<br>  | 38.9                      | 181.5  | 16   | 39   |             |                             |
|   |  | (1.53)                    | (7.15) |      |      | MP-6216-39P | MP-6216-39P-C               |
|   |    | 45.5                      | 193    | 21   | 61   |             |                             |
|   |  | (1.80)                    | (7.60) |      |      | MP-6216-61P | MP-6216-61P-C               |
|  | Cable connecting receptacle with socket contacts, Black finish, Gold plated solder contacts.<br>                              | 36.7                      | 181.5  | 16   | 39   |             |                             |
|   |  | (1.45)                    | (7.15) |      |      | MP-6211-39S | MP-6211-39S-C               |
|  |   | 43.0                      | 193    | 21   | 61   |             |                             |
|   |  | (1.70)                    | (7.60) |      |      | MP-6211-61S | MP-6211-61S-C               |
|  | Straight cable plug with pin contacts, NPT 3/4" threaded backshell, Black finish, Gold plated solder contacts.<br>            | 38.9                      | 90     | NPT  | 39   |             |                             |
|   |  | (1.53)                    | (3.54) | 3/4" |      | MP-6516-39P | MP-6516-39P-C               |
|  |   | 45.5                      | 100    | NPT  | 61   |             |                             |
|   |  | (1.80)                    | (3.94) | 3/4" |      | MP-6516-61P | MP-6516-61P-C               |
|  | Cable connecting receptacle with socket contacts, NPT 3/4" threaded backshell, Black finish, Gold plated solder contacts.<br> | 36.7                      | 90     | NPT  | 39   |             |                             |
|   |  | (1.45)                    | (3.54) | 3/4" |      | MP-6511-39S | MP-6511-39S-C               |
|  |   | 43.0                      | 100    | NPT  | 61   |             |                             |
|   |  | (1.70)                    | (3.94) | 3/4" |      | MP-6511-61S | MP-6511-61S-C               |



| PRODUCT - FIGURE  | DRAWING<br>Dimensions in mm (inches)  | Dimensions in mm (inches) |        |        |        |        |        | PINS | PART NUMBER | PART NUMBER<br>With Dustcap |
|---|---|---------------------------|--------|--------|--------|--------|--------|------|-------------|-----------------------------|
|   |   | A                         | B      | C      | D      | E      | F      |      |             |                             |
|  | Panel plug with pin contacts, Black finish, Gold plated solder contacts.<br>               | 38.86                     | 29.36  | 6-32   | 39.0   | 32     | -      | 39   | MP-6256-39P | MP-6256-39P-C               |
|   |   | (1.53)                    | (1.16) | UNC    | (1.54) | (1.26) | -      |      |             |                             |
|  | Panel receptacle plug with socket contacts, Black finish, Gold plated solder contacts.<br> | 43.94                     | 34.93  | 6-32   | 45.5   | 35     | -      | 61   | MP-6256-61P | MP-6256-61P-C               |
|   |   | (1.73)                    | (1.38) | UNC    | (1.80) | (1.38) | -      |      |             |                             |
|  | Panel receptacle plug with socket contacts, Black finish, Gold plated solder contacts.<br> | 36.7                      | 29.36  | 3.05   | 31.8   | 22.3   | 30.1   | 39   | MP-6212-39S | MP-6212-39S-C               |
|   |   | (1.44)                    | (1.15) | (0.12) | (1.25) | (0.87) | (1.18) |      |             |                             |
|  | Panel receptacle plug with socket contacts, Black finish, Gold plated solder contacts.<br> | 43.0                      | 34.93  | 3.74   | 38.1   | 22.3   | 36.4   | 61   | MP-6212-61S | MP-6212-61S-C               |
|   |   | (1.69)                    | (1.38) | (0.15) | (1.50) | (0.87) | (1.43) |      |             |                             |

| PRODUCT - FIGURE  | DRAWING<br>Dimensions in mm (inches)   | DESCRIPTION | Dimensions in mm (inches) |        |        |        | PINS | PART NUMBER |
|---|--|-------------|---------------------------|--------|--------|--------|------|-------------|
|   |  |             | A                         | B      | C      | D      |      |             |
|  | Plug protective dustcap to suit MP-6256<br>       |             | 31.7                      | 15.9   | 127    | 4.40   | 39   | MP-742-39S  |
|   |  |             | (1.25)                    | (0.62) | (4.99) | (0.17) |      |             |
|  | Plug protective dustcap to suit MP-6256<br>       |             | 38.05                     | 16.70  | 127    | 4.40   | 61   | MP-742-61S  |
|   |  |             | (1.50)                    | (0.66) | (4.99) | (0.17) |      |             |
|  | Receptacle protective dustcap to suit MP-6216<br> |             | 36.9                      | 13.13  | 127    | -      | 39   | MP-742-39L  |
|   |  |             | (1.45)                    | (0.52) | (4.99) | -      |      |             |
|  | Receptacle protective dustcap to suit MP-6216<br> |             | 43.14                     | 14.15  | 127    | -      | 61   | MP-742-61L  |
|   |  |             | (1.70)                    | (0.56) | (4.99) | -      |      |             |
|  | Plug protective dustcap to suit MP-6212<br>       |             | 31.7                      | 15.9   | 127    | 4.40   | 39   | MP-738-39S  |
|   |  |             | (1.25)                    | (0.62) | (4.99) | (0.17) |      |             |
|  | Plug protective dustcap to suit MP-6212<br>       |             | 38.05                     | 16.70  | 127    | 4.40   | 61   | MP-738-61S  |
|   |  |             | (1.50)                    | (0.66) | (4.99) | (0.17) |      |             |
|  | Receptacle protective dustcap to suit MP-6211<br> |             | 36.9                      | 13.13  | 127    | -      | 39   | MP-738-39L  |
|   |  |             | (1.45)                    | (0.52) | (4.99) | -      |      |             |
|  | Receptacle protective dustcap to suit MP-6211<br> |             | 43.14                     | 14.15  | 127    | -      | 61   | MP-738-61L  |
|   |  |             | (1.70)                    | (0.56) | (4.99) | -      |      |             |



## STANDARD DATA MP-62 SERIES / MP - 65 SERIES

|                                   |  | VALUE  |                     |
|-----------------------------------|--|--|---------------------|
| <b>GENERAL CHARACTERISTICS</b>    | Number of contacts                       | 39   | 61                  |
|                                   | Number of channels                       | 12   | 20                  |
|                                   | Termination                              | Solder                                       |                     |
|                                   | Wire Gauge - Stranded Wire               | 37 x 24AWG-20AWG<br>2 x 20AWG-16AWG          | 24AWG-20AWG         |
|                                   | Environmental                            | Complies with EU RoHS 2 Directive 2011/65/EU |                     |
| <b>ELECTRICAL CHARACTERISTICS</b> | Operating Voltage at Sea level - DC      | 600V*  |                     |
|                                   | Operating Voltage at Sea level - AC      | 600V*  |                     |
|                                   | Test Voltage AC RMS                      | 1500V  |                     |
|                                   | Current Carrying Capacity                | 37 x 7.5A<br>2 x 13A                         | 7.5A                |
|                                   | Insulation Resistance                    | 5000M $\Omega$                               |                     |
| <b>CLIMATIC CHARACTERISTICS</b>   | Protection Class                         | IP67 (when mated)                            |                     |
|                                   | Operating Temperature                    | -55°C to +125°C (-67°F to +257°F)            |                     |
| <b>MECHANICAL CHARACTERISTICS</b> | Cable Retention                          | PG Gland / NPT Thread                        |                     |
|                                   | Mechanical Operations                    | 500 mating cycles (minimum)                  |                     |
| <b>MATERIALS</b>                  | Connector / Shell Finish                 | Aluminium Alloy / Black                      |                     |
|                                   | Insert                                   | Neoprene                                     |                     |
|                                   | Male pin contact machined - Plating      | Brass / Gold plated                          |                     |
|                                   | Female socket contact machined - Plating | Brass / Gold plated                          |                     |
| <b>CLAMPING CHARACTERISTICS</b>   | PG Gland                                 | 16   | 21                  |
|                                   | Cable Clamping range mm (inches)         | 9-14 (0.35"-0.55")                           | 13-18 (0.51"-0.70") |

\*Not suitable for domestic applications above 50V

Rev 3 - 03/2013





## 146 SERIES RECTANGULAR CONNECTORS

Amphenol Tuchel C146 series rectangular connectors feature modular components ensuring a vast range of different features and benefits for the end user. The zinc diecast aluminum housings are finished in a durable powder coat and available in either top or side entry. Connector coupling is achieved via a positive locking lever ensuring a positive rapid connection. The C146 series is suitable for general-purpose audio and lighting applications and is completely intermateable with all competitor connectors.



## FIBRE OPTIC








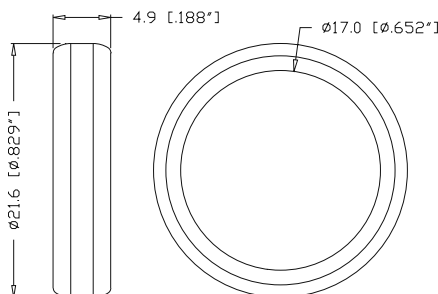
Amphenol has over 25 years experience in fibre optics dating back to their development of the first industry standard connector, the SMA. Today we can offer a complete range of products including Hybrid Fibre optic connectors for HDTV broadcast cameras SMPTE 304M compliant and ruggedised connectors and cable assemblies for indoor or outdoor applications.







## ACCESSORIES

- Colour coded boots(backshells) and rings to assist in cable identification.
- In-line adaptors. Pre-wired for convenience.
- Termination tool for fast assembly of cable connectors.
- Mounting hardware.
- Metal boots(backshells) for rugged environments.

| PRODUCT - FIGURE | DRAWING | DESCRIPTION  | VARIATIONS                                 | PART NUMBER         |
|------------------|---------|--|--|---------------------|
|                  |         | XLR 3 pole male to 3 pole male adapter, Pre wired, Metal Shell     | Nickel Finish<br>Black Finish              | AC3M3MW<br>AC3M3MBW |
|                  |         | XLR 3 pole female to 3 pole female adapter, Pre wired, Metal Shell | Nickel Finish<br>Black Finish              | AC3F3FW<br>AC3F3FBW |
|                  |         | XLR 3 pole female to 3 pole male adapter, Pre wired, Metal Shell   | Nickel Finish<br>Black Finish              | AC3F3MW<br>AC3F3MBW |
|                  |         | XLR 3 pole female to 5 pole male adapter, Pre wired, Metal Shell   | Nickel Finish                              | AC3F5MW             |
|                  |         | XLR 3 pole male to 5 pole female adapter, Pre wired, Metal Shell   | Nickel Finish                              | AC3M5FW             |
|                  |         | XLR 5 pole male to 5 pole male adapter, Pre wired, Metal Shell     | Nickel Finish                              | AC5M5MW             |
|                  |         | Termination Tool   | For IDC and Solder cable connectors        | T2860               |
|                  |         | Termination Tool   | For AC Series Right Angle cable connectors | T2880               |
|                  |         | Termination Tool   | For AX Series cable connectors             | T2890               |
|                  |         | A Type / C Type Connector Mounting, Self-Tapping Screw             | 2.9 x 1.06 Tri-rondular                    | 52500002-734        |
|                  |         | B Type Connector Mounting, Self-Tapping Screw                      | M2.5                                       | 52500005-732        |

| PRODUCT - FIGURE  | DRAWING<br>Dimensions in mm (inches)   | DESCRIPTION   | VARIATIONS   | PART NUMBER     |
|---|--|---|--------------|-----------------|
|    |                 | AX Series Coloured Boot   | Brown        | AX-BOOT-1       |
|   |  |   | Red          | AX-BOOT-2       |
|   |  |   | Orange       | AX-BOOT-3       |
|   |  |   | Yellow       | AX-BOOT-4       |
|   |  |   | Green        | AX-BOOT-5       |
|   |  |   | Blue         | AX-BOOT-6       |
|   |  |   | Violet       | AX-BOOT-7       |
|   |  |   | Grey         | AX-BOOT-8       |
|   |  |   | White        | AX-BOOT-9       |
|   |  |   | Black        | AX-BOOT         |
| Clear   | AX-BOOT-CLR  |   |              |                 |
|   |               | AC Coloured Boot / Backshell<br><br><b>Note:</b> Number Identification optional. (Please contact us.)                                 | Brown        | AC-NUT-BRN      |
|   |  |   | Red          | AC-NUT-RED      |
|   |  |   | Orange       | AC-NUT-ORG      |
|   |  |   | Yellow       | AC-NUT-YEL      |
|   |  |   | Green        | AC-NUT-GRN      |
|   |  |   | Blue         | AC-NUT-BLU      |
|   |  |   | Violet       | AC-NUT-VIO      |
|   |  |   | Grey         | AC-NUT-GRY      |
| White   | AC-NUT-WHT   |   |              |                 |
|  |  | Description: Coloured Grommets to suit AC Series, T Series and Musician range   | Brown        | AC-GROMMET-BRN  |
|   |  |   | Red          | AC-GROMMET-RED  |
|   |  |   | Orange       | AC-GROMMET-ORG  |
|   |  |   | Yellow       | AC-GROMMET-YEL  |
|   |  |   | Green        | AC-GROMMET-GRN  |
|   |  |   | Blue         | AC-GROMMET-BLU  |
|   |  |   | Violet       | AC-GROMMET-VIO  |
|   |  |   | Grey         | AC-GROMMET-GRY  |
| White   | AC-GROMMET-WHT   |   |              |                 |
|  |  | AC Coloured Identification Rings – Plain and Numbered<br><br><b>Note:</b> Custom number Identification optional. (Please contact us.) | Brown        | AC-RING-BRN     |
|   |  |   | Red          | AC-RING-RED     |
|   |  |   | Orange       | AC-RING-ORG     |
|   |  |   | Yellow       | AC-RING-YEL     |
|   |  |   | Green        | AC-RING-GRN     |
|   |  |   | Blue         | AC-RING-BLU     |
|   |  |   | Violet       | AC-RING-VIO     |
|   |  |   | Grey         | AC-RING-GRY     |
|   |  |   | White        | AC-RING-WHT     |
|   |  |   | Red #1-24    | AC-RING-RED-PK1 |
|   |  |   | Yellow #1-24 | AC-RING-YEL-PK1 |
|   |  |   | Blue #1-24   | AC-RING-BLU-PK1 |
|   |  |   | Red #1-48    | AC-RING-RED-PK2 |
|   |  |   | Yellow #1-48 | AC-RING-YEL-PK2 |
| Blue #1-48  | AC-RING-BLU-PK2  |   |              |                 |

ACC.

| PRODUCT - FIGURE  | DRAWING  | DESCRIPTION  | VARIATIONS     | PART NUMBER  |
|---|--|--|----------------|--------------|
|  | <p style="text-align: center;">Dimensions in mm (inches)</p>  | AC Metal Boot / Backshell, Black Finish  | Not Applicable | AC-NUT-METAL |
|  |   | AC Thermoplastic Boot / Backshell. Suitable for use with 8.5mm (0.33") O.D. cable. | Not Applicable | AC-NUT-J-BLK |


ACC.

NOTE: All accessories comply with EU RoHS 2 Directive 2011/65/EU

NOTE: Please do not refer to this printed catalogue as a colour reference. For exact colours contact your sales representative.

## CONNECTOR WIRING INFORMATION


### XLR (Microphone / Patch Cables)

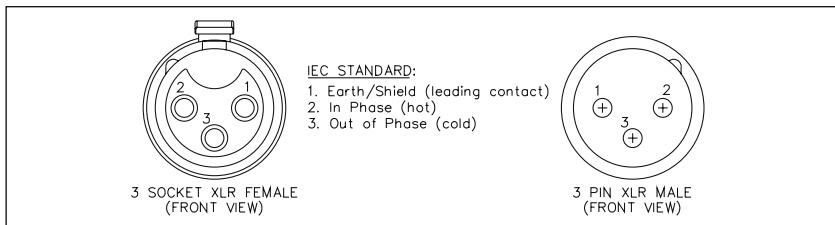

The standard XLR 3 contact pin outs are as shown above for a balanced lead. In such a configuration audio "Hot" (pin 2) is the in-phase connection whilst audio "Cold" (pin 3) is the out-of-phase connection. For an unbalanced lead however, you may connect pin 1 to either pin 2 or pin 3, but not both. In such a configuration the remaining pin is used for the audio signal.

When terminating the cable shielding to pin 1 it is suggested that the shield be only grounded at one end of the cable to avoid inducing "hum". Pin 1 is a leading contact that engages at interconnection, before pin 2 or pin 3.


### PDN (Speaker Cables)

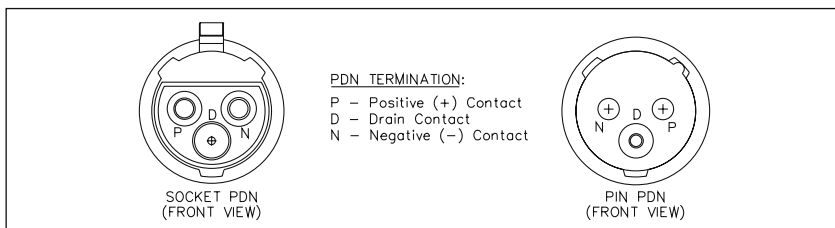


The PDN stands for Positive, Drain and Negative. P pin is used for the Positive (+) line and the N pin is for the return line. D pin is a leading contact that engages at interconnection, before the major contacts. If applicable, solder the cable screen to this contact.

### 1/4" Phono (6.35mm) (Standard Applications)


#### MICROPHONE CABLE - BALANCED

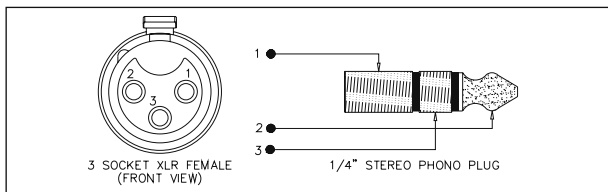


#### MICROPHONE CABLE - UNBALANCED

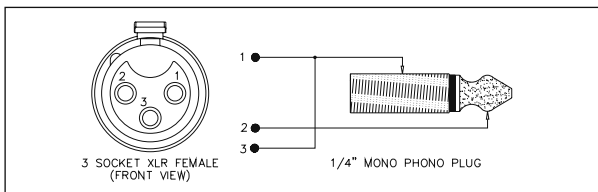

#### INSTRUMENT / LINE CABLE (MONO)

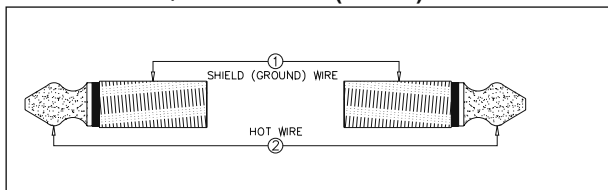

#### INSTRUMENT / LINE CABLE (STEREO)

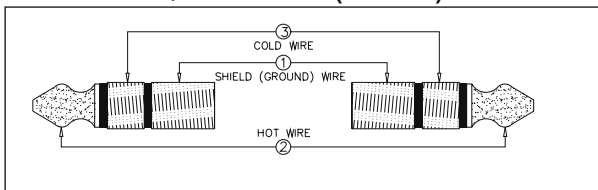


# Amphenol

## CONNECTOR WIRING INFORMATION

### MP Series


MP-41 Series  
4 Ch -13 pin

| Ch      | + | - | G |
|---------|---|---|---|
| 1       | B | C | E |
| 2       | F | K | H |
| 3       | J | D | A |
| 4       | N | M | G |
| General |   |   |   |
| Ground  | L |   |   |




MP-41 Series  
6 Ch - 19 pin

| Ch      | + | - | G |
|---------|---|---|---|
| 1       | L | M | U |
| 2       | A | N | B |
| 3       | K | J | T |
| 4       | V | P | C |
| 5       | H | S | G |
| 6       | R | D | E |
| General |   |   |   |
| Ground  | F |   |   |




MP-41 Series  
8 Ch -25 pin

| Ch      | + | - | G |
|---------|---|---|---|
| 1       | A | E | F |
| 2       | G | C | B |
| 3       | D | H | J |
| 4       | M | L | K |
| 5       | Q | P | N |
| 6       | W | S | R |
| 7       | T | X | Y |
| 8       | Z | V | U |
| General |   |   |   |
| Ground  | a |   |   |




MP-41 Series  
12 Ch-37 pin

| Ch      | + | - | G |
|---------|---|---|---|
| 1       | E | F | A |
| 2       | B | C | G |
| 3       | H | J | D |
| 4       | S | T | K |
| 5       | L | M | U |
| 6       | V | W | N |
| 7       | P | R | X |
| 8       | a | b | g |
| 9       | c | d | j |
| 10      | e | f | m |
| 11      | n | p | h |
| 12      | r | s | k |
| General |   |   |   |
| Ground  | z |   |   |




MP-41 Series  
16 Ch-54 pin

| Ch      | +  | - | G  |
|---------|----|---|----|
| 1       | W  | f | r  |
| 2       | J  | R | a  |
| 3       | k  | v | AC |
| 4       | E  | M | V  |
| 5       | e  | q | y  |
| 6       | B  | H | P  |
| 7       | Z  | j | u  |
| 8       | D  | L | U  |
| 9       | d  | p | x  |
| 10      | A  | G | O  |
| 11      | Y  | h | t  |
| 12      | C  | K | T  |
| 13      | c  | n | w  |
| 14      | F  | N | X  |
| 15      | g  | s | AB |
| 16      | S  | b | m  |
| General |    |   |    |
| Ground  | AG |   |    |



MP-41 Series  
28 Ch-85 pin

| Ch      | +  | -  | G  |
|---------|----|----|----|
| 1       | A  | B  | C  |
| 2       | E  | F  | H  |
| 3       | J  | K  | L  |
| 4       | N  | P  | R  |
| 5       | S  | T  | U  |
| 6       | X  | Y  | Z  |
| 7       | a  | b  | c  |
| 8       | d  | f  | g  |
| 9       | h  | i  | j  |
| 10      | k  | m  | n  |
| 11      | p  | q  | r  |
| 12      | t  | u  | v  |
| 13      | w  | x  | y  |
| 14      | z  | AA | AB |
| 15      | AC | AD | AE |
| 16      | AF | AH | AJ |
| 17      | AK | AL | AM |
| 18      | AP | AR | AS |
| 19      | AT | AU | AV |
| 20      | AW | AX | AY |
| 21      | AZ | BA | BB |
| 22      | BC | BD | BE |
| 23      | BJ | BK | BL |
| 24      | BM | BN | BP |
| 25      | BS | BT | BU |
| 26      | BV | BR | BF |
| 27      | BH | AN | s  |
| 28      | W  | M  | D  |
| General |    |    |    |
| Ground  | V  |    |    |




MP-41 Series  
48 Ch - 150 pin

| Ch      | +   | -   | G   |
|---------|-----|-----|-----|
| 1       | 1   | 2   | 3   |
| 2       | 5   | 6   | 7   |
| 3       | 8   | 9   | 10  |
| 4       | 11  | 12  | 13  |
| 5       | 14  | 15  | 16  |
| 6       | 17  | 18  | 19  |
| 7       | 21  | 22  | 23  |
| 8       | 24  | 25  | 26  |
| 9       | 27  | 28  | 29  |
| 10      | 20  | 30  | 31  |
| 11      | 32  | 33  | 34  |
| 12      | 35  | 36  | 37  |
| 13      | 38  | 39  | 40  |
| 14      | 41  | 42  | 43  |
| 15      | 44  | 45  | 46  |
| 16      | 47  | 48  | 49  |
| 17      | 50  | 51  | 52  |
| 18      | 53  | 54  | 55  |
| 19      | 57  | 58  | 59  |
| 20      | 60  | 61  | 62  |
| 21      | 63  | 64  | 65  |
| 22      | 66  | 67  | 68  |
| 23      | 69  | 70  | 71  |
| 24      | 72  | 73  | 74  |
| 25      | 75  | 76  | 77  |
| 26      | 78  | 79  | 80  |
| 27      | 82  | 83  | 84  |
| 28      | 85  | 86  | 87  |
| 29      | 88  | 89  | 90  |
| 30      | 91  | 92  | 93  |
| 31      | 94  | 95  | 96  |
| 32      | 97  | 98  | 99  |
| 33      | 100 | 101 | 102 |
| 34      | 103 | 104 | 105 |
| 35      | 56  | 81  | 106 |
| 36      | 107 | 108 | 109 |
| 37      | 110 | 111 | 112 |
| 38      | 113 | 114 | 115 |
| 39      | 116 | 117 | 118 |
| 40      | 119 | 120 | 121 |
| 41      | 122 | 123 | 124 |
| 42      | 125 | 126 | 127 |
| 43      | 139 | 128 | 129 |
| 44      | 130 | 131 | 132 |
| 45      | 133 | 134 | 135 |
| 46      | 136 | 137 | 138 |
| 47      | 140 | 141 | 142 |
| 48      | 143 | 144 | 145 |
| General |     |     |     |
| Ground  | 150 |     |     |


MP-62 Series  
12 Ch-39 pin

| Ch      | +   | - | G |
|---------|-----|---|---|
| 1       | p   | n | q |
| 2       | W   | A | X |
| 3       | N   | f | P |
| 4       | L   | e | M |
| 5       | J   | d | K |
| 6       | G   | c | H |
| 7       | E   | b | F |
| 8       | D   | a | Z |
| 9       | C   | B | Y |
| 10      | U   | j | V |
| 11      | i   | h | T |
| 12      | R   | g | S |
| General |     |   |   |
| Ground  | N/A |   |   |



MP-62 Series  
20 Ch-61 pin

| Ch      | +   | -  | G  |
|---------|-----|----|----|
| 1       | JJ  | HH | NN |
| 2       | MM  | KK | PP |
| 3       | BB  | AA | CC |
| 4       | s   | FF | W  |
| 5       | r   | EE | V  |
| 6       | e   | D  | x  |
| 7       | f   | E  | y  |
| 8       | q   | DD | U  |
| 9       | S   | p  | T  |
| 10      | P   | N  | R  |
| 11      | m   | k  | n  |
| 12      | L   | K  | M  |
| 13      | J   | i  | j  |
| 14      | H   | G  | h  |
| 15      | g   | F  | z  |
| 16      | d   | C  | w  |
| 17      | B   | A  | c  |
| 18      | b   | a  | Z  |
| 19      | v   | u  | Y  |
| 20      | t   | GG | X  |
| General |     |    |    |
| Ground  | N/A |    |    |



| Part Number    | Page | Part Number    | Page | Part Number   | Page | Part Number    | Page | Part Number   | Page |
|----------------|------|----------------|------|---------------|------|----------------|------|---------------|------|
| Symbols        |      | AC3FBVB1-AU-B  | 41   | AC3MAV1-AU-B  | 36   | AC3MMCP BULK   | 14   | AC4FR         | 15   |
| 47-10070       | 91   | AC3FBVB2-AU-B  | 41   | AC3MAV2-AU-B  | 36   | AC3MMCPJ       | 14   | AC4M          | 11   |
| 47-10090       | 91   | AC3FBVB3-AU-B  | 41   | AC3MAV3-AU-B  | 36   | AC3MMDP        | 60   | AC4M-AU       | 11   |
| 47-10110       | 91   | AC3FBVBL1-AU-B | 42   | AC3MAV4-AU-B  | 36   | AC3MMDP BULK   | 60   | AC4MB         | 11   |
| 47-10120       | 91   | AC3FBVBL2-AU-B | 42   | AC3MAV-AU-B   | 36   | AC3MMDPL       | 60   | AC4MB-AU      | 11   |
| 47-10150       | 91   | AC3FBVBL3-AU-B | 42   | AC3MB         | 10   | AC3MMDPL BULK  | 60   | AC4MB BULK    | 11   |
| 112119         | 90   | AC3FBVBL1-AU-B | 41   | AC3MB-AU      | 10   | AC3MMDZ        | 23   | AC4MBJ        | 11   |
| 112133         | 90   | AC3FBVBL2-AU-B | 41   | AC3MB BULK    | 10   | AC3MMDZ-AU     | 23   | AC4M BULK     | 11   |
| 112507         | 90   | AC3FBVL1-AU-B  | 42   | AC3MBH1-AU-B  | 39   | AC3MMDZB       | 23   | AC4MDZ        | 24   |
| 112508         | 90   | AC3FBVL2-AU-B  | 42   | AC3MBH2-AU-B  | 39   | AC3MMDZB-AU    | 23   | AC4MDZ-AU     | 24   |
| 112509         | 90   | AC3FBVL3-AU-B  | 42   | AC3MBH3-AU-B  | 39   | AC3MMDZB BULK  | 23   | AC4MDZB       | 24   |
| 112519         | 90   | AC3FBVL-AU-B   | 41   | AC3MBH-AU-B   | 39   | AC3MMDZB BULK  | 23   | AC4MDZB-AU    | 24   |
| 112521         | 90   | AC3FCP         | 14   | AC3MBHB1-AU-B | 39   | AC3MMDZV       | 23   | AC4MDZB BULK  | 24   |
| 112565         | 90   | AC3FCP-AU      | 14   | AC3MBHB2-AU-B | 39   | AC3MMDZVB      | 23   | AC4MDZV       | 24   |
| 112606         | 90   | AC3FCP BULK    | 14   | AC3MBHB3-AU-B | 39   | AC3MMJ         | 10   | AC4MDZVB      | 24   |
| 112950         | 90   | AC3FCPI        | 18   | AC3MBHB-AU-B  | 39   | AC3MMP         | 26   | AC4MJ         | 11   |
| 112951         | 90   | AC3FCPI-AU     | 18   | AC3MBHBL-AU-B | 39   | AC3MMP-AU      | 26   | AC4MP         | 27   |
| 112952         | 90   | AC3FCPI BULK   | 18   | AC3MBHL-AU-B  | 39   | AC3MMPB        | 26   | AC4MP-AU      | 27   |
| 112953         | 90   | AC3FCPJ        | 14   | AC3MBJ        | 10   | AC3MMPB-AU     | 26   | AC4MPB        | 27   |
| 112955         | 90   | AC3FDP         | 60   | AC3M BULK     | 10   | AC3MMPB BULK   | 26   | AC4MPB-AU     | 27   |
| 112956         | 90   | AC3FDP BULK    | 60   | AC3MBV1-AU-B  | 40   | AC3MMP BULK    | 26   | AC4MPB BULK   | 27   |
| 112957         | 90   | AC3FDPH        | 60   | AC3MBV2-AU-B  | 40   | AC3MMPNZ       | 26   | AC4MP BULK    | 27   |
| 52500002-734   | 137  | AC3FDPH BULK   | 60   | AC3MBV3-AU-B  | 40   | AC3MMPNZ-AU    | 26   | AC4MPNZ       | 27   |
| 52500005-732   | 137  | AC3FDPHL       | 60   | AC3MBV-AU-B   | 39   | AC3MMPNZB      | 26   | AC4MPNZ-AU    | 27   |
|                |      | AC3FDPHL BULK  | 60   | AC3MBVB1-AU-B | 40   | AC3MMPNZB-AU   | 26   | AC4MPNZB      | 27   |
|                |      | AC3FDPI        | 62   | AC3MBVB2-AU-B | 40   | AC3MMPNZB BULK | 26   | AC4MPNZB-AU   | 27   |
| A              |      | AC3FDPI BULK   | 62   | AC3MBVB3-AU-B | 40   | AC3MMPNZ BULK  | 26   | AC4MPNZB BULK | 27   |
| AC3F           | 10   | AC3FDPIB       | 62   | AC3MBVB-AU-B  | 39   | AC3MMPNZV      | 26   | AC4MPNZ BULK  | 27   |
| AC3F3FBW       | 137  | AC3FDPIB BULK  | 62   | AC3MCP        | 14   | AC3MMPNZVB     | 26   | AC4MPNZV      | 27   |
| AC3F3FW        | 137  | AC3FDPL        | 60   | AC3MCP-AU     | 14   | AC3MMPV        | 26   | AC4MPNZVB     | 27   |
| AC3F3MBW       | 137  | AC3FDPL BULK   | 60   | AC3MCP BULK   | 14   | AC3MMPVB       | 26   | AC4MPV        | 27   |
| AC3F3MW        | 137  | AC3FDPV        | 60   | AC3MCPJ       | 18   | AC3MMR         | 15   | AC4MPVB       | 27   |
| AC3F5MW        | 137  | AC3FDPV BULK   | 60   | AC3MCPJ       | 18   | AC3MP          | 27   | AC4MR         | 15   |
| AC3FAH1-AU-B   | 36   | AC3FDPV        | 60   | AC3MCPJ       | 18   | AC3MP-AU       | 27   | AC4MR         | 15   |
| AC3FAH2-AU-B   | 37   | AC3FDPVL       | 60   | AC3MCPJ       | 14   | AC3MPB         | 27   | AC5FAH-AU-B   | 43   |
| AC3FAH3-AU-B   | 37   | AC3FDPVL BULK  | 60   | AC3MDP        | 60   | AC3MPB-AU      | 27   | AC5F-AU       | 11   |
| AC3FAH-AU-B    | 36   | AC3FDZ         | 23   | AC3MDP BULK   | 60   | AC3MPB BULK    | 27   | AC5FAV-AU-B   | 43   |
| AC3FAHL1-AU-B  | 37   | AC3FDZB        | 23   | AC3MDPH       | 60   | AC3MP BULK     | 27   | AC5FB         | 11   |
| AC3FAHL2-AU-B  | 37   | AC3FDZB-AU     | 23   | AC3MDPH BULK  | 60   | AC3MPNZ        | 26   | AC5FB-AU      | 11   |
| AC3FAHL3-AU-B  | 37   | AC3FDZB BULK   | 23   | AC3MDPHL      | 60   | AC3MPNZ-AU     | 26   | AC5FB BULK    | 11   |
| AC3FAHL-AU-B   | 37   | AC3FDZ BULK    | 23   | AC3MDPHL BULK | 60   | AC3MPNZB       | 26   | AC5FBJ        | 11   |
| AC3F-AU        | 10   | AC3FDZV        | 23   | AC3MDPI       | 62   | AC3MPNZB-AU    | 26   | AC5F BULK     | 11   |
| AC3FAV1-AU-B   | 37   | AC3FDZVB       | 23   | AC3MDPI BULK  | 62   | AC3MPNZB BULK  | 26   | AC5F BULK     | 11   |
| AC3FAV2-AU-B   | 38   | AC3FI          | 16   | AC3MDPIL      | 62   | AC3MPNZ BULK   | 26   | AC5FDZ        | 24   |
| AC3FAV3-AU-B   | 38   | AC3FI-AU       | 16   | AC3MDPIL BULK | 62   | AC3MPNZV       | 26   | AC5FDZ-AU     | 24   |
| AC3FAV-AU-B    | 37   | AC3FIB         | 16   | AC3MDPL       | 60   | AC3MPNZVB      | 26   | AC5FDZB       | 24   |
| AC3FAVL1-AU-B  | 38   | AC3FIB-AU      | 16   | AC3MDPL BULK  | 60   | AC3MPPI        | 62   | AC5FDZB-AU    | 24   |
| AC3FAVL2-AU-B  | 38   | AC3FIB BULK    | 16   | AC3MDPV       | 60   | AC3MPPI BULK   | 62   | AC5FDZB BULK  | 24   |
| AC3FAVL3-AU-B  | 38   | AC3FI BULK     | 16   | AC3MDPV BULK  | 60   | AC3MPPIL       | 62   | AC5FDZ BULK   | 24   |
| AC3FAVL-AU-B   | 38   | AC3FJ          | 10   | AC3MDPV BULK  | 60   | AC3MPPIL BULK  | 62   | AC5FDZV       | 24   |
| AC3FB          | 10   | AC3FPPI        | 62   | AC3MDPVL      | 60   | AC3MPV         | 27   | AC5FDZVB      | 24   |
| AC3FB-AU       | 10   | AC3FPPI BULK   | 62   | AC3MDZ        | 23   | AC3MPVB        | 27   | AC5FJ         | 11   |
| AC3FB BULK     | 10   | AC3FPPIB       | 62   | AC3MDZ-AU     | 23   | AC4F           | 11   | AC5FPZ        | 28   |
| AC3FBH1-AU-B   | 40   | AC3FPPIB BULK  | 62   | AC3MDZB       | 23   | AC4F-AU        | 11   | AC5FPZ-AU     | 28   |
| AC3FBH2-AU-B   | 40   | AC3FPZ         | 27   | AC3MDZB-AU    | 23   | AC4FB          | 11   | AC5FPZB       | 28   |
| AC3FBH3-AU-B   | 40   | AC3FPZ-AU      | 27   | AC3MDZB BULK  | 23   | AC4FB-AU       | 11   | AC5FPZB-AU    | 28   |
| AC3FBH-AU-B    | 40   | AC3FPZB        | 27   | AC3MDZ BULK   | 23   | AC4FB BULK     | 11   | AC5FPZB BULK  | 28   |
| AC3FBHB1-AU-B  | 40   | AC3FPZB-AU     | 27   | AC3MDZV       | 23   | AC4FBJ         | 11   | AC5FPZV       | 28   |
| AC3FBHB2-AU-B  | 40   | AC3FPZB BULK   | 27   | AC3MDZVB      | 23   | AC4F BULK      | 11   | AC5FPZVB      | 28   |
| AC3FBHB3-AU-B  | 40   | AC3FPZ BULK    | 27   | AC3MI         | 16   | AC4FDZ         | 24   | AC5FR         | 15   |
| AC3FBHB-AU-B   | 40   | AC3FPZV        | 27   | AC3MI-AU      | 16   | AC4FDZ-AU      | 24   | AC5M          | 11   |
| AC3FBHBL1-AU-B | 41   | AC3FPZVB       | 27   | AC3MIB        | 16   | AC4FDZB        | 24   | AC5M5MW       | 137  |
| AC3FBHBL2-AU-B | 41   | AC3FR          | 15   | AC3MIB-AU     | 16   | AC4FDZB-AU     | 24   | AC5MAH-AU-B   | 43   |
| AC3FBHBL3-AU-B | 41   | AC3M           | 10   | AC3MIB BULK   | 16   | AC4FDZB BULK   | 24   | AC5M-AU       | 11   |
| AC3FBHBL-AU-B  | 40   | AC3M3MBW       | 137  | AC3MIB BULK   | 16   | AC4FDZ BULK    | 24   | AC5MAV-AU-B   | 43   |
| AC3FBHL1-AU-B  | 41   | AC3M3MW        | 137  | AC3MI BULK    | 16   | AC4FDZV        | 24   | AC5MB         | 11   |
| AC3FBHL2-AU-B  | 41   | AC3M5FW        | 137  | AC3MM         | 10   | AC4FDZVB       | 24   | AC5MB-AU      | 11   |
| AC3FBHL3-AU-B  | 41   | AC3MA-AU-B     | 36   | AC3MM-AU      | 10   | AC4FJ          | 11   | AC5MB BULK    | 11   |
| AC3FBHL-AU-B   | 40   | AC3MAH1-AU-B   | 35   | AC3MMB        | 10   | AC4FPZ         | 28   | AC5MBJ        | 11   |
| AC3FBJ         | 10   | AC3MAH2-AU-B   | 35   | AC3MMB-AU     | 10   | AC4FPZB        | 28   | AC5M BULK     | 11   |
| AC3F BULK      | 10   | AC3MAH3-AU-B   | 35   | AC3MMB BULK   | 10   | AC4FPZB-AU     | 28   | AC5MDZ        | 24   |
| AC3FBV1-AU-B   | 41   | AC3MAH4-AU-B   | 35   | AC3MMBJ       | 10   | AC4FPZB BULK   | 28   | AC5MDZ-AU     | 24   |
| AC3FBV2-AU-B   | 41   | AC3MAH4-SW-B   | 35   | AC3MMB BULK   | 10   | AC4FPZ BULK    | 28   | AC5MDZB       | 24   |
| AC3FBV3-AU-B   | 41   | AC3MAH-AU-B    | 35   | AC3MMCP       | 14   | AC4FPZV        | 28   | AC5MDZB-AU    | 24   |
| AC3FBV-AU-B    | 41   | AC3M-AU        | 10   | AC3MMCP-AU    | 14   | AC4FPZVB       | 28   | AC5MDZB BULK  | 24   |



# Amphenol

| Part Number    | Page | Part Number    | Page | Part Number    | Page | Part Number    | Page | Part Number  | Page |
|----------------|------|----------------|------|----------------|------|----------------|------|--------------|------|
| AC5MDZ BULK    | 24   | AC6AMPNZVB     | 29   | AC-GROMMET-BLU | 138  | ACJM-MN-2      | 113  | ACJS-NV35-5  | 110  |
| AC5MDZV        | 24   | AC6AMPV        | 29   | AC-GROMMET-BRN | 138  | ACJM-MN-2S     | 113  | ACJS-PC      | 112  |
| AC5MDZVB       | 24   | AC6AMPVB       | 29   | AC-GROMMET-GRN | 138  | ACJM-MV-2      | 113  | ACJS - PH    | 112  |
| AC5MJ          | 11   | AC6AMR         | 15   | AC-GROMMET-GRY | 138  | ACJM-MV-2S     | 113  | ACJS-PHOP    | 111  |
| AC5MP          | 28   | AC7F           | 12   | AC-GROMMET-ORG | 138  | ACJM-MV35-2    | 110  | ACJS-PHOP-1  | 111  |
| AC5MP-AU       | 28   | AC7FB          | 12   | AC-GROMMET-RED | 138  | ACJM-MV35-2S   | 110  | ACJS-PHR     | 112  |
| AC5MPB         | 28   | AC7FB BULK     | 12   | AC-GROMMET-VIO | 138  | ACJM-MVD985-2  | 110  | ACJS-PHS     | 112  |
| AC5MPB-AU      | 28   | AC7FBJ         | 12   | AC-GROMMET-WHT | 138  | ACJM-MVD985-2S | 110  | ACJS-PVB-3   | 113  |
| AC5MPB BULK    | 28   | AC7F BULK      | 12   | AC-GROMMET-YEL | 138  | ACJM-MVS-2     | 114  | ACJS-PVB-3S  | 113  |
| AC5MP BULK     | 28   | AC7FDZ         | 25   | ACJC5H BULK    | 53   | ACJM-MVS-2S    | 114  | ACJS-PVB-5   | 113  |
| AC5MPNZ        | 28   | AC7FDZB        | 25   | ACJC5HL BULK   | 53   | ACJM-NH35      | 110  | AC-NUT-BLU   | 138  |
| AC5MPNZ-AU     | 28   | AC7FDZB BULK   | 25   | ACJC5S BULK    | 53   | ACJM-NV35-2    | 110  | AC-NUT-BRN   | 138  |
| AC5MPNZB       | 28   | AC7FDZ BULK    | 25   | ACJC5SL BULK   | 53   | ACJM-NV35-2S   | 110  | AC-NUT-GRN   | 138  |
| AC5MPNZB-AU    | 28   | AC7FDZV        | 25   | ACJC5V BULK    | 53   | ACJM-PC        | 112  | AC-NUT-GRY   | 138  |
| AC5MPNZB BULK  | 28   | AC7FDZVB       | 25   | ACJC5VL BULK   | 53   | ACJM - PH      | 111  | AC-NUT-J-BLK | 139  |
| AC5MPNZ BULK   | 28   | AC7FJ          | 12   | ACJC6AH BULK   | 51   | ACJM-PHOP      | 111  | AC-NUT-METAL | 139  |
| AC5MPNZV       | 28   | AC7FPZ         | 30   | ACJC6AHL BULK  | 51   | ACJM-PHOP-1    | 111  | AC-NUT-ORG   | 138  |
| AC5MPNZVB      | 28   | AC7FPZB        | 30   | ACJC6AV BULK   | 51   | ACJM-PHR       | 112  | AC-NUT-RED   | 138  |
| AC5MPV         | 28   | AC7FPZB BULK   | 30   | ACJC6AVL BULK  | 51   | ACJM-PHS       | 112  | AC-NUT-VIO   | 138  |
| AC5MPVB        | 28   | AC7FPZ BULK    | 30   | ACJC6H BULK    | 54   | ACJM-PVB-2     | 113  | AC-NUT-WHT   | 138  |
| AC5MR          | 15   | AC7FPZV        | 30   | ACJC6HL BULK   | 54   | ACJM-PVB-2S    | 113  | AC-NUT-YEL   | 138  |
| AC6AF          | 12   | AC7FPZVB       | 30   | ACJC6S BULK    | 54   | ACJR-BLK       | 121  | ACPL-CBK     | 121  |
| AC6AF-AU       | 12   | AC7FR          | 15   | ACJC6SL BULK   | 54   | ACJR-BLU       | 121  | ACPL-CBL     | 121  |
| AC6AFB         | 12   | AC7M           | 12   | ACJC6V BULK    | 54   | ACJR-GRN       | 121  | ACPL-CGR     | 121  |
| AC6AFB-AU      | 12   | AC7MB          | 12   | ACJC6VL BULK   | 54   | ACJR-RED       | 121  | ACPL-CRD     | 121  |
| AC6AFB BULK    | 12   | AC7MB BULK     | 12   | ACJC9AH BULK   | 51   | ACJR-SBK       | 121  | ACPL-CWH     | 121  |
| AC6AFBJ        | 12   | AC7MBJ         | 12   | ACJC9AHL BULK  | 51   | ACJR-SBL       | 121  | ACPL-CYL     | 121  |
| AC6AF BULK     | 12   | AC7M BULK      | 12   | ACJC9AV BULK   | 52   | ACJR-SGR       | 121  | ACPM-GB      | 106  |
| AC6AFDZ        | 25   | AC7MDZ         | 25   | ACJC9AVL BULK  | 52   | ACJR-SRD       | 121  | ACPM-GB-AU   | 106  |
| AC6AFDZ-AU     | 25   | AC7MDZB        | 25   | ACJC9H BULK    | 54   | ACJR-SWH       | 121  | ACPM-GB BULK | 106  |
| AC6AFDZB       | 25   | AC7MDZB BULK   | 25   | ACJC9HL BULK   | 54   | ACJR-SYL       | 121  | ACPM-GN      | 106  |
| AC6AFDZB-AU    | 25   | AC7MDZ BULK    | 25   | ACJC9M BULK    | 56   | ACJR-WHT       | 121  | ACPM-GN-AU   | 106  |
| AC6AFDZB BULK  | 25   | AC7MDZV        | 25   | ACJC9S BULK    | 55   | ACJR-YEL       | 121  | ACPM-GN BULK | 106  |
| AC6AFDZ BULK   | 25   | AC7MDZVB       | 25   | ACJC9SL BULK   | 55   | ACJS-HHDR      | 110  | ACPM-KB      | 104  |
| AC6AFDZV       | 25   | AC7MJ          | 12   | ACJC9V BULK    | 55   | ACJS-HHOP      | 111  | ACPM-KB-AU   | 104  |
| AC6AFDZVB      | 25   | AC7MP          | 30   | ACJC9VL BULK   | 55   | ACJS-HHOP-1    | 111  | ACPM-KB BULK | 104  |
| AC6AFJ         | 12   | AC7MPB         | 30   | ACJC10AH BULK  | 52   | ACJS-IH        | 112  | ACPM-KN      | 104  |
| AC6AFPZ        | 29   | AC7MPB BULK    | 30   | ACJC10AHL BULK | 52   | ACJS-IHS       | 112  | ACPM-KN-AU   | 104  |
| AC6AFPZ-AU     | 29   | AC7MP BULK     | 30   | ACJC10AV BULK  | 52   | ACJS-MC        | 112  | ACPM-KN-BULK | 104  |
| AC6AFPZB       | 29   | AC7MPNZ        | 29   | ACJC10AVL BULK | 52   | ACJS - MH      | 112  | ACPM-RB      | 107  |
| AC6AFPZB-AU    | 29   | AC7MPNZB       | 29   | ACJC10H BULK   | 55   | ACJS-MHD       | 113  | ACPM-RB-AU   | 107  |
| AC6AFPZB BULK  | 29   | AC7MPNZB BULK  | 29   | ACJC10HL BULK  | 55   | ACJS-MHD985    | 110  | ACPM-RB BULK | 107  |
| AC6AFPZ BULK   | 29   | AC7MPNZ BULK   | 29   | ACJC10S BULK   | 56   | ACJS-MHDC*     | 112  | ACPM-RN      | 107  |
| AC6AFPZV       | 29   | AC7MPNZV       | 29   | ACJC10SL BULK  | 56   | ACJS-MHDCM     | 112  | ACPM-RN-AU   | 107  |
| AC6AFPZVB      | 29   | AC7MPNZVB      | 29   | ACJC10V BULK   | 55   | ACJS-MHDE      | 113  | ACPM-RN BULK | 107  |
| AC6AFR         | 15   | AC7MPV         | 30   | ACJC10VL BULK  | 55   | ACJS-MHDEM     | 113  | ACPM-TB      | 105  |
| AC6AM          | 12   | AC7MPVB        | 30   | ACJD-BLK       | 122  | ACJS-MHDM      | 113  | ACPM-TB-AU   | 105  |
| AC6AM-AU       | 12   | AC7MR          | 15   | ACJD-BLU       | 122  | ACJS-MHDR      | 111  | ACPM-TB BULK | 105  |
| AC6AMB         | 12   | AC-BNC20A      | 92   | ACJD-GRN       | 122  | ACJS-MHDRM     | 111  | ACPM-TN      | 105  |
| AC6AMB-AU      | 12   | AC-BNC20AJ75   | 92   | ACJD-RED       | 122  | ACJS-MHOM      | 111  | ACPM-TN-AU   | 105  |
| AC6AMB BULK    | 12   | AC-BNC20AP75   | 92   | ACJD-WHT       | 122  | ACJS-MHOP      | 111  | ACPM-TN BULK | 105  |
| AC6AMBJ        | 12   | AC-BNC20B      | 92   | ACJD-YEL       | 122  | ACJS-MHOP-1    | 111  | ACPR-BLK     | 121  |
| AC6AM BULK     | 12   | AC-BNC20BJ75   | 92   | ACJM-HHDR      | 110  | ACJS-MHR       | 112  | ACPR-BLU     | 121  |
| AC6AMDZ        | 25   | AC-BNC20BP75   | 92   | ACJM-HHOP      | 111  | ACJS-MHS       | 112  | ACPR-GRN     | 121  |
| AC6AMDZ-AU     | 25   | AC-BNC20M      | 92   | ACJM-HHOP-1    | 111  | ACJS-MIV-3     | 113  | ACPR-RED     | 121  |
| AC6AMDZB       | 25   | AC-BNC20MJ75   | 92   | ACJM-IH        | 112  | ACJS-MIV-3S    | 113  | ACPR-SBK     | 121  |
| AC6AMDZB-AU    | 25   | AC-BNC20MP75   | 92   | ACJM-IHS       | 112  | ACJS-MIV-5     | 113  | ACPR-SBL     | 121  |
| AC6AMDZB BULK  | 25   | AC-BNC40A      | 92   | ACJM-MC        | 112  | ACJS-MN-3      | 113  | ACPR-SGR     | 121  |
| AC6AMDZ BULK   | 25   | AC-BNC40AJ75   | 92   | ACJM-MH        | 111  | ACJS-MN-3S     | 113  | ACPR-SRD     | 121  |
| AC6AMDZV       | 25   | AC-BNC40AP75   | 92   | ACJM-MHD       | 113  | ACJS-MN-5      | 113  | ACPR-SWH     | 121  |
| AC6AMDZVB      | 25   | AC-BNC40B      | 92   | ACJM-MHD985    | 110  | ACJS-MV-3      | 113  | ACPR-SYL     | 121  |
| AC6AMJ         | 12   | AC-BNC40BJ75   | 92   | ACJM-MHDC*     | 112  | ACJS-MV-3S     | 113  | ACPR-WHT     | 121  |
| AC6AMP         | 29   | AC-BNC40BP75   | 92   | ACJM-MHDCM     | 112  | ACJS-MV-5      | 113  | ACPR-YEL     | 121  |
| AC6AMP-AU      | 29   | AC-BNC40M      | 92   | ACJM-MHDE      | 113  | ACJS-MV35-3    | 110  | ACPS-GB      | 106  |
| AC6AMPB        | 29   | AC-BNC40MJ75   | 92   | ACJM-MHDEM     | 113  | ACJS-MV35-3S   | 110  | ACPS-GB-AU   | 106  |
| AC6AMPB-AU     | 29   | AC-BNC40MP75   | 92   | ACJM-MHDM      | 113  | ACJS-MV35-5    | 110  | ACPS-GB BULK | 106  |
| AC6AMPB BULK   | 29   | AC-BNC-JJ-75   | 91   | ACJM-MHDR      | 111  | ACJS-MVD985-3  | 110  | ACPS-GN      | 106  |
| AC6AMP BULK    | 29   | AC-BNC-JJ-75B  | 91   | ACJM-MHDM      | 111  | ACJS-MVD985-3S | 110  | ACPS-GN-AU   | 106  |
| AC6AMPNZ       | 29   | AC-BNC-JJA-75T | 91   | ACJM-MHOM      | 111  | ACJS-MVD985-5  | 110  | ACPS-GN BULK | 106  |
| AC6AMPNZ-AU    | 29   | AC-BNC-JS-75   | 91   | ACJM-MHOP      | 111  | ACJS-MVS-3     | 114  | ACPS-KB      | 104  |
| AC6AMPNZB      | 29   | AC-BNC-JS-75B  | 91   | ACJM-MHOP-1    | 111  | ACJS-MVS-3S    | 114  | ACPS-KB-AU   | 104  |
| AC6AMPNZB-AU   | 29   | AC-BNC-LABEL   | 92   | ACJM-MHR       | 112  | ACJS-MVS-5     | 114  | ACPS-KB BULK | 104  |
| AC6AMPNZB BULK | 29   | AC-BNC-PJ-75   | 91   | ACJM-MHS       | 112  | ACJS-NH35      | 110  | ACPS-KN      | 104  |
| AC6AMPNZ BULK  | 29   | AC-BNC-PJ-75B  | 91   | ACJM-MIV-2     | 113  | ACJS-NV35-3    | 110  | ACPS-KN-AU   | 104  |
| AC6AMPNZV      | 29   | AC-BNC-PJA-75T | 91   | ACJM-MIV-2S    | 113  | ACJS-NV35-3S   | 110  | ACPS-KN BULK | 104  |



# Amphenol

| Part Number     | Page | Part Number     | Page | Part Number   | Page | Part Number    | Page | Part Number   | Page |
|-----------------|------|-----------------|------|---------------|------|----------------|------|---------------|------|
| ACPS-RB         | 107  | AP-6-14         | 78   | EP-4-13PB     | 77   | MP-4101-37P    | 128  | MP-25042-54S  | 129  |
| ACPS-RB-AU      | 107  | AP-6-21         | 78   | EP-4-14       | 77   | MP-4101-37P-C  | 128  | MP-25042-85L  | 129  |
| ACPS-RB BULK    | 107  | AP-6-22         | 78   | EP-4-14B      | 77   | MP-4101-54P    | 128  | MP-25042-85S  | 129  |
| ACPS-RN         | 107  | AP-8-11         | 78   | EP-5-11P      | 76   | MP-4101-54P-C  | 128  | MP-25042-150L | 129  |
| ACPS-RN-AU      | 107  | AP-8-12         | 78   | EP-5-11PB     | 76   | MP-4101-85P    | 128  | MP-25042-150S | 129  |
| ACPS-RN BULK    | 107  | AP-8-13         | 78   | EP-5-12       | 76   | MP-4101-85P-C  | 128  | MP-25043-13L  | 130  |
| ACPS-TB         | 105  | AP-8-14         | 78   | EP-5-12B      | 76   | MP-4101-150P   | 128  | MP-25043-13S  | 130  |
| ACPS-TB-AU      | 105  | AP-8-21         | 78   | EP-5-13P      | 77   | MP-4101-150P-C | 128  | MP-25043-19L  | 130  |
| ACPS-TB BULK    | 105  | AP-8-22         | 78   | EP-5-13PB     | 77   | MP-4102-13P    | 129  | MP-25043-19S  | 130  |
| ACPS-TN         | 105  | AX3F            | 4    | EP-5-14       | 77   | MP-4102-13P-C  | 129  | MP-25043-25L  | 130  |
| ACPS-TN-AU      | 105  | AX3F-AU         | 4    | EP-5-14B      | 77   | MP-4102-19P    | 129  | MP-25043-25S  | 130  |
| ACPS-TN BULK    | 105  | AX3FB           | 4    | EP-6-11P      | 76   | MP-4102-19P-C  | 129  | MP-25043-37L  | 130  |
| AC-RING-BLU     | 138  | AX3FB-AU        | 4    | EP-6-11PB     | 76   | MP-4102-25P    | 129  | MP-25043-37S  | 130  |
| AC-RING-BLU-PK1 | 138  | AX3FB BULK      | 4    | EP-6-12       | 76   | MP-4102-25P-C  | 129  | MP-25043-54L  | 130  |
| AC-RING-BLU-PK2 | 138  | AX3F BULK       | 4    | EP-6-12B      | 76   | MP-4102-37P    | 129  | MP-25043-54S  | 130  |
| AC-RING-BRN     | 138  | AX3M            | 4    | EP-6-13P      | 77   | MP-4102-37P-C  | 129  | MP-25043-85L  | 130  |
| AC-RING-GRN     | 138  | AX3M-AU         | 4    | EP-6-13PB     | 77   | MP-4102-54P    | 129  | MP-25043-85S  | 130  |
| AC-RING-GRY     | 138  | AX3MB           | 4    | EP-6-14       | 77   | MP-4102-54P-C  | 129  | MP-25043-150L | 130  |
| AC-RING-ORG     | 138  | AX3MB-AU        | 4    | EP-6-14B      | 77   | MP-4102-85P    | 129  | MP-25043-150S | 130  |
| AC-RING-RED     | 138  | AX3MB BULK      | 4    | EP-8-11P      | 76   | MP-4102-85P-C  | 129  | MP-108300     | 131  |
| AC-RING-RED-PK1 | 138  | AX3M BULK       | 4    | EP-8-11PB     | 76   | MP-4102-150P   | 129  | MP-108400     | 131  |
| AC-RING-RED-PK2 | 138  | AX4F            | 5    | EP-8-12       | 76   | MP-4102-150P-C | 129  | MP-108500     | 131  |
| AC-RING-VIO     | 138  | AX4F-AU         | 5    | EP-8-12B      | 76   | MP-4106-13S    | 128  | MP-108600     | 131  |
| AC-RING-WHT     | 138  | AX4FB           | 5    | EP-8-13P      | 77   | MP-4106-13S-C  | 128  | MP-EXT-16/18  | 131  |
| AC-RING-YEL     | 138  | AX4FB-AU        | 5    | EP-8-13PB     | 77   | MP-4106-19S    | 128  | MP-GUIDE-16   | 131  |
| AC-RING-YEL-PK1 | 138  | AX4FB BULK      | 5    | EP-8-14       | 77   | MP-4106-19S-C  | 128  | MP-GUIDE-18   | 131  |
| AC-RING-YEL-PK2 | 138  | AX4F BULK       | 5    | EP-8-14B      | 77   | MP-4106-25S    | 128  | MP-INS-16     | 131  |
| AG3F            | 123  | AX4M            | 4    |               |      | MP-4106-25S-C  | 128  | MP-INS-18     | 131  |
| AG3FCCH         | 123  | AX4M-AU         | 4    | J             |      | MP-4106-37S    | 128  | R             |      |
| AG3FCE          | 123  | AX4MB           | 5    | JM2P          | 101  | MP-4106-37S-C  | 128  | RJX8FA3HB     | 85   |
| AG3FCRV         | 124  | AX4MB-AU        | 5    | JM2P-AU       | 101  | MP-4106-54S    | 128  | RJX8FB5HB     | 85   |
| AG3FL           | 123  | AX4MB BULK      | 5    | JM2PB         | 101  | MP-4106-54S-C  | 128  | RJX8FB5HEB    | 85   |
| AG3M            | 123  | AX4M BULK       | 4    | JM2PB-AU      | 101  | MP-4106-85S    | 128  | RJX8FB5HGRB   | 85   |
| AG3MCC          | 123  | AX5F            | 5    | JM2PB BULK    | 101  | MP-4106-85S-C  | 128  | RJX8FB5HGREG  | 85   |
| AG3MCCH         | 123  | AX5F-AU         | 5    | JM2P BULK     | 101  | MP-4106-150S   | 128  | RJX8FB5HGVB   | 85   |
| AG4F            | 123  | AX5FB           | 5    | JS3P          | 101  | MP-4106-150S-C | 128  | RJX8FB5HGYB   | 85   |
| AG4FCCH         | 123  | AX5FB-AU        | 5    | JS3P-AU       | 101  | MP-4164-13S    | 129  | RJX8FB5HGYEB  | 85   |
| AG4FCE          | 123  | AX5FB BULK      | 5    | JS3PB         | 101  | MP-4164-13S-C  | 129  | RJX8FB5HRGB   | 85   |
| AG4FCRV         | 124  | AX5F BULK       | 5    | JS3PB-AU      | 101  | MP-4164-19S    | 129  | RJX8FB5HRGEB  | 85   |
| AG4FL           | 123  | AX5M            | 5    | JS3PB BULK    | 101  | MP-4164-19S-C  | 129  | RJX8FB5HRRB   | 85   |
| AG4M            | 123  | AX5M-AU         | 5    |               |      | MP-4164-25S    | 129  | RJX8FB5HRRB   | 85   |
| AG4MCC          | 123  | AX5MB           | 5    | K             |      | MP-4164-25S-C  | 129  | RJX8FB5HRYB   | 85   |
| AG4MCCH         | 123  | AX5MB-AU        | 5    | KM2P          | 119  | MP-4164-37S    | 129  | RJX8FB5HRYEB  | 85   |
| AG4MPCH         | 124  | AX5MB BULK      | 5    | KM2P-AU       | 119  | MP-4164-37S-C  | 129  | RJX8FB5HUUB   | 85   |
| AG5F            | 123  | AX5M BULK       | 5    | KM2PB         | 119  | MP-4164-54S    | 129  | RJX8FB5HUUB   | 85   |
| AG5FCCH         | 123  | AX-BOOT         | 138  | KM2PB-AU      | 119  | MP-4164-54S-C  | 129  | RJX8M         | 81   |
| AG5FCE          | 123  | AX-BOOT-1       | 138  | KM2PB BULK    | 119  | MP-4164-85S    | 129  | RJX8MB        | 81   |
| AG5FCRV         | 124  | AX-BOOT-2       | 138  | KM2P BULK     | 119  | MP-4164-85S-C  | 129  | RJX8MB BULK   | 81   |
| AG5FL           | 123  | AX-BOOT-3       | 138  | KS3P          | 119  | MP-4164-150S   | 129  | RJX8M BULK    | 81   |
| AG5M            | 123  | AX-BOOT-4       | 138  | KS3P-AU       | 119  | MP-4164-150S-C | 129  |               |      |
| AG5MCC          | 123  | AX-BOOT-5       | 138  | KS3PB         | 119  | MP-6211-39S    | 133  | S             |      |
| AG5MCCH         | 123  | AX-BOOT-6       | 138  | KS3PB-AU      | 119  | MP-6211-39S-C  | 133  | SP-2-F        | 68   |
| AG6F            | 123  | AX-BOOT-7       | 138  | KS3PB BULK    | 119  | MP-6211-61S    | 133  | SP-2-FB       | 68   |
| AG6FCCH         | 123  | AX-BOOT-8       | 138  | KS3P BULK     | 119  | MP-6211-61S-C  | 133  | SP-2-FBG      | 68   |
| AG6FCE          | 123  | AX-BOOT-9       | 138  | KS3PC         | 119  | MP-6216-39P    | 133  | SP-2-FBL      | 68   |
| AG6FCRV         | 124  | AX-BOOT-CLR     | 138  | KS3PC-AU      | 119  | MP-6216-39P-C  | 133  | SP-2-FBS      | 68   |
| AG6FL           | 123  |                 |      |               |      | MP-6216-61P    | 133  | SP-2-FBSG     | 68   |
| AG6M            | 123  | B               |      | M             |      | MP-6216-61P-C  | 133  | SP-2-FBSL     | 68   |
| AG6MCC          | 123  | BNC-U-LINK 75*1 | 91   | M22520/1-01   | 131  | MP-6511-39S    | 133  | SP-2-FG       | 68   |
| AG6MCCH         | 123  |                 |      | MP-738-39L    | 134  | MP-6511-39S-C  | 133  | SP-2-FL       | 68   |
| AP-4-11         | 78   | E               |      | MP-738-39S    | 134  | MP-6511-61S    | 133  | SP-2-FN       | 68   |
| AP-4-12         | 78   |                 |      | MP-738-61L    | 134  | MP-6516-39P    | 133  | SP-2-FNG      | 68   |
| AP-4-13         | 78   | EP-3-11P        | 76   | MP-738-61S    | 134  | MP-6516-39P-C  | 133  | SP-2-FNL      | 68   |
| AP-4-14         | 78   | EP-3-11PB       | 76   | MP-742-39L    | 134  | MP-6516-61P    | 133  | SP-2-FNS      | 68   |
| AP-4-21         | 78   | EP-3-12         | 76   | MP-742-39S    | 134  | MP-6516-61P-C  | 133  | SP-2-FNSG     | 68   |
| AP-4-22         | 78   | EP-3-12B        | 76   | MP-742-61L    | 134  | MP-25042-13L   | 129  | SP-2-FNSL     | 68   |
| AP-5-11         | 78   | EP-3-13P        | 77   | MP-742-61S    | 134  | MP-25042-13S   | 129  | SP-2-FS       | 68   |
| AP-5-12         | 78   | EP-3-13PB       | 77   | MP-4101-13P   | 128  | MP-25042-19L   | 129  | SP-2-FSG      | 68   |
| AP-5-13         | 78   | EP-3-14         | 77   | MP-4101-13P-C | 128  | MP-25042-19S   | 129  | SP-2-FSL      | 68   |
| AP-5-14         | 78   | EP-3-14B        | 77   | MP-4101-19P   | 128  | MP-25042-25L   | 129  | SP-2-MD       | 70   |
| AP-5-21         | 78   | EP-4-11P        | 76   | MP-4101-19P-C | 128  | MP-25042-25S   | 129  | SP-2-MDH      | 70   |
| AP-5-22         | 78   | EP-4-11PB       | 76   | MP-4101-25P   | 128  | MP-25042-37L   | 129  | SP-2-MDV      | 70   |
| AP-6-11         | 78   | EP-4-12B        | 76   | MP-4101-25P-C | 128  | MP-25042-37S   | 129  | SP-4-F        | 69   |
| AP-6-12         | 78   | EP-4-12B        | 76   | MP-4101-25P-C | 128  | MP-25042-54L   | 129  | SP-4-FB       | 69   |
| AP-6-13         | 78   | EP-4-13P        | 77   |               |      |                |      |               |      |

| Part Number | Page | Part Number | Page | Part Number | Page | Part Number | Page | Part Number | Page |
|-------------|------|-------------|------|-------------|------|-------------|------|-------------|------|
| SP-4-FBG    | 69   | SP-4-MDH    | 70   | TM1PBJ      | 99   | TM2P BULK   | 97   | TS3PBJ      | 97   |
| SP-4-FBL    | 69   | SP-4-MDHT   | 71   | TM1P BULK   | 99   | TM2PJ       | 97   | TS3PBM      | 98   |
| SP-4-FBS    | 69   | SP-4-MDHT-8 | 70   | TM1PJ       | 99   | TM2PN       | 98   | TS3PBM-AU   | 98   |
| SP-4-FBSG   | 69   | SP-4-MDT    | 70   | TM1RBJ      | 99   | TM2PN-AU    | 98   | TS3PBM BULK | 98   |
| SP-4-FBSL   | 69   | SP-4-MDV    | 71   | TM1RBJ-AU   | 99   | TM2PN BULK  | 98   | TS3PBMJ     | 98   |
| SP-4-FG     | 69   | SP-4-MDV-2  | 71   | TM1RBJ BULK | 99   | TM2PNJ      | 98   | TS3P BULK   | 97   |
| SP-4-FL     | 69   | SP-4-MDVT-8 | 71   | TM1RJ       | 99   | TM2R        | 98   | TS3PJ       | 97   |
| SP-4-FN     | 69   |             |      | TM1RJ-AU    | 99   | TM2RB       | 98   | TS3PN       | 98   |
| SP-4-FNG    | 69   | T           |      | TM1RJ BULK  | 99   | TM2RBJ      | 98   | TS3PN-AU    | 98   |
| SP-4-FNL    | 69   |             |      | TM2P        | 97   | TM2RBJ-AU   | 98   | TS3PN BULK  | 98   |
| SP-4-FNS    | 69   | T2860       | 137  | TM2P-AU     | 97   | TM2RBJ BULK | 98   | TS3PNJ      | 98   |
| SP-4-FNSG   | 69   | T2880       | 137  | TM2PB       | 97   | TM2RJ       | 98   | TS3R        | 98   |
| SP-4-FNSL   | 69   | T2890       | 137  | TM2PB-AU    | 97   | TM2RJ-AU    | 98   | TS3RB       | 98   |
| SP-4-FS     | 69   | TH29-1      | 131  | TM2PB BULK  | 97   | TM2RJ BULK  | 98   | TS3RBJ      | 98   |
| SP-4-FSG    | 69   | TM1P        | 99   | TM2PBJ      | 97   | TS3P        | 97   | TS3RBJ-AU   | 98   |
| SP-4-FSL    | 69   | TM1P-AU     | 99   | TM2PBM      | 98   | TS3P-AU     | 97   | TS3RBJ BULK | 98   |
| SP-4-MC     | 71   | TM1PB       | 99   | TM2PBM-AU   | 98   | TS3PB       | 97   | TS3RJ       | 98   |
| SP-4-MD     | 70   | TM1PB-AU    | 99   | TM2PBM BULK | 98   | TS3PB-AU    | 97   | TS3RJ-AU    | 98   |
| SP-4-MD-8   | 70   | TM1PB BULK  | 99   | TM2PBMJ     | 98   | TS3PB BULK  | 97   | TS3RJ BULK  | 98   |

## PRODUCT SAFETY INFORMATION

This should be read in conjunction with Data Sheet information contained in individual product brochures. Failure to observe the advice in this information sheet and the operating conditions specified in the Data Sheets could result in hazardous situations.

### 1. Material Content and Physical Form

Electrical connectors do not usually contain hazardous materials. They contain conducting and non-conducting materials. Shells are manufactured in metal and plastic. Insulators can be formed in either natural rubber, synthetic rubber, plastic or glass insulating materials. Contact materials vary with the type of connector and its application. They are usually manufactured from either copper alloys, nickel, alumel, chromel or steel. In special applications, other alloys may be specified.

### 2. Fire Characteristics and Electric Shock Hazard

There is no fire hazard when the connector is correctly wired and used within the specified parameters. Incorrect wiring or assembly of the connector or careless use of metal tools or conductive fluids, or transit damage to any of the component parts may cause electric shock or burns. Live circuits must not be broken by separating mated connectors as this may cause arcing, ionisation and burning. Heat dissipation is greater at maximum resistance in a circuit. Hot spots may occur when resistance is raised locally by damage, e.g. cracked or deformed contacts, or broken strands of wire. Local overheating may also result from the use of the incorrect application tools or from poor quality soldering.

Overheating may occur if the ratings in the Data Sheets are exceeded and can cause breakdown of insulation and hence electric shock.

If heating is allowed to continue it intensifies by further increasing the local resistance through loss of temper or spring contact, formation of oxide film on contacts and wires, and leakage currents through carbonisation of insulation and tracking points. Fire can then result in the presence of combustible materials and this may release noxious fumes. Overheating may not be visually apparent. Burns may result from touching overheated components.

### 3. Handling

Care must be taken to avoid damage to any component parts of electrical connectors during installation and use. Although there are normally no sharp edges, care must be taken when handling certain components to avoid injury to fingers. Electrical connectors may be damaged in transit to customers, and damage may result in creation of hazards. Products should therefore be examined prior to installation/use and rejected if found to be damaged.

### 4. Disposal

Incineration of certain materials may release noxious or even toxic fumes.

### 5. Application

Connectors with exposed contacts should not be selected for use on the current supply side of an electrical circuit, because an electric shock could result from touching exposed contacts of an unmated connector. Voltages in excess of 30 V.A.C. or 42.5

V.D.C. are potentially hazardous and care should be taken to ensure that such voltages cannot be transmitted in any way to exposed metal parts of the connector body. The connector and wiring should be checked, before making live, to have no damage to metal parts or insulators, no solder blobs, loose strands, conducting lubricants, swarf, or any other undesired conducting particles. Circuit resistance and continuity check should be made to make certain that there are no low resistance joints or spurious conducting paths. Always use the correct application tools as specified in the Data Sheets. Do not permit untrained personnel to wire, assemble or tamper with connectors. For operation voltage please see appropriate national regulations.

### Important General Information

#### A) Air and creepage paths / Operating voltage.

The admissible operating voltages depend on the individual applications and the valid national and other applicable safety regulations. For this reason the air and creepage path data are only reference values. Observe reduction of air and creepage paths due to PC board and/or harnessing.

#### B) Other important information

Amphenol Australia Pty Ltd continuously endeavours to improve its products. Therefore, products may deviate from the description, technical data and shape as shown in product brochures.

#### C) Assembly instructions

If applicable, special assembly instructions have been included in or on the connector packaging. See also separate instructions in product brochures.



DISTRIBUTED BY

## Amphenol Australia Pty Ltd

20 Industry Blvd.  
Carrum Downs VIC 3201  
Australia

Phone: +61 3 8796 8888  
Fax: +61 3 8796 8801  
Email: [info@amphenol.com.au](mailto:info@amphenol.com.au)  
Web: [www.amphenolaudio.com](http://www.amphenolaudio.com)

## Amphenol Audio USA

**Sales Office**  
P.O. Box 11401  
Denver CO 80211 USA

**Warehouse**  
5069 Maureen Lane, Unit B  
Moorpark CA 93120 USA

Email: [sales@amphenolaudio.com](mailto:sales@amphenolaudio.com)  
Web: [www.amphenolaudio.com](http://www.amphenolaudio.com)

© 2013 Amphenol Australia Pty Ltd

Subject to all applicable laws and regulations Amphenol Australia Pty Ltd reserves the right to change specifications of any product, system or service contained in this brochure without liability.

Catalogue Part Number: CAT-AUDIO-01

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9