

120-960W, 24V Output DIN Rail Mount Power Supplies

Features

- ◆ Very Compact Size
- ◆ High Efficiency (Up to 95%)
- ◆ 150% Peak Power Capability for 4s
- ◆ ErP Compliant Design
- ◆ Low Standby Power Draw
- ◆ Remote On/Off
- ◆ Remote Voltage Adjustment
- ◆ Hazardous Location Option (/HL)



Key Market Segments & Applications



| Specifications | | DRF120 | DRF240 | DRF480 | DRF960 |
|--|-----|---|--------------------|--------------------|--------------------|
| Input Voltage Range ⁽¹⁾ | V | 85 - 264VAC, 125 - 370VDC* | | | 180 - 264VAC |
| Input Frequency | Hz | 47 - 63Hz | | | |
| Inrush Current (typ) (Cold Start) | A | 20 | | | |
| Power Factor (115/230VAC) (Meets EN61000-3-2) | - | 0.98 / 0.95 | 0.98 / 0.95 | 0.98 / 0.92 | - / 0.98 |
| Input Current (115/230VAC) | A | 1.2 / 0.6 | 2.4 / 1.2 | 4.7 / 2.5 | - / 4.5 |
| Line Regulation | mV | <96mV | | | |
| Load Regulation | mV | <240mV | | | |
| Ripple & Noise ⁽²⁾ | mV | <240mV | | | |
| Overcurrent Protection | - | >101% of peak current rating. Shutdown after 4 seconds | | | |
| Overvoltage Protection | - | 30 - 35.5V, (31.5 - 34V for DRF960). Cycle input voltage or remote on/off to reset | | | |
| Hold Up Time (230VAC input) | ms | > 20ms | | | >10ms |
| Efficiency (115 / 230VAC) | % | 89 / 91 | 92.5 / 94 | 92.5 / 94 | - / 95 |
| Standby Power Draw | W | <0.5W | <0.5W | <0.75W | <1W |
| LED Indicators | - | Green LED = DC is OK (>80% Nom). Red LED = Peak Load Operation | | | |
| DC OK relay | - | Relay contact 30V/1A | | | |
| Remote On / Off | - | When signal is low, the output is On | | | |
| Remote Voltage Adjust | - | 5 - 6V voltage programs output from 24 - 28V | | | |
| Operating Temperature | °C | -25 to +70°C. Start up at -40°C. Derate linearly to 75% load above 60°C (50°C for DRF960) | | | |
| Storage Temperature | °C | -40 to +85°C | | | |
| Operating Humidity (non condensing) | %RH | 5 - 95%RH | | | |
| Parallel Operation | - | Droop Mode - Refer to Installation Manual | | | |
| Series Operation | - | Possible | | | |
| Cooling | - | Convection | | | |
| Withstand Voltage (For 1 minute) | VAC | Input to Output 3kVAC, Input to GND 1.5kVAC, Output to GND 500VDC (960W : 500VAC) | | | |
| Isolation Resistance | MΩ | >100MΩ at 25°C, 70%RH & 500VDC | | | |
| Vibration (Non operating) | - | 10-55Hz (sweep for 1 min); 19.6m/s ² (2G) Constant; X,Y,Z each 1 hour | | | |
| Shock | - | <196m/s ² | | | |
| Safety Agency Certifications ⁽³⁾ | - | UL508 Listed, IEC/UL/EN60950-1†, CE Mark ATEX, IEC Ex, & GL. Class 1 Div 2, Group A, B, C, D (DRF120-480 only) | | | |
| Conducted & Radiated EMI Immunity | - | EN55032-B Radiated & Conducted EN61000-4-2 (contact lvl 2, air lvl 3), -3 (lvl 3), -4 (lvl 3) -5 (norm mode lvl 3, com mode lvl 4), -6 (lvl 3), -8 (lvl 4), -11 | | | |
| Line Dips | - | SEMI-F47 (200VAC input, 120-480W only) | | | |
| Weight (Typ) | g | 600 | 900 | 1300 | 1735 |
| Size (WxHxD) | in | 1.44 x 4.86 x 4.53 | 1.93 x 4.86 x 4.53 | 3.23 x 4.86 x 4.53 | 4.33 x 4.86 x 5.47 |
| Mounts on TS-35/7.5 or -35/15 rail | mm | 36.5 x 123.4 x 115 | 49 x 123.4 x 115 | 82 x 123.4 x 115 | 110 x 123.4 x 139 |
| Case material | - | Metal | | | |
| Warranty | yrs | Five years | | | |

(1) Withstands 300VAC for 5s (2) See installation manual (3) See options table

*Safety certified for AC input only

(4) Operating period at peak output current is 4 sec, max duty cycle <35% & < rated output power

† Certification to the IEC62368-1 standard in progress (2019)


Model Selector

| Model | Output Voltage | Adjust Range | Max Current | Max Power | Peak Output Current ⁽⁴⁾ | Peak Output Power ⁽⁴⁾ |
|-------------|----------------|--------------|-------------|-----------|------------------------------------|----------------------------------|
| DRF120-24-1 | 24V | 24 - 28V | 5A | 120W | 7.5A | 180W |
| DRF240-24-1 | 24V | 24 - 28V | 10A | 240W | 15A | 360W |
| DRF480-24-1 | 24V | 24 - 28V | 20A | 480W | 30A | 720W |
| DRF960-24-1 | 24V | 24 - 28V | 40A | 960W | 60A | 1440W |

Outline DRF120-24-1




Outline DRF240-24-1

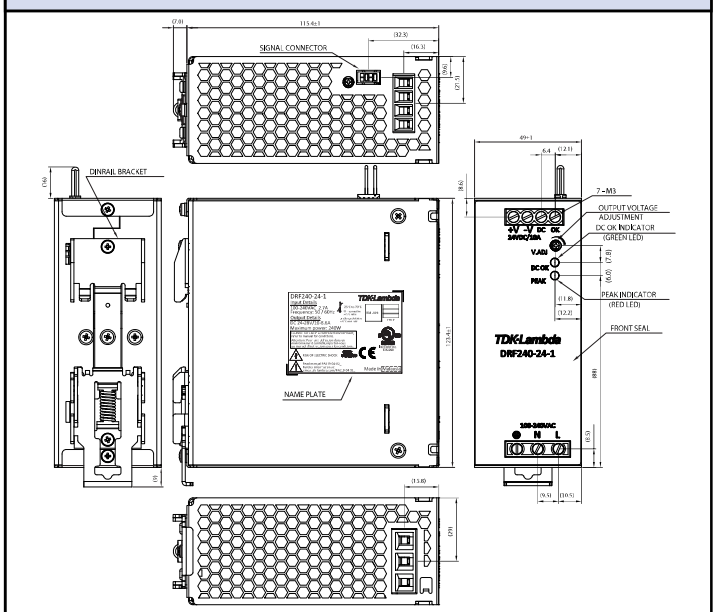

Outline DRF480-24-1



Outline DRF960-24-1

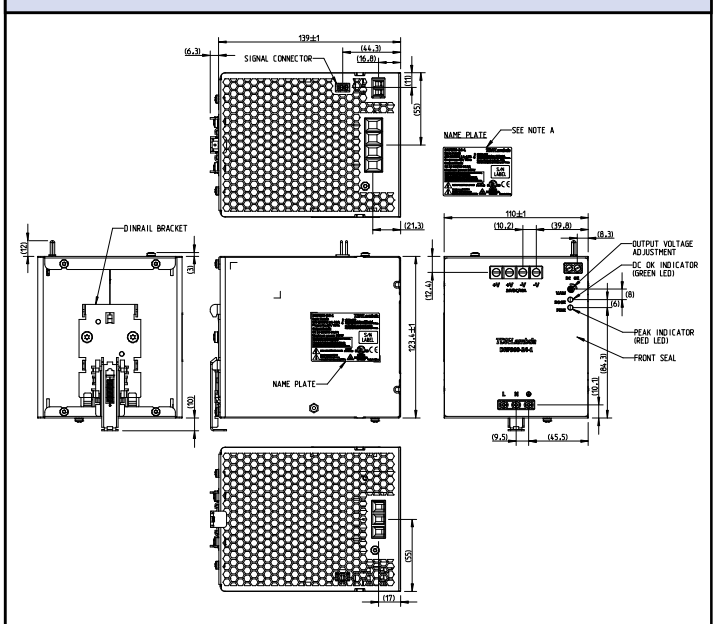

Options

| Suffix | Description |
|-----------------------|---|
| /HL (DRF120-480 only) | ATEX, IEC EX, GL Certification (Incl pcb coating) |

For Additional Information, please visit
<https://product.tdk.com/info/en/products/power/index.html>



Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9