

66024**4N55 DUAL CHANNEL, HERMETICALLY
SEALED OPTOCOUPLER****Mii****OPTOELECTRONIC PRODUCTS
DIVISION****Features:**

- DSCC Approved 5962-8767901EX
- 1500 Vdc isolation test voltage
- TTL and CMOS compatible
- 2MHz bandwidth typical
- Faraday shield to provide high common mode rejection

Applications:

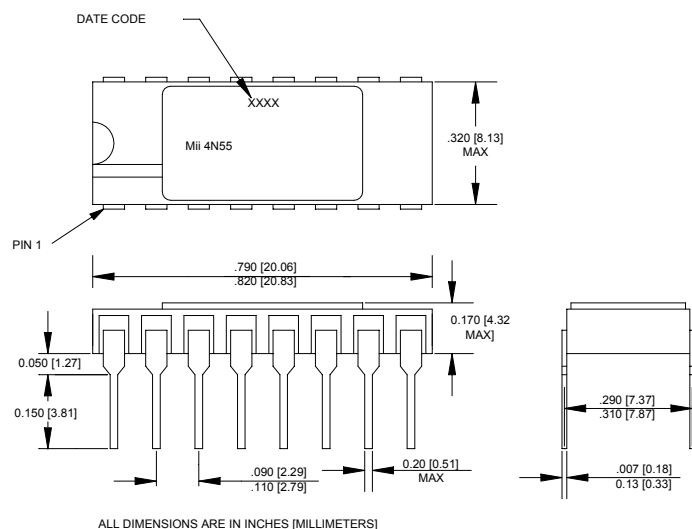
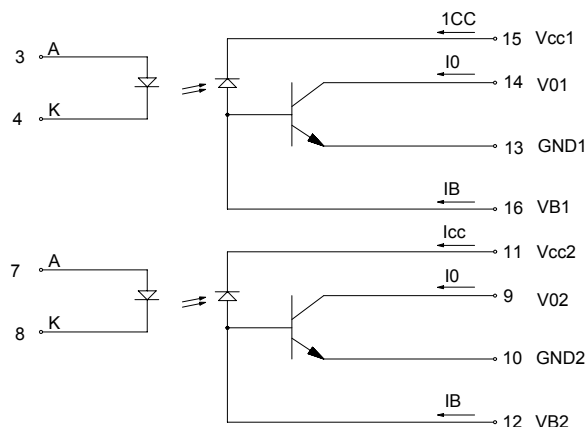
- Military and space
- Voltage level shifting
- Isolated receiver input
- Communication systems
- Medical systems

DESCRIPTION

The **66024** optocoupler contains two completely isolated optocouplers in a hermetically sealed dual inline package. Each channel provides high switching speeds while providing high isolation (1500V min) over the full military temperature range (-55° to +125°C). The 66024 is available in standard and MIL-PRF-38534 screened versions or tested to customer specifications.

ABSOLUTE MAXIMUM RATINGS

Storage Temperature.....	-65°C to +150°C
Operating Free-Air Temperature Range	-55°C to +125°C
Lead Solder Temperature.....	260°C for 10s (1.6mm below seating plane)
Peak Forward Input Current	40mA (1ms duration)
Average Forward Input Current	20mA
Input Power Dissipation	40mW
Reverse Input Voltage (each channel)	5V
Supply voltage - V_{CC} (each channel)	20V
Output Current - I_O (each channel)	20mA
Output Power Dissipation (each channel)...(derate linearly at a rate of 1.4mW/°C above 100°C	50mW
Output Voltage - V_O (each channel)	20V
Base Current (each channel).....	5mA

Package Dimensions**Schematic Diagram**

ELECTRICAL CHARACTERISTICST_a = -55°C to 125°C unless otherwise specified.

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS	NOTE
Current Transfer Ratio	CTR	9	20		%	I _F = 16mA, V _O = 0.4V, V _{CC} = 4.5V	1, 2
Output Leakage Current	I _{OH1}		70	250	μA	I _F = 250μA, V _{CC} = V _O = 18V I _F (other channel) = 20mA	1
Logic High Output Current	I _{OH}		20	100	μA	I _F = 0, V _{CC} = V _O = 18V I _F (other channel) = 20mA	1
High Level Output Current	I _{CCH}		0.2	10	μA	I _F = 0, V _{CC} = 18V I _F (other channel) = 20mA	1
Low Level Supply Current	I _{CCL}		35	200	μA	I _{F1} = I _{F2} = 20mA, V _{CC} = 18V	1
Input Forward Voltage	V _F		1.5	1.8	V	I _F = 20mA	1
Input Reverse Breakdown Voltage	BV _R	3			V	I _R = 10μA	1
Input-Output Insulation Leakage Current	I _{I-O}			1.0	μA	V _{I-O} = 1500Vdc, Relative Humidity = 45% t _A = 25°C, t = 5s	3
Propagation Delay Time To High Output Level	t _{PLH}		2	6	μs	I _F = 16mA, V _{CC} = 5V, R _L = 8.2kΩ C _L = 50pF	1
Propagation Delay Time To Low Output Level	t _{PHL}		0.4	2	μs	I _F = 16mA, V _{CC} = 5V, R _L = 8.2kΩ C _L = 50pF	1

TYPICAL CHARACTERISTICST_a = 25°C, V_{CC} = 5V Each Channel

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS	NOTE
Input Capacitance	C _{IN}		120		pF	V _F = 0, f = MHz	1
Capacitance (Input-Output)	C _{I-O}		1.5		pF	f = 1MHz, V _F = 0	1, 4
Capacitance (Input-Input)	C _{I-I}		0.55		pF	f = 1MHz	
Input Diode Temperature Coefficient	ΔV _F ΔT _A		-1.9		mV/°C	I _F = 18mA	1
Resistance (Input-Output)	R _{I-O}		10 ¹²		Ω	V _{I-O} = 500Vdc	1
Input-Input Insulation Leakage Current	I _{I-I}		1		pA	Relative Humidity = 45% V _{I-I} = 500Vdc, t = 5s	3
Common Mode Transient immunity at High Output Level	CM _H	500	1000		V/μs	V _{CM} = 10V P-P, R _L = 8.2kΩ, I _F = 0mA	1, 5
Common Mode Transient Immunity at Low Output Level	CM _L	500	1000		V/μs	V _{CM} = 10V P-P, R _L = 8.2kΩ, I _F = 16mA	1, 6

NOTES:

- Each channel.
- CURRENT TRANSFER RATIO is defined as the ratio of output collector current, I_O, to the forward LED input current, I_F, times 100%.
- Measured between each input pair shorted together.
- Measured between input pins shorted together and the output pins for that channel shorted together.
- CM_H is the maximum tolerable common mode transient to assure that the output will remain in a high logic state (ie. V_O > @.0V).
- CM_L is the maximum tolerable common mode transient to assure that the output will remain in a low logic state (ie. V_O < 0.8V).

RECOMMENDED OPERATING CONDITIONS:

PARAMETER	SYMBOL	MIN	MAX	UNITS
Input Current, Low Level	I_{FL}	0	2	μA
Supply Voltage	V_{CC}	2.0	18	V

SELECTION GUIDE

PART NUMBER	PART DESCRIPTION
66024-000	Dual Channel Optocoupler with 100% device screening
66024-001	DSCC Dwg 5962-8767901EX Dual Channel Optocoupler
66024-002	Dual Channel, Optocoupler tested over full military temperature range (-55° to +125°C)
66024-003	Dual Channel, commercial (0° to 70°C)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9