



N SWITCH -EDGE CARD SMT RIGHT TYPE

R161.428.233

Series : N

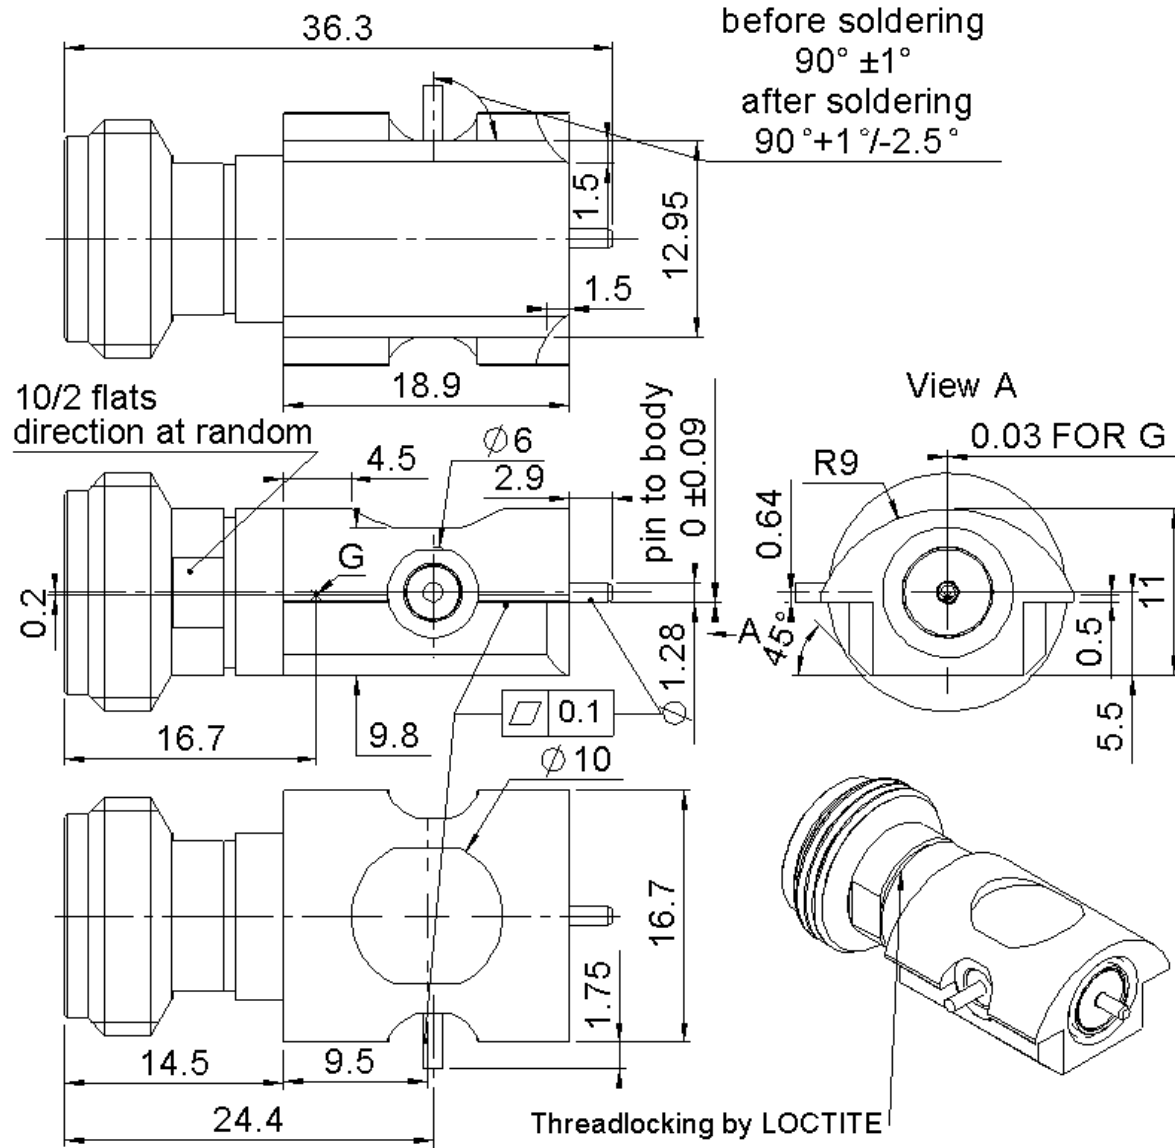

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
BODY	BRASS	-
CENTER CONTACT	BERYLIUM COPPER	NPGR
OUTER CONTACT	BRASS	BBR 2
INSULATOR	PEEK	-
GASKET	-	-
OTHERS PARTS	BRASS	NPGR
-	-	-
-	-	-

Issue : 0804 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



N SWITCH -EDGE CARD SMT RIGHT TYPE

R161.428.233

Series : N

PACKAGING

Standard	Unit	Other
20	'W' option	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance	50 Ω
Frequency	DC-3 GHz
VSWR	1.1 + 0,1000 x F(GHz) Maxi
Isolation at DC to 1 Ghz	-47 dB Typical
Isolation at 1 to 2 Ghz	-43 dB Typical
Isolation at 2 to 3 Ghz	-40 dB Typical
Insertion loss at DC to 1 Ghz	0.1 dB Maxi
Insertion loss at 1 to 2 Ghz	0.15 dB Maxi
Insertion loss at 2 to 3 Ghz	0.2 dB Maxi
RF leakage	- (NA - F(GHz)) dB Maxi
Voltage rating	300 Veff Maxi
Dielectric withstanding voltage	500 Veff mini
Insulation resistance	5000 M Ω mini
Power withstanding	100 W at 0.9 GHz
	100 W at 1.8 GHz

ENVIRONMENTAL

Operating temperature	-40/+85 ° C
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

OTHER CHARACTERISTICSAssembly instruction **NA**

Others :

Activation Force = 15N min to 20N max

Disassembly torque of body:250N.cm min

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	NA N mini
Axial force – Opposite end	NA N mini
Torque	NA N.cm mini
Axial force side pin	(1)
Recommended torque	
Mating	130 N.cm
Panel nut	NA N.cm
Mating life	100 Cycles mini
Weight	28,1500 g

(1)Do not apply force on the center contact before mounting the switch on PCB

Issue : 0804 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



N SWITCH -EDGE CARD SMT RIGHT TYPE


R161.428.233

Series : N

SOLDER PROCEDURE

1. Deposit solder paste 'Sn Ag4 Cu0.5' on mounting zone by screen printing application. We recommend a low residue flux.
We advise a thickness of 150 microm (5.850 microinch). Verify that the edges of the zone are clean.
2. Placement of the receptacle on the mounting zone with an automatic machine of 'pick and place' type. A video camera is recommended for positioning of the component . Adhesive agents must not be used on the receptacle.
3. This process of soldering has been tested with convection oven .Below please find ,the typical profile to use.
4. The cleaning of printed circuit boards is not obliged .
5. Verification of solder joints and position of the component by visual inspection.

NOTE : The receptacle and the plug must not be mated before completion of this procedure

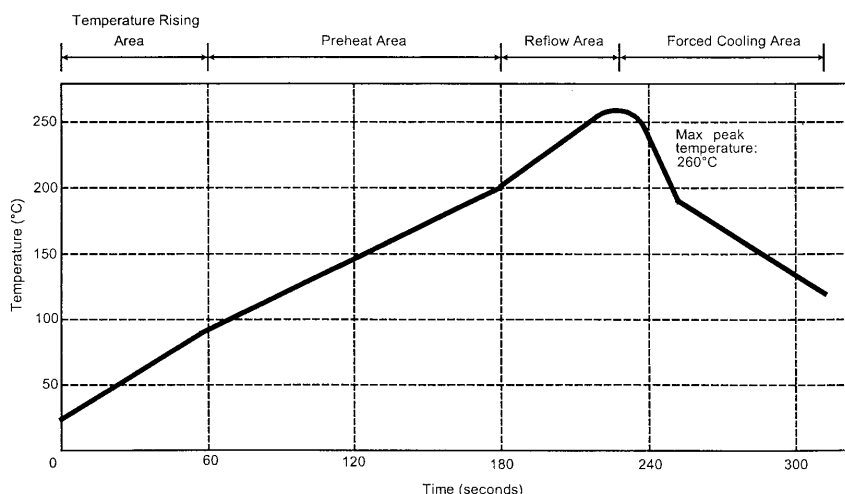TEMPERATURE PROFILE

Parameter	Value	Unit
Temperature rising Area	1 - 4	°C/sec
Max Peak Temperature	260	°C
Max dwell time @260°C	10	sec
Min dwell time @235°C	20	sec
Max dwell time @235°C	60	sec
Temperature drop in cooling Area	-1 to - 4	°C/sec
Max dwell time above 100°C	420	sec

Issue : 0804 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




N SWITCH -EDGE CARD SMT RIGHT TYPE


R161.428.233

Series : N

PCB for N switch

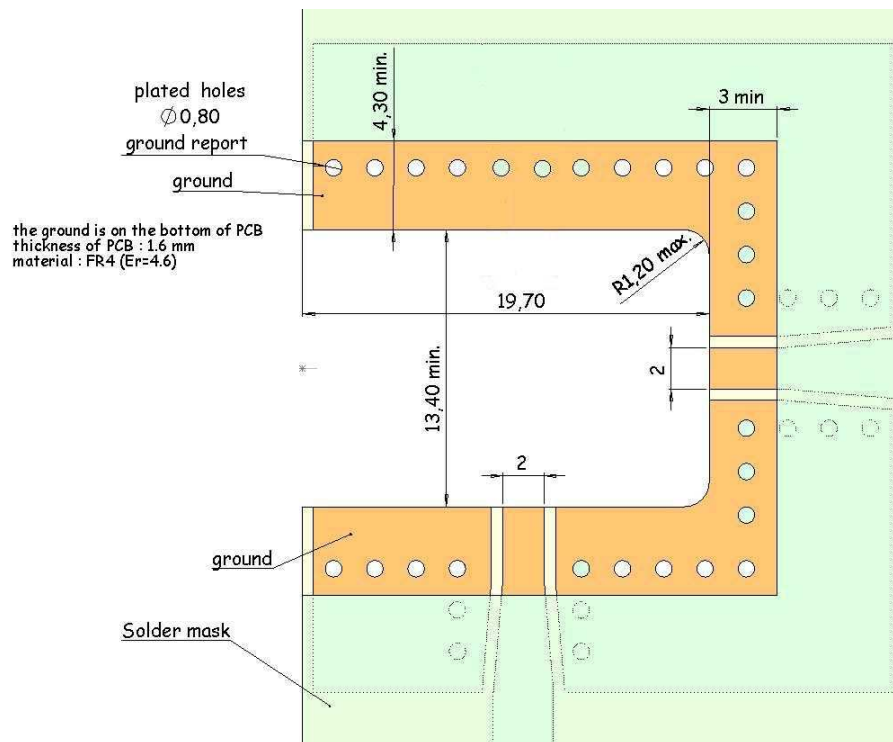

Shadow of N switch for video camera

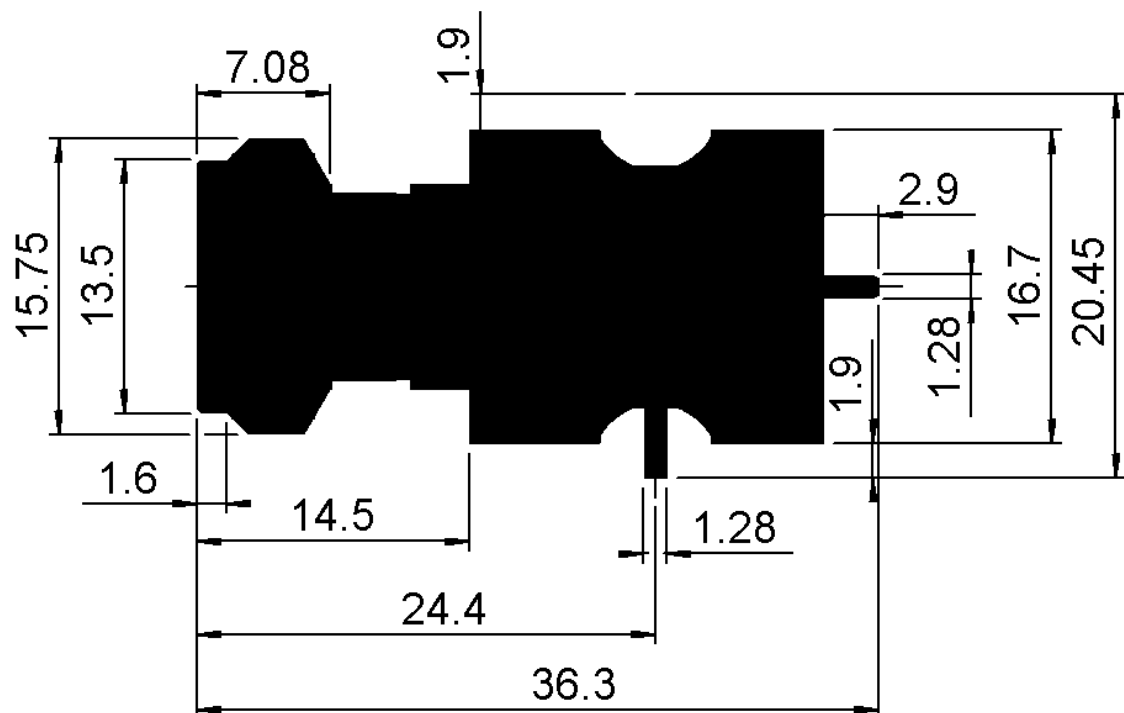

Issue : 0804 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9