



## Features

- Balanced Mini-TRIGARD™
- 5 mm diameter, 7.5 mm long
- UL Recognized 
- RoHS compliant\* versions available

## Applications

- Telecommunications
- Industrial electronics
- Commercial electronics
- Consumer electronics
- Automotive, aircraft, military electronics

## 2036 Series - Miniature 3-Pole Gas Discharge Tube

### Characteristics

Test Methods per ITU-T (CCITT) K.12, IEEE C62.31

| Characteristic                    | Model No. |         |         |         |         |         |
|-----------------------------------|-----------|---------|---------|---------|---------|---------|
|                                   | 2036-07   | 2036-09 | 2036-15 | 2036-20 | 2036-23 | 2036-25 |
| DC Sparkover $\pm 20\%$ @ 100 V/s | 75 V      | 90 V    | 150 V   | 200 V   | 230 V   | 250 V   |
| Impulse Sparkover                 |           |         |         |         |         |         |
| 100 V/ $\mu$ s                    | 250 V     | 250 V   | 350 V   | 425 V   | 450 V   | 475 V   |
| 1000 V/ $\mu$ s                   | 525 V     | 550 V   | 500 V   | 575 V   | 600 V   | 625 V   |

| Characteristic                    | Model No. |         |         |         |         |         |
|-----------------------------------|-----------|---------|---------|---------|---------|---------|
|                                   | 2036-30   | 2036-35 | 2036-40 | 2036-42 | 2036-47 | 2036-60 |
| DC Sparkover $\pm 20\%$ @ 100 V/s | 300 V     | 350 V   | 400 V   | 420 V   | 470 V   | 600 V   |
| Impulse Sparkover                 |           |         |         |         |         |         |
| 100 V/ $\mu$ s                    | 500 V     | 600 V   | 650 V   | 675 V   | 750 V   | 850 V   |
| 1000 V/ $\mu$ s                   | 650 V     | 750 V   | 825 V   | 850 V   | 950 V   | 1100 V  |

|                                  |                                                                   |                            |
|----------------------------------|-------------------------------------------------------------------|----------------------------|
| Impulse Transverse Delay         | 100 V/ $\mu$ s                                                    | <75 ns                     |
| Insulation Resistance            | 100 V (50 V for Model 2036-07 & 2036-09)                          | >10 <sup>10</sup> $\Omega$ |
| Glow Voltage                     | 10 mA                                                             | ~70 V                      |
| Arc Voltage                      | 1 A                                                               | ~10 V                      |
| Glow-Arc Transition Current      |                                                                   | <0.5 A                     |
| Capacitance                      | 1 MHz                                                             | <2 pF                      |
| DC Holdover Voltage <sup>1</sup> | 135 V, (52 V for Model 2036-07 & 2036-09, 80 V for Model 2036-15) | <150 ms                    |
| Impulse Discharge Current        | 20000 A, 8/20 $\mu$ s <sup>2</sup>                                | 1 operation minimum        |
|                                  | 10000 A, 8/20 $\mu$ s                                             | >10 operations             |
|                                  | 2000 A, 10/350 $\mu$ s                                            | 1 operation                |
|                                  | 200 A, 10/1000 $\mu$ s                                            | >300 operations            |
|                                  | 200 A, 10/700 $\mu$ s                                             | >500 operations            |
| Alternating Discharge Current    | 20 Arms, 1 s <sup>2</sup>                                         | 1 operation minimum        |
|                                  | 10 Arms, 1 s                                                      | >10 operations             |
| Operating Temperature            |                                                                   | -55 to +85 °C              |
| Climatic Category (IEC 60068-1)  |                                                                   | 40/90/21                   |

Optional Switch-Grade Fail-Short device available.

### Notes:

- **UL recognized component, UL File E153537.**
- No model number marking on tube; date code and voltage only: month year digits, xxxV (e.g. 0209 400V).
- The rated discharge current for Mini-TRIGARD™ Gas Discharge Tubes is the total current equally divided between each line to ground.
- Sparkover limits after life  $\pm 25\%$ , IR >10<sup>8</sup>  $\Omega$  (-25 %, +30 % for Model 2036-07, 2036-09 and 2036-60).
- Operating characteristics per RUS PE-80 and Telcordia GR 1361 available, contact factory.
- Line to Line voltage is approximately 1.8 to 2 times the stated Line to Ground breakdown voltage.
- At delivery AQL 0.65 Level II, DIN ISO 2859.

<sup>1</sup> Network applied.


<sup>2</sup> DC Sparkover may exceed  $\pm 25\%$  after discharge, but will continue to protect without venting.

## 2036 Series - Miniature 3-Pole Gas Discharge Tube

**BOURNS®**

### Product Dimensions

**2036-XX-A**

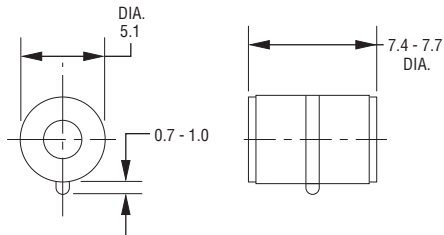


**2036-XX-B2**



**2036-XX-B3**




**2036-XX-B9**

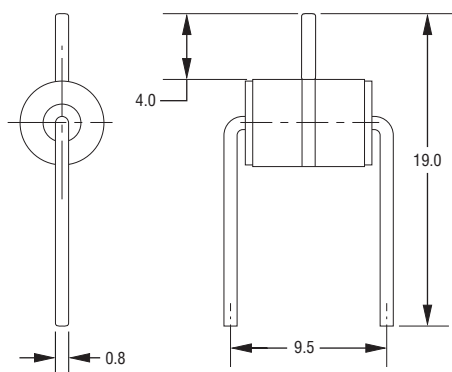


DIMENSIONS = MILLIMETERS


**2036-XX-B**

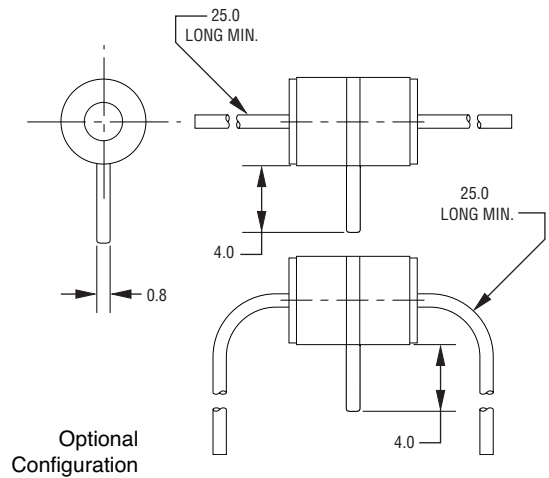

**2036-XX-B8**

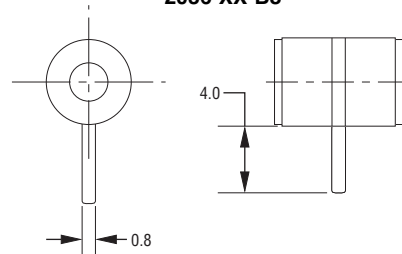

**FAIL-SHORT CONFIGURATION  
2036-XX-B2F SHOWN**

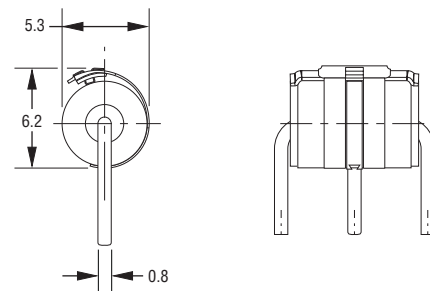

Specifications are subject to change without notice.  
Customers should verify actual device performance in their specific applications.

## 2036 Series - Miniature 3-Pole Gas Discharge Tube

**BOURNS®**

### Switch-Grade Fail-Short Device Shorting Curve 2036-XX-XF



ELTGS = Each Line to Ground Simultaneously

NOTE: When using a GDT failsafe device, it is imperative that all components associated and connected to the GDT with failsafe be tested in their respective completely integrated environment (finished product) to assure proper operation.

### How to Order

2036 - xx - x (n) F LF

Model Number Designator \_\_\_\_\_

Voltage (Divided by 10) \_\_\_\_\_

|            |            |
|------------|------------|
| 07 = 75 V  | 30 = 300 V |
| 09 = 90 V  | 35 = 350 V |
| 15 = 150 V | 40 = 400 V |
| 20 = 200 V | 42 = 420 V |
| 23 = 230 V | 47 = 470 V |
| 25 = 250 V | 60 = 600 V |

Leads \_\_\_\_\_

A = None  
B = 0.8 mm

Lead Shape \_\_\_\_\_  
(See Product Dimension Drawings)

Fail-Short Option \_\_\_\_\_

Blank = Standard Product  
F = With Fail-Short Mechanism

RoHS Compliant Option \_\_\_\_\_

Blank = Standard Product  
LF = RoHS Compliant Product

### Packaging Specifications

Model 2036-xx-n ships standard bulk pack, 100 pcs./tray.

REV. 08/29/12

Specifications are subject to change without notice.  
Customers should verify actual device performance in their specific applications.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9