



## 32K X 8 BIT LOW POWER CMOS SRAM

## FEATURES

- 32768x8 bit static CMOS RAM
- Access times 70 ns
- Common data inputs and data outputs
- Three-state outputs
- Typ. operating supply current
  - o 70 ns: 50 mA
- TTL/CMOS-compatible
- Automatical reduction of power dissipation in long Read Cycles
- Power supply voltage 5V + 10%
- Operating temperature ranges
  - o 0 to 70 °C
  - o -40 to 85 °C
- QS 9000 Quality Standard
- ESD protection > 2000 V (MIL STD 883C M3015.7)
- Latch-up immunity >100 mA
- Packages: PDIP28 (600 mil)  
SOP28 (330 mil)

## DESCRIPTION

The AS6C62256A is a static RAM manufactured using a CMOS process technology with the following operating modes:

- Read                      - Standby
- Write                    - Data Retention


The memory array is based on a 6-transistor cell.

The circuit is activated by the falling edge of E. The address and control inputs open simultaneously. According to the information of W and G, the data inputs, or outputs, are active. In a Read cycle, the data outputs are activated by the falling edge of G, afterwards the data word read will be available at the outputs DQ0-DQ7. After the address change, the data outputs go High-Z until the new information read is available. The data outputs have not preferred state.

The Read cycle is finished by the falling edge of W, or by the rising edge of E, respectively.

Data retention is guaranteed down to 2 V. With the exception of E, all inputs consist of NOR gates, so that no pull-up/pull-down resistors are required.

## PIN CONFIGURATION

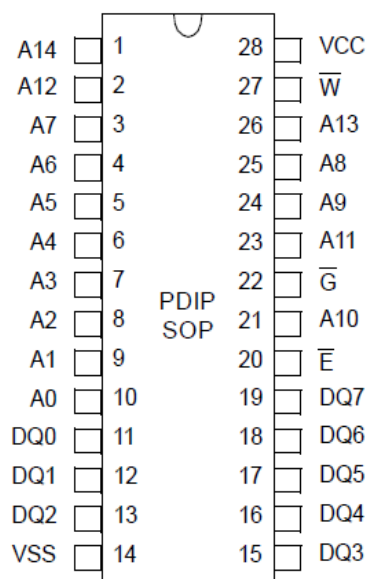

Top View


## PIN DESCRIPTION

| Signal Name | Signal Description   |
|-------------|----------------------|
| A0 - A14    | Address Inputs       |
| DQ0 - DQ7   | Data In/Out          |
| $\bar{E}$   | Chip Enable          |
| $\bar{G}$   | Output Enable        |
| $\bar{W}$   | Write Enable         |
| VCC         | Power Supply Voltage |
| VSS         | Ground               |



## 32K X 8 BIT LOW POWER CMOS SRAM

## Block Diagram

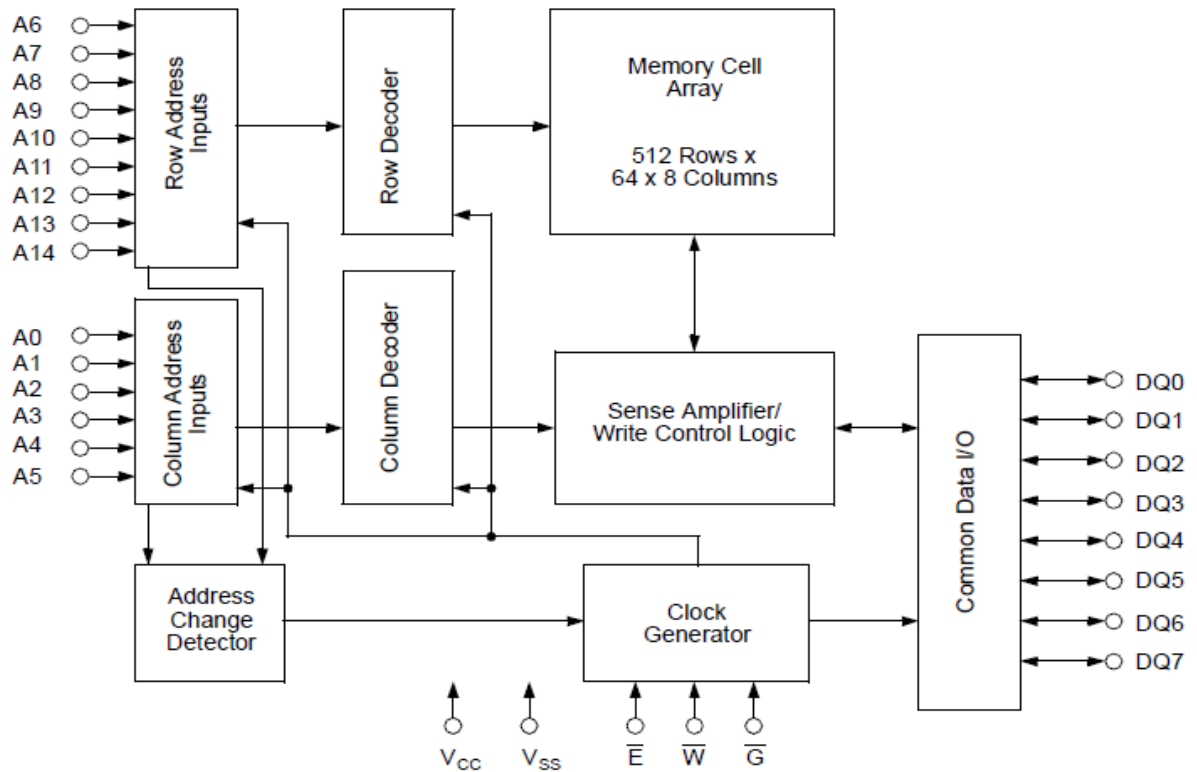

## Truth Table

| Operating Mode       | $\overline{E}$ | $\overline{W}$ | $\overline{G}$ | DQ0 - DQ7          |
|----------------------|----------------|----------------|----------------|--------------------|
| Standby/not selected | H              | *              | *              | High-Z             |
| Internal Read        | L              | H              | H              | High-Z             |
| Read                 | L              | H              | L              | Data Outputs Low-Z |
| Write                | L              | L              | *              | Data Inputs High-Z |

\* H or L



## 32K X 8 BIT LOW POWER CMOS SRAM

**Characteristics**

All voltages are referenced to  $V_{SS} = 0$  V (ground).

All characteristics are valid in the power supply voltage range and in the operating temperature range specified.

Dynamic measurements are based on a rise and fall time of  $\leq 5$  ns, measured between 10 % and 90 % of  $V_{IL}$ , as well as input levels of  $V_{IL} = 0$  V and  $V_{IH} = 3$  V. The timing reference level of all input and output signals is 1.5 V, with the exception of the  $t_{dis}$ -times and  $t_{en}$ -times, in which cases transition is measured  $\pm 200$  mV from steady-state voltage.

| Absolute Maximum Ratings <sup>a</sup>                                          |          | Symbol     | Min. | Max.                        | Unit |
|--------------------------------------------------------------------------------|----------|------------|------|-----------------------------|------|
| Power Supply Voltage                                                           |          | $V_{CC}$   | -0.5 | 7                           | V    |
| Input Voltage                                                                  |          | $V_I$      | -0.5 | $V_{CC} + 0.5$ <sup>b</sup> | V    |
| Output Voltage                                                                 |          | $V_O$      | -0.5 | $V_{CC} + 0.5$ <sup>b</sup> | V    |
| Power Dissipation                                                              |          | $P_D$      | -    | 1                           | W    |
| Operating Temperature                                                          | C-Type   | $T_a$      | 0    | 70                          | °C   |
|                                                                                | I-Type   |            | -40  | 85                          |      |
| Storage Temperature                                                            | C/I-Type | $T_{stg}$  | -65  | 125                         | °C   |
| Output Short-Circuit Current<br>at $V_{CC} = 5$ V and $V_O = 0$ V <sup>c</sup> |          | $ I_{OS} $ |      | 200                         | mA   |

<sup>a</sup> Stresses greater than those listed under „Absolute Maximum Ratings“ may cause permanent damage to the device. This is a stress rating only, and functional operation of the device at condition above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability

<sup>b</sup> Maximum voltage is 7 V

<sup>c</sup> Not more than 1 output should be shorted at the same time. Duration of the short circuit should not exceed 30 s.

| Recommended Operating Conditions | Symbol   | Conditions | Min. | Max.           | Unit |
|----------------------------------|----------|------------|------|----------------|------|
| Power Supply Voltage             | $V_{CC}$ |            | 4.5  | 5.5            | V    |
| Input Low Voltage <sup>d</sup>   | $V_{IL}$ |            | -0.3 | 0.8            | V    |
| Input High Voltage               | $V_{IH}$ |            | 2.2  | $V_{CC} + 0.3$ | V    |

<sup>d</sup> -2 V at Pulse Width 10 ns



## 32K X 8 BIT LOW POWER CMOS SRAM

| Electrical Characteristics                         | Symbol        | Conditions                                                                                                   | Min. | Max.    | Unit                           |
|----------------------------------------------------|---------------|--------------------------------------------------------------------------------------------------------------|------|---------|--------------------------------|
| Supply Current - Operating Mode                    | $I_{CC(OP)}$  | $V_{CC} = 5.5 \text{ V}$<br>$V_{IL} = 0.8 \text{ V}$<br>$V_{IH} = 2.2 \text{ V}$<br>$t_{cW} = 70 \text{ ns}$ |      | 70      | mA                             |
| Supply Current - Standby Mode (CMOS level)         | $I_{CC(SB)}$  | $V_{CC} = 5.5 \text{ V}$<br>$V_{\overline{E}} = V_{CC} - 0.2 \text{ V}$<br>C-Type<br>I-Type                  |      | 5<br>10 | $\mu\text{A}$<br>$\mu\text{A}$ |
| Supply Current - Standby Mode (TTL level)          | $I_{CC(SB)1}$ | $V_{CC} = 5.5 \text{ V}$<br>$V_{\overline{E}} = 2.2 \text{ V}$                                               |      | 1       | mA                             |
| Output High Voltage                                | $V_{OH}$      | $V_{CC} = 4.5 \text{ V}$<br>$I_{OH} = -1.0 \text{ mA}$                                                       | 2.4  |         | V                              |
| Output Low Voltage                                 | $V_{OL}$      | $V_{CC} = 4.5 \text{ V}$<br>$I_{OL} = 3.2 \text{ mA}$                                                        |      | 0.4     | V                              |
| Input High Leakage Current                         | $I_{IH}$      | $V_{CC} = 5.5 \text{ V}$<br>$V_{IH} = 5.5 \text{ V}$                                                         |      | 2       | $\mu\text{A}$                  |
| Input Low Leakage Current                          | $I_{IL}$      | $V_{CC} = 5.5 \text{ V}$<br>$V_{IL} = 0 \text{ V}$                                                           | -2   |         | $\mu\text{A}$                  |
| Output High Current                                | $I_{OH}$      | $V_{CC} = 4.5 \text{ V}$<br>$V_{OH} = 2.4 \text{ V}$                                                         |      | -1      | mA                             |
| Output Low Current                                 | $I_{OL}$      | $V_{CC} = 4.5 \text{ V}$<br>$V_{OL} = 0.4 \text{ V}$                                                         | 3,2  |         | mA                             |
| Output Leakage Current High at Three-State Outputs | $I_{OHZ}$     | $V_{CC} = 5.5 \text{ V}$<br>$V_{OH} = 5.5 \text{ V}$                                                         |      | 1       | $\mu\text{A}$                  |
| Low at Three-State Outputs                         | $I_{OLZ}$     | $V_{CC} = 5.5 \text{ V}$<br>$V_{OL} = 0 \text{ V}$                                                           | -1   |         | $\mu\text{A}$                  |



## 32K X 8 BIT LOW POWER CMOS SRAM


| Switching Characteristics<br>Read Cycle | Symbol     |              | 07   |      | Unit |
|-----------------------------------------|------------|--------------|------|------|------|
|                                         | Alt.       | IEC          | Min. | Max. |      |
| Read Cycle Time                         | $t_{RC}$   | $t_{cR}$     | 70   |      | ns   |
| Address Access Time to Data Valid       | $t_{AA}$   | $t_{a(A)}$   |      | 70   | ns   |
| Chip Enable Access Time to Data Valid   | $t_{ACE}$  | $t_{a(E)}$   |      | 70   | ns   |
| Output Enable Access Time to Data Valid | $t_{OE}$   | $t_{a(G)}$   |      | 35   | ns   |
| $\overline{E}$ HIGH to Output in High-Z | $t_{HZCE}$ | $t_{dis(E)}$ |      | 25   | ns   |
| $\overline{G}$ HIGH to Output in High-Z | $t_{HZOE}$ | $t_{dis(G)}$ |      | 25   | ns   |
| $\overline{E}$ LOW to Output in Low-Z   | $t_{LZCE}$ | $t_{en(E)}$  | 5    |      | ns   |
| $\overline{G}$ LOW to Output in Low-Z   | $t_{LZOE}$ | $t_{en(G)}$  | 0    |      | ns   |
| Output Hold Time from Address Change    | $t_{OH}$   | $t_{v(A)}$   | 5    |      | ns   |

| Switching Characteristics<br>Write Cycle | Symbol     |                | 07   |      | Unit |
|------------------------------------------|------------|----------------|------|------|------|
|                                          | Alt.       | IEC            | Min. | Max. |      |
| Write Cycle Time                         | $t_{WC}$   | $t_{cW}$       | 70   |      | ns   |
| Write Pulse Width                        | $t_{WP}$   | $t_{w(W)}$     | 55   |      | ns   |
| Write Pulse Width Setup Time             | $t_{WP}$   | $t_{su(W)}$    | 55   |      | ns   |
| Address Setup Time                       | $t_{AS}$   | $t_{su(A)}$    | 0    |      | ns   |
| Address Valid to End of Write            | $t_{AW}$   | $t_{su(A-WH)}$ | 65   |      | ns   |
| Chip Enable Setup Time                   | $t_{CW}$   | $t_{su(E)}$    | 65   |      | ns   |
| Pulse Width Chip Enable to End of Write  | $t_{CW}$   | $t_{w(E)}$     | 65   |      | ns   |
| Data Setup Time                          | $t_{DS}$   | $t_{su(D)}$    | 30   |      | ns   |
| Data Hold Time                           | $t_{DH}$   | $t_{h(D)}$     | 0    |      | ns   |
| Address Hold from End of Write           | $t_{AH}$   | $t_{h(A)}$     | 0    |      | ns   |
| $\overline{W}$ LOW to Output in High-Z   | $t_{HZWE}$ | $t_{dis(W)}$   |      | 25   | ns   |
| $\overline{G}$ HIGH to Output in High-Z  | $t_{HZOE}$ | $t_{dis(G)}$   |      | 25   | ns   |
| $\overline{W}$ HIGH to Output in Low-Z   | $t_{LZWE}$ | $t_{en(W)}$    | 0    |      | ns   |
| $\overline{G}$ LOW to Output in Low-Z    | $t_{LZOE}$ | $t_{en(G)}$    | 0    |      | ns   |




## 32K X 8 BIT LOW POWER CMOS SRAM

## Data Retention Mode

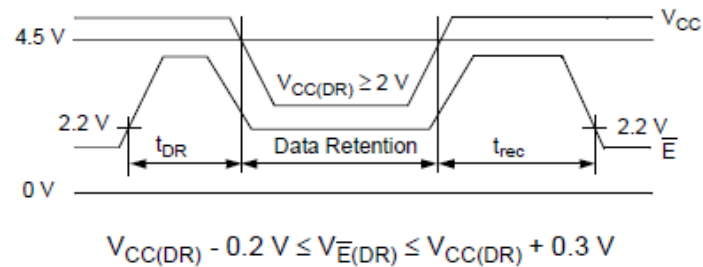 $\bar{E}$ -Controlled

| Data Retention Characteristics | Symbol<br>Alt. | IEC          | Conditions                                                                                   | Min.     | Typ. | Max.   | Unit                           |
|--------------------------------|----------------|--------------|----------------------------------------------------------------------------------------------|----------|------|--------|--------------------------------|
| Data Retention Supply Voltage  |                | $V_{CC(DR)}$ |                                                                                              | 2        |      | 5.5    | V                              |
| Data Retention Supply Current  |                | $I_{CC(DR)}$ | $V_{CC(DR)} = 3 \text{ V}$<br>$V_{\bar{E}} = V_{CC(DR)} - 0.2 \text{ V}$<br>C-Type<br>I-Type |          |      | 3<br>6 | $\mu\text{A}$<br>$\mu\text{A}$ |
| Data Retention Setup Time      | $t_{CDR}$      | $t_{su(DR)}$ | See Data Retention Waveforms (above)                                                         | 0        |      |        | ns                             |
| Operating Recovery Time        | $t_R$          | $t_{rec}$    |                                                                                              | $t_{cR}$ |      |        | ns                             |

## Test Configuration for Functional Check

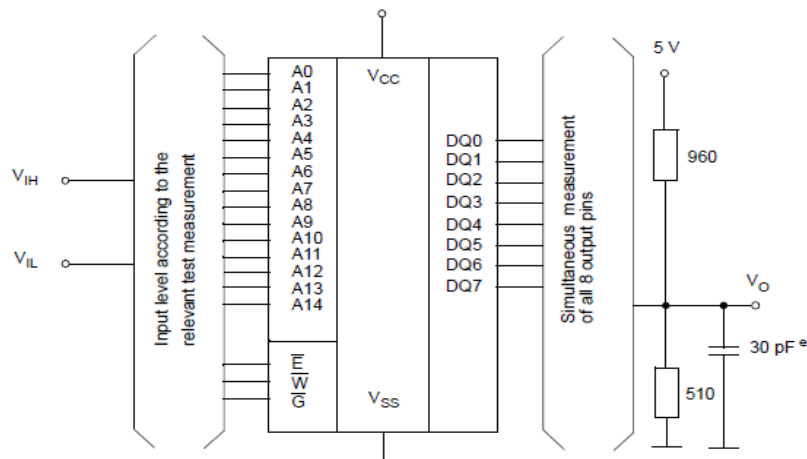

<sup>e</sup> In measurement of  $t_{dis(E)}$ ,  $t_{dis(W)}$ ,  $t_{dis(G)}$ ,  $t_{en(E)}$ ,  $t_{en(W)}$ ,  $t_{en(G)}$  the capacitance is 5 pF.



## 32K X 8 BIT LOW POWER CMOS SRAM

| Capacitance        | Conditions                                               | Symbol | Min. | Max. | Unit |
|--------------------|----------------------------------------------------------|--------|------|------|------|
| Input Capacitance  | $V_{CC} = 5.0\text{ V}$<br>$V_I = V_{SS}$                | $C_I$  | -    | 7    | pF   |
| Output Capacitance | $f = 1\text{ MHz}$<br>$T_a = 25\text{ }^{\circ}\text{C}$ | $C_O$  | -    | 7    | pF   |

All pins not under test must be connected with ground by capacitors.

## Device Marking (example)



## ORDERING INFORMATION

| Alliance         | Organization | VCC Range   | Package          | Operating Temp         | Speed ns |
|------------------|--------------|-------------|------------------|------------------------|----------|
| AS6C62256A-70SCN | 32K x 8      | 4.5V – 5.5V | SOP28 (330 mil)  | Commercial~ 0 C – 70 C | 70       |
| AS6C62256A-70SIN | 32K x 8      | 4.5V – 5.5V | SOP28 (330 mil)  | Industrial~ 40 C– 85 C | 70       |
| AS6C62256A-70PCN | 32K x 8      | 4.5V – 5.5V | PDIP28 (600 mil) | Commercial~ 0 C – 70 C | 70       |
| AS6C62256A-70PIN | 32K x 8      | 4.5V – 5.5V | PDIP28 (600 mil) | Industrial~ 40 C– 85 C | 70       |


## PART NUMBERING SYSTEM

| AS6C        | 62256                                 | A       | -70         | X                                                            | X                                                                               | N                                       |
|-------------|---------------------------------------|---------|-------------|--------------------------------------------------------------|---------------------------------------------------------------------------------|-----------------------------------------|
| SRAM prefix | Device Number:<br>Low Power<br>(256K) | Die Rev | Access Time | Package Option:<br>P=28pin 600mil PDIP<br>S=28pin 330mil SOP | Temperature Range:<br>C = Commercial (0 to 70 C)<br>I = Industrial (40 to 85 C) | N = Lead Free<br>RoHS<br>compliant part |




## 32K X 8 BIT LOW POWER CMOS SRAM

**Read Cycle 1: Ai-controlled (during Read Cycle :  $\overline{E} = \overline{G} = V_{IL}$ ,  $\overline{W} = V_{IH}$ )**


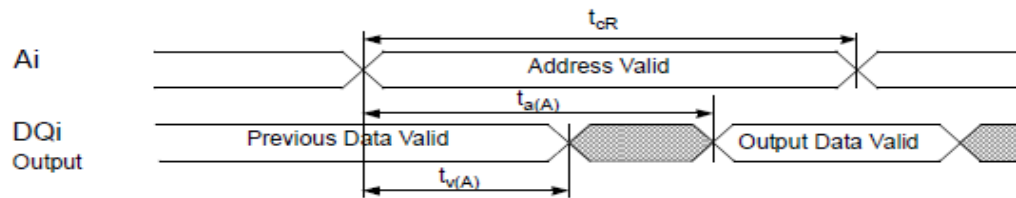


**Read Cycle 2:  $\overline{G}$ -,  $\overline{E}$ -controlled (during Read Cycle:  $\overline{W} = V_{IH}$ )**

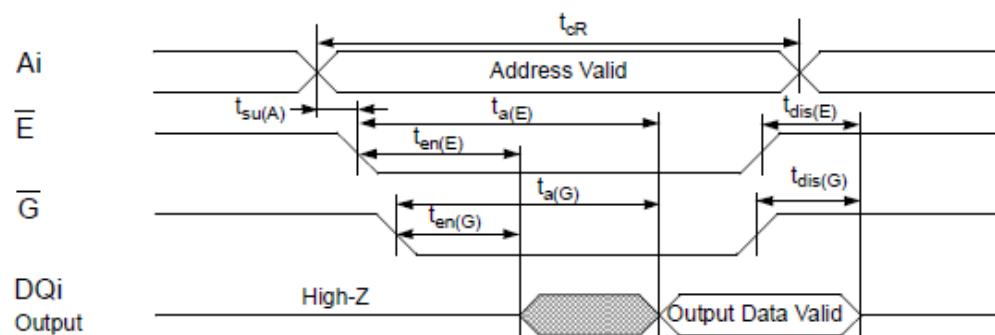



## 32K X 8 BIT LOW POWER CMOS SRAM

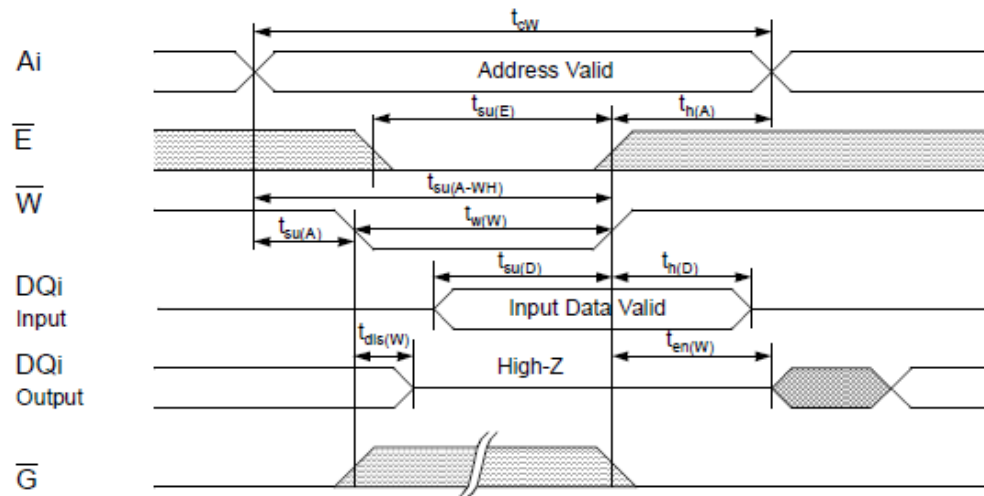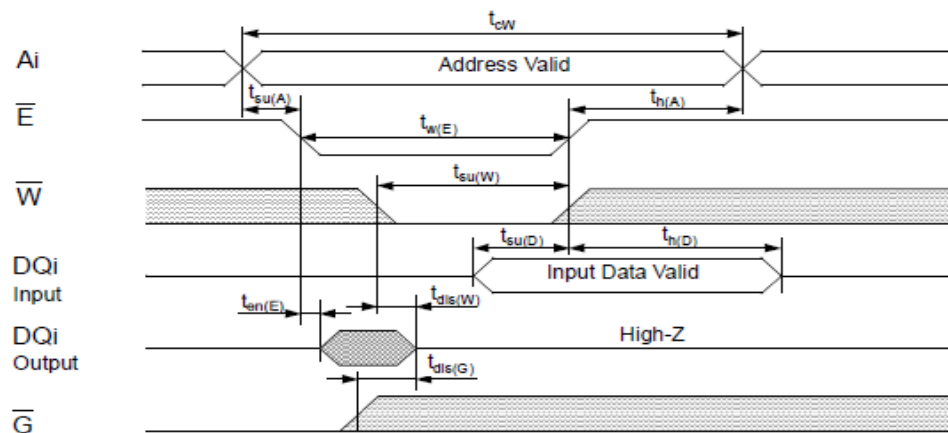**Write Cycle1:  $\overline{W}$ -controlled****Write Cycle 2:  $\overline{E}$ -controlled**

undefined L- to H-level H- to L-level

The information describes the type of component and shall not be considered as assured characteristics. Terms of delivery and rights to change design reserved.



## 32K X 8 BIT LOW POWER CMOS SRAM



Alliance Memory, Inc  
511 Taylor Way,  
San Carlos, CA 94070, USA  
Phone: 650-610-6800  
Fax: 650-620-9211  
[www.alliancememory.com](http://www.alliancememory.com)

Copyright © Alliance Memory  
All Rights Reserved

© Copyright 2009 Alliance Memory, Inc. All rights reserved. Our three-point logo, our name and Intelliwatt are trademarks or registered trademarks of Alliance. All other brand and product names may be the trademarks of their respective companies. Alliance reserves the right to make changes to this document and its products at any time without notice. Alliance assumes no responsibility for any errors that may appear in this document. The data contained herein represents Alliance's best data and/or estimates at the time of issuance. Alliance reserves the right to change or correct this data at anytime, without notice. If the product described herein is under development, significant changes to these specifications are possible. The information in this product data sheet is intended to be general descriptive information for potential customers and users, and is not intended to operate as, or provide any guarantee or warranty to any user or customer. Alliance does not assume any responsibility or liability arising out of the application or use of any product described herein, and disclaims any express or implied warranties related to the sale and/or use of Alliance products including liability or warranties related to fitness for a particular purpose, merchantability, or infringement of any intellectual property rights, except as expressly agreed to in Alliance's Terms and Conditions of Sale (which are available from Alliance). All sales of Alliance products are made exclusively according to Alliance's Terms and Conditions of Sale. The purchase of products from Alliance does not convey a license under any patent rights, copyrights; mask works rights, trademarks, or any other intellectual property rights of Alliance or third parties. Alliance does not authorize its products for use as critical components in life-supporting systems where a malfunction or failure may reasonably be expected to result in significant injury to the user, and the inclusion of Alliance products in such life-supporting systems implies that the manufacturer assumes all risk of such use and agrees to indemnify Alliance against all claims arising from such use.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9