



THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPERTY OF BEL/STEWART/TRP CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF TRP CONNECTOR.

PRODUCT MAY BE PROTECTED BY ONE OR MORE OF THE FOLLOWING US PATENTS:
5736910 5939955 6425781 6428361 6554638 6840817 7123117
7429195 7717749 7808751 6217391 6149050 7924130

REVISONS				
#	LYR	DESCRIPTION	DATE	DWN
G		EC-1411035 COMPANY LOGO CHANGE	09FEB2015	TR

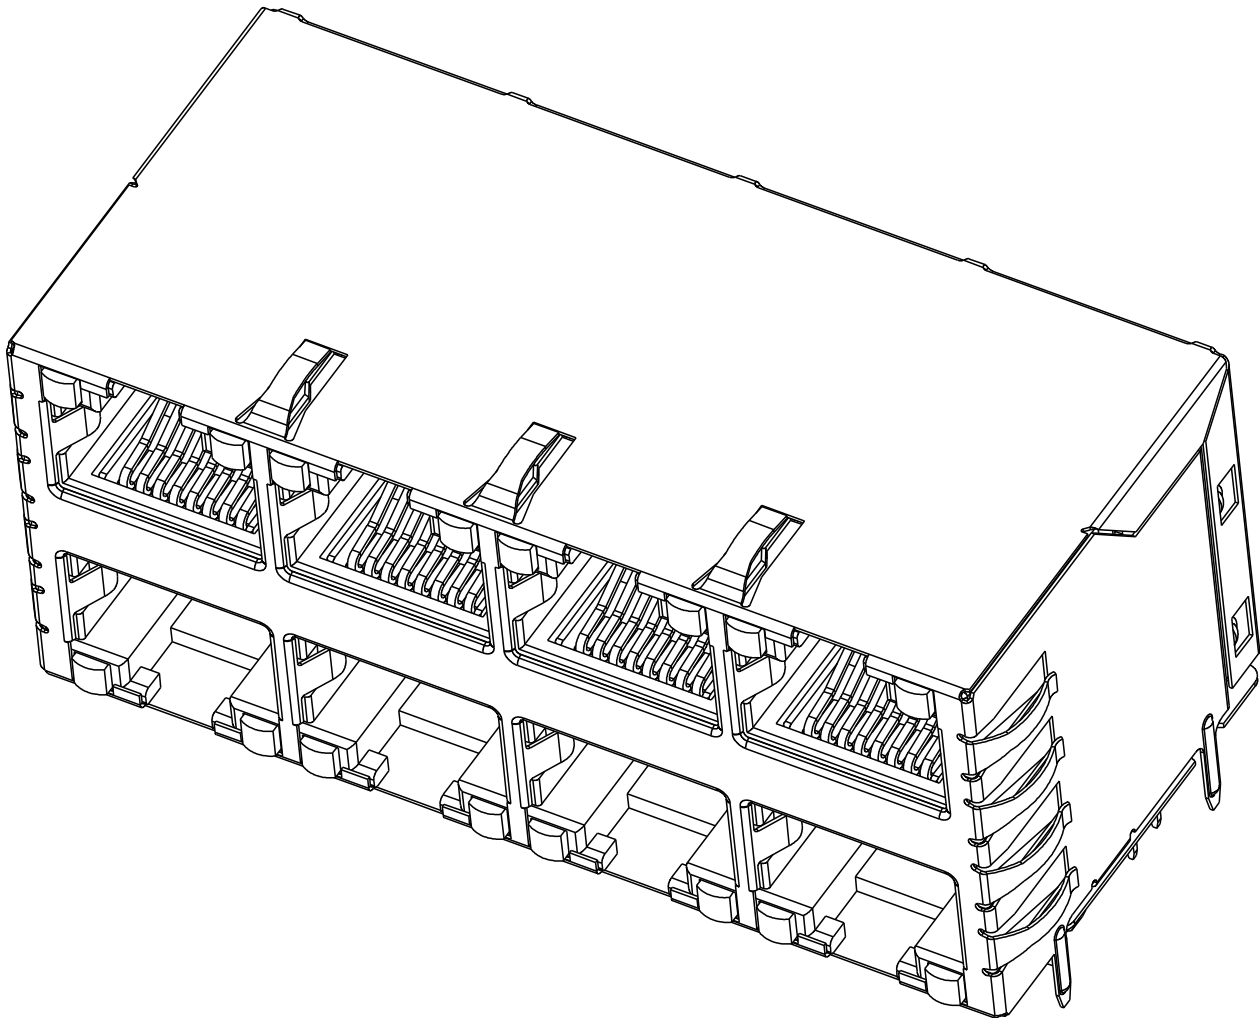

S866P9 10/100 CIRCUIT
TOP AND BOTTOM PORTS

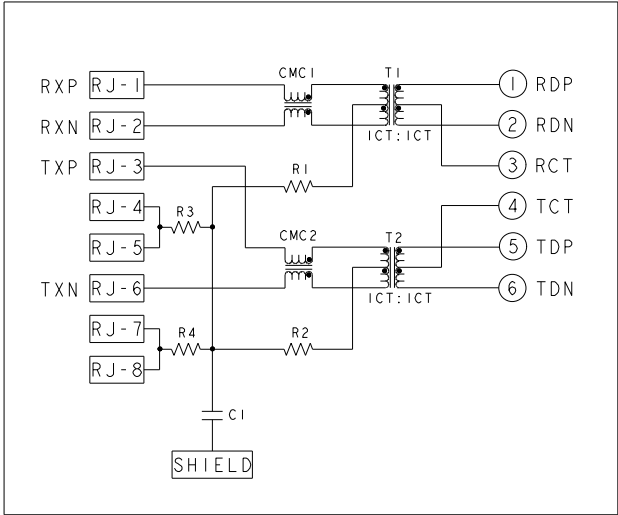

C1 = 1000pF, 2kV, ±10%, X7R DECOUPLING CAP.
R1-R4 = 75 OHMS, 1/16 W, ±5% RESISTORS

1. MATERIALS:
PLASTIC HOUSING: BLACK, THERMOPLASTIC FLAMMABILITY RATING UL 94V-0
SHIELD: BRASS, PREPLATED WITH 0.76um MIN SEMI-BRIGHT NICKEL,
POST DIPPED WITH 2.54um MIN SAC SOLDER ON SOLDER TAILS,
CONTACTS: PHOSPHOR BRONZE, 1.27um MIN OVERALL NICKEL
UNDERPLATE WITH SELECT 1.27um MIN GOLD AT MATING INTERFACE
AND 2.54um MIN MATTE TIN ON SOLDER TAILS.
LED: DIFFUSED EPOXY LENS, CARBON STEEL LEAD FRAME TAILS OF LED
ARE PREPLATED WITH 2.03um MIN SILVER OVER 1.02um MIN NICKEL
UNDERPLATE OVER 1.02um MIN COPPER UNDERPLATE. POST-PLATED WITH
2.54um MIN MATTE TIN AND/OR SAC SOLDER DIP OR PURE TIN SOLDER DIP
INTERNAL MAGNETICS PC BOARDS: HIGH TEMP PCB, TG>170°C.
2. MAGNETICS
APPLICATION: 10/100 BASE-T
IMPEDANCE: 100 OHMS
TURNS RATIO (CHIP:CABLE): TX = 1:1, RX = 1:1
OPEN CIRCUIT INDUCTANCE (OCL): 350uH MIN @100kHz, 0.1VRMS,
8mADC BIAS FROM 0°C TO 70°C, TX AND RX
PERFORMANCE @ 25°C:
INSERTION LOSS (IL): 1.1dB MAX FROM 0.5MHz TO 100MHz
RETURN LOSS (RL): 18dB MIN FROM 0.5MHz TO 30MHz
18-20LOG(f/30)dB MIN FROM 30.1MHz TO 60MHz
12dB MIN FROM 60.1MHz TO 80MHz
CROSSTALK ATTENUATION: 35dB MIN FROM 0.5MHz TO 40MHz
33-20LOG(f/50)dB MIN FROM 40.1MHz TO 100MHz
COMMON MODE REJECTION RATIO (CMRR): 30dB MIN FROM 0.5MHz TO 100MHz
ISOLATION VOLTAGE: COMPLIES WITH IEEE802.3 2002, PARA 23.5.1.1, ITEM b.
3. PART NUMBER, DATE CODE AND COUNTRY OF ORIGIN LOCATED IN APPROXIMATE AREA SHOWN. DATE CODE "YY" IS THE YEAR, "WW" IS THE WEEK, "D" IS THE DAY OF WEEK, WITH SUNDAY="1"

4. AGENCY APPROVAL LOGO, TRP LOGO AND PRODUCT LOGO TO BE LOCATED IN APPROXIMATE AREA SHOWN.

5. OPERATING TEMP: FROM 0°C TO +70°C.
6. RJ45 CAVITY CONFORMS TO FCC RULES AND REGULATION PART 68 SUBPART F.


7. DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER.

8. BASIC DIMENSION ESTABLISHED BY CUSTOMER, BUT MAY NOT BE GREATER THAN 5.08mm.
9. LEDS ARE DRIVEN WITH CONSTANT CURRENT AT APPROX 20mA
LED COLOR: DOMINANT WAVELENGTH (λD): GREEN 568 nm TYP. @ IF=20mA
FORWARD VOLTAGE (VF): GREEN 2.2V TYP. @ IF=20mA
DOMINANT WAVELENGTH (λD): YELLOW 588 nm TYP. @ IF=20mA
FORWARD VOLTAGE (VF): YELLOW 2.1V TYP. @ IF=20mA



10. THESE PARTS ARE RECOMMENDED FOR WAVE SOLDERING PROCESS, PEAK SOLDERING TEMPERATURE IS 260 °C MAX, 10 SECONDS MAX.

2.21	GREEN	YELLOW	GREEN	YELLOW	1840133-6
3.04	GRN/YEL	GREEN	GRN/YEL	GREEN	1840133-5
3.04	GRN/YEL	GRN/YEL	GRN/YEL	GRN/YEL	1840133-4
3.04	GREEN	YELLOW	GREEN	YELLOW	1840133-3
3.04	YELLOW	GREEN	GREEN	YELLOW	1840133-2
3.04	GREEN	GREEN	GREEN	GREEN	1840133-1
DIM A	BOTTOM LED NO. 2	BOTTOM LED NO. 1	TOP LED NO. 2	TOP LED NO. 1	PART NO.


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KEKE YOUTH 19APR2006	 trp CONNECTOR a bel group		DONGGUAN CHINA
DIMENSIONS: mm		CHK DENNIS CHEN 19APR2006			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.25 1 PLC ±0.25 2 PLC ±0.25 3 PLC ±0.25 4 PLC ±0.25 ANGLES ±0.25		APVD TEDDY XIONG 19APR2006	MODEL NAME MAGJACK		DESC 2X4 S866P9 10/100 W/ LED
PRODUCT SPEC 108-2100		APPLICATION SPEC -		SIZE A1	RESTRICTED TO -
CUSTOMER DRAWING		SCALE 4:1		SHEET 1	REV G

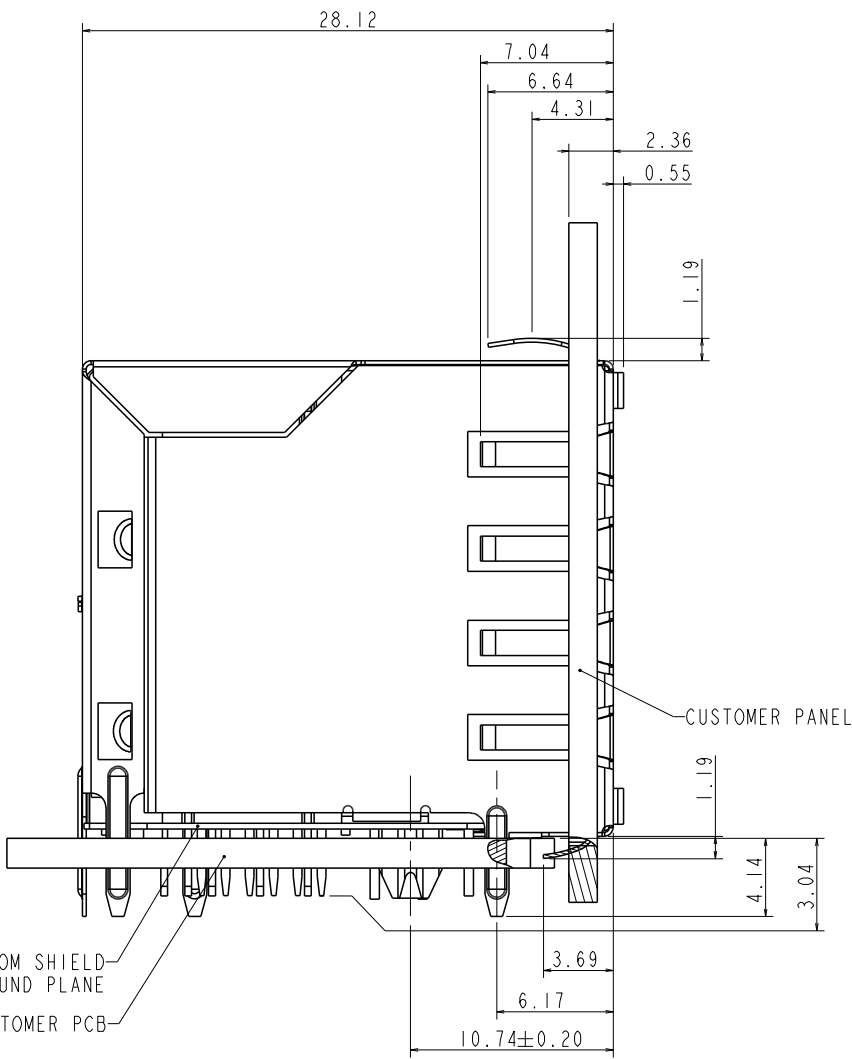


SIDE VIEW SHOWN WITH
PANEL AND PCB
FOR LOCATION

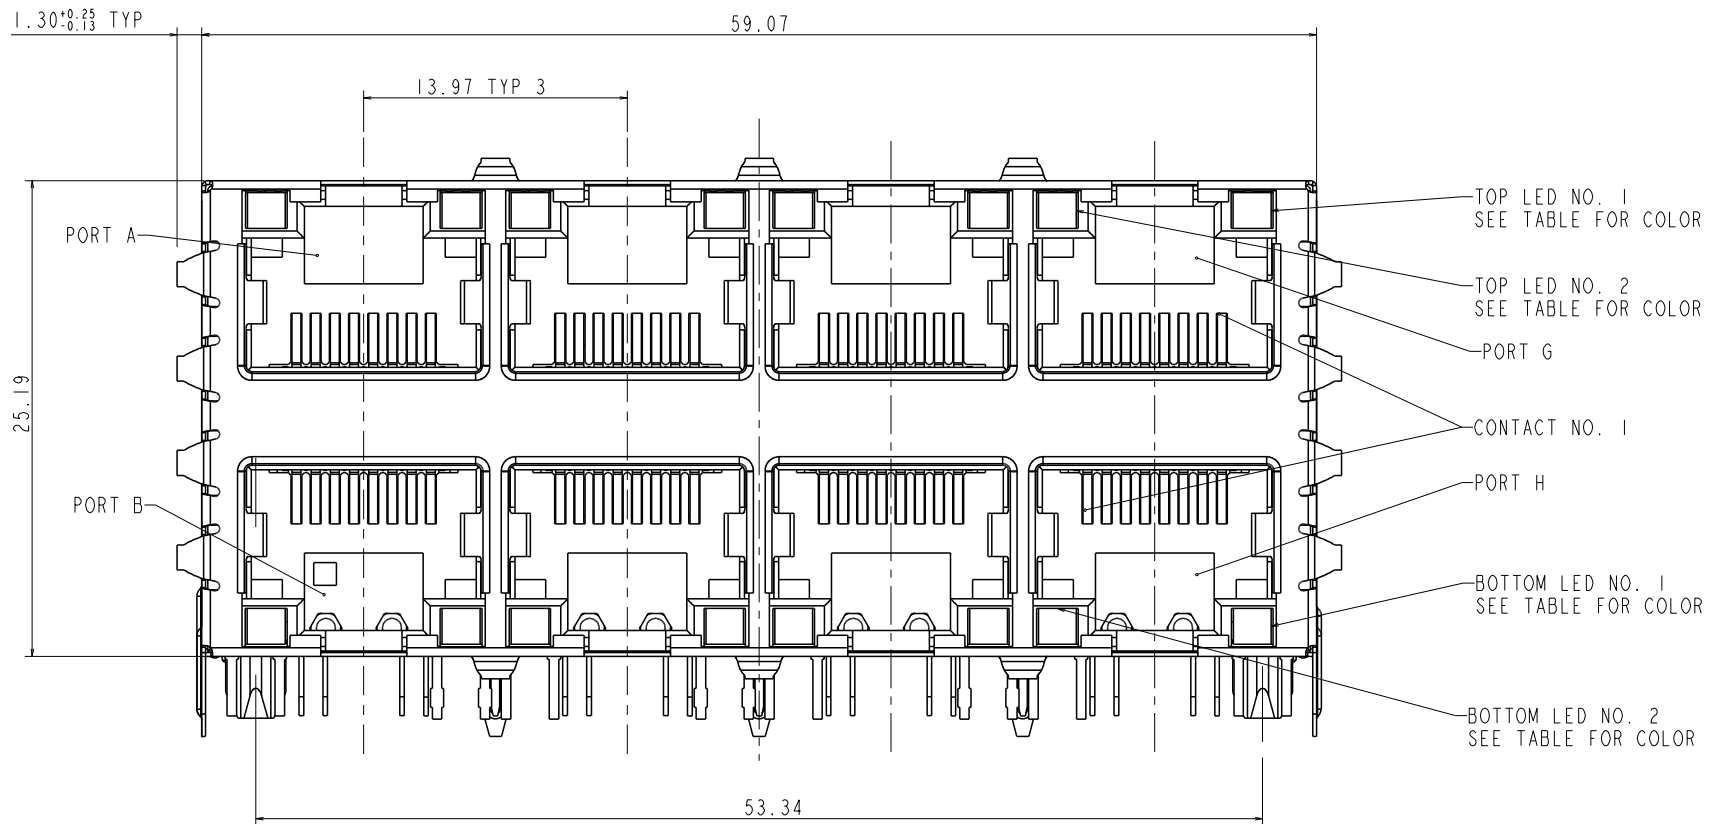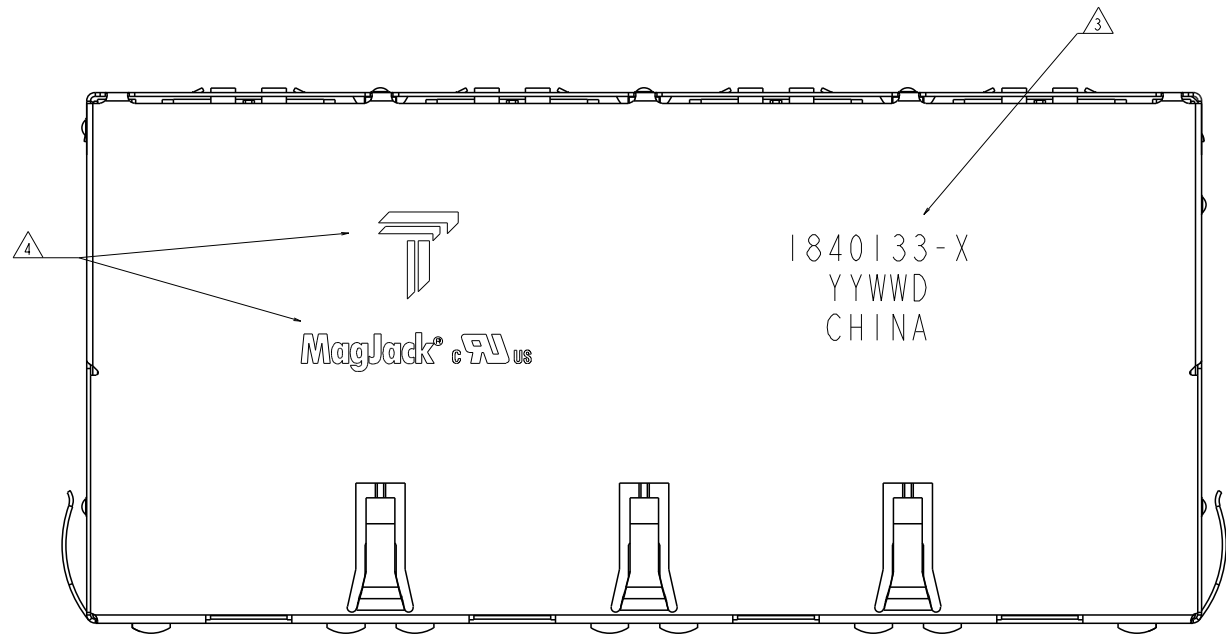



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KEKE YOUTH 19APR2006	 trp CONNECTOR a bel group		DONGGUAN CHINA	
DIMENSIONS: mm		CHK DENNIS CHEN 19APR2006				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD TEDDY XIONG 19APR2006				
0 PLC ±0.25 1 PLC ±0.25 2 PLC ±0.25 3 PLC ±0.25 4 PLC ±0.25 ANGLES ±0.25		MODEL NAME MAGJACK				
PRODUCT SPEC 108-2100		APPLICATION SPEC -	DESC 2X4 S866P9 10/100 W/ LED		SIZE A1	
		CAGE CODE 1840133		DRAWING NO -		RESTRICTED TO -
		CUSTOMER DRAWING		SCALE 4:1		SHEET 2 OF 4
						REV G

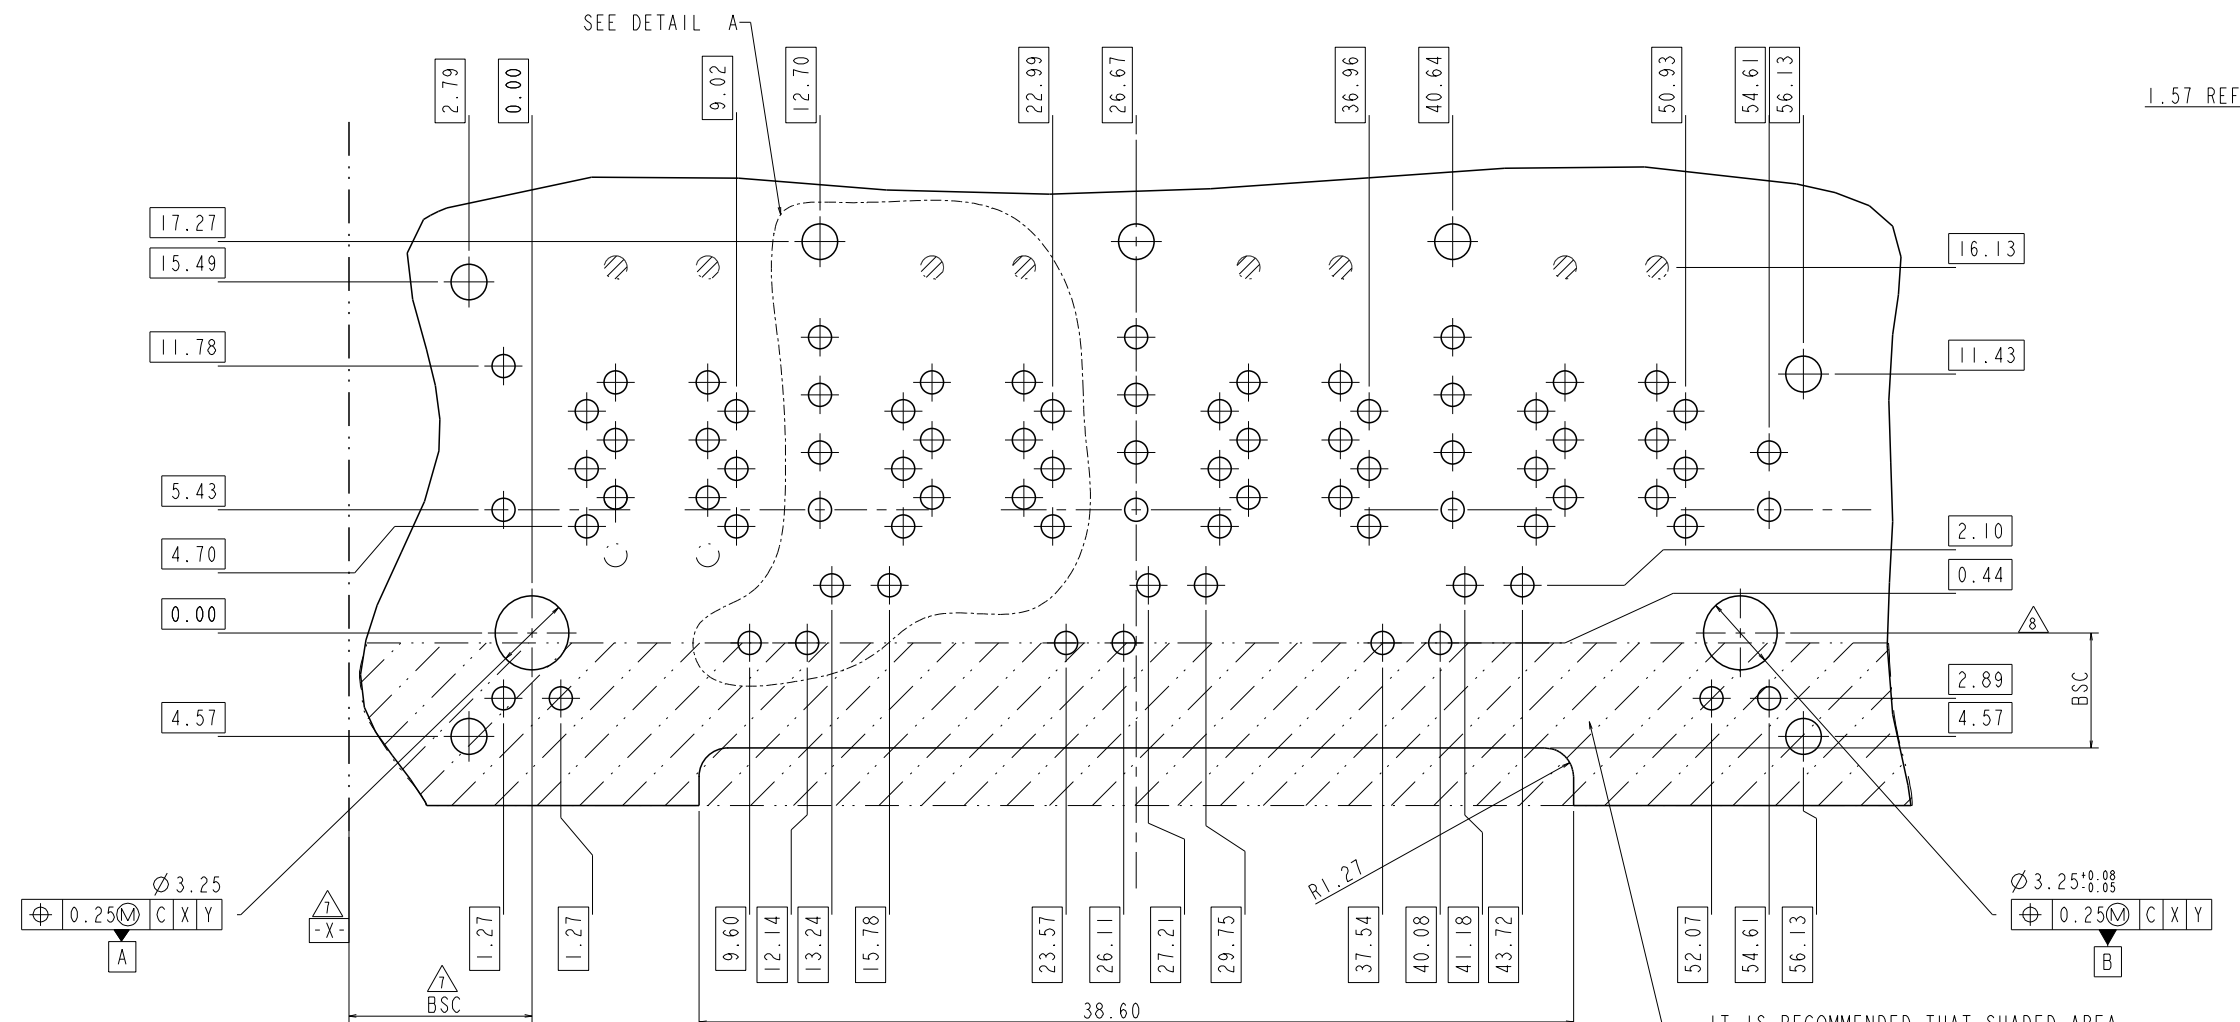

PC BOARD LAYOUT
VIEWED FROM COMPONENT SIDE
SCALE 6:1

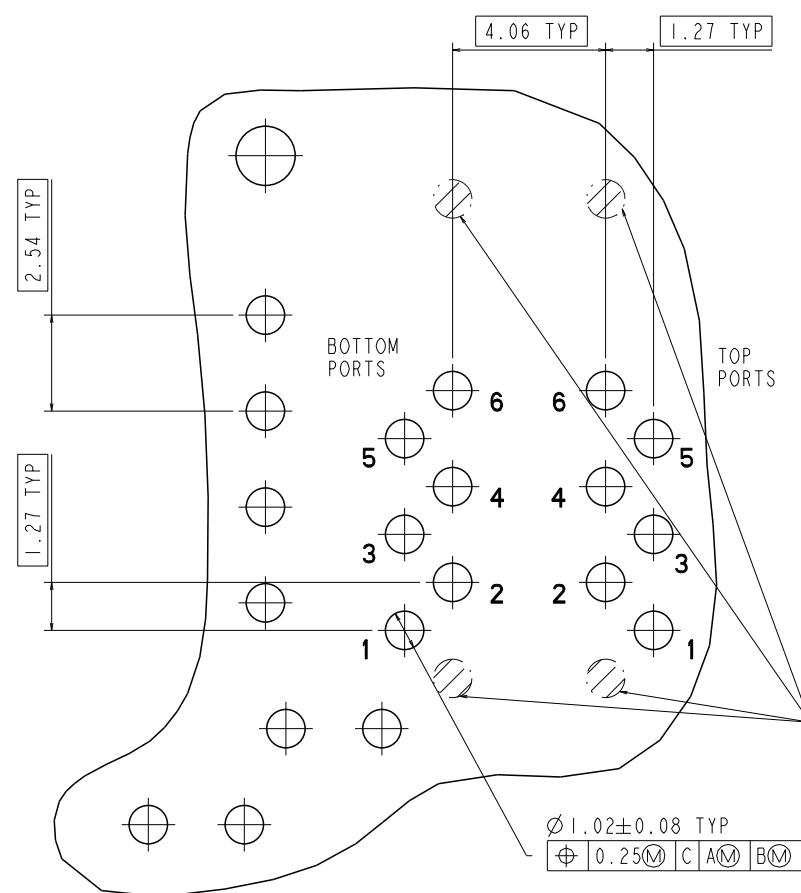


DETAIL A
PIN DESIGNATION
SCALE 10:1

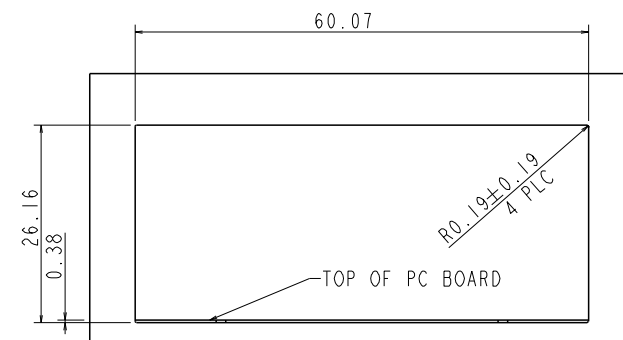
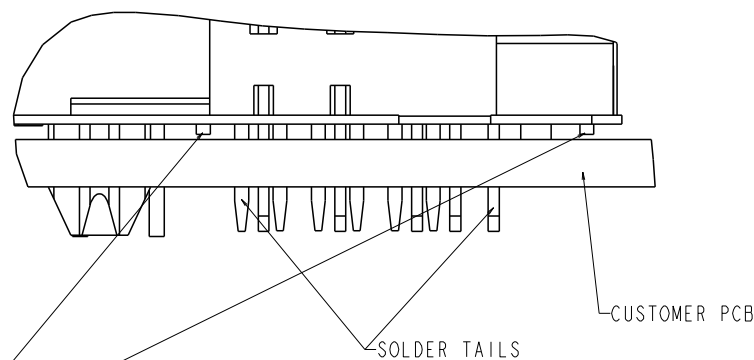


SUGGESTED PANEL CUTOUT DIMENSIONS

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN KEKE YOUTH 19APR2006	 DONGGUAN CHINA	
DIMENSIONS: mm		CHK DENNIS CHEN 19APR2006		
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.25 1 PLC ±0.25 2 PLC ±0.25 3 PLC ±0.25 4 PLC ±0.25	APPROV TEDDY XIONG 19APR2006	DESC 2X4 S86P9 10/100 W/ LED	
		MODEL NAME MAGJACK	SIZE A1	RESTRICTED TO -
PRODUCT SPEC 108-2100	APPLICATION SPEC -	STACK NON-PoE		
CUSTOMER DRAWING		SCALE 4:1 SHEET 3 OF 4 REV G		

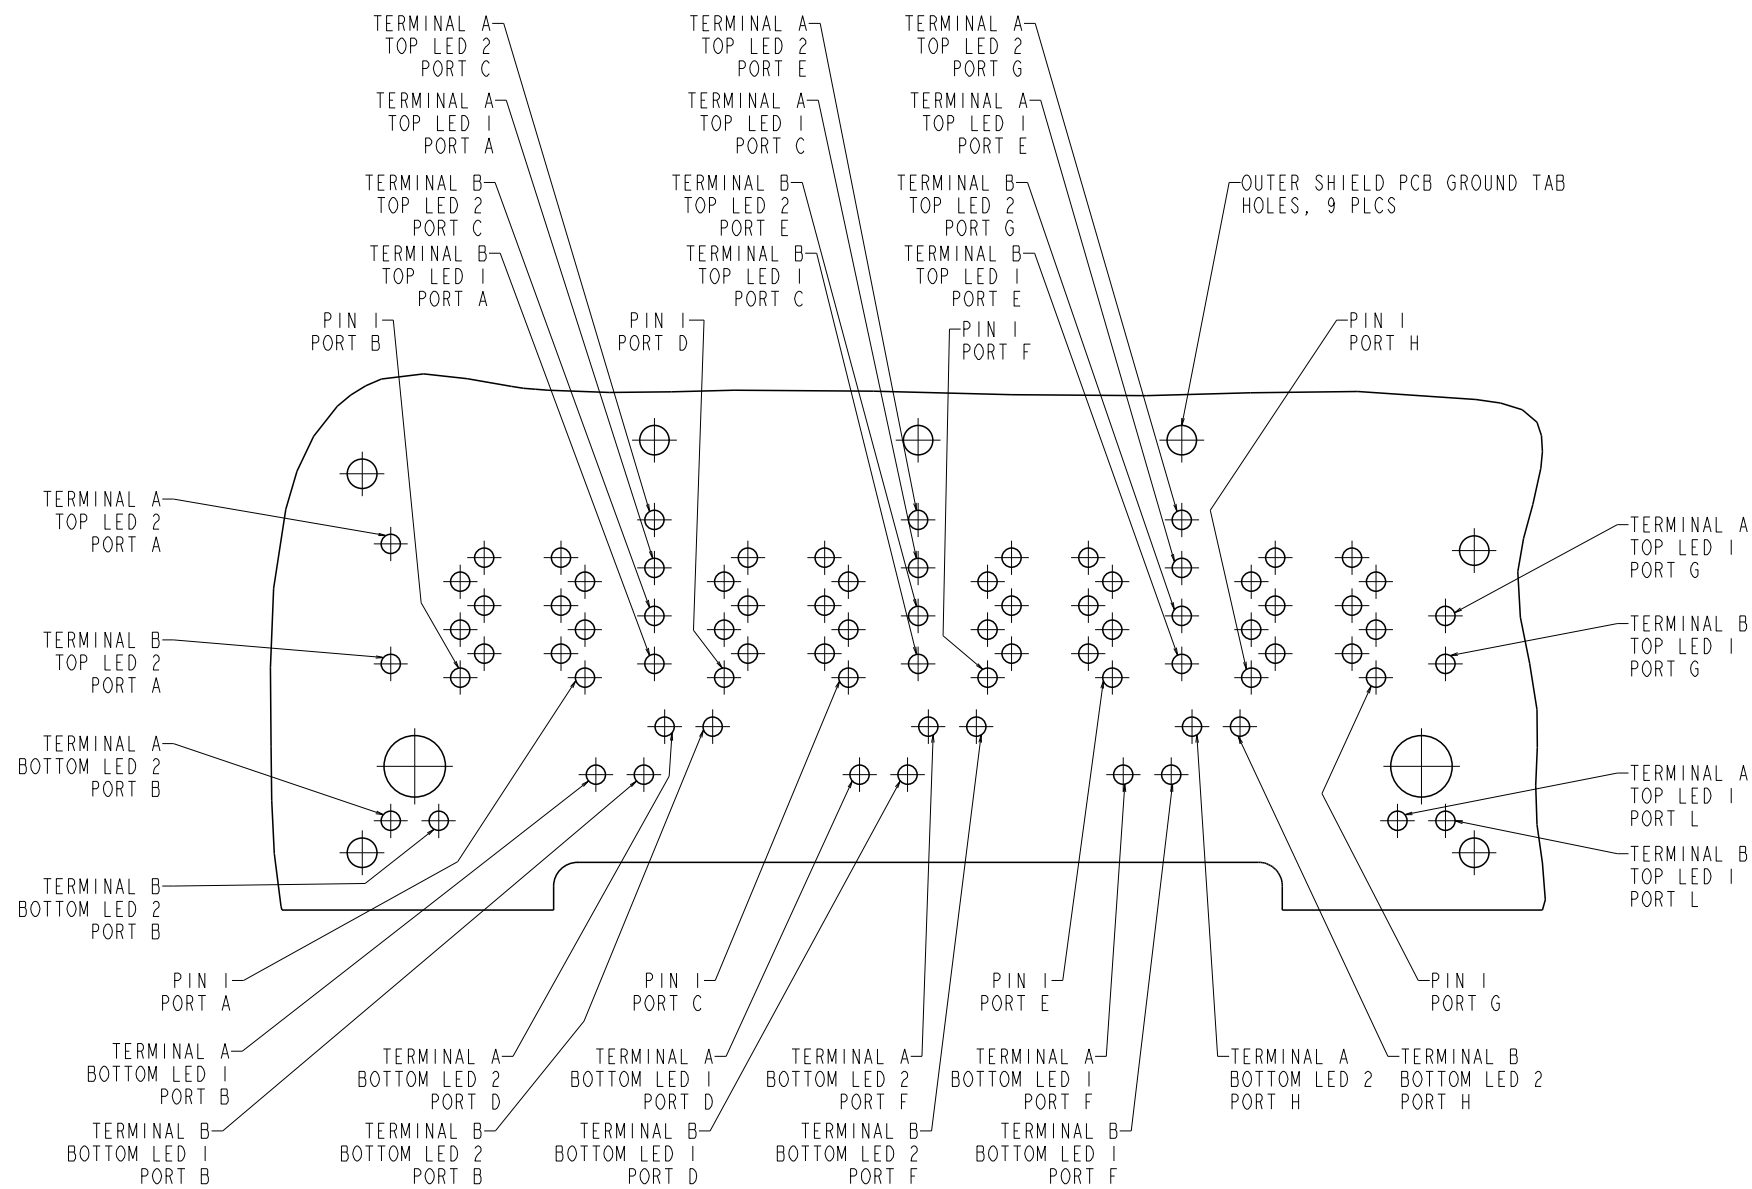

LED HOLE DESIGNATION VIEWED FROM COMPONENT SIDE

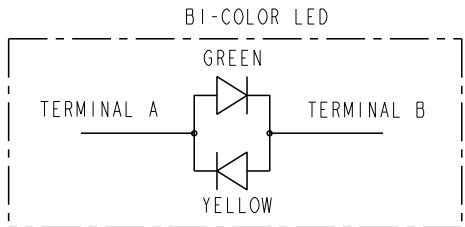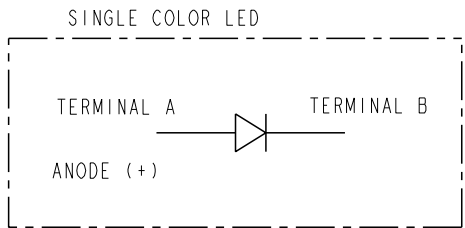

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: KEKE YOUTH 19APR2006			trp CONNECTOR a bel group	DONGGUAN CHINA
DIMENSIONS:		CHK: DENNIS CHEN 19APR2006				
mm		APVD: TEDDY XIONG 19APR2006				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		MODEL NAME		DESC	
	0 PLC	±0.25	MAGJACK		2X4 S866P9 10/100 W/ LED	
	1 PLC	±0.25	STACK NON-PoE		SIZE	CAGE CODE
	2 PLC	±0.25			DRAWING NO	
	4 PLC	±0.25			RESTRICTED TO	
PRODUCT SPEC	APPLICATION SPEC		CUSTOMER DRAWING		SCALE 4:1 SHEET 4 of 4 REV G	
108-2100	-				C=1840133	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9