

Standard Metal Film Leaded Resistors



A homogeneous film of metal alloy is deposited on a high grade ceramic body. After a helical groove has been cut in the resistive layer, tinned connecting leads of electrolytic copper are welded to the end-caps.

The resistors are coated with a colored lacquer (light-blue for type SFR16S; light-green for type SFR25 and red-brown for type SFR25H) which provides electrical, mechanical, and climatic protection. The encapsulation is resistant to all cleaning solvents in accordance with IEC 60068-2-45.

FEATURES

- Small size (SFR16S: 0204, SFR25 / SFR25H: 0207)
- Low noise (max. 1.5 μ V/V for R > 1 M Ω)
- Compatible to both lead (Pb)-free and lead containing soldering processes
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



FREE

APPLICATIONS

General purpose resistors

TECHNICAL SPECIFICATIONS						
DESCRIPTION	SFR16S	SFR25	SFR25H			
DIN size	0204	0207	0207			
Resistance range	1 Ω to 3 M Ω ; Jumper (0 Ω)	0.22 Ω to 10 M Ω ; Jumper (0 Ω)	0.22 Ω to 10 M Ω			
Resistance tolerance	± 5 %; ± 1 %					
Temperature coefficient	± 250 ppm/K; ± 100 ppm/K					
Rated dissipation, P ₇₀	0.5 W	0.4 W	0.5 W			
Thermal resistance	170 K/W	200 K/W	150 K/W			
Operating voltage, U _{max.} AC/DC	200 V	250 V	350 V			
Operating temperature range	-55 °C to 155 °C					
Permissible film temperature	155 °C					
Max. resistance range at rated dissipation ΔR/R max. , after 1000 h	± (2 % R + 0.05 Ω)					

Note


• R value is measured with probe distance of 24 mm ± 1 mm using 4-terminal method.



TEMPERATURE COEFFICIENT AND RESISTANCE RANGE					
TYPE	TOLERANCE	TCR	RESISTANCE	E-SERIES	
		± 250 ppm/K	1 Ω to \leq 4.7 Ω		
	± 5 %	± 100 ppm/K	4.7 Ω to 100 kΩ	E24	
SFR16S		± 250 ppm/K	> 100 kΩ to 3 MΩ		
3FN 103	± 1 %	± 100 ppm/K	5.6 Ω to 100 kΩ	E24; E96	
	± 1 70	± 250 ppm/K	> 100 kΩ to 3 MΩ	E24, E90	
	Jumper (0 Ω)	-	\leq 30 m Ω ; $I_{\text{max.}} = 3 \text{ A}$	-	
	. 5.0/	± 250 ppm/K	0.22 Ω to 4.7 Ω		
		± 100 ppm/K	$>$ 4.7 Ω to 1 M Ω	E24	
SFR25, SFR25H	± 5 %	± 250 ppm/K	$>$ 1 M Ω to 10 M Ω	E24	
		± 250 ppm/K	1 Ω to 4.7 Ω		
	. 1.0/	± 100 ppm/K	$>$ 4.7 Ω to 1 M Ω	E24: E06	
	± 1 %	± 250 ppm/K	$>$ 1 M Ω to 10 M Ω	E24; E96	
	Jumper (0 Ω) ⁽¹⁾	-	\leq 30 m Ω ; $I_{\text{max.}} = 5 \text{ A}$	-	

Note

⁽¹⁾ Jumper is only available for SFR25.

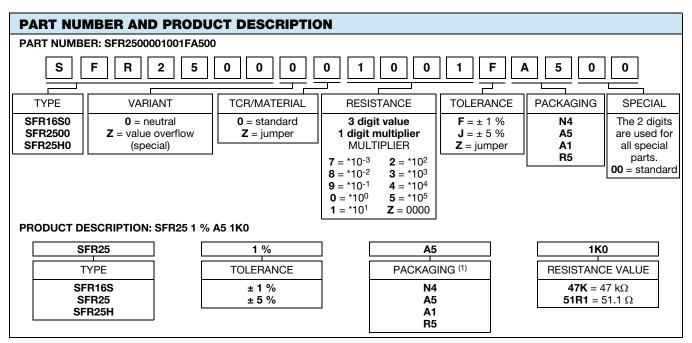

Notes

- The products can be ordered using either the PRODUCT DESCRIPTION or the PART NUMBER.
- N4 packaging indicates SFR25 and SFR25H radial version.



PACKAGING							
TYPE CODE		QUANTITY	PACKAGING STYLE WIDTH		PITCH	DIMENSIONS	
	A5	5000	Taped acc. to IEC 60286-1 fan-folded in a box			75 mm x 73 mm x 270 mm	
SFR16S	R5	5000	Taped acc. to IEC 60286-1 on a reel	52 mm	5 mm	92 mm x 278 mm x 278 mm	
	A1 ⁽¹⁾	1000	Taped acc. to IEC 60286-1 fan-folded in a box			75 mm x 28 mm x 262 mm	
	A5 5000 Ta	Taped acc. to IEC 60286-1 fan-folded in a box			75 mm x 98 mm x 270 mm		
SFR25, SFR25H	R5	5000	Taped acc. to IEC 60286-1 on a reel	52 mm	5 mm	93 mm x 300 mm x 298 mm	
	A1 ⁽¹⁾	1000	Taped acc. to IEC 60286-1 fan-folded in a box			75 mm x 28 mm x 262 mm	
	N4 ⁽²⁾	4000	Taped acc. to IEC 60286-2 fan-folded in a box	-	12.7 mm	45 mm x 262 mm x 330 mm	

Notes


MARKING

The nominal resistance and tolerance are marked on the resistor using four or five colored bands in accordance with IEC 60062, marking codes for resistors and capacitors.

 $^{^{(1)}\,}$ A1 packaging only available for resistors with $\pm~5~\%$ tolerance.


⁽²⁾ N4 packaging only available for SFR25 and SFR25H radial version.

FUNCTIONAL PERFORMANCE

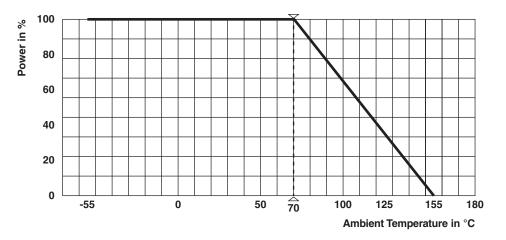


Derating

Maximum dissipation (P_{max.}) in percentage of rated power as a function of the ambient temperature (T_{amb})

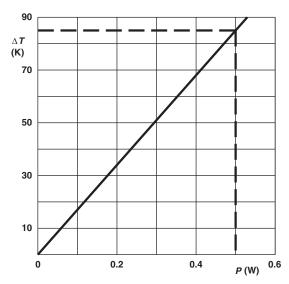

SFR16S Hot-spot temperature rise (ΔT) as a function of dissipated power

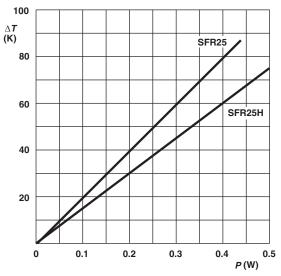


SFR25/SFR25H Hot-spot temperature rise (ΔT) as a function of dissipated power


Note

 $\bullet~$ The maximum permissible hot-spot temperature is 155 $^{\circ}\text{C}.$




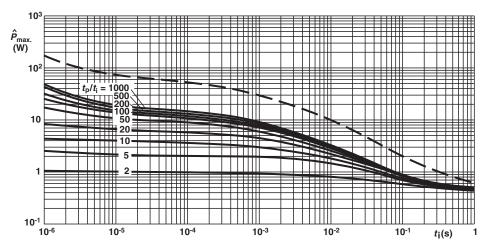

SFR16S Pulse on a regular basis; maximum permissible peak pulse power (\hat{P}_{max}) as a function of pulse duration (t_i)

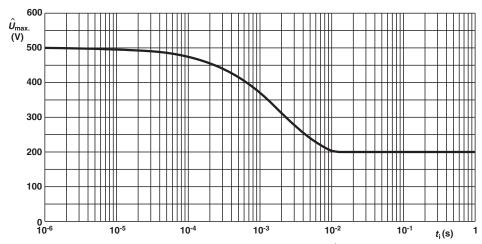


SFR16S Pulse on a regular basis; maximum permissible peak pulse voltage (\hat{U}_{max}) as a function of pulse duration (t_i)

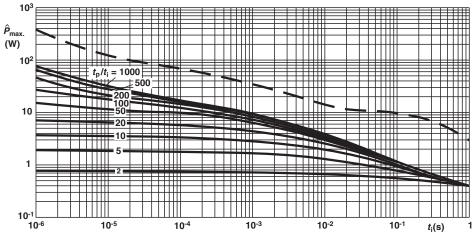


SFR25 Pulse on a regular basis; maximum permissible peak pulse power (\hat{P}_{max}) as a function of pulse duration (t_i)




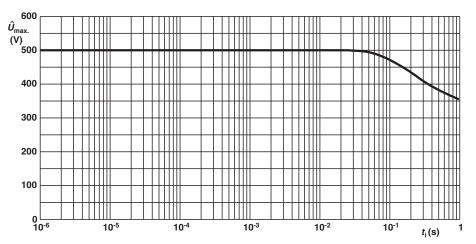

SFR25 Pulse on a regular basis; maximum permissible peak pulse voltage (\hat{U}_{max}) as a function of pulse duration (t_i)

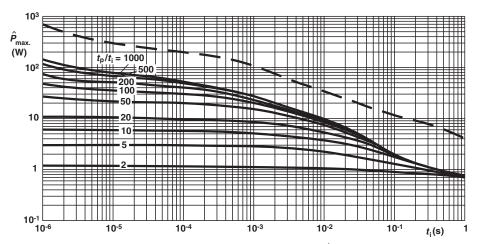

SFR25H Pulse on a regular basis; maximum permissible peak pulse power (\hat{P}_{max}) as a function of pulse duration (t_i)

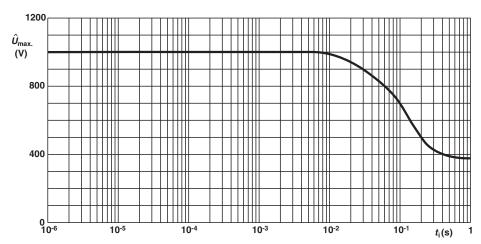

SFR25H Pulse on a regular basis; maximum permissible peak pulse voltage (\hat{U}_{max}) as a function of pulse duration (t_i)



TESTS PROCEDURES AND REQUIREMENTS

All tests are carried out in accordance with the following specifications:

• EN 60115-1, generic specification (includes tests)

The test and requirements table contains only the most important tests. For the full test schedule refer to the documents listed above.

The tests are carried out in accordance with IEC 60068-2-xx test method and under standard atmospheric conditions in accordance with IEC 60068-1, 5.3.

Unless otherwise specified the following values apply:

• Temperature: 15 °C to 35 °C

• Relative humidity: 45 % to 75 %

• Air pressure: 86 kPa to 106 kPa (860 mbar to 1060 mbar).

For performing some of the tests, the components are mounted on a test board in accordance with IEC 60115-1, 4.31. In test procedures and requirements table, only the tests and requirements are listed with reference to the relevant clauses of IEC 60115-1 and IEC 60068-2-xx test methods. A short description of the test procedure is also given.


TEST F	ROCEDU	JRES AND RE	QUIREMENTS						
IEC 60115-1 CLAUSE	60115-1 60068-2 TEST PROCEDURE			REQU	JIREMENTS	PERMISSIBI	LE CHANGE (∆R _{max.})	
4.5	-	Resistance	-	± 5 %; ± 1 %					
4.8	-	Temperature coefficient	At (20 / -55 / 20) °C and (20 / 155 / 20) °C	± 250 ppm/K; ± 100 ppm/K					
					< 68 kΩ	68 kΩ to 100 kΩ	> 100 k Ω to 1 M Ω	> 1 MΩ	
4.12	-	Noise	IEC 60195	SFR16S	\leq 0.1 μ V/V	≤ 0.5 µV/V	≤ 1.5 µV/V	\leq 1.5 μ V/V	
				SFR25, SFR25H	≤ 0.1 µV/V	≤ 0.1 µV/V	≤ 0.1 µV/V	≤ 1.5 µV/V	
4.13	-	Short time	Room temperature;	SFR16S, SFR25		± (0.25 %	R + 0.05 Ω)		
		overload	$U = 2.5 \text{ x or } U = 2 \text{ x } U_{\text{max.}}; 5 \text{ s}$	SFR25H		± (1 % F	? + 0.05 Ω)		
4.16	21 (Ua1) 21 (Ub) 21 (Uc)	Robustness of terminations	Tensile, bending, and torsion	± (0.25 % R + 0.05 Ω)					
4.17	20 (Ta)	Coldovobility	at +235 °C; 2 s; solder bath method; SnPb40						
4.17	20 (Ta)	Solderability	at +245 °C; 3 s; solder bath method; SnAg3Cu0.5	Good tinning (≥ 9		(2 95 % COVE	≥ 95 % covered); no damage		
4.18	20 (Tb)	Resistance to soldering heat	Unmounted components (260 ± 5) °C; (10 ± 1) s	± (0.25 % R + 0.05 Ω)					
4.19	14 (Na)	Rapid change of temperature	30 min at -55 °C and 30 min at +155 °C; 5 cycles	± (0.25 % R + 0.05 Ω)					
4.20	29 (Eb)	Bump	3 x 1500 bumps in 3 directions; 40 g		± (0.25 %	6 R + 0.05 Ω);	no damage		
4.22	6 (Fc)	Vibration	10 sweep cycles per direction; 10 Hz to 2000 Hz 1.5 mm or 200 m/s ²	± (0.25 % R + 0.05 Ω); no damage					
4.23		Climatic sequence:							
4.23.2	2 (Ba)	Dry heat	155 °C; 16 h						
4.23.3	30 (Db)	Damp heat, cyclic	55 °C; 24 h; 90 % to 100 % RH; 1 cycle						
4.23.4	1 (Aa)	Cold	-55 °C; 2 h						
4.23.5	13 (M)	Low air pressure	8.5 kPa; 2 h; 15 °C to 35 °C						
4.23.6	30 (Db)	Damp heat, cyclic	55 °C; 5 days; 95 % to 100 % RH; 5 cycles	SFR16S, SFR25,); no visible da); no visible da		
4.23.7		DC load	apply rated power for 1 min			± 2 % R; no	% R; no visible damage		

www.vishay.com

Vishay BCcomponents


TEST P	TEST PROCEDURES AND REQUIREMENTS							
IEC 60115-1 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS PERMISSIBLE CHANGE ($\Delta R_{ m max.}$)				
4.24	78 (Cab)	Damp heat (steady state)	(40 ± 2) °C; 56 days; (93 ± 3) % RH	± (2 % R + 0.05 Ω)				
4.25.1		Endurance (at 70 °C)	$U = \sqrt{P_{70} \times R} \text{ or } U = U_{\text{max.}};$ 1.5 h on; 0.5 h off 70 °C; 1000 h	± (2 % R + 0.05 Ω)				

DIMENSIONS



DIMENSIONS - Leaded resistor types, mass and relevant physical dimensions						
TYPE	Ø D _{max.} (mm)	L _{1 max.} (mm)	L _{2 max.} (mm)	Ø d (mm)	MASS (mg)	
SFR16S	1.9	3.5	4.1	0.45 ± 0.05	102	
SFR25	2.5	6.5	7.5	0.58 ± 0.05	205	
SFR25H	2.5	6.5	7.5	0.58 ± 0.05	205	

SFR25, SFR25H WITH RADIAL TAPING

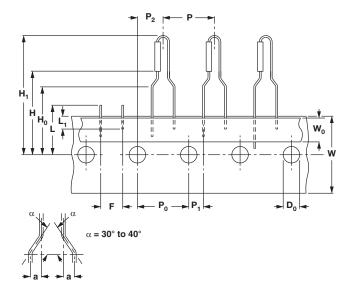

DIMENSIONS in millimeters		
Pitch of components	Р	12.7 ± 1.0
Feed-hole pitch	P ₀	12.7 ± 0.2
Feed-hole center to lead at topside at the tape	P ₁	3.85 ± 0.5
Feed-hole center to body center	P ₂	6.35 ± 1.0
Lead-to-lead distance	F	4.8 + 0.7 / - 0
Tape width	W	18.0 ± 0.5
Minimum hold down tape width	W_0	5.5
Maximum component height	H1	29
Lead wire clinch height	H ₀	16.5 ± 0.5
Height of component from tape center	Н	19.5 ± 1
Feed-hole diameter	D ₀	4.0 ± 0.2
Maximum length of snipped lead	L	11.0
Minimum lead wire (tape portion) shortest lead	L ₁	2.5

Note

 Please refer to document "Packaging" for more detail (www.vishay.com/doc?28721).



HISTORICAL 12NC INFORMATION

- The resistors had a 12-digit numeric code starting with 23.
- The subsequent 6 digits for 1 % or 7 digits for 5 % indicated the resistor type and packaging.
- The remaining digits indicated the resistance value:
 - -The first 3 digits for 1 % or 2 digits for 5 % indicated the resistance value.
 - -The last digit indicated the resistance decade.

Resistance Decade for ± 5 % Tolerance

RESISTANCE DECADE	LAST DIGIT
0.10 Ω to 0.91 Ω	7
1 Ω to 9.1 Ω	8
10 Ω ο 91 Ω	9
100 Ω to 910 Ω	1
1 k Ω to 9.1 k Ω	2
10 k Ω to 91 k Ω	3
100 k Ω to 910 k Ω	4
1 M Ω to 9.1 M Ω	5
= 10 MΩ	6

Resistance Decade for ± 1 % Tolerance

RESISTANCE DECADE	LAST DIGIT
1 Ω to 9.76 Ω	8
10 Ω to 97.6 Ω	9
100 Ω to 976 Ω	1
1 k Ω to 9.76 k Ω	2
10 kΩ to 97.6 kΩ	3
100 k Ω to 976 k Ω	4
1 MΩ to 9.76 MΩ	5
= 10 MΩ	6

12NC Example

The 12NC of a SFR25 resistor, value 5600 Ω ± 5 %, taped on a bandolier of 5000 units in ammopack was: 2322 181 43562.

HISTORICAL 12NC - Resistor type and packaging							
		23					
TYPE	TOL.	В	BANDOLIER ON REEL				
ITPE	IOL.	RADIAL TAPED STRAIGHT LEADS			STRAIGHT LEADS		
		4000 UNITS	1000 UNITS	5000 UNITS	5000 UNITS		
SFR16S	± 5 %	-	22 187 73	22 187 53	06 187 23		
	± 1 %	-	-	06 187 3	06 187 1		
	Jumper	-	-	06 187 90013	22 187 90346		
	± 5 %	06 184 03	22 181 53	22 181 43	22 181 63		
SFR25	± 1 %	-	-	22 188 2	06 181 8		
	Jumper	-	22 181 90018	22 181 90019	06 181 90011		
SFR25H	± 5 %	06 186 03	22 186 16	22 186 76	06 186 63		
	± 1 %	-	-	22 186 3	06 186 8		



Legal Disclaimer Notice

Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.

Revision: 02-Oct-12 Document Number: 91000

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru_4 moschip.ru_9