


# ISS-102 SERIES

## Two-Channel Intrinsically Safe Switch



### Wiring Diagrams

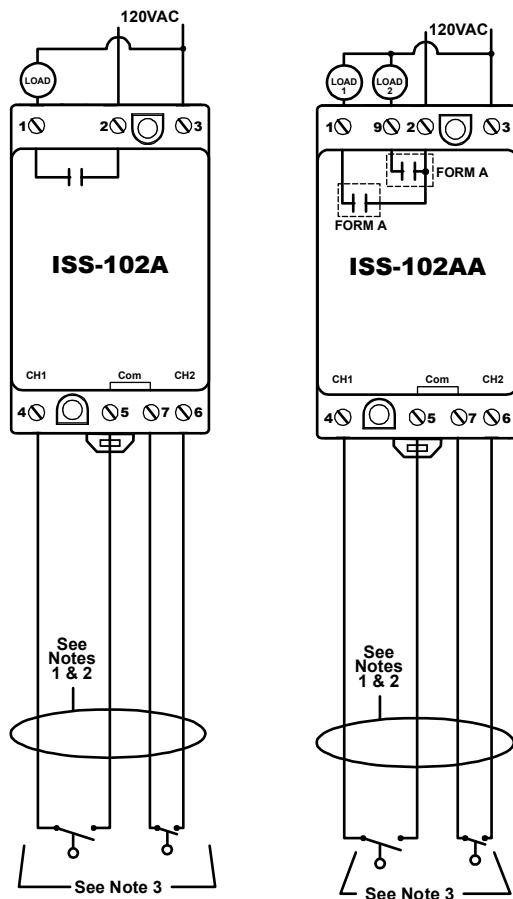

### Description

The ISS-102 is a two-channel, intrinsically-safe switch designed for multiple uses including a pump-up/pump-down (latching) controller or two-channel switch. LEDs indicate the state of the intrinsically-safe inputs and output relays and user-selectable options are available including a variable resistance threshold for float inputs. The ISS-102 enclosure is surface or DIN rail mountable.

**-LC** Each input channel is active when the corresponding switch is closed. When the lag input (CH2) is activated, the output closes. Applying latching logic, the output contact remains closed until the lead (CH1) and the lag (CH2) inputs are deactivated. Sensitivity is fixed at 100kOhms with a debounce time delay of 2 seconds.

**-DCS** This dual-channel switch has two Form A output relays. Two LEDs illuminate the output state of their respective Form A relay. Resistance probes or switches can be used on its inputs. Sensitivity is fixed at 100kOhms with a debounce time delay of 0.5 seconds.

**-MC** By selecting the proper functionality through the DIP switches, you can define a pump-up or pump-down, single or dual channel non-latching switch. The sensitivity adjustment (4.7k-100kOhms) allows you to define the input impedance at which the output relays (one Form A & one Form C) will change state, with a debounce time delay of 0.5 or 2 seconds.

### Features & Benefits

FEATURES	BENEFITS
<b>Finger-safe terminals</b>	Meets IEC 61000 safety requirements
<b>Compact design for DIN rail or surface mount</b>	Allows flexibility in panel installation
<b>LED status indicator</b>	Visual indication of relay engagement
<b>Two input channels</b>	Flexibility for pump up/pump down latching controller or two-channel switch applications

### Ordering Information


MODEL	LINE VOLTAGE	DESCRIPTION
ISS-102A-LC	120VAC	Latching Controller
ISS-102AA-DCS	120VAC	Dual Channel Switch
ISS-102ACI-MC	120VAC	Multi-function Controller
ISS-102C-M-LC	120VAC	MSHA* evaluated
ISS-102CCI-M-MC	120VAC	MSHA* evaluated

\* Mine Safety and Health Administration

For more wiring diagrams and notes, see next page.

# ISS-102 SERIES

## Wiring Diagrams (continued)

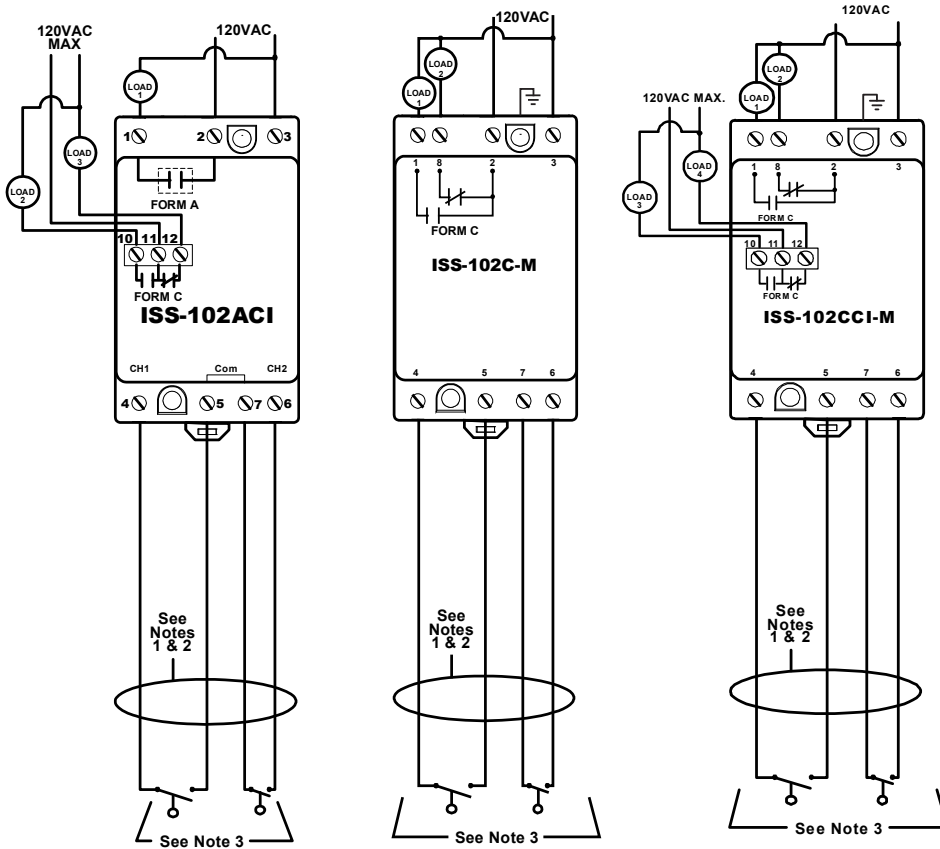

- NOTES:**
1. Maximum distance between unit and switch contact is 10,000 feet.
  2. All non-intrinsically-safe wiring shall be separated from intrinsically-safe wiring. Description of special wiring methods can be found in the National Electrical Code ANSI/NFPA 70, Article 504 Intrinsically-Safe Systems. Check your state and local codes for additional requirements.
  3. All switch contacts shall be non-energy storing, containing no inductance or capacitance.

## Specifications

### Functional Characteristics

<b>Debounce Time</b>	0.5 or 2 seconds
<b>Probe Sense Voltage</b>	5vdc pulsed
<b>Output Characteristics</b>	
<b>Output Contact Rating</b>	180VA @120VAC, C150
<b>Pilot Duty</b>	5A @120VAC
<b>General Purpose</b>	100,000 cycles min. @ rated load
<b>Relay Contact Life (Electrical)</b>	10,000,000 cycles
<b>Relay Contact Life (Mechanical)</b>	
<b>Output Relay Type</b>	
<b>ISS-102A-LC</b>	One Form A
<b>ISS-102AA-DCS</b>	Two Form A
<b>ISS-102ACI-MC</b>	One Form A & One isolated Form C
<b>ISS-102C-M-LC</b>	One Form C
<b>ISS-102CCI-M-MC</b>	Two Form C (one isolated)
<b>General Characteristics</b>	
<b>Temperature Range</b>	-20° to 55°C (-4° to 131°F)
<b>Maximum Input Power</b>	2 W
<b>Wire Range</b>	12 to 20 AWG
<b>Terminal Torque</b>	3.5 to 4.5 in.-lbs. (max. 4.5 in.-lbs.)

### Provides Intrinsically-Safe Circuits in the following locations:

Division 1 and 2	
Class I, Groups A,B,C,D;	
Class II, Groups E,F,G;	
Class III	
$V_{oc} = 16.8V$	$P_o = \frac{V_{oc} * I_{sc}}{4}$
$I_{sc} = 1.2mA$	4
$L_a = 100mH$	
$C_a = 0.39\mu F$	

### Entity Parameters

### Standards Passed

**Electrostatic Discharge (ESD)**  
**Radio Frequency Immunity (RFI)**  
**Fast Transients**  
**Safety Mark**  
**UL**

IEC 61000-4-2, Level 3, 6kV contact, 8kV air.  
IEC 61000-4-3, Level 3, 10V/m  
IEC 61000-4-4, Level 3, 4kV input power

### Dimensions

### Weight Mounting Method

UL913 Sixth Edition (File #E233355)  
(except Models ISS-102C-M-LC & ISS-102CCI-M-MC which have been evaluated by MSHA)  
**H** 88.9 mm (3.5") ; **W** 52.93 mm (2.08") ;  
**D** 59.69 mm (2.35")  
0.7 lb. (11.2 oz., 317.51 g)  
35mm DIN rail or Surface Mount  
(#6 or #8 screws)

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9