



MIC803

3-Pin Microprocessor Supervisor Circuit with Open-Drain Reset Output

General Description

The MIC803 is a single-voltage supervisor with open-drain reset output that provides accurate power supply monitoring and reset generation in microprocessor based systems. The function of the device is to assert a reset signal if the power supply voltage drops below the Reset Threshold voltage, and retain this reset for the Reset Timeout Period once the power supply increases above the Reset Threshold voltage.

The MIC803 consumes only 4.5 μ A of supply current and offers three reset delay periods of 20ms, 140ms and 1120ms (min). It features factory programmed reset threshold levels from 2.63V to 4.63V to accommodate 3.0V, 3.3V, and 5.0V power supplies. It is available in the compact 3-pin SC-70 and SOT-23 packages.



Features

- 4.5 μ A supply current (typical) at 3.6V
- Open-Drain /RESET output
- /RESET remains valid with V_{CC} as low as 1V
- 20ms, 140ms, or 1120ms (min) reset timeout Options
- 2.63V to 4.63V Preset Voltage Threshold Options
- 2.5% Voltage Threshold Accuracy over temperature
- 3-pin SC70-3 package (2.0mm x 2.1mm)
- 3-pin SOT-23 package (2.3mm x 2.9mm)
- -40°C to +125°C Junction Temperature Range

Applications

- Critical microcomputer power monitoring
- Portable equipment
- Solid state drives
- Printers/computers
- Embedded controllers

Typical Application

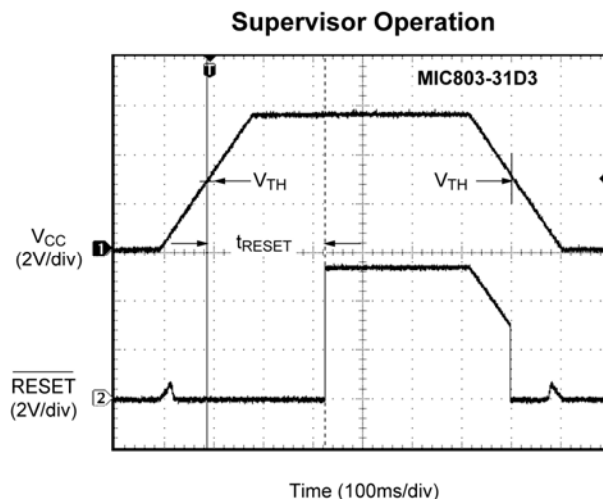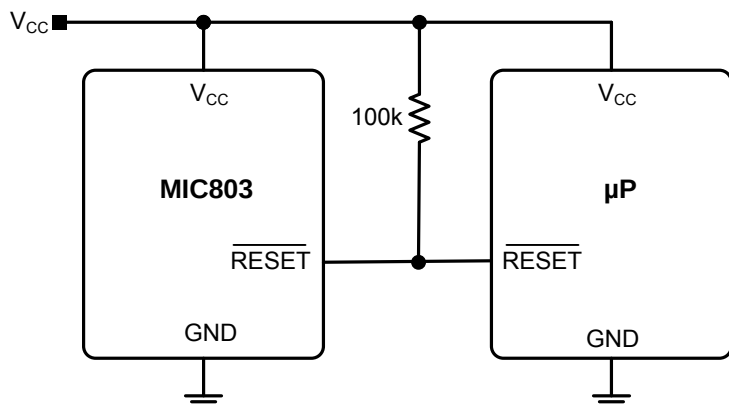




Ordering Information ⁽¹⁾

Part Number	Marking	Nominal V _{TH} (V)	Min. t _{RESET} ⁽²⁾ (ms)	Junction Temperature Range	Package
MIC803-46D2VC3	<u>AS</u>	4.63	20	–40° to +125°C	SC70-3
MIC803-44D2VC3	<u>AP</u>	4.38	20	–40° to +125°C	SC70-3
MIC803-41D2VC3	<u>AK</u>	4.10	20	–40° to +125°C	SC70-3
MIC803-40D2VC3	<u>A2</u>	4.00	20	–40° to +125°C	SC70-3
MIC803-31D2VC3	<u>AG</u>	3.08	20	–40° to +125°C	SC70-3
MIC803-30D2VC3	<u>AV</u>	3.00	20	–40° to +125°C	SC70-3
MIC803-29D2VC3	<u>AD</u>	2.93	20	–40° to +125°C	SC70-3
MIC803-26D2VC3	<u>AA</u>	2.63	20	–40° to +125°C	SC70-3
MIC803-46D3VC3	<u>AT</u>	4.63	140	–40° to +125°C	SC70-3
MIC803-44D3VC3	<u>AQ</u>	4.38	140	–40° to +125°C	SC70-3
MIC803-41D3VC3	<u>AM</u>	4.10	140	–40° to +125°C	SC70-3
MIC803-40D3VC3	<u>A5</u>	4.00	140	–40° to +125°C	SC70-3
MIC803-31D3VC3	<u>A4</u>	3.08	140	–40° to +125°C	SC70-3
MIC803-30D3VC3	<u>AX</u>	3.00	140	–40° to +125°C	SC70-3
MIC803-29D3VC3	<u>AE</u>	2.93	140	–40° to +125°C	SC70-3
MIC803-26D3VC3	<u>AB</u>	2.63	140	–40° to +125°C	SC70-3
MIC803-46D4VC3	<u>AU</u>	4.63	1120	–40° to +125°C	SC70-3
MIC803-44D4VC3	<u>AR</u>	4.38	1120	–40° to +125°C	SC70-3
MIC803-41D4VC3	<u>AN</u>	4.10	1120	–40° to +125°C	SC70-3
MIC803-40D4VC3	<u>A6</u>	4.00	1120	–40° to +125°C	SC70-3
MIC803-31D4VC3	<u>AJ</u>	3.08	1120	–40° to +125°C	SC70-3
MIC803-30D4VC3	<u>AZ</u>	3.00	1120	–40° to +125°C	SC70-3
MIC803-29D4VC3	<u>A3</u>	2.93	1120	–40° to +125°C	SC70-3
MIC803-26D4VC3	<u>AC</u>	2.63	1120	–40° to +125°C	SC70-3
MIC803-46D2VM3	<u>AS</u>	4.63	20	–40° to +125°C	SOT23-3
MIC803-44D2VM3	<u>AP</u>	4.38	20	–40° to +125°C	SOT23-3
MIC803-41D2VM3	<u>AK</u>	4.10	20	–40° to +125°C	SOT23-3
MIC803-40D2VM3	<u>A2</u>	4.00	20	–40° to +125°C	SOT23-3
MIC803-31D2VM3	<u>AG</u>	3.08	20	–40° to +125°C	SOT23-3
MIC803-30D2VM3	<u>AV</u>	3.00	20	–40° to +125°C	SOT23-3
MIC803-29D2VM3	<u>AD</u>	2.93	20	–40° to +125°C	SOT23-3
MIC803-26D2VM3	<u>AA</u>	2.63	20	–40° to +125°C	SOT23-3
MIC803-46D3VM3	<u>AT</u>	4.63	140	–40° to +125°C	SOT23-3
MIC803-44D3VM3	<u>AQ</u>	4.38	140	–40° to +125°C	SOT23-3
MIC803-41D3VM3	<u>AM</u>	4.10	140	–40° to +125°C	SOT23-3
MIC803-40D3VM3	<u>A5</u>	4.00	140	–40° to +125°C	SOT23-3
MIC803-31D3VM3	<u>A4</u>	3.08	140	–40° to +125°C	SOT23-3
MIC803-30D3VM3	<u>AX</u>	3.00	140	–40° to +125°C	SOT23-3
MIC803-29D3VM3	<u>AE</u>	2.93	140	–40° to +125°C	SOT23-3
MIC803-26D3VM3	<u>AB</u>	2.63	140	–40° to +125°C	SOT23-3

Part Number	Marking	Nominal V_{TH} (V)	Min. $t_{RESET}^{(2)}$ (ms)	Junction Temperature Range	Package
MIC803-46D4VM3	<u>AU</u>	4.63	1120	-40° to +125°C	SOT23-3
MIC803-44D4VM3	<u>AR</u>	4.38	1120	-40° to +125°C	SOT23-3
MIC803-41D4VM3	<u>AN</u>	4.10	1120	-40° to +125°C	SOT23-3
MIC803-40D4VM3	<u>A6</u>	4.00	1120	-40° to +125°C	SOT23-3
MIC803-31D4VM3	<u>AJ</u>	3.08	1120	-40° to +125°C	SOT23-3
MIC803-30D4VM3	<u>AZ</u>	3.00	1120	-40° to +125°C	SOT23-3
MIC803-29D4VM3	<u>A3</u>	2.93	1120	-40° to +125°C	SOT23-3
MIC803-26D4VM3	<u>AC</u>	2.63	1120	-40° to +125°C	SOT23-3

Notes:

- 1: All devices available in Tape and Reel only.
- 2: -40° to +85°C Temp. Range

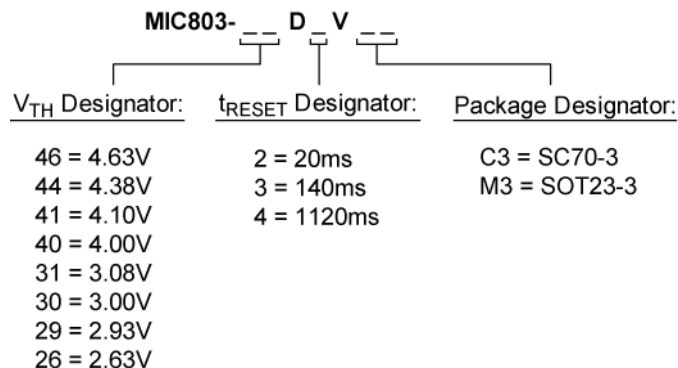Part Numbering Convention:**Pin Configuration****3-Pin SC70****3-Pin SOT-23****Pin Description**

Pin Number	Pin Name	Pin Function
1	GND	Ground Pin
2	/RESET	/RESET goes low if V_{CC} falls below the reset threshold (V_{TH}), and remains asserted for one timeout period after V_{CC} exceeds V_{TH}
3	V_{CC}	Power Supply Input and monitored voltage

Absolute Maximum Ratings⁽¹⁾

Supply Voltage (V_{CC})	-0.3V to 6.0V
Reset Output (/RESET)	-0.3V to 6.0V
Input Current (V_{CC})	20mA
Output Current (/RESET)	20mA
Rate of Rise (V_{CC})	100V/us
Junction Temperature (T_J)	+150°C
Lead Temperature (soldering, 10sec.)	260°C
Storage Temperature (T_S)	-65°C to +150°C
ESD Rating ⁽³⁾	3kV

Operating Ratings⁽²⁾

Supply Voltage (V_{CC})	1.0V to 5.5V
Reset Output Voltage (/RESET)	0.0V to 5.5V
Junction Temperature (T_J)	-40°C to +125°C
Junction Thermal Resistance	
3-Pin SC70 (θ_{JA})	260°C/W
3-Pin SOT23 (θ_{JA})	203°C/W

Electrical Characteristics⁽⁴⁾

For typical values, $V_{CC} = 5.0V$ for MIC803-46/44/41/40, $V_{CC} = 3.3V$ for MIC803-31/30/29, $V_{CC} = 3.0V$ for MIC803-26; $T_J = 25^\circ\text{C}$, **Bold** values indicate $-40^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$; unless noted.

Parameter	Conditions		Min	Typ	Max	Units
Power Supply Input						
Operating Voltage Range (V _{CC})	T _J = -40°C to +85°C		1.0		5.5	V
	T _J = -40°C to +125°C		1.2		5.5	
Supply Current (I _{CC})	T _J = -40°C to +85°C	V _{CC} = 5.5V, no Load		5.5	15	μA
		V _{CC} = 3.6V, no Load		4.5	10	
	T _J = +85°C to +125°C	V _{CC} = 5.5V, no Load			18	
		V _{CC} = 3.6V, no Load			13	
Voltage Threshold						
Reset Threshold (V _{TH})	MIC803-46	T _J = -40°C to +85°C	4.50	4.63	4.75	V
		T _J = -40°C to +125°C	4.44		4.82	
	MIC803-44	T _J = -40°C to +85°C	4.25	4.38	4.50	
		T _J = -40°C to +125°C	4.20		4.56	
	MIC803-41	T _J = -40°C to +85°C	4.00	4.10	4.20	
		T _J = -40°C to +125°C	3.97		4.24	
	MIC803-40	T _J = -40°C to +85°C	3.89	4.00	4.10	
		T _J = -40°C to +125°C	3.80		4.20	
	MIC803-31	T _J = -40°C to +85°C	3.00	3.08	3.15	
		T _J = -40°C to +125°C	2.95		3.21	
	MIC803-30	T _J = -40°C to +85°C	2.93	3.00	3.08	
		T _J = -40°C to +125°C	2.90		3.11	
	MIC803-29	T _J = -40°C to +85°C	2.82	2.93	3.00	
		T _J = -40°C to +125°C	2.81		3.05	
	MIC803-26	T _J = -40°C to +85°C	2.55	2.63	2.70	
		T _J = -40°C to +125°C	2.50		2.76	

Electrical Characteristics (Continued)


For typical values, $V_{CC} = 5.0V$ for MIC803-46/44/41/40, $V_{CC} = 3.3V$ for MIC803-31/30/29, $V_{CC} = 3.0V$ for MIC803-26; $T_J = 25^\circ C$, **Bold** values indicate $-40^\circ C \leq T_J \leq +125^\circ C$; unless noted.

Parameter	Conditions		Min	Typ	Max	Units
Reset Time						
V _{CC} to /RESET Delay (t _D)	V _{CC} = V _{TH} to (V _{TH} – 100mV)			15		μs
Reset Timeout Period (t _{RESET})	D2	T _J = -40°C to +85°C	20	35	44	ms
		T _J = +85°C to +125°C	16		48	
	D3	T _J = -40°C to +85°C	140	230	360	
		T _J = +85°C to +125°C	112		420	
	D4	T _J = -40°C to +85°C	1120	1800	2400	
		T _J = +85°C to +125°C	900		3200	
Reset Output						
/RESET Output Voltage (V _{OL})	V _{CC} ≥ 4.0V, I _{SINK} = 3.2mA				0.4	V
	V _{CC} > 2.5V, I _{SINK} = 1.2mA				0.3	V
	V _{CC} ≥ 1.0V, I _{SINK} = 50μA				0.3	V
/RESET Output Leakage	V _{CC} > V _{TH} , /RESET deasserted				1	μA


Notes:

1. Exceeding the absolute maximum rating may damage the device.
2. The device is not guaranteed to function outside its operating rating.
3. Devices are ESD sensitive. Handling precautions recommended. Human body model, 1.5k Ω in series with 100pF.
4. Specification for packaged product only.


Typical Characteristics

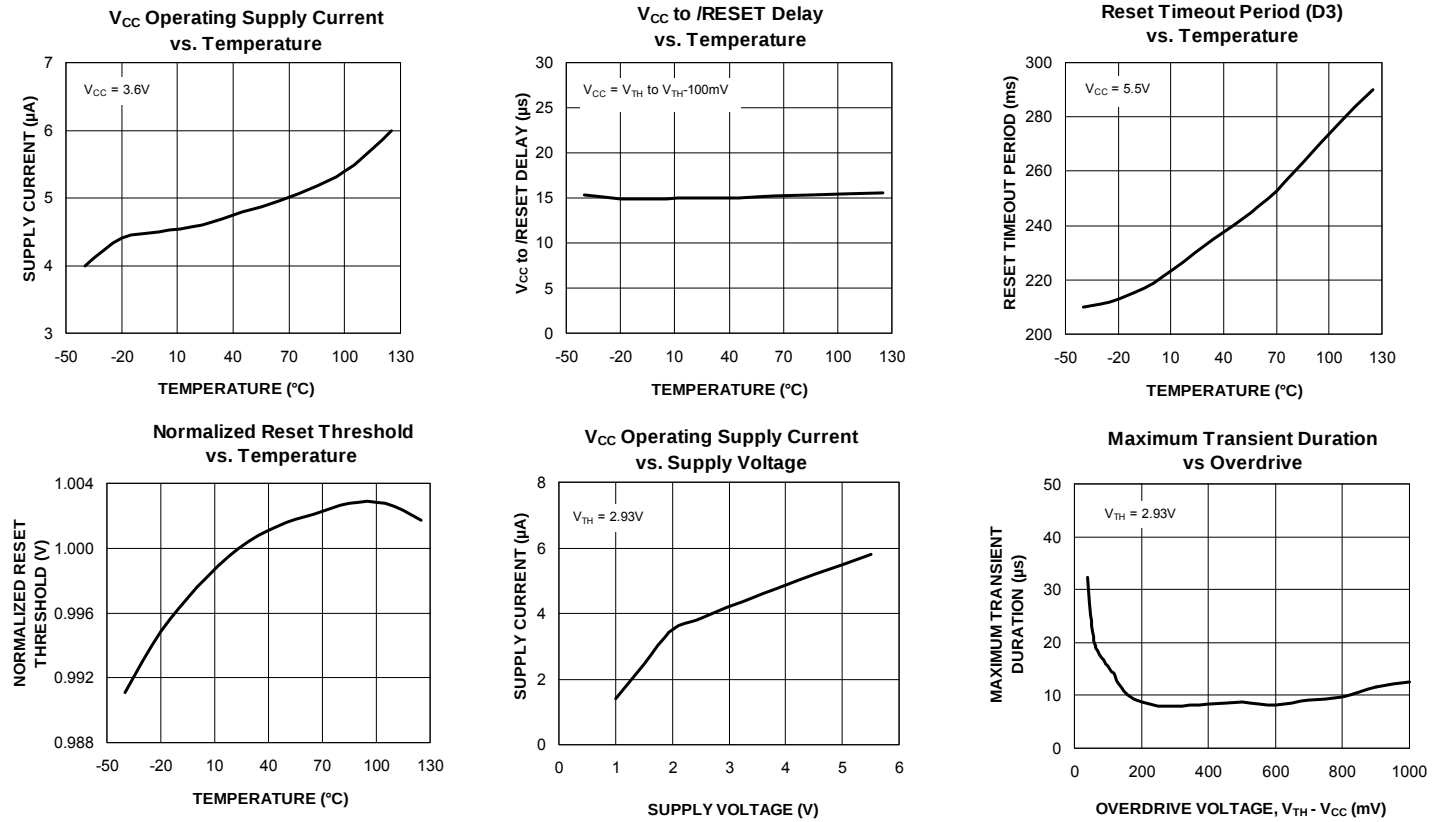

Timing Diagram

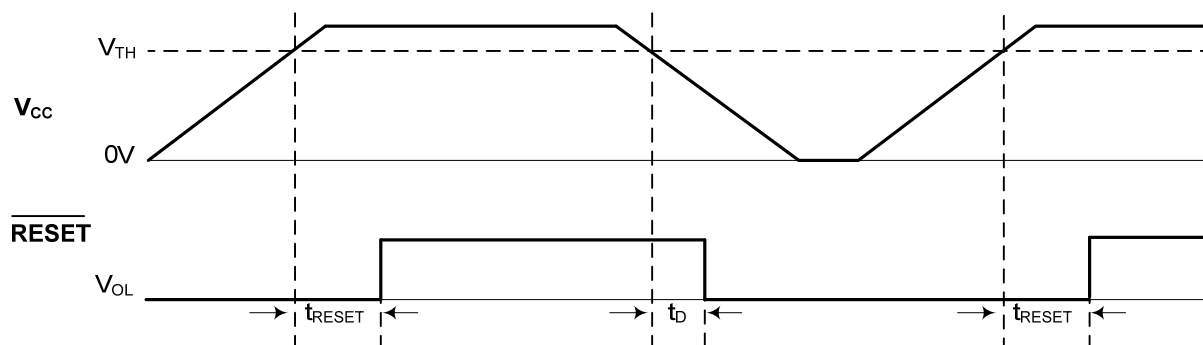

Functional Diagram

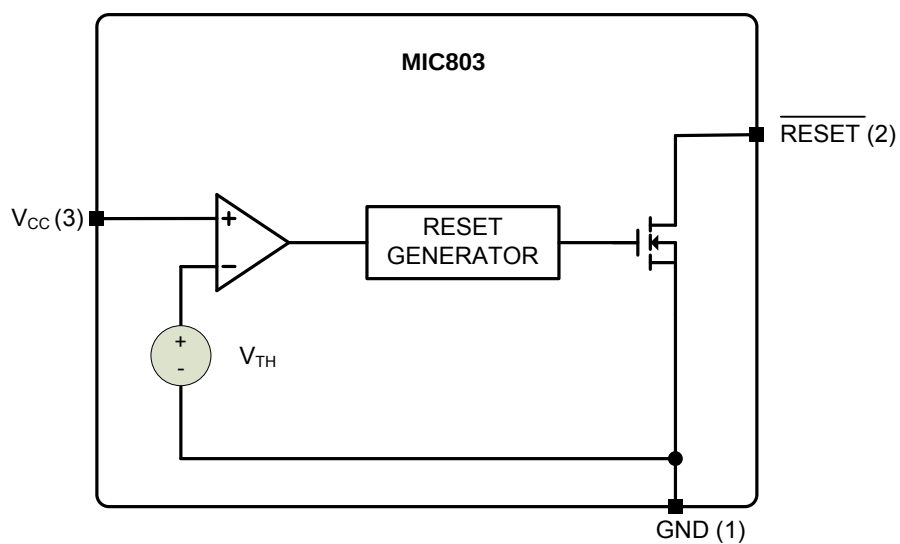

Application Information

Microprocessor Reset

The $\overline{\text{RESET}}$ pin is asserted whenever V_{CC} falls below the Reset Threshold Voltage, V_{TH} . The $\overline{\text{RESET}}$ pin remains asserted for the duration of the Reset Timeout Period (t_{RESET}) after V_{CC} has risen above the Reset Threshold Voltage. The reset function ensures the microprocessor is properly reset and powers up in a known condition after a power failure. $\overline{\text{RESET}}$ will remain valid with V_{CC} as low as 1.0V.

The $\overline{\text{RESET}}$ output is a simple open-drain N-channel MOSFET structure. A pull-up resistor must be used to pull this output up to some voltage. For most applications, this voltage will be the same power supply that supplies V_{CC} to the MIC803. As shown in Figure 1, it is possible, however, to tie this resistor to some other voltage. This will allow the MIC803 to monitor one voltage while level-shifting the $\overline{\text{RESET}}$ output to some other voltage. The pull-up voltage must be limited to 5.5V. The resistor must be small enough to supply current to the inputs and leakage paths that are driven by the $\overline{\text{RESET}}$ output.

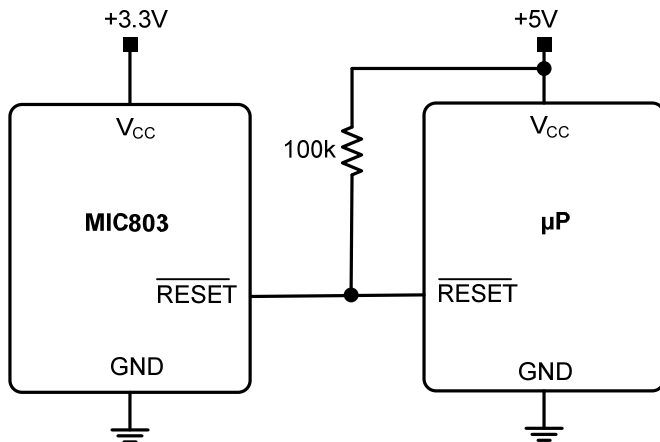


Figure 1. MIC803 used in a Multiple Supply System

$\overline{\text{RESET}}$ Valid at Low Voltage

As V_{CC} drops to 0V, the MIC803 will no longer be able to pull the $\overline{\text{RESET}}$ output low, and the pull-up resistor will pull the output high. The value of the pull-up resistor and the voltage it is connected to will affect the point at which this happens.

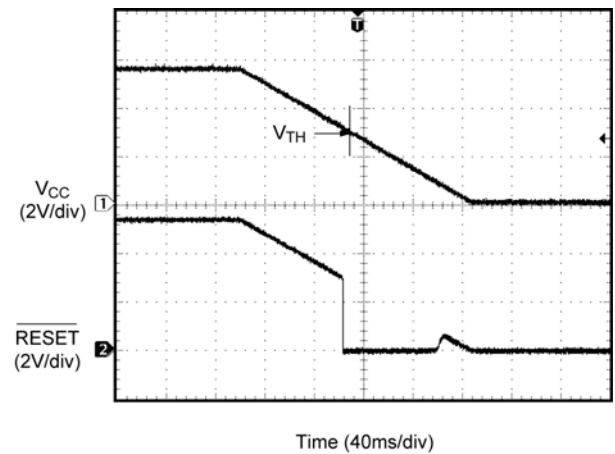


Figure 2. $\overline{\text{RESET}}$ at falling V_{CC}

Wire OR'ing The $\overline{\text{RESET}}$ Output

Since the $\overline{\text{RESET}}$ output is open-drain, several reset sources can be wire-ORed, in parallel, to allow resets from multiple sources.

V_{CC} Transients

The MIC803 is relatively immune to negative-going V_{CC} glitches below the Reset Threshold. See the Typical Characteristic Curve, *Maximum Transient Duration vs Overdrive* on page 6 of the datasheet. As shown in Figure 3, the Overdrive Voltage is the difference between the Threshold Voltage and the minimum point of the V_{CC} glitch. Typically, an overdrive of 100mV, with duration of 15 μ s or less will not cause a reset. If additional transient immunity is needed, a 0.1 μ F bypass capacitor can be placed as close as possible to the MIC803 on the V_{CC} pin.



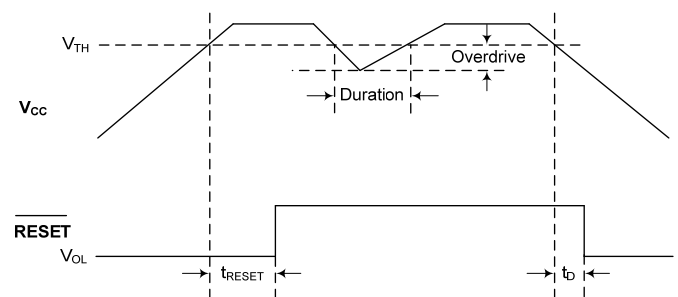


Figure 3. V_{CC} Transient


Package Information

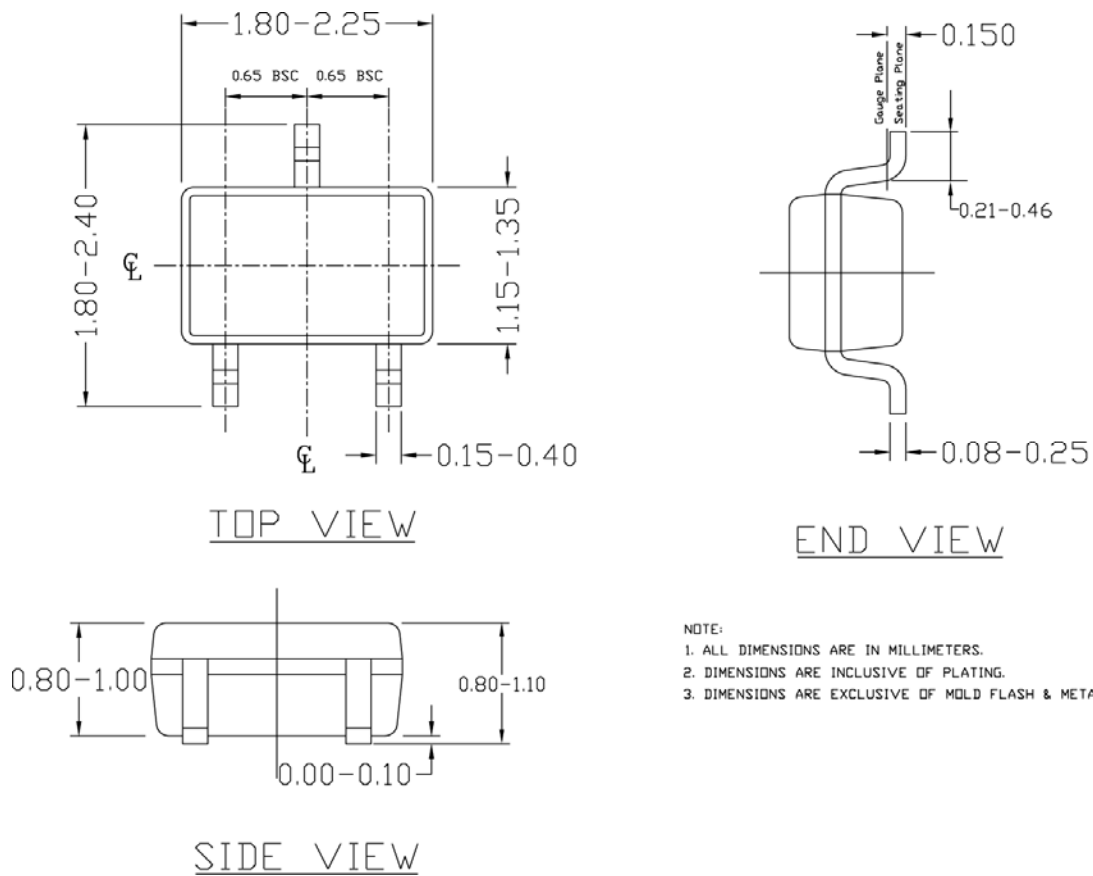


3-Pin SC-70 (C3)

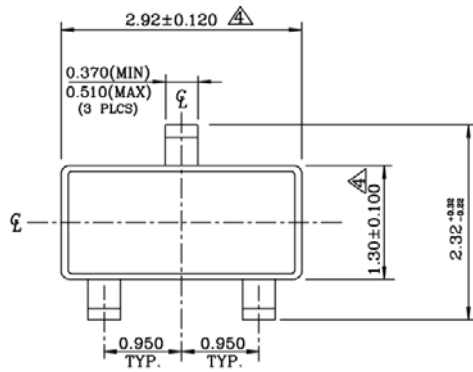

Top View

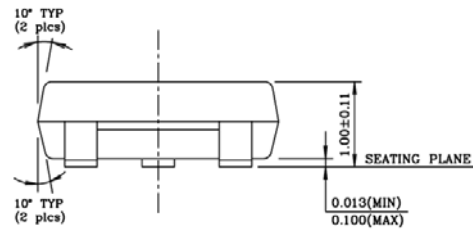

Side View

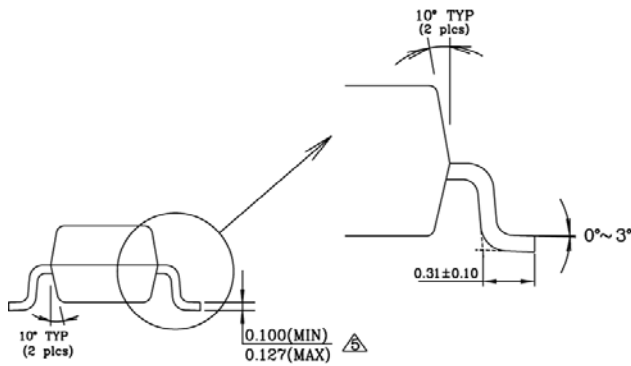

End View

NOTE:

1. All dimensions are in millimeters.
 2. Package surface to be matte finish VDI 11~13. Y14.5M, 1982.
 3. Die is facing up for mold & trim/form.
- ▲ Dimension are exclusive mold flash and gate burr.
 ▲ Dimension are exclusive solder plating.

3-Pin SOT-23 (M3)

MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA
 TEL +1 (408) 944-0800 FAX +1 (408) 474-1000 WEB <http://www.micrel.com>

Micrel makes no representations or warranties with respect to the accuracy or completeness of the information furnished in this data sheet. This information is not intended as a warranty and Micrel does not assume responsibility for its use. Micrel reserves the right to change circuitry, specifications and descriptions at any time without notice. No license, whether express, implied, arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Micrel's terms and conditions of sale for such products, Micrel assumes no liability whatsoever, and Micrel disclaims any express or implied warranty relating to the sale and/or use of Micrel products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is a Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2010 Micrel, Incorporated.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9