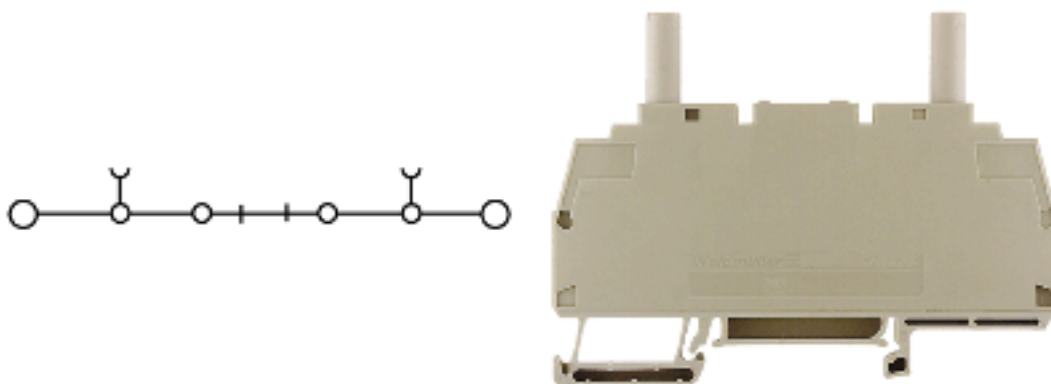


**General ordering data**

Order No.	1018600000
Part designation	WTL 6/3/STB
Version	Disconnect and modular disconnect terminal, 6 mm ² , Screw connection, Wemid, dark beige, TS 35
EAN	4008190259266
Qty.	50 pc(s).

Product notes

Note, ordering data	TS32 version on request
Product description	Different current transformer circuits, e.g. for replacing measuring instruments or electricity meters, can be realised.
Function	With socket
Note, accessories	For further disconnect test terminal accessories, see chapter "Accessories"

2 clampable conductors (H05V/H07V) with equal cross-section (rated connection)

Solid, min.	0.5 mm ²
Solid, max.	2.5 mm ²
Flexible, min.	0.5 mm ²
Flexible, max.	2.5 mm ²
Flexible with ferrule, min. (DIN 46228 pt 1)	0.5 mm ²
Flexible with ferrule, max. (DIN 46228 pt 1)	2.5 mm ²

Additional technical data

Colour of insulating material	dark beige
Connection direction	on side
End plate required	No
Explosion-tested version "Ex e"	No
Installation advice	TS 35
Insulating material	Wemid
Levels cross-connected internally	No

Additional technical data

No. of identical terminals	1
No. of levels	1
No. of terminal strips per level	2
Open sides	closed
Operating temperature range	- 50 °C, + 120 °C
Product family	W-Series
Type of connection	Screwed
Type of mounting	Snap-on
UL 94 flammability rating of insulation material	V-0
Version	Test-disconnect terminals

CSA rating data

Voltage (CSA)	300 V
CSA current	45 A
Min. cross-section (CSA)	AWG 20
Max. cross-section (CSA)	AWG 8

Conductors for clamping (additional connection)

Flexible with ferrule, min. (DIN 46228 pt 1)	0.5 mm ²
Flexible with ferrule, max. (DIN 46228 pt 1)	6 mm ²

Conductors for clamping (rated connection)

Clamping range, min.	0.5 mm ²
Clamping range, max.	10 mm ²
Type of connection	Screw connection
2nd type of connection	screwed
Connection direction	on side
No. of connections	2
Stripping length	12 mm
Clamping screw	M 3.5
Blade size	4.0 x 0.8 mm
Tightening torque range	0.8...1.6 Nm
Torque level with DMS electric screwdriver	3
Gauge to IEC 60947-1	A5
Solid, min.	0.5 mm ²
Solid, max.	10 mm ²
Stranded, min.	1.5 mm ²
Stranded, max.	10 mm ²
Flexible, min.	0.5 mm ²
Flexible, max.	10 mm ²
Flexible with ferrule, min. (DIN 46228/1)	0.5 mm ²
Flexible with ferrule, max. (DIN 46228/1)	6 mm ²
Flexible, min., ferrule with plastic collar (DIN 46228 pt 4)	0.5 mm ²
Flexible, max., ferrule with plastic collar (DIN 46228 pt 4)	6 mm ²
AWG conductor size, min.	AWG 20
AWG conductor size, max.	AWG 8
AWG conductor size, min.	0.52 mm ²
AWG conductor size, max.	8.37 mm ²

Conductors for clamping (rated connection)**Dimensions**

Width	7.9 mm
Height of lowest version	65 mm
Length	87 mm
Weight	35.65 g
TS 35 offset	42.5 mm

Disconnect terminals

Cross-disconnect	sliding
Integral test socket	Yes
Slitting	sliding
Tightening torque range	0.5...0.8 Nm
Torque level with DMS electric screwdriver	3

Rating data

Rated cross-section	6 mm ²
Rated voltage	500 V
Rated impulse voltage	6 kV
Rated current	41 A
Standards	IEC 60947-7-1
Current with max. conductor	57 A
Pollution severity	3

UL rating data

Voltage (UL)	300 V
Current (UL)	45 A
Min. cross-section (UL)	AWG 20
Max. cross-section (UL)	AWG 8

Approvals

Approvals institutes

**Classifications**

eClass 4.1	27-14-11-26
eClass 5.0	27-14-11-26
eClass 5.1	27-14-11-26

Similar products

Order No.	Part designation	Version
1018800000	WTL 6/3	Disconnect and modular disconnect terminal, 6 mm ² , Screw connection, Wemid, dark beige, TS 35
1018640000	WTL 6/3 BR	Disconnect and modular disconnect terminal, 6 mm ² , Screw connection, Wemid, dark beige, TS 35

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9