
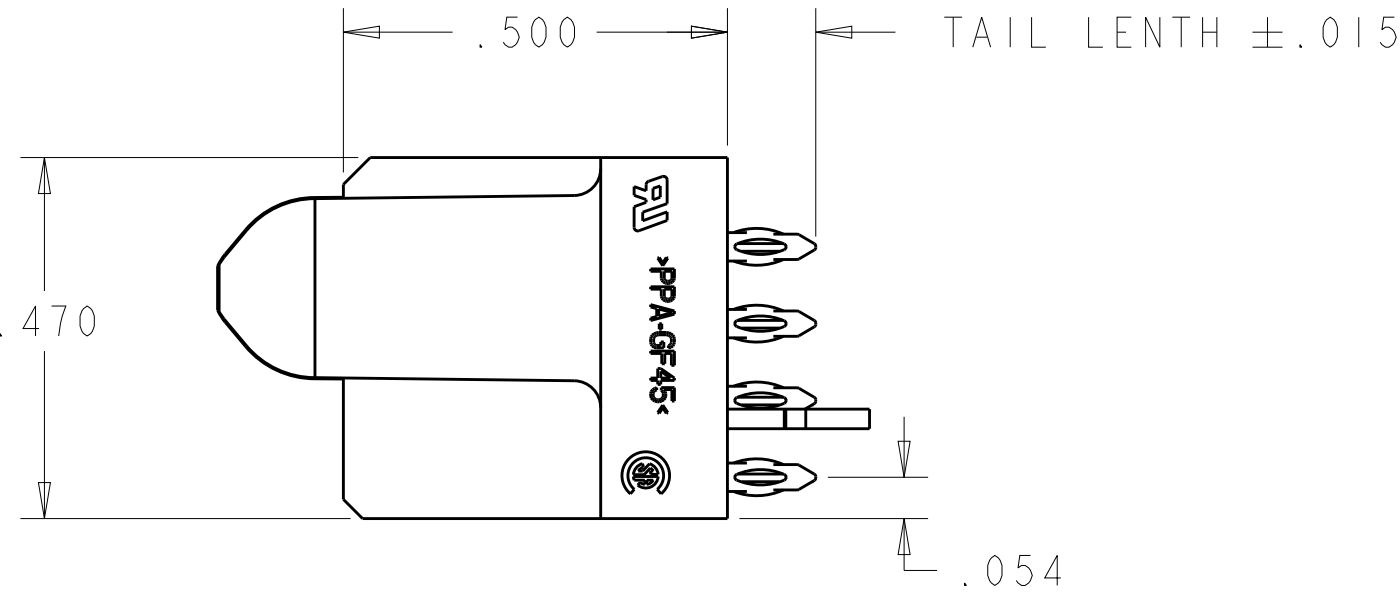
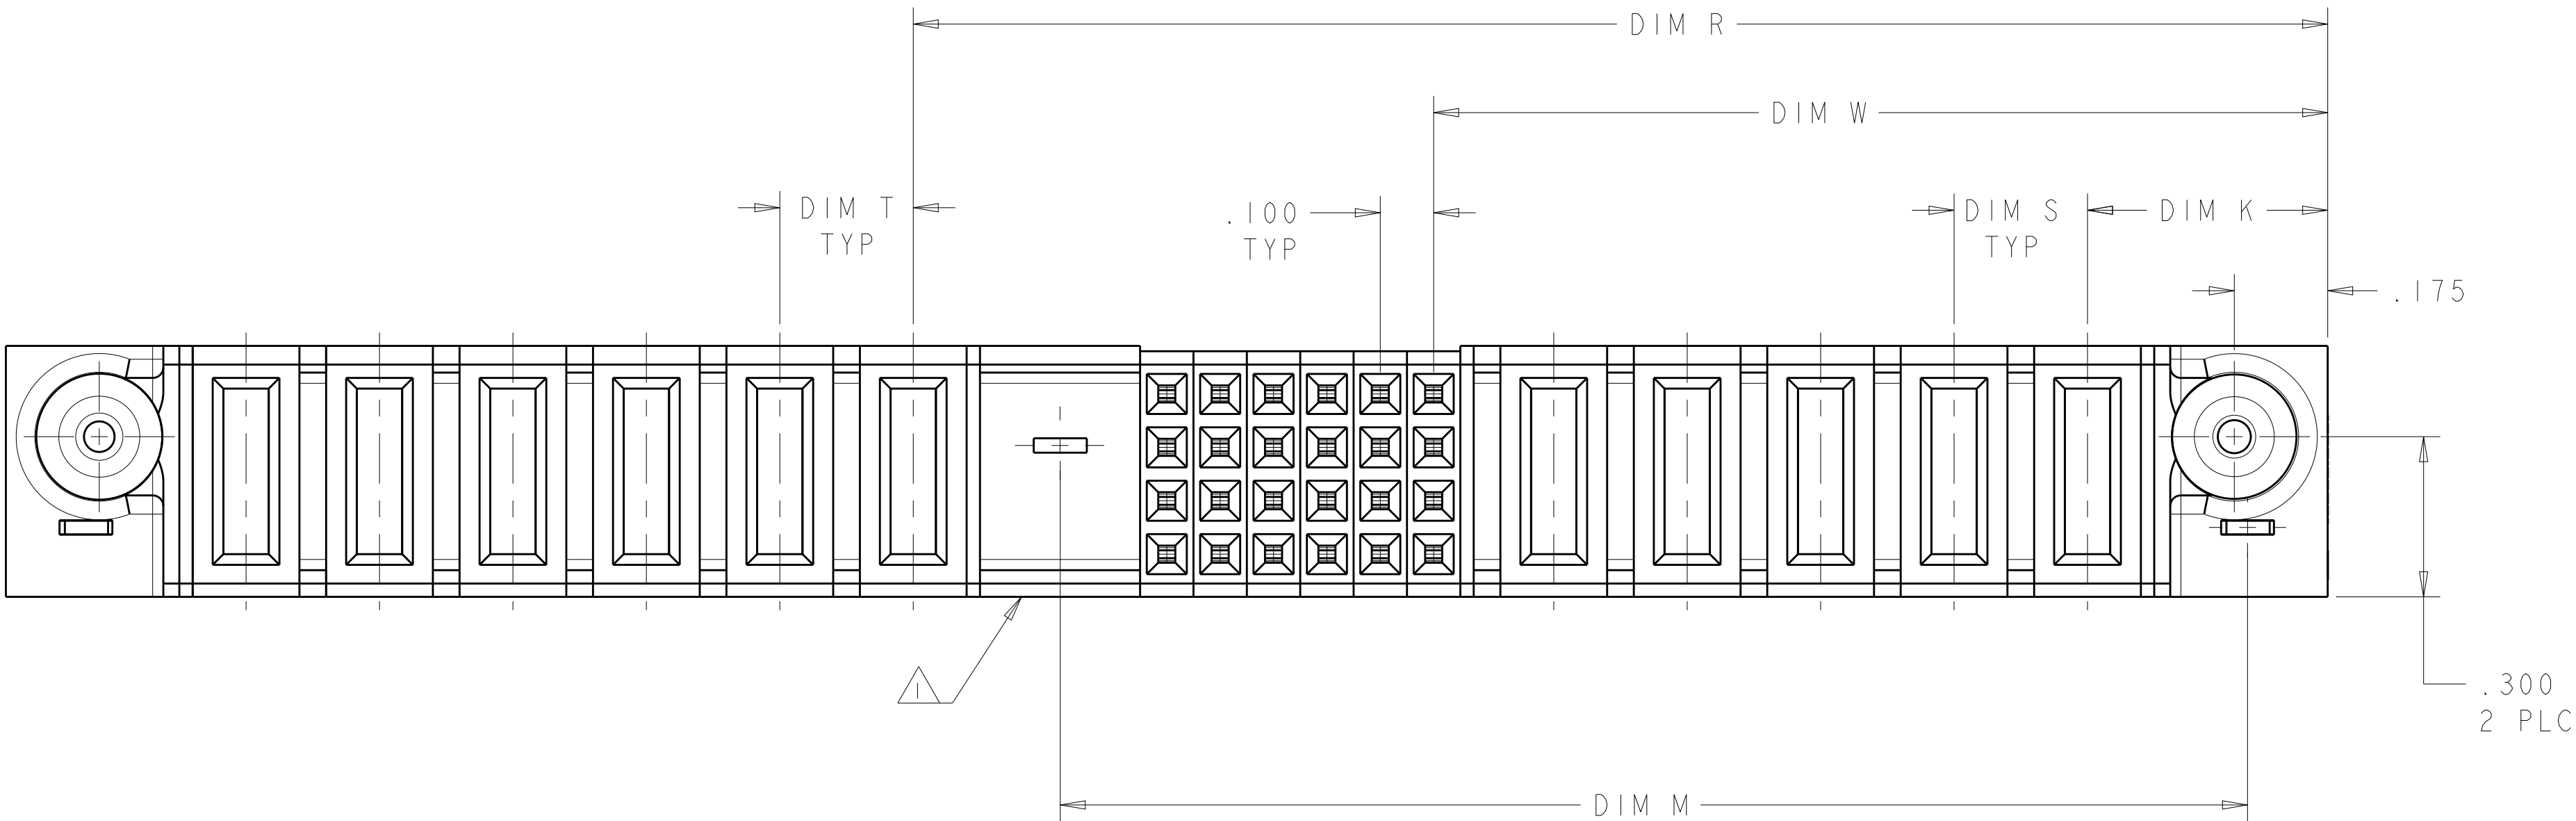
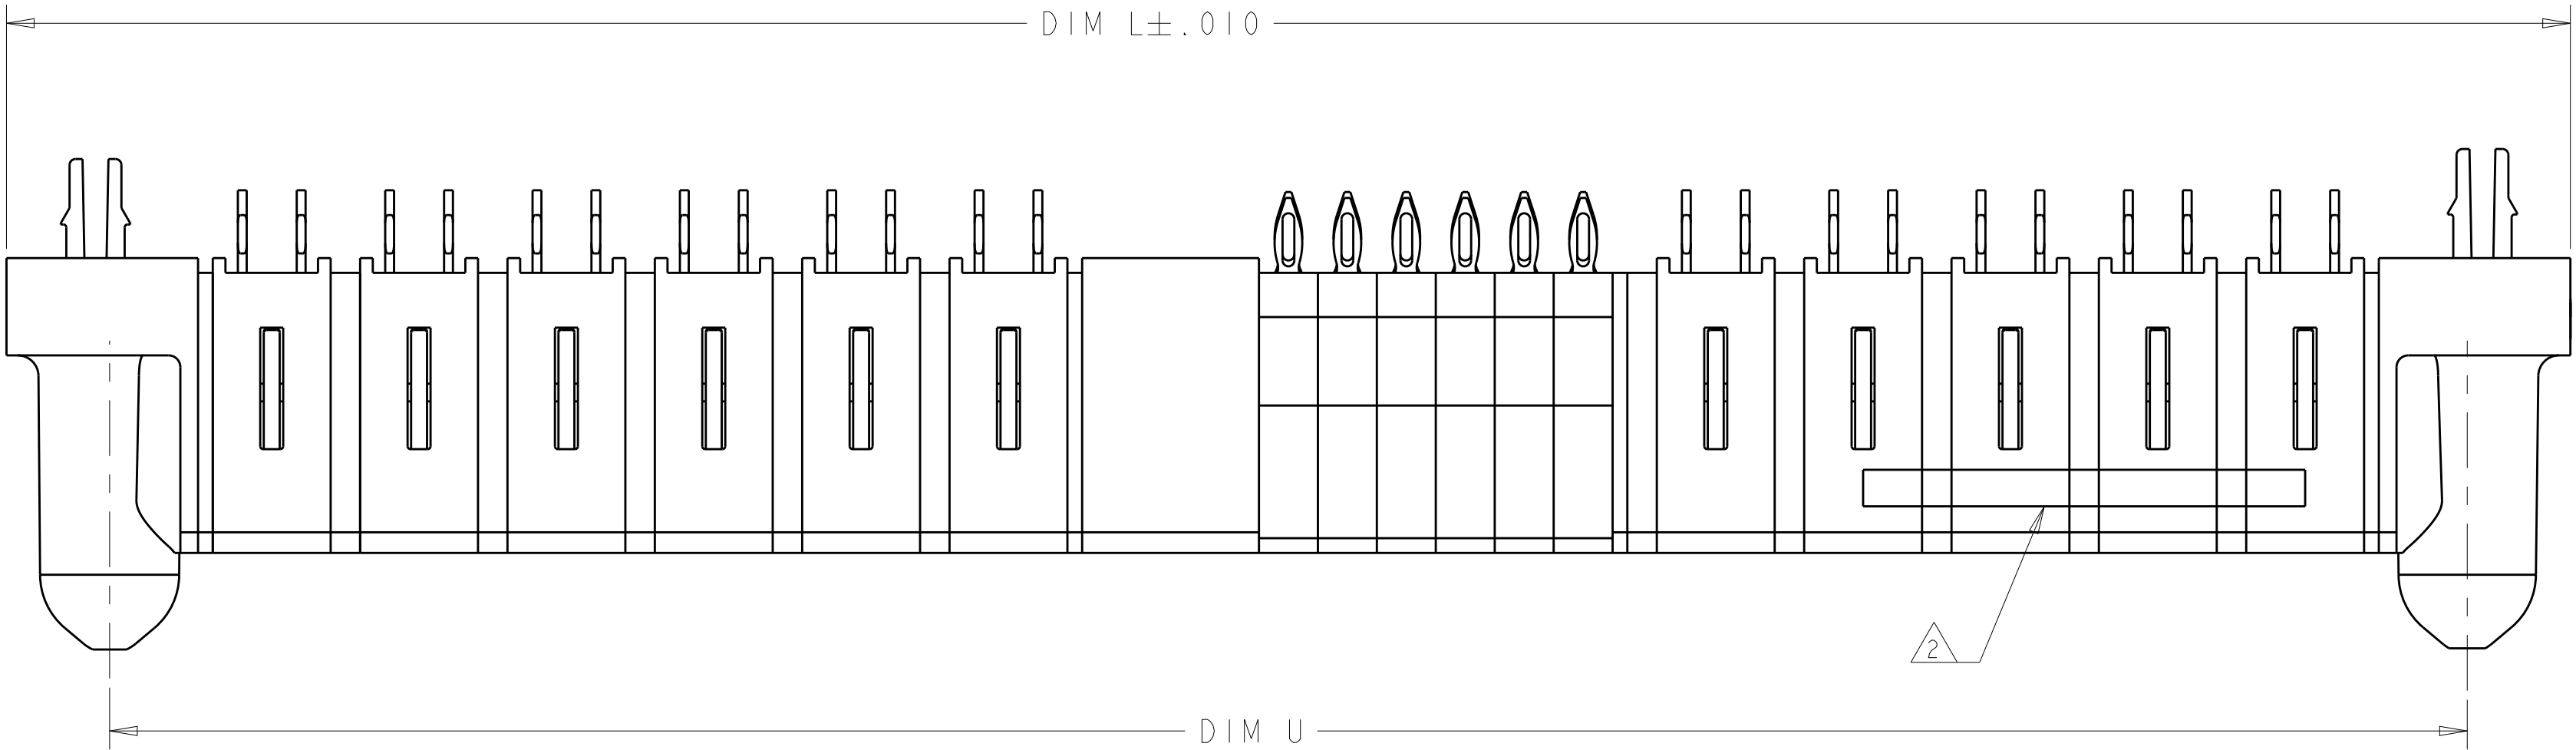


LOC		DIST		REVISIONS				
ES	00	P	LYR	DESCRIPTION	DATE	DWN	APVD	
		K9		REV PER ECR-12-018831	30OCT2012	AY	SZ	

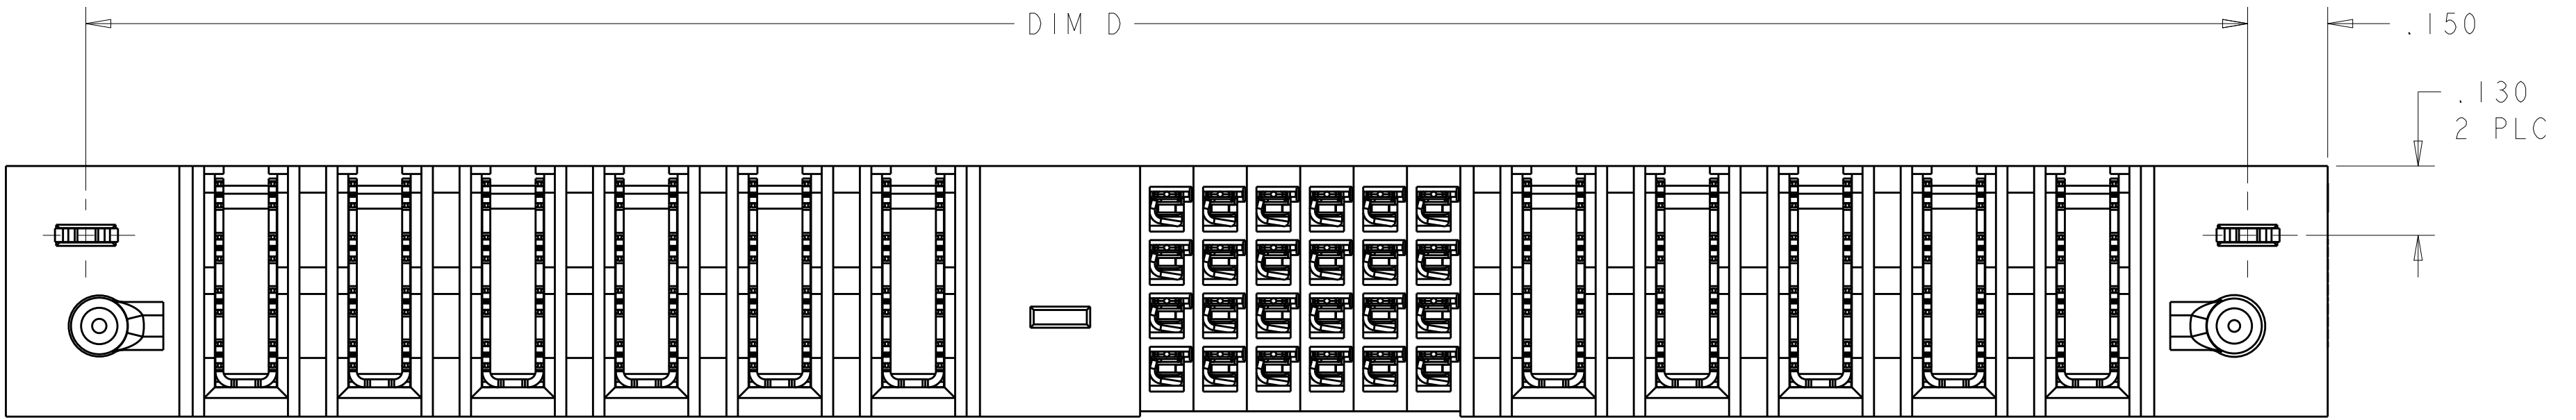

- 1
- OPTIONAL CENTER MODULE, WITH Ø.150 THRU HOLE OR HOLD DOWN FEATURE
- 2
- "AMP", PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN
PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES
- 3
- MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-O
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 4
- CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA
OF POWER CONTACTS AND SIGNAL CONTACTS.
- 5
- MECHANICAL CONNECTOR KEEP OUT ZONE
- 6
- DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 7
- PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- 8
- PCB - 0.0453 ±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn
OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 HOLE
- 9
- VARAIBLE DIMENSION SHOWN VIEW (SHEET 6)


THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	R. GRZYBOWSKI		29APR05		 TE Connectivity			
				CHK	M. PERCHERKE		29APR05					
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	M. PERCHERKE		-		NAME	VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL		
INCHES				PRODUCT SPEC		108-1973		APPLICATION SPEC				
		0 PLC		±"		114-13038			RESTRICTED TO			
		1 PLC		±.01								
		2 PLC		±.01				SIZE				
		3 PLC		±.005								
		4 PLC		±.0020				CAGE CODE				
		ANGLES		±.0020								
		FINISH						DRAWING NO				
MATERIAL				WEIGHT		-		CUSTOMER DRAWING	SCALE	SHEET	OF	REV
								2:1	1	19	K9	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

K9	1.350	1.300	-	-	1.200	.625	-	1.650	.450	1P + 20S + 1P	6-6450540-6
	2.550	2.500	.250	.250	1.650	1.375	-	2.85	.450	4P + 8S + 4P	6-6450540-5
	1.350	1.300	-	-	1.200	.625	-	1.650	.450	1P + 20S + 1P	6-6450540-2
	-	3.300	.200	.200	2.200	1.625	-	3.650	.450	6P + 20S + 6P	6-6450540-1
	2.950	2.900	.250	.250	2.050	1.375	-	3.250	.450	4P + 24S + 4P	6-6450540-0
	2.050	2.000	.250	.250	1.650	.925	-	2.350	.450	2P + 24S + 2P	5-6450540-9
	2.050	2.000	.250	.250	1.400	1.125	-	2.350	.450	3P + 8S + 3P	5-6450540-5
	2.500	2.450	.250	.250	1.850	1.375	-	2.800	.450	4P + 16S + 3P	5-6450540-4
	2.950	2.900	.250	.250	2.050	1.375	-	3.250	.450	4P + 24S + 4P	5-6450540-3
	1.350	1.300	-	-	1.200	.675	-	1.650	.450	1P + 16S + 1P	5-6450540-2
	1.750	1.700	.250	.250	1.350	.875	-	2.050	.450	2P + 16S + 2P	5-6450540-1
	5.950	5.900	.250	.250	3.550	2.8750	-	6.250	.450	10P + 24S + 10P	5-6450540-0
	5.150	5.100	.250	.250	3.250	2.375	-	5.450	.450	8P + 32S + 8P	4-6450540-9
	1.250	1.200	-	-	1.100	.625	-	1.550	.450	1P + 16S + 1P	4-6450540-8
	2.150	2.100	.250	.250	1.500	1.175	-	2.450	.450	3P + 8S + 3P	4-6450540-7
	1.150	1.100	-	-	1.000	.675	-	1.450	.450	1P + 8S + 1P	4-6450540-6
	-	-	-	.200	-	-	-	2.820	.450	12HDP	4-6450540-5
	-	-	.200	.200	2.600	1.625	-	3.970	.450	6HDP + 36S + 7HDP	4-6450540-4
	2.65	2.60	.250	.250	2.250	1.625	-	2.950	.450	5P + 20S + 2P	(E)4-6450540-3
	-	-	-	.200	-	-	-	2.620	.450	11HDP	(E)4-6450540-2
	-	-	.200	.200	2.600	1.625	-	3.770	.450	6P + 36S + 6P	4-6450540-1
	-	-	.200	.200	4.500	3.425	-	7.470	.450	15P + 40S + 15P	4-6450540-0
	-	-	.200	.200	-	-	-	7.470	-	15P + 40S + 15P	(D)3-6450540-9
	4.650	4.600	.250	.250	3.250	1.875	-	4.950	.450	6P + 52S + 6P	(D)2-6450540-7
	1.950	1.900	-	-	1.550	.875	-	2.250	.450	2P + 24S + 2P	(D)2-6450540-5
	2.450	2.400	.250	.250	1.800	1.125	-	2.750	.450	3P + 24S + 3P	(D)2-6450540-0
	-	1.575	-	-	1.425	.700	-	1.925	.475	1P + 24S + 1P	(E)1-6450540-8
	-	5.450			3.075	2.425	-	5.800	.425	10P + 24S + 12P	1-6450540-4
	3.250	3.200	.200	.200	2.125	1.575	-	3.550	.425	6P + 20S + 6P	1-6450540-2
	-	2.850	.250	.250	2.000	1.125	-	3.200	.450	3P + 32S + 4P	1-6450540-1
	1.950	1.900	.250	.250	1.550	.875	-	2.250	.450	2P + 24S + 2P	1-6450540-0
	-	1.400	.250	.250	1.300	.625	-	1.750	.450	1P + 24S + 1P	6450540-7
	-	2.400	.250	.250	2.050	1.375	-	2.750	.450	4P + 24S + 2P	6450540-6
	-	3.100	.250	.250	2.000	1.625	-	3.450	.450	5P + 12S + 5P	6450540-5
	-	3.400	.250	.250	2.050	1.375	-	3.750	.450	4P + 24S + 6P	6450540-4
	-	7.400	.250	.250	5.050	2.875	-	7.750	.450	10P + 84S + 10P	6450540-3
	-	4.000	.250	.250	2.650	1.675	2.225	4.350	.450	5P+24S+1M+6P	6450540-2
	-	1.575	-	-	1.425	.700	-	1.925	.475	1P + 24S + 1P	6450540-1
	D	U	T	S	R	W	M	L	K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.
TOLERANCES UNLESS OTHERWISE SPECIFIED:

DIMENSIONS:
INCHES



MATERIAL

D PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.2°
FINISH

DWN
R. GRZYBOWSKI
CHK
M. PERCHERKE
APVD
M. PERCHERKE

29APR05
29APR05

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038
WEIGHT
-

CUSTOMER DRAWING

NAME
VERTICAL RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL

SIZE
A1

CAGE CODE
100779

DRAWING NO
6450540

RESTRICTED TO
-

SCALE
2:1

SHEET
2

OF
19


REV
K9

TE Connectivity


TE

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER	SIGNAL							POWER	
			P2	6	5	4	3	2	1	PI		
6450540-1	D C B A		GP	AP	AP	AP	AP	AP	AP	AP	GP	
				AP	AP	AP	AP	AP	AP	AP		
				AP	AP	AP	AP	AP	AP	AP		
				AP	AP	AP	AP	AP	AP	AP		
IP + 24S + IP												

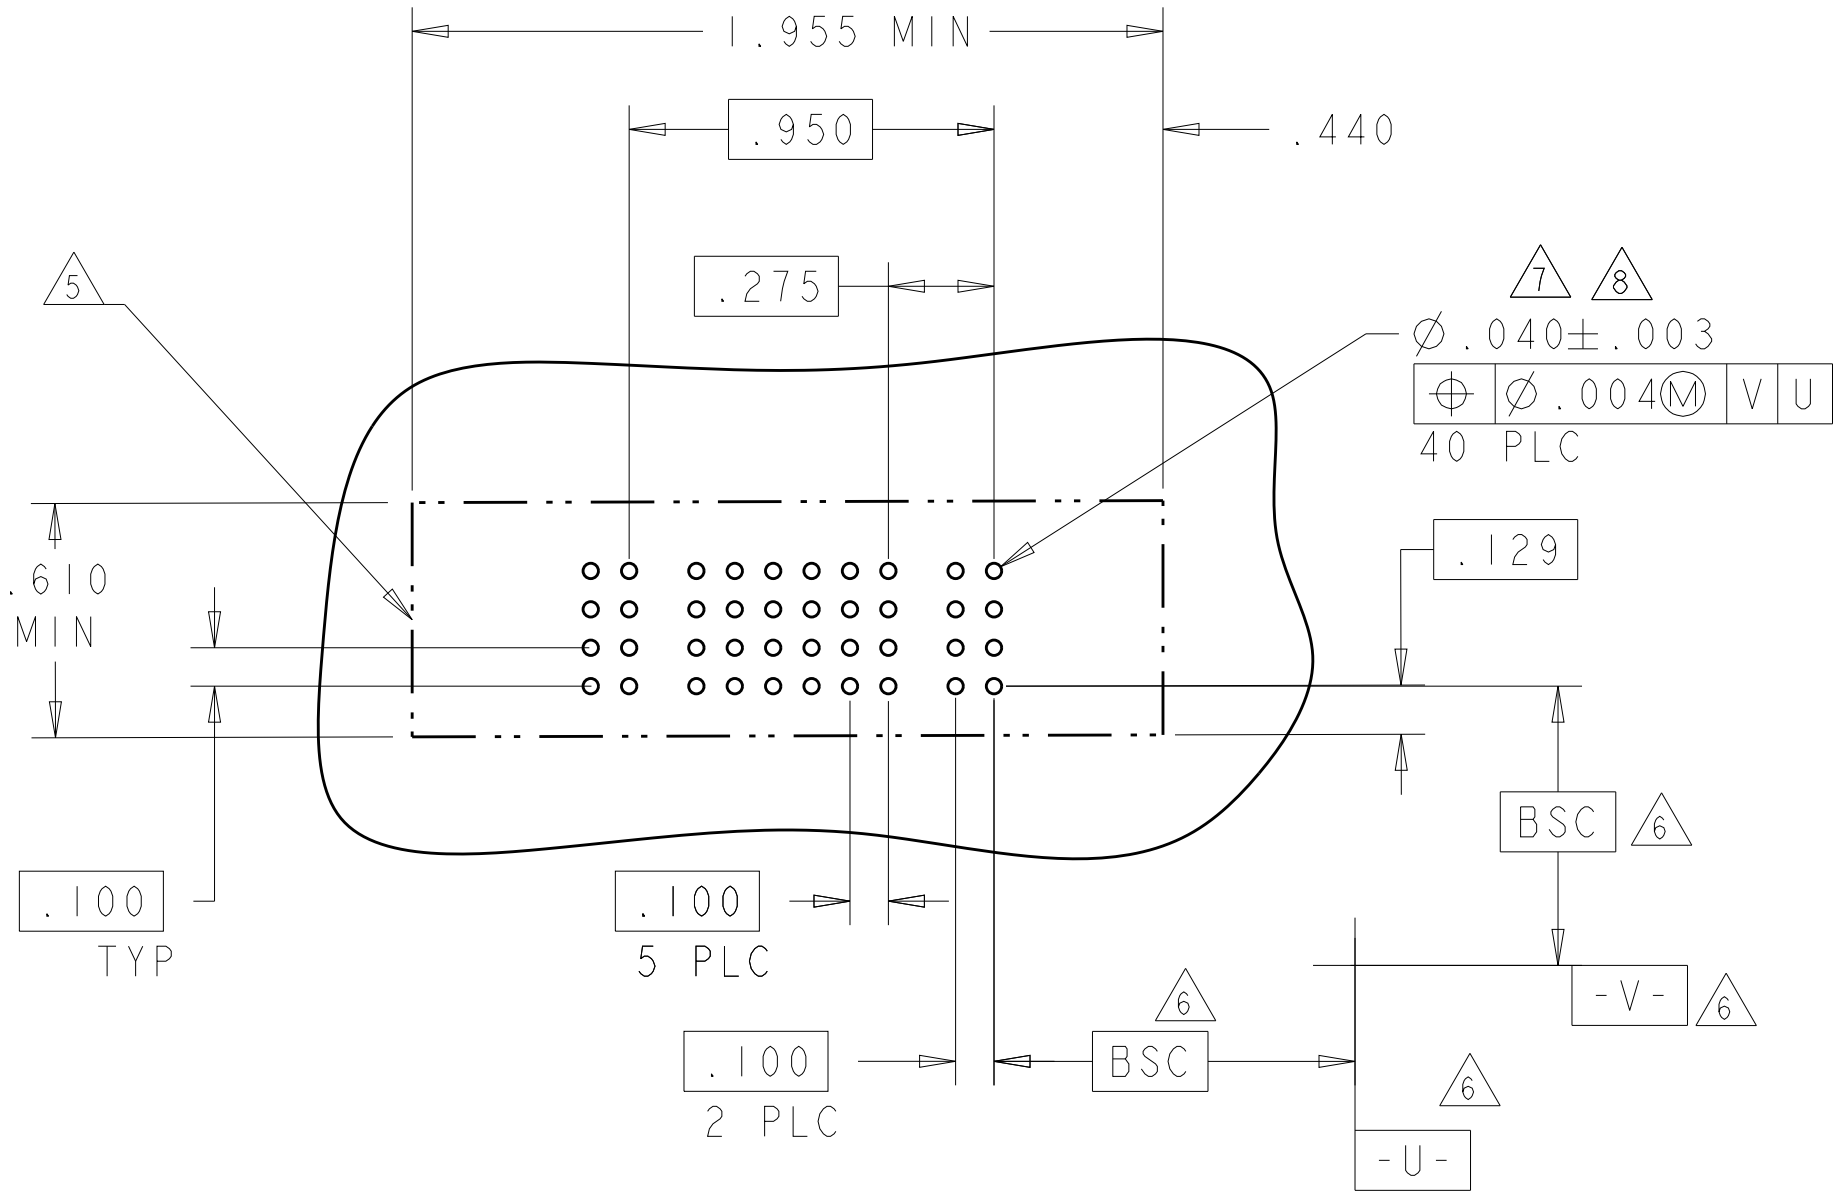

PART NUMBER	ROWS		POWER							SIGNAL						POWER					
			P11	P10	P9	P8	P7	P6		MI	6	5	4	3	2	1	P5	P4	P3	P2	
6450540-2	D C B A		GP	GP	GP	GP	GP	GP		AP	AP	AP	AP	AP	AP	GP	GP	GP	GP	GP	
										AP	AP	AP	AP	AP	AP						
										AP	AP	AP	AP	AP	AP						
										AP	AP	AP	AP	AP	AP						
5P + 24S + 1M + 6P																					

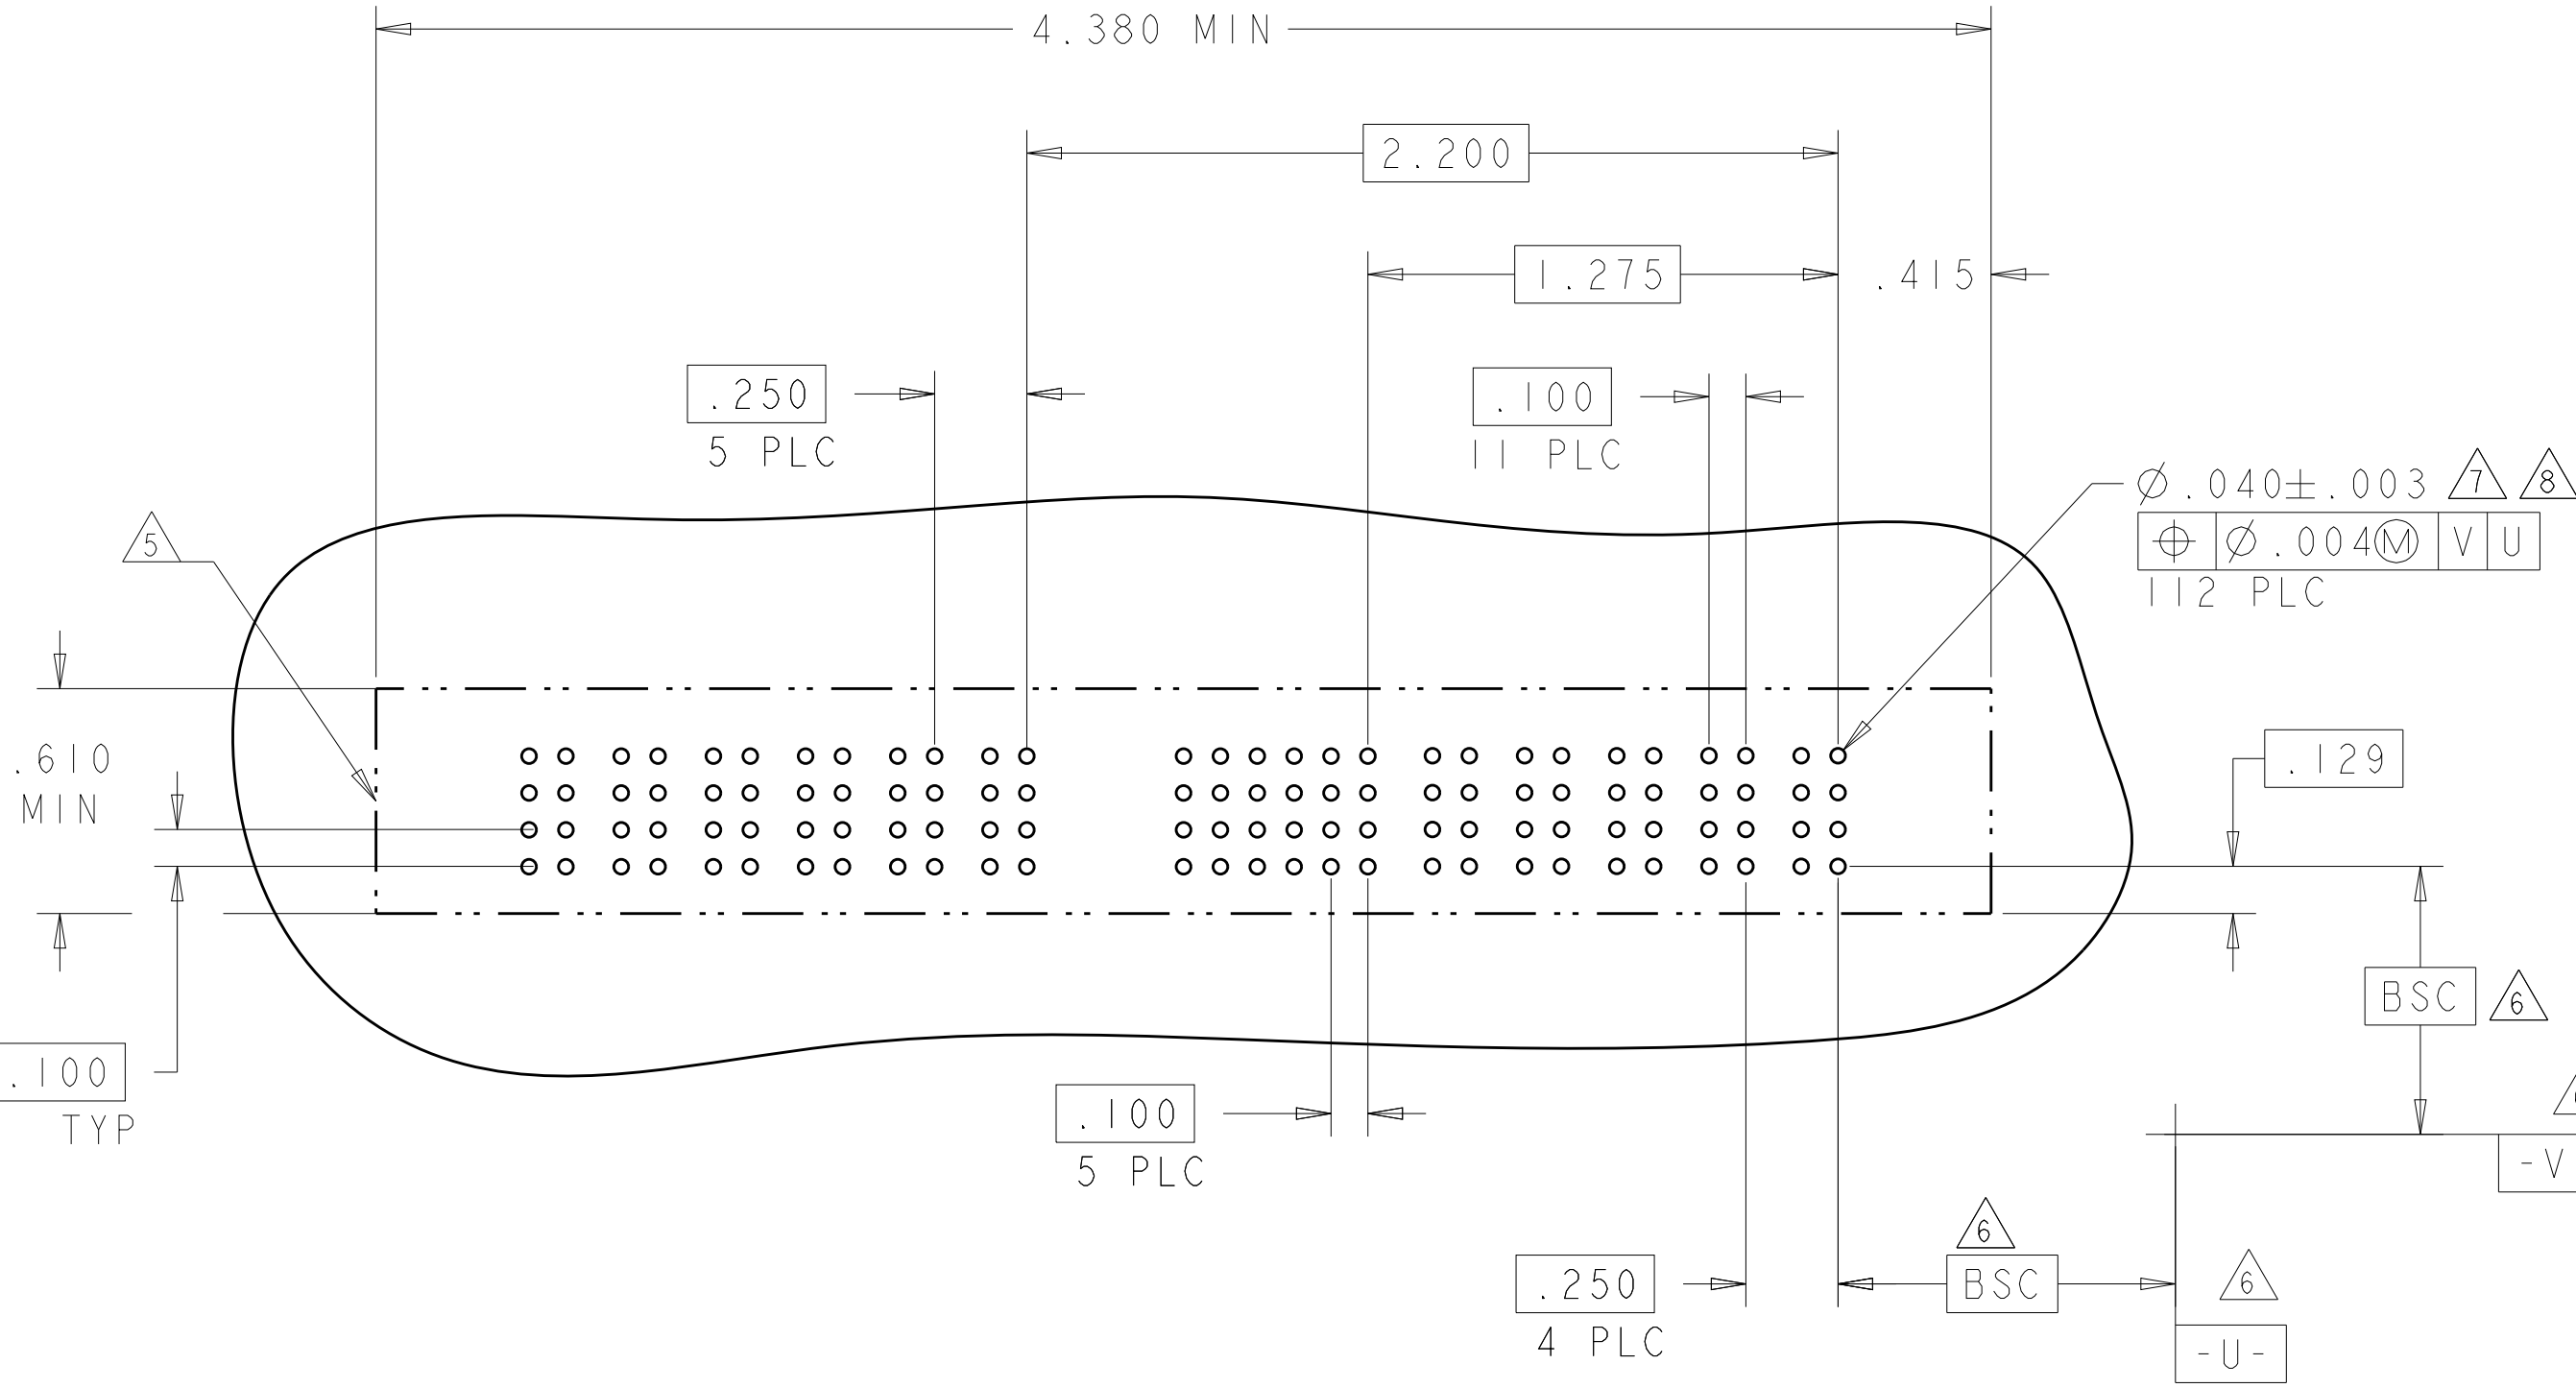

PART NUMBER	ROWS		POWER		SIGNAL							POWER		
			P4	P3	6	5	4	3	2	1	P2	P1		
2-6450540-5	D C B A		GP	GP	AP	AP	AP	AP	AP	AP	GP	GP		
					AP	AP	AP	AP	AP	AP				
					AP	AP	AP	AP	AP	AP				
					AP	AP	AP	AP	AP	AP				
2P + 24S + 2P														

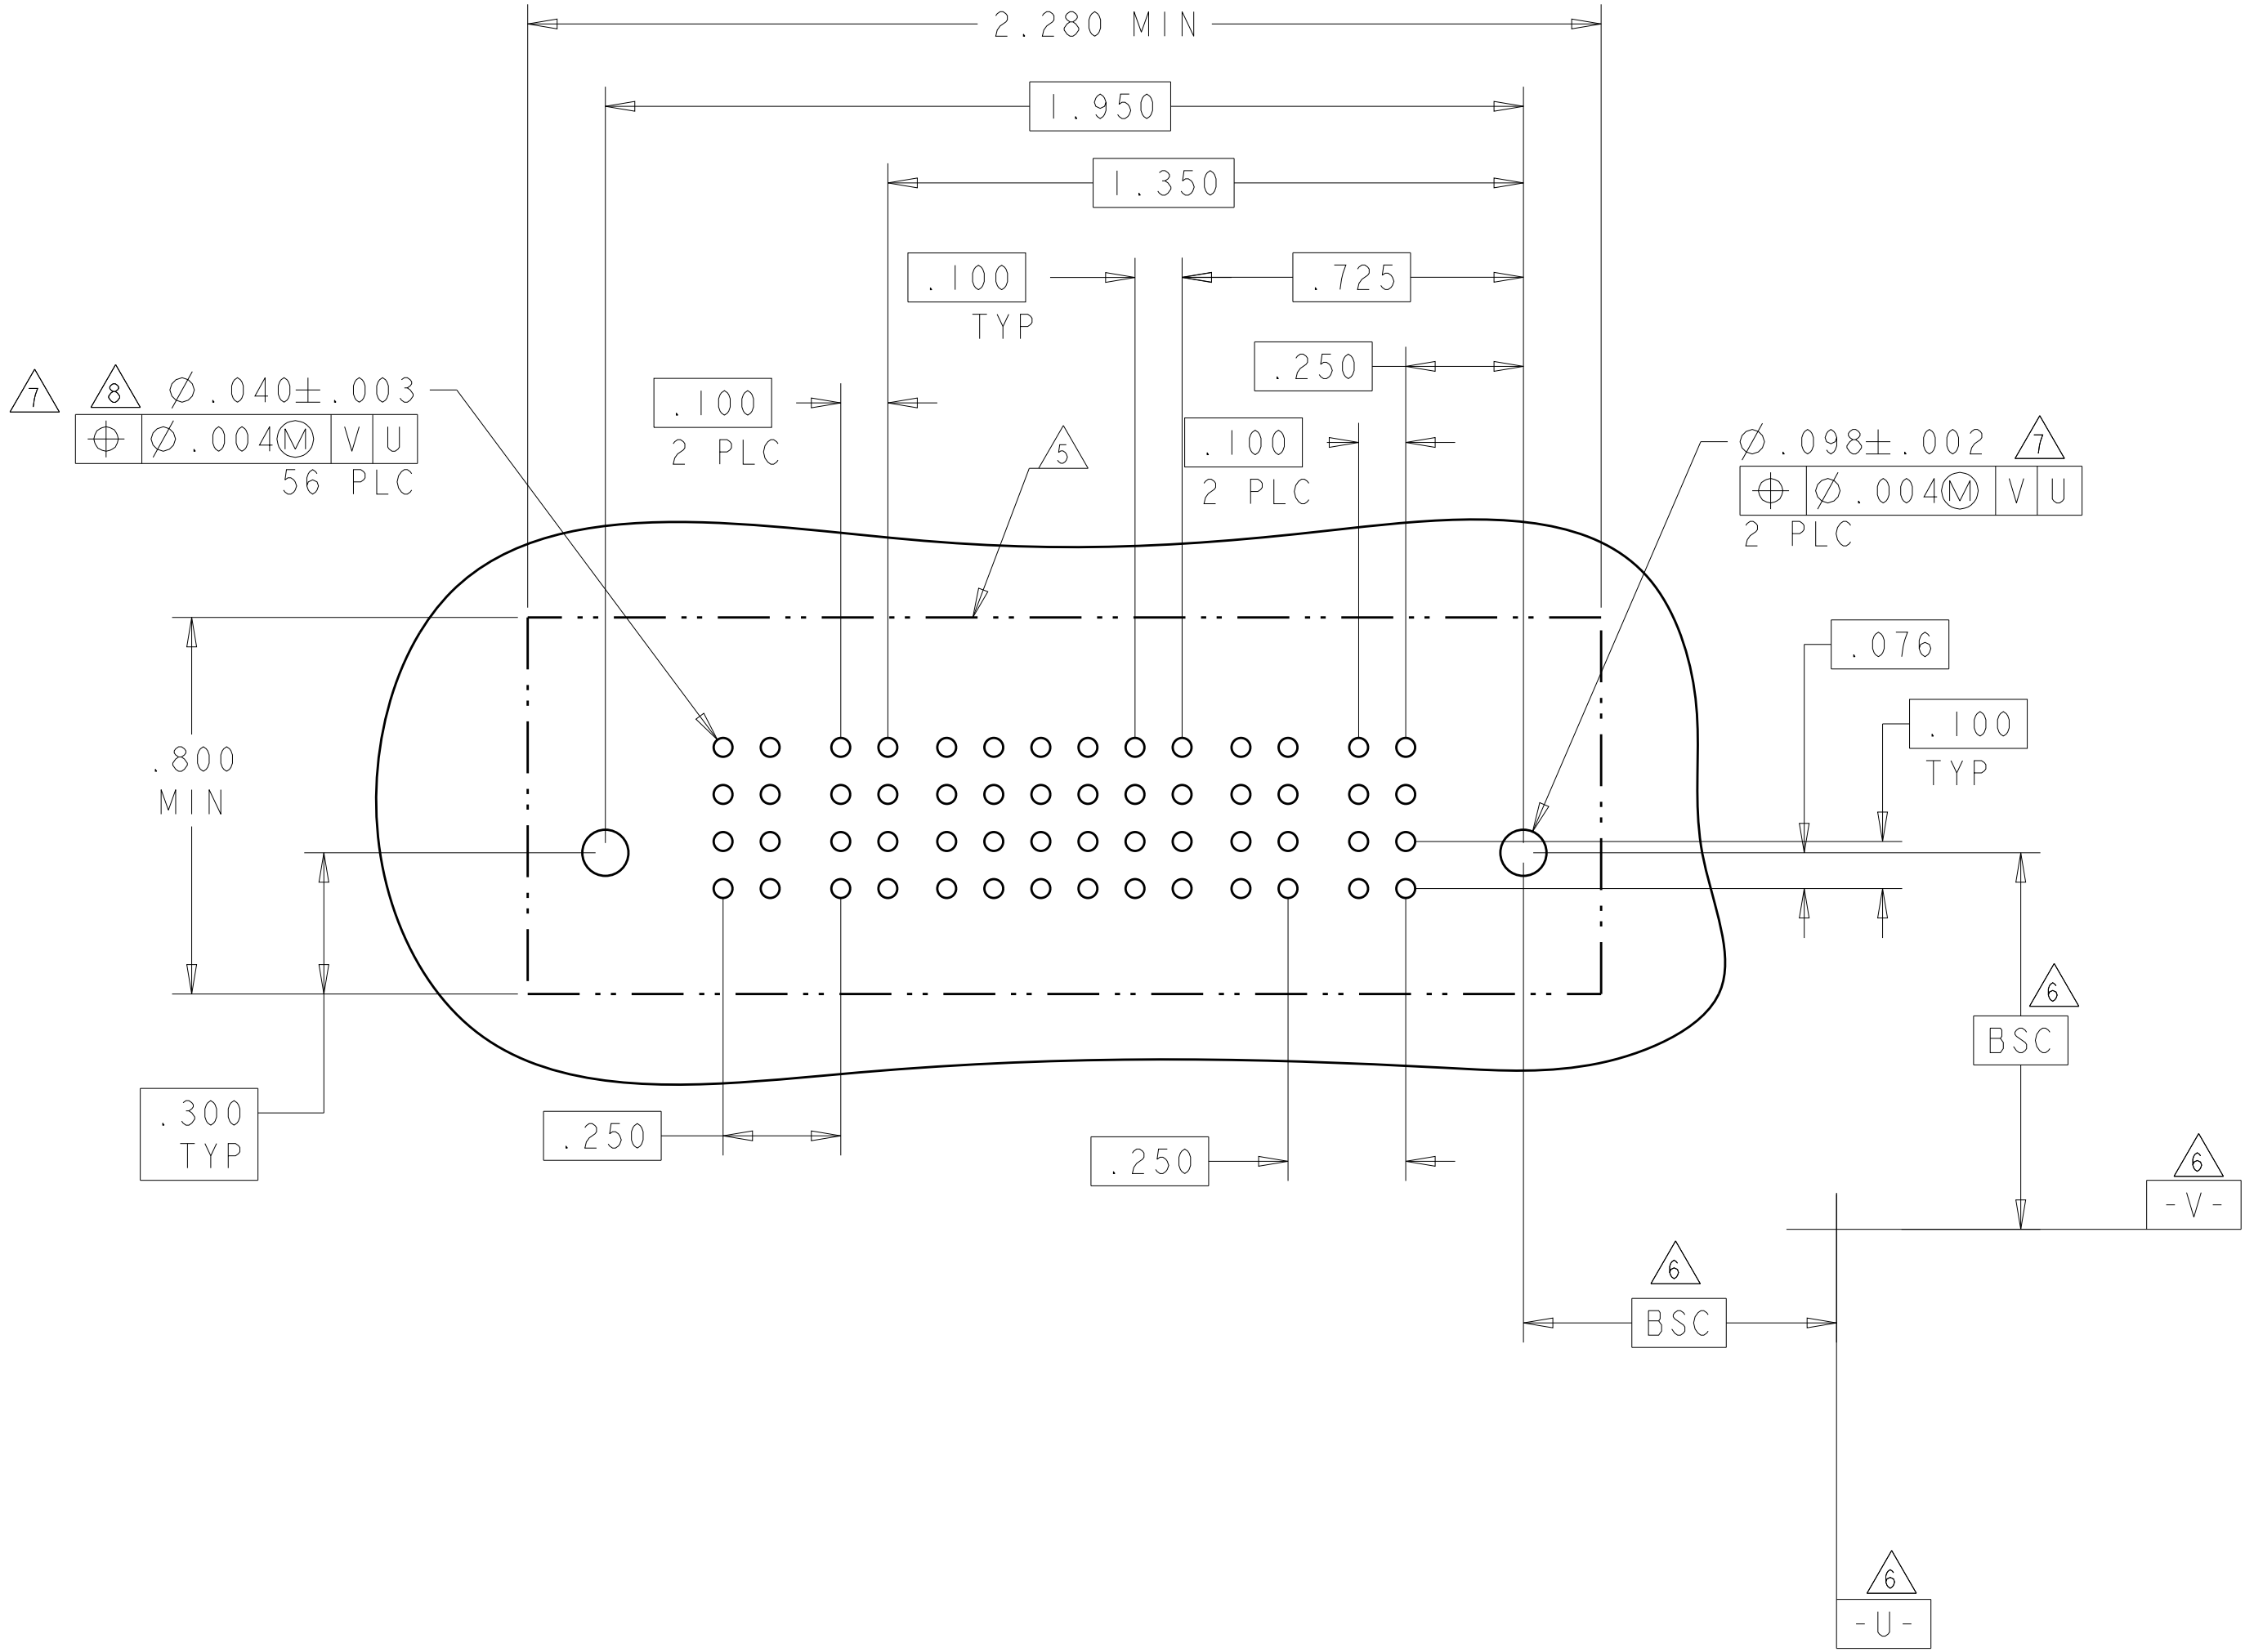

VS	STD POWER PRESSFIT CONTACT .115 LG
VP	MFBL POWER PRESSFIT CONTACT .115 LG
GS	STD POWER PRESSFIT CONTACT .135 LG
GP	MFBL POWER PRESSFIT CONTACT .135 LG
P	SIGNAL PRESSFIT CONTACT .115 LG
AP	SIGNAL PRESSFIT CONTACT .135 LG
CODE	TAIL LENGTH

CONTACT TABLE

THIS DRAWING IS A CONTROLLED DOCUMENT.

OWN R.GRZYBOWSKI 29APR05
CHK M.PERCHEKKE 29APR05
APVD M.PERCHEKKE

DIMENSIONS:
INCHES

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.002
ANGLES ±2°
FINISH

PRODUCT SPEC 108-1973
APPLICATION SPEC 114-13038
WEIGHT
CUSTOMER DRAWING

NAME

SIZE CAGE CODE DRAWING NO
A100779C=6450540

RESTRICTED TO











TE Connectivity


VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL


SCALE 2:1 SHEET 3 OF 19 REV K9

[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 29APR05		 TE Connectivity	
DIMENSIONS:		CWH M. PERCHERKE 29APR05		NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. PERCHERKE		VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
INCHES		PRODUCT SPEC 108-1973		SIZE CAGE CODE DRAWING NO	
		APPLICATION SPEC 114-13038		RESTRICTED TO	
0 PLC ±. 1 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 <i>7</i> ANGLES		WEIGHT -		A1 00779 C=6450540 -	
MATERIAL		FINISH		SCALE 2:1 SHEET 4 OF 19 REV K9	
CUSTOMER DRAWING					

PART NUMBER	ROWS		POWER					SIGNAL			POWER					
			P10	P9	P8	P7	P6	3	2	1	P5	P4	P3	P2	P1	
6450540-5	D C B A															
5P + 12S + 5P																


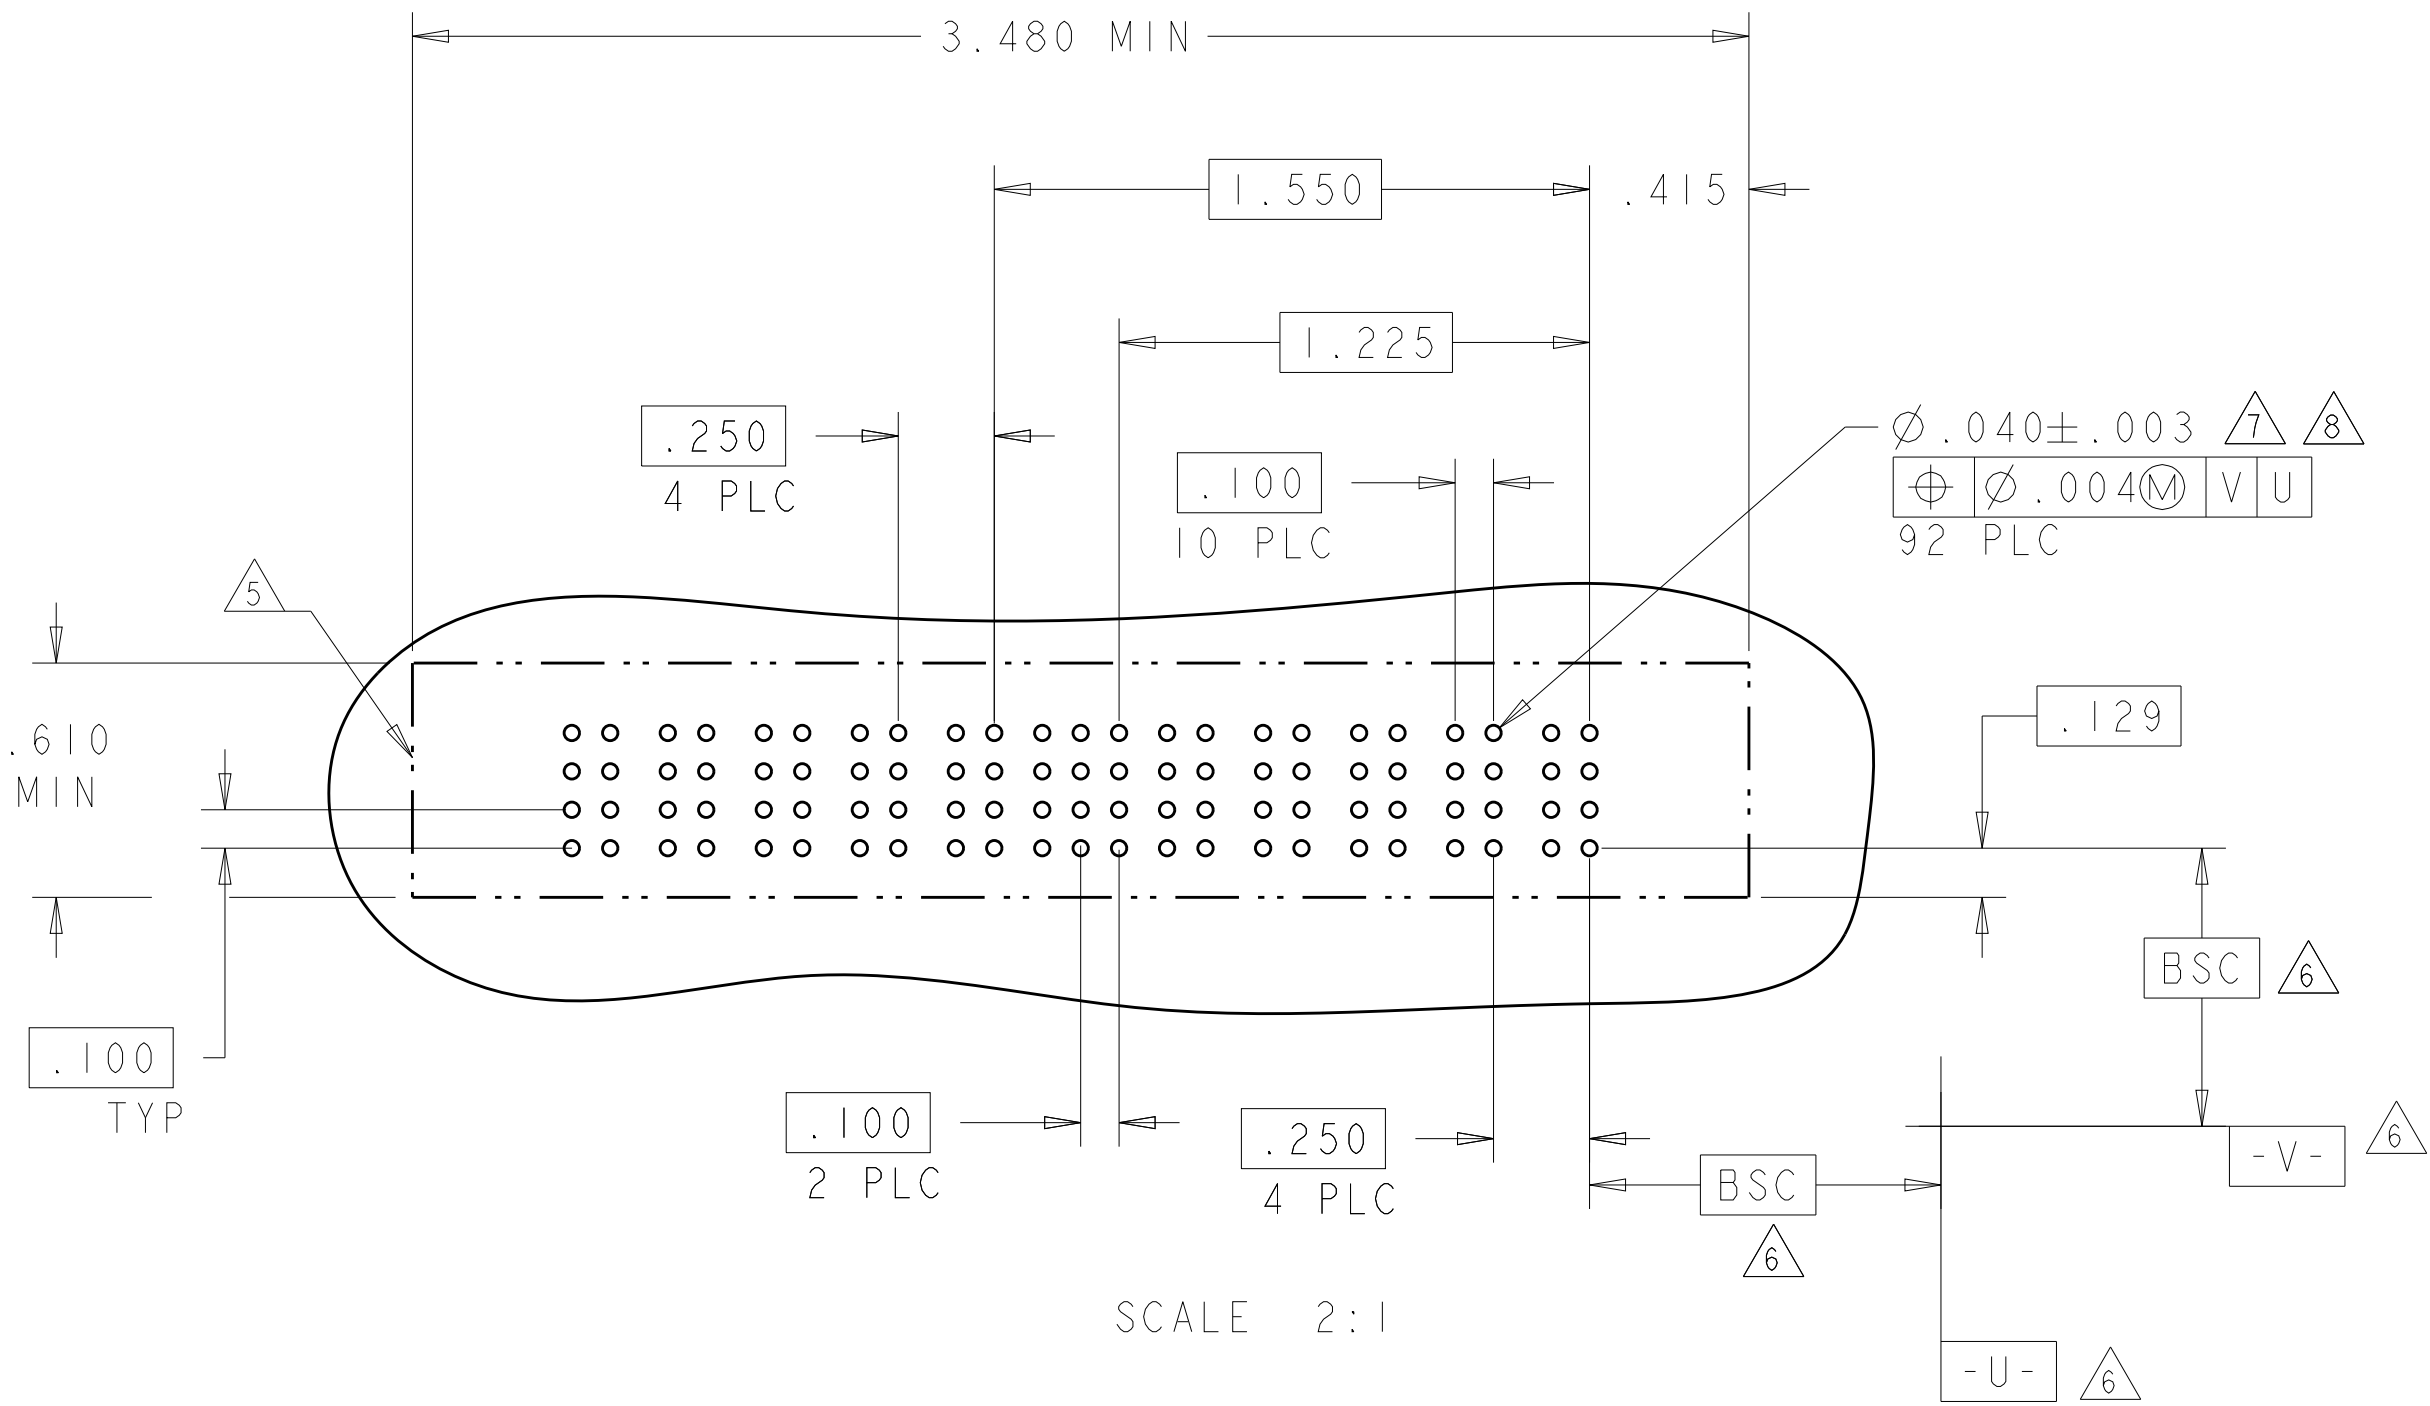





THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 29APR05		 TE Connectivity	
DIMENSIONS: INCHES		CHW M. PERCHERKE 29APR05			
		APVD M. PERCHERKE -		NAME VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		PRODUCT SPEC			
		108-1973			
		APPLICATION SPEC			
		114-13038			
MATERIAL		WEIGHT -		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
FINISH		A 100779 © 6450540		-	
		CUSTOMER DRAWING		SCALE 2:1 SHEET 5 OF 19 REV K9	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER		SIGNAL						POWER				
			P6	P5	6	5	4	3	2	1	P4	P3	P2	P1	
6450540-6	D C B A				AP	AP	AP	AP	AP	AP					
					AP	AP	AP	AP	AP	AP					
					AP	AP	AP	AP	AP	AP					
					AP	AP	AP	AP	AP	AP					
4P + 24S + 2P															

PART NUMBER	ROWS		POWER	SIGNAL						POWER	
			P2	6	5	4	3	2	1	P1	
6450540-7	D C B A		GP	AP	AP	AP	AP	AP	AP	GP	
				AP	AP	AP	AP	AP	AP		
				AP	AP	AP	AP	AP	AP		
				AP	AP	AP	AP	AP	AP		
IP + 24S + IP											

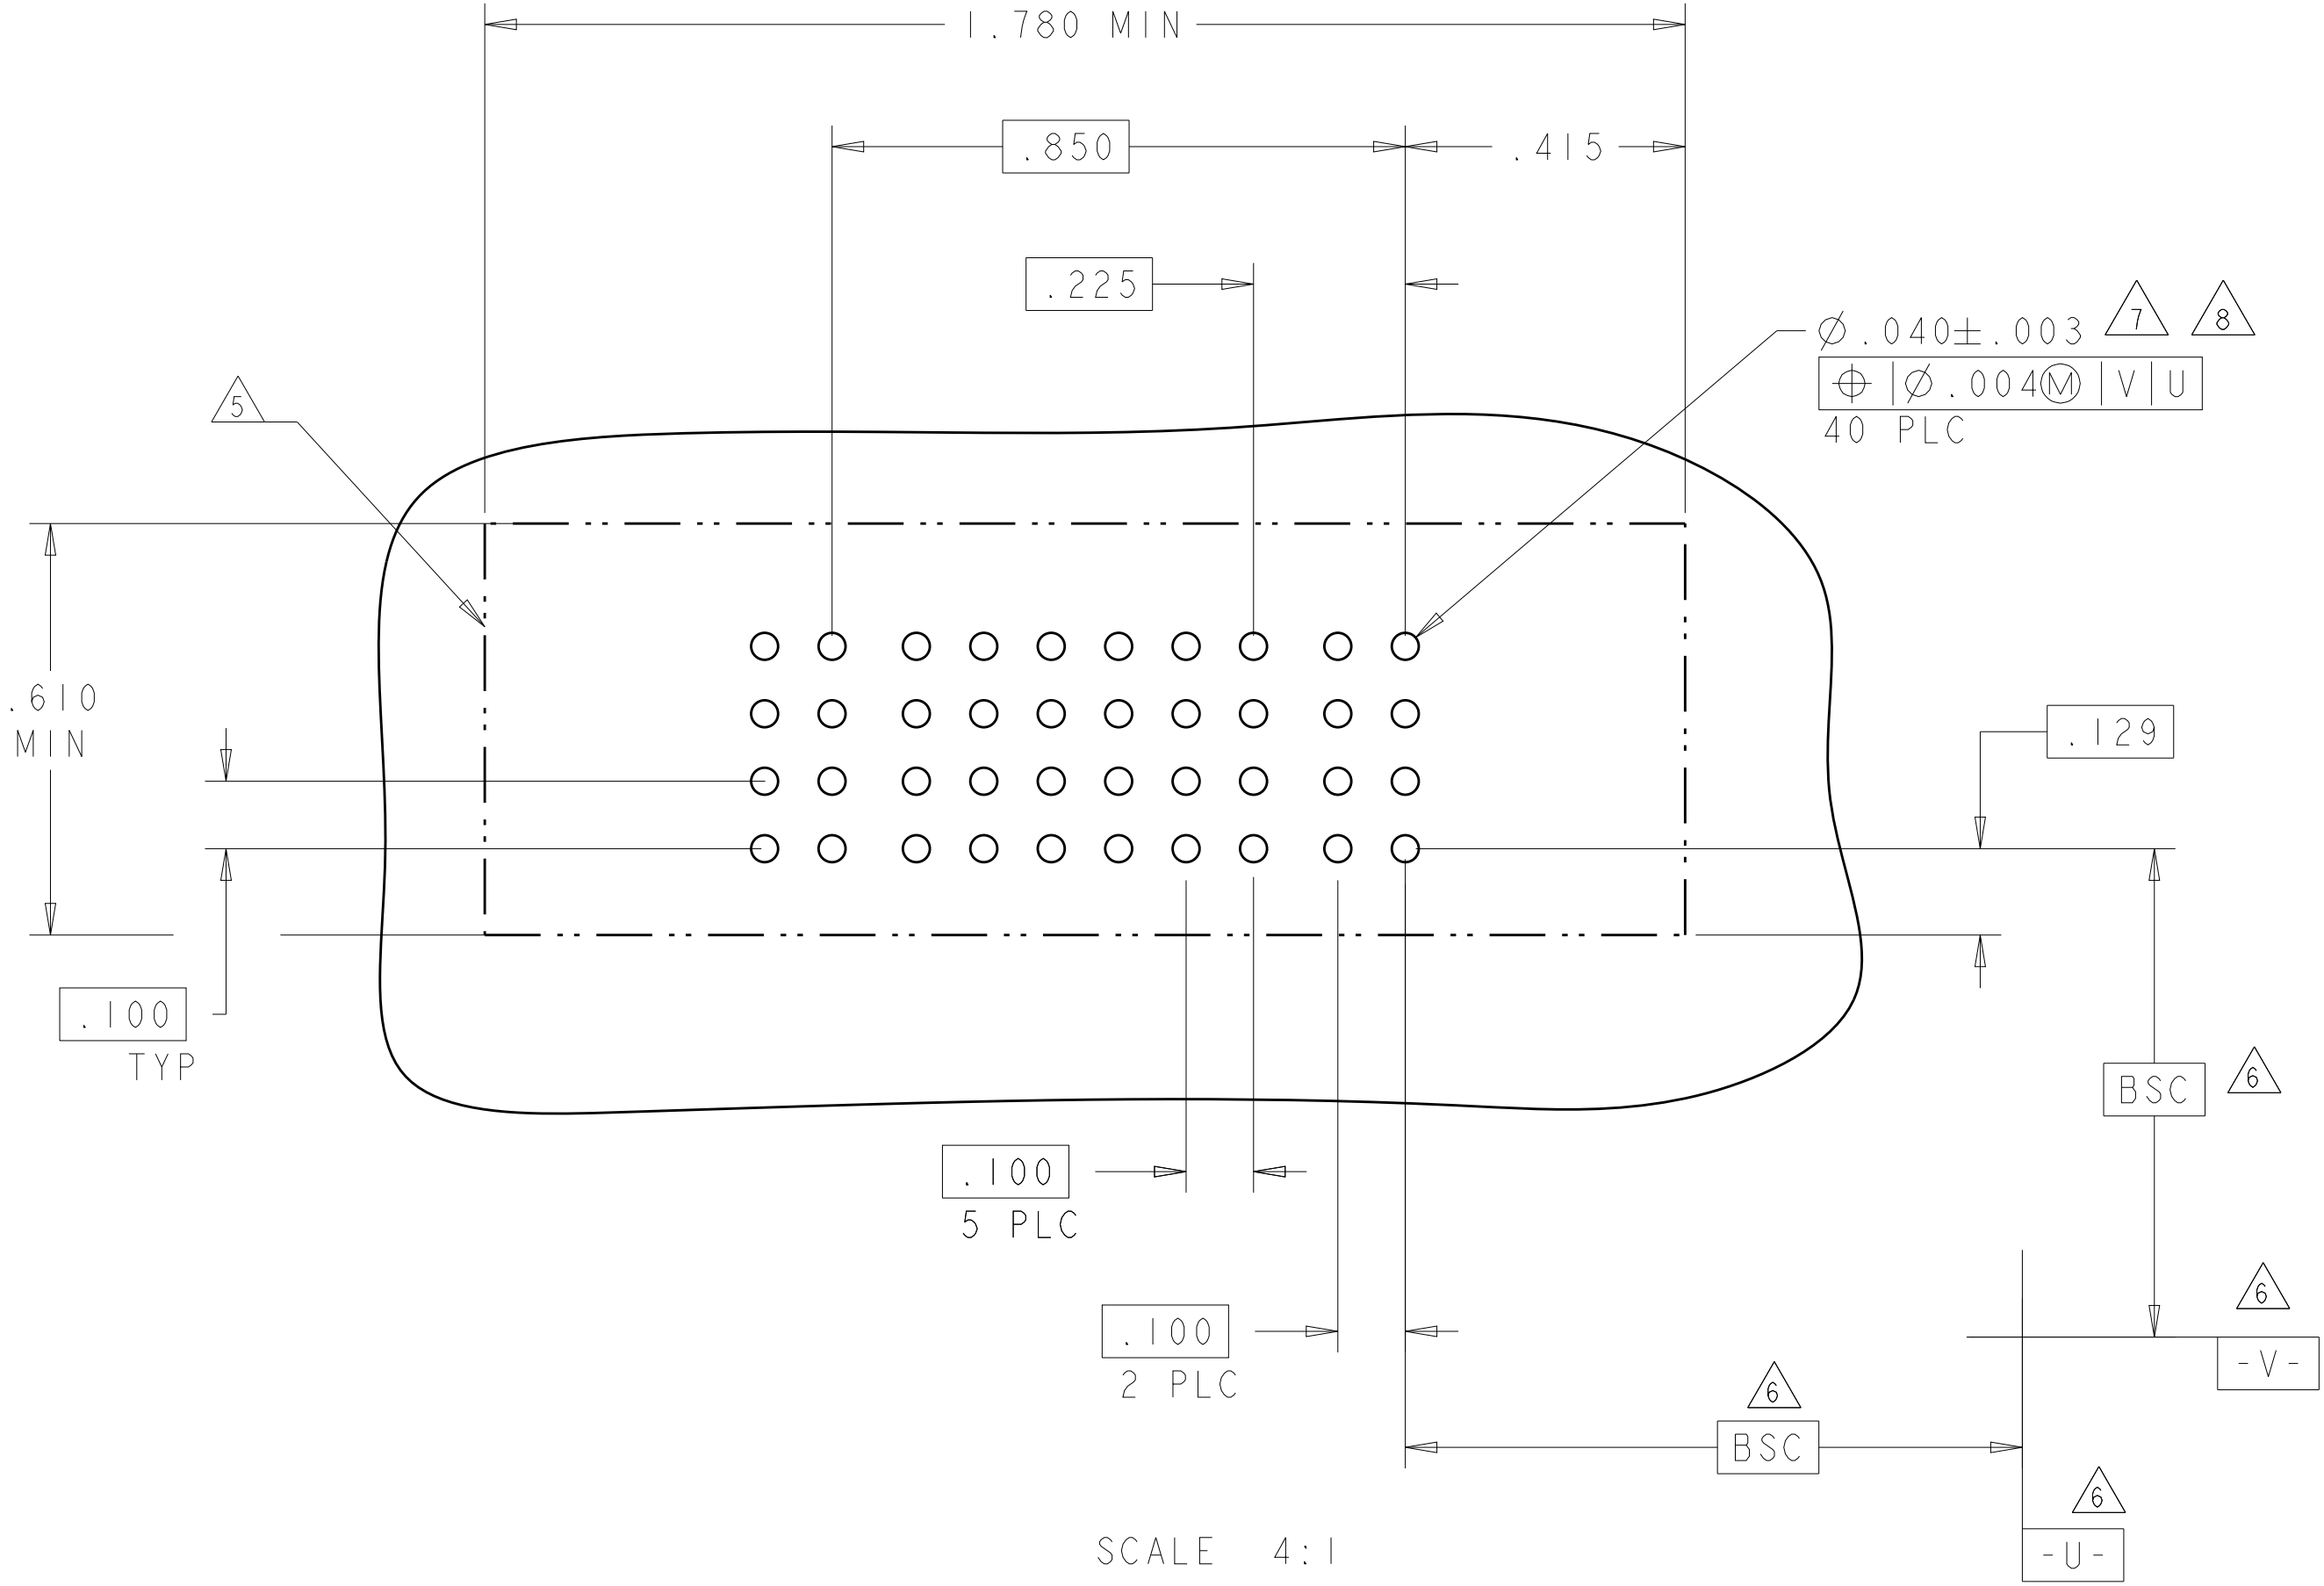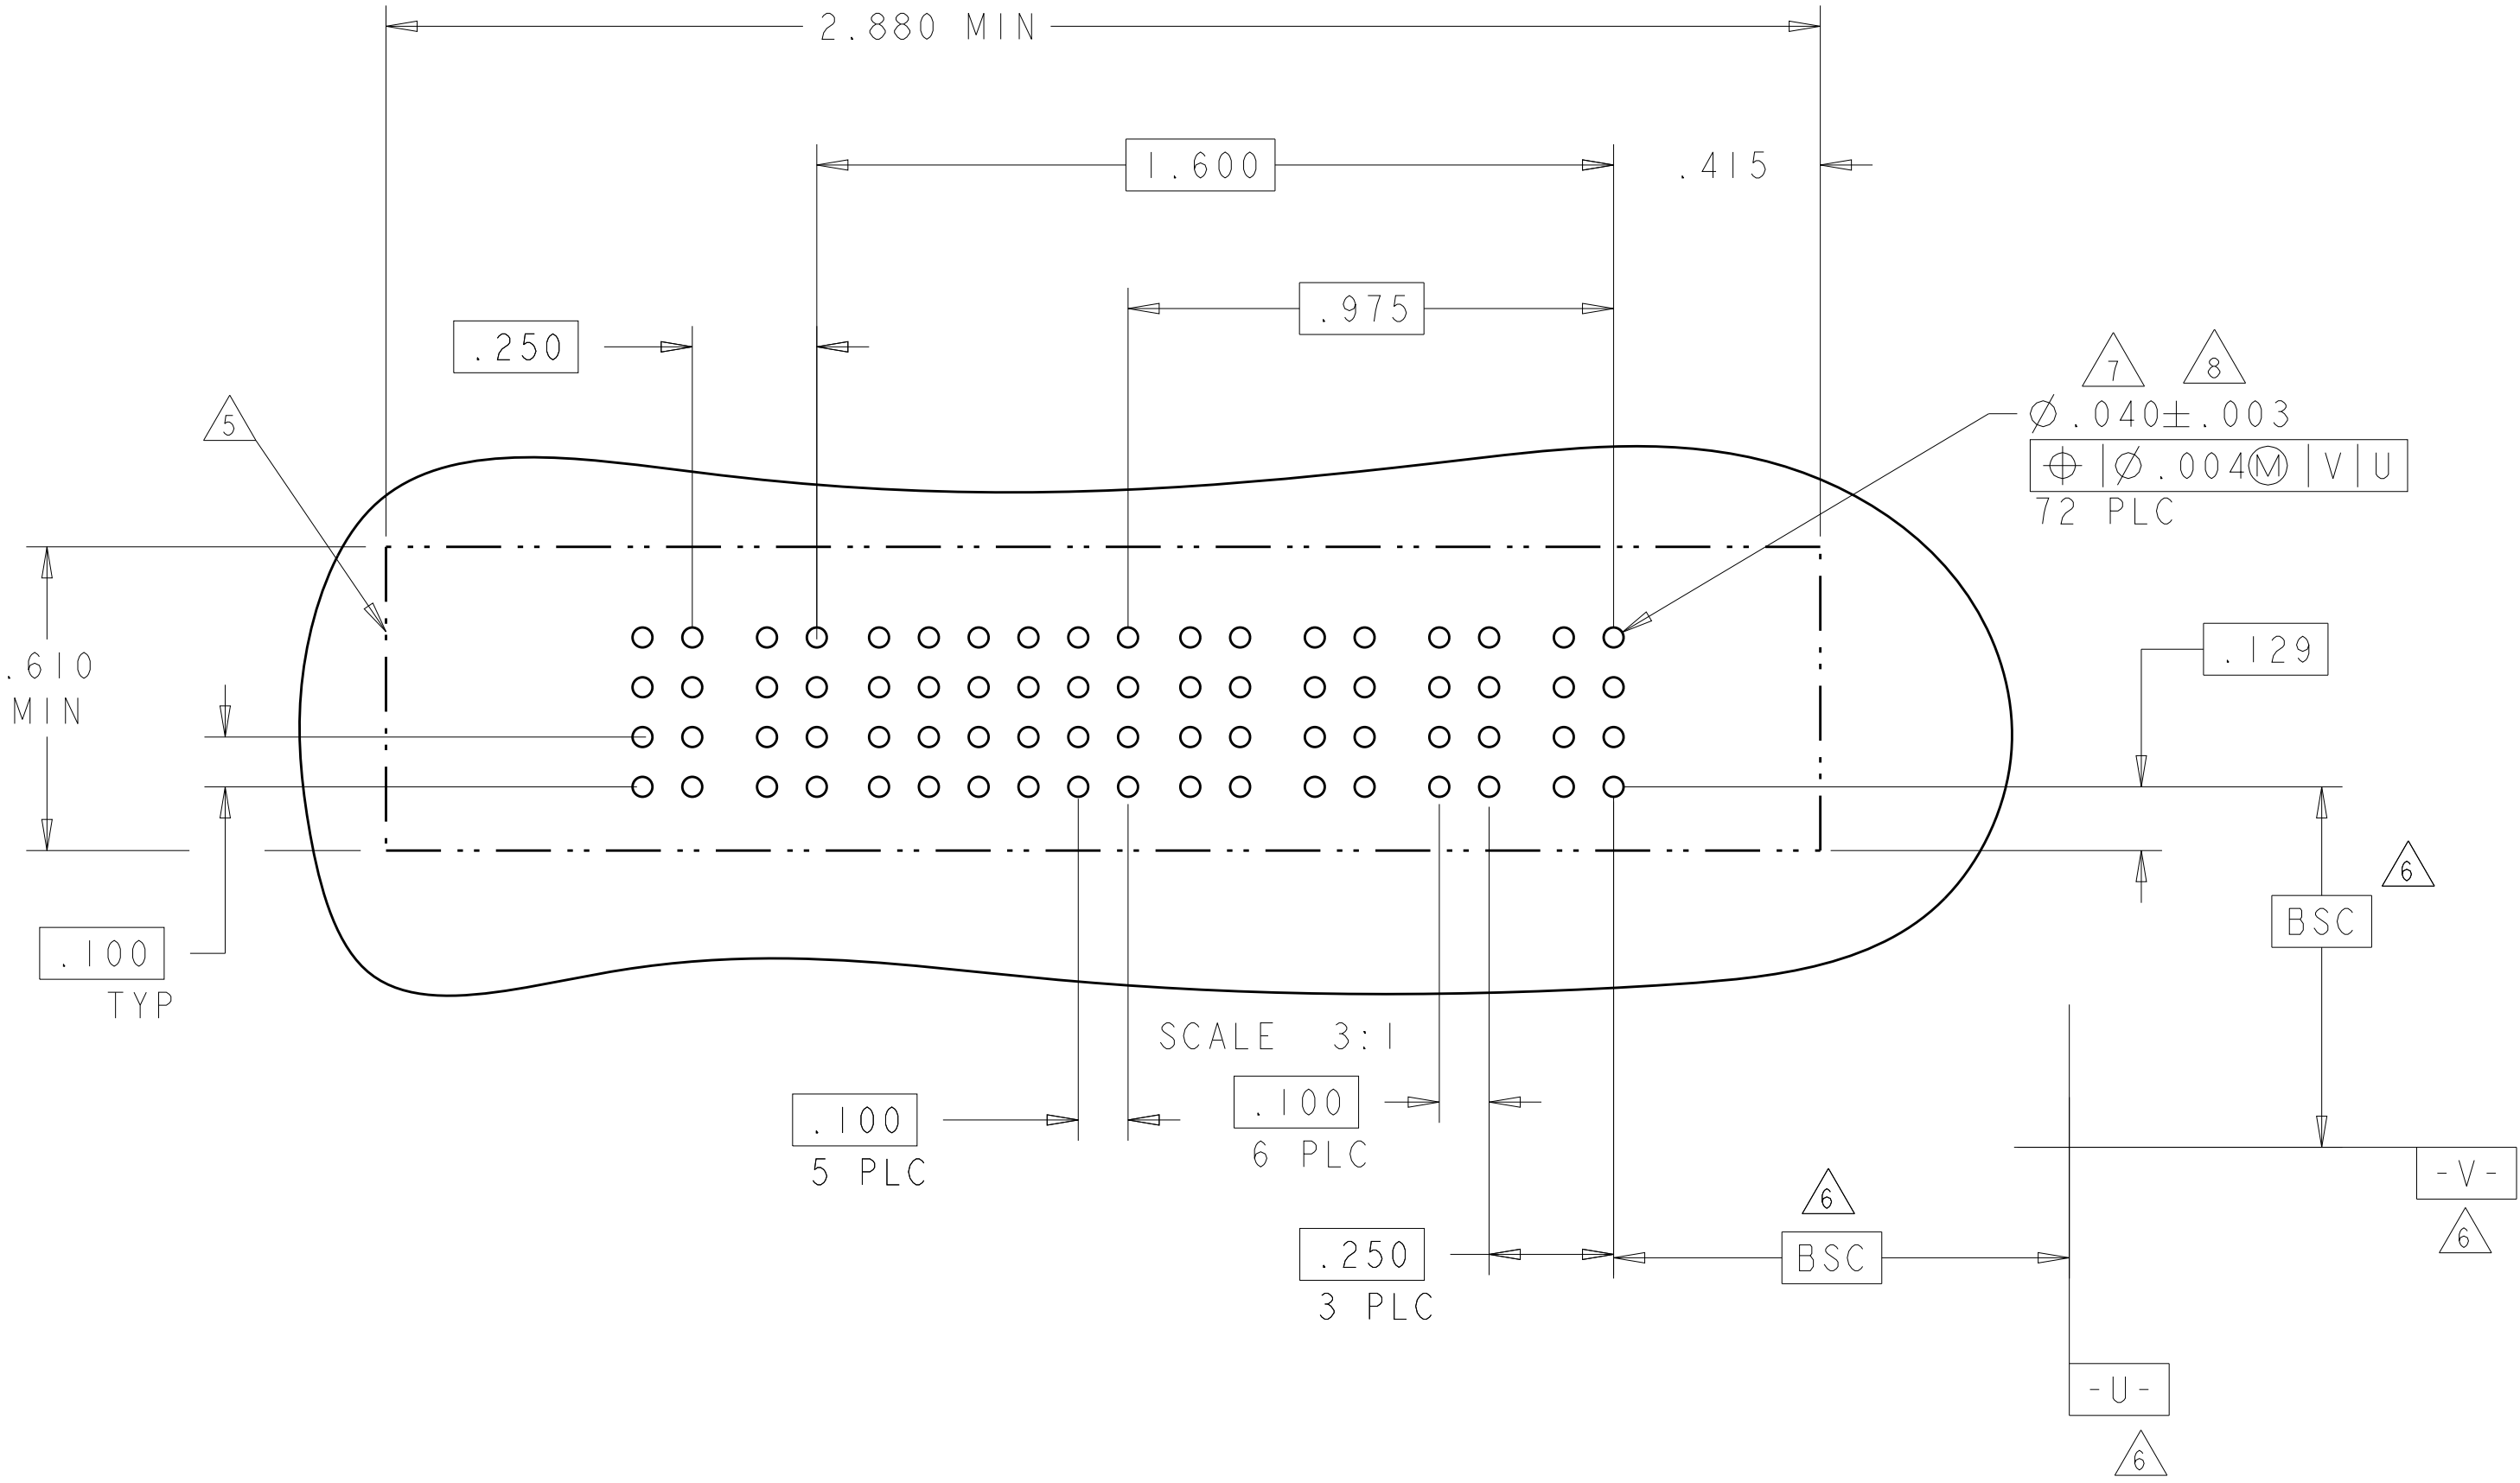

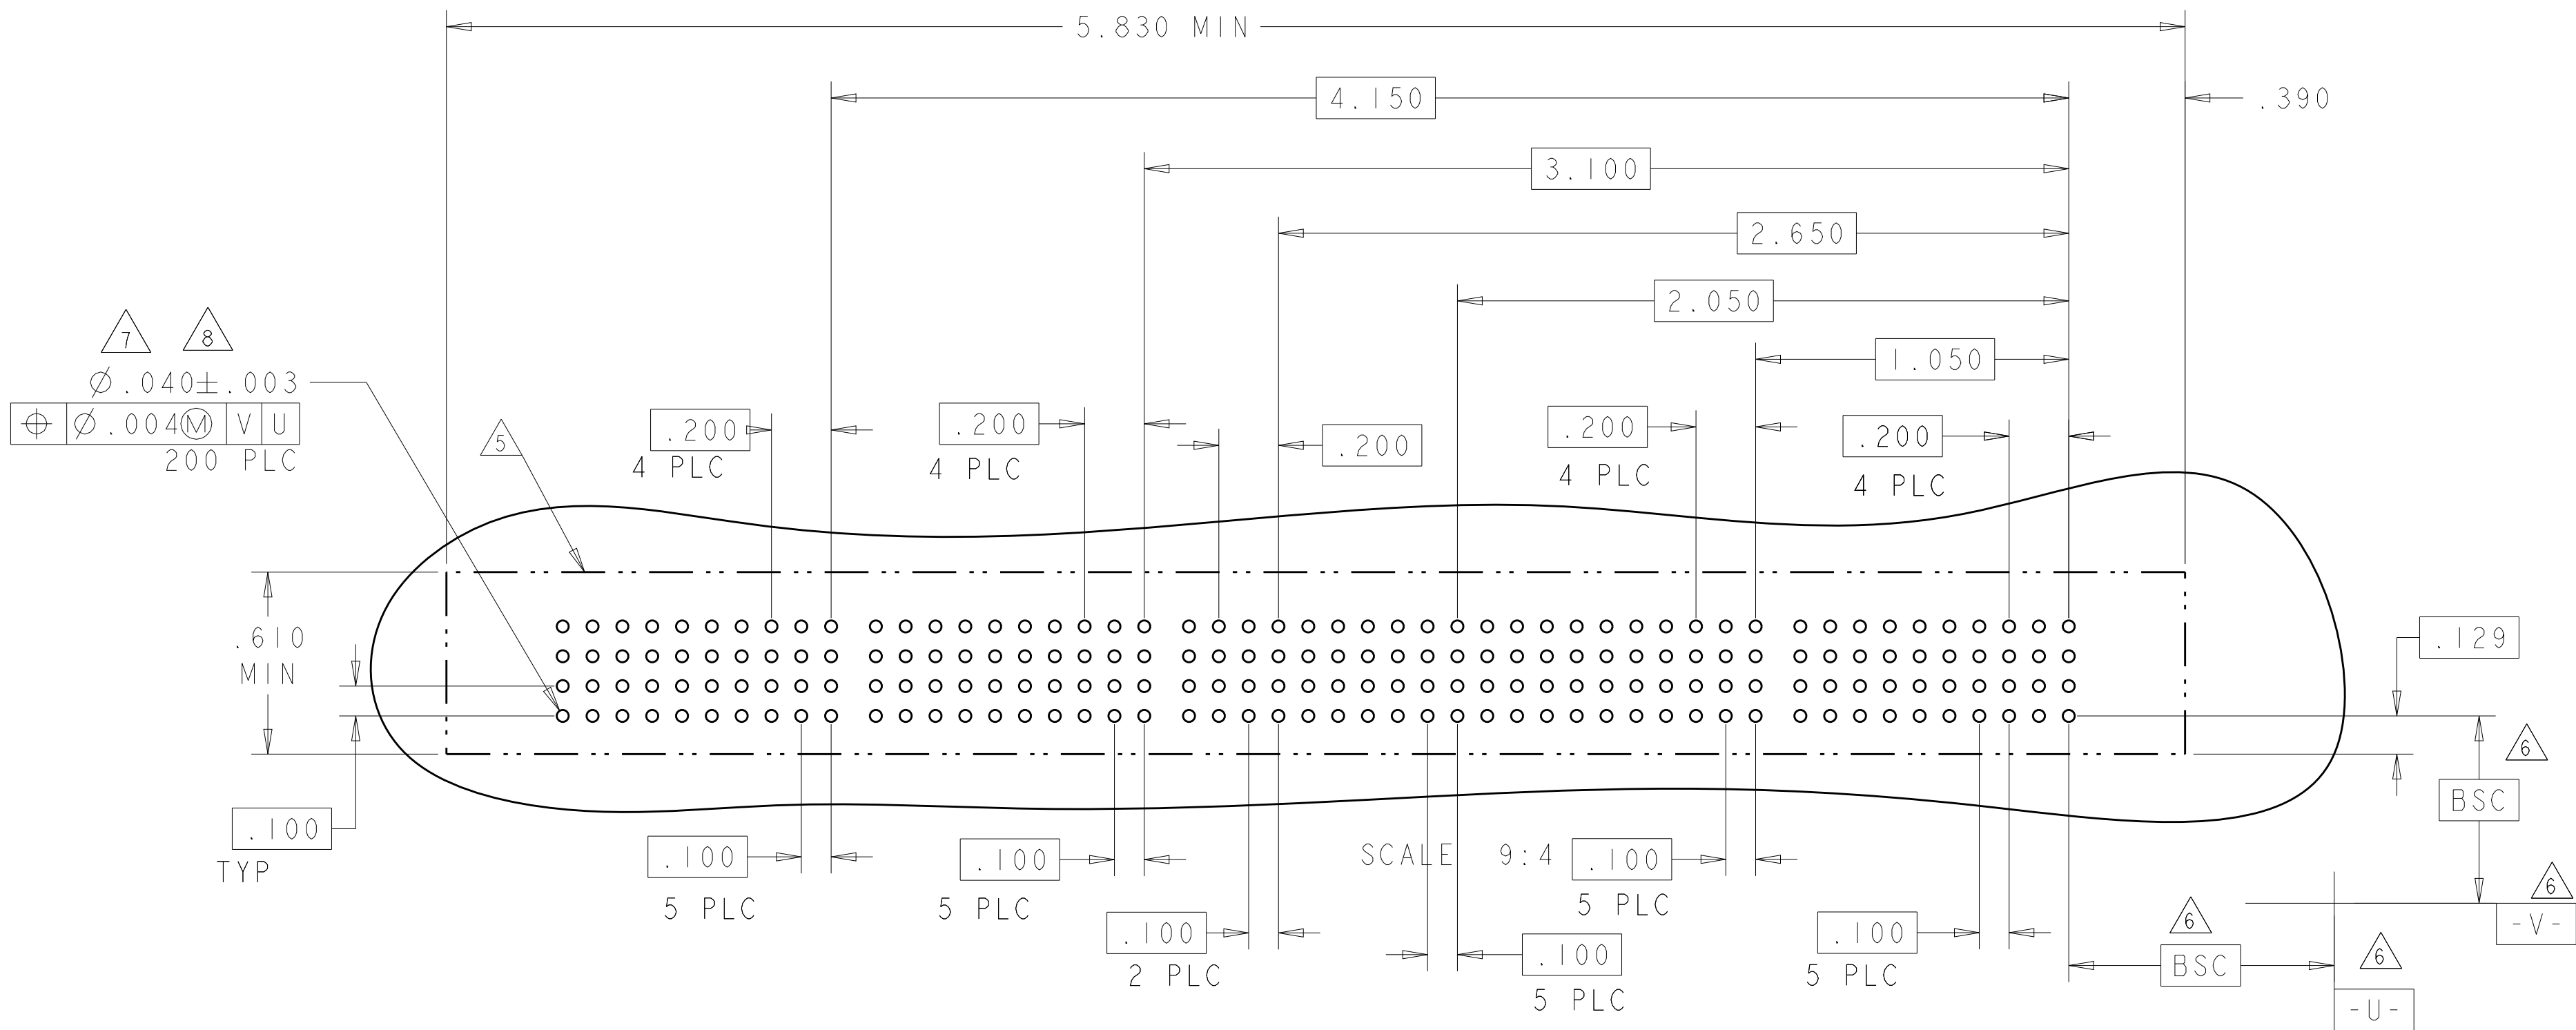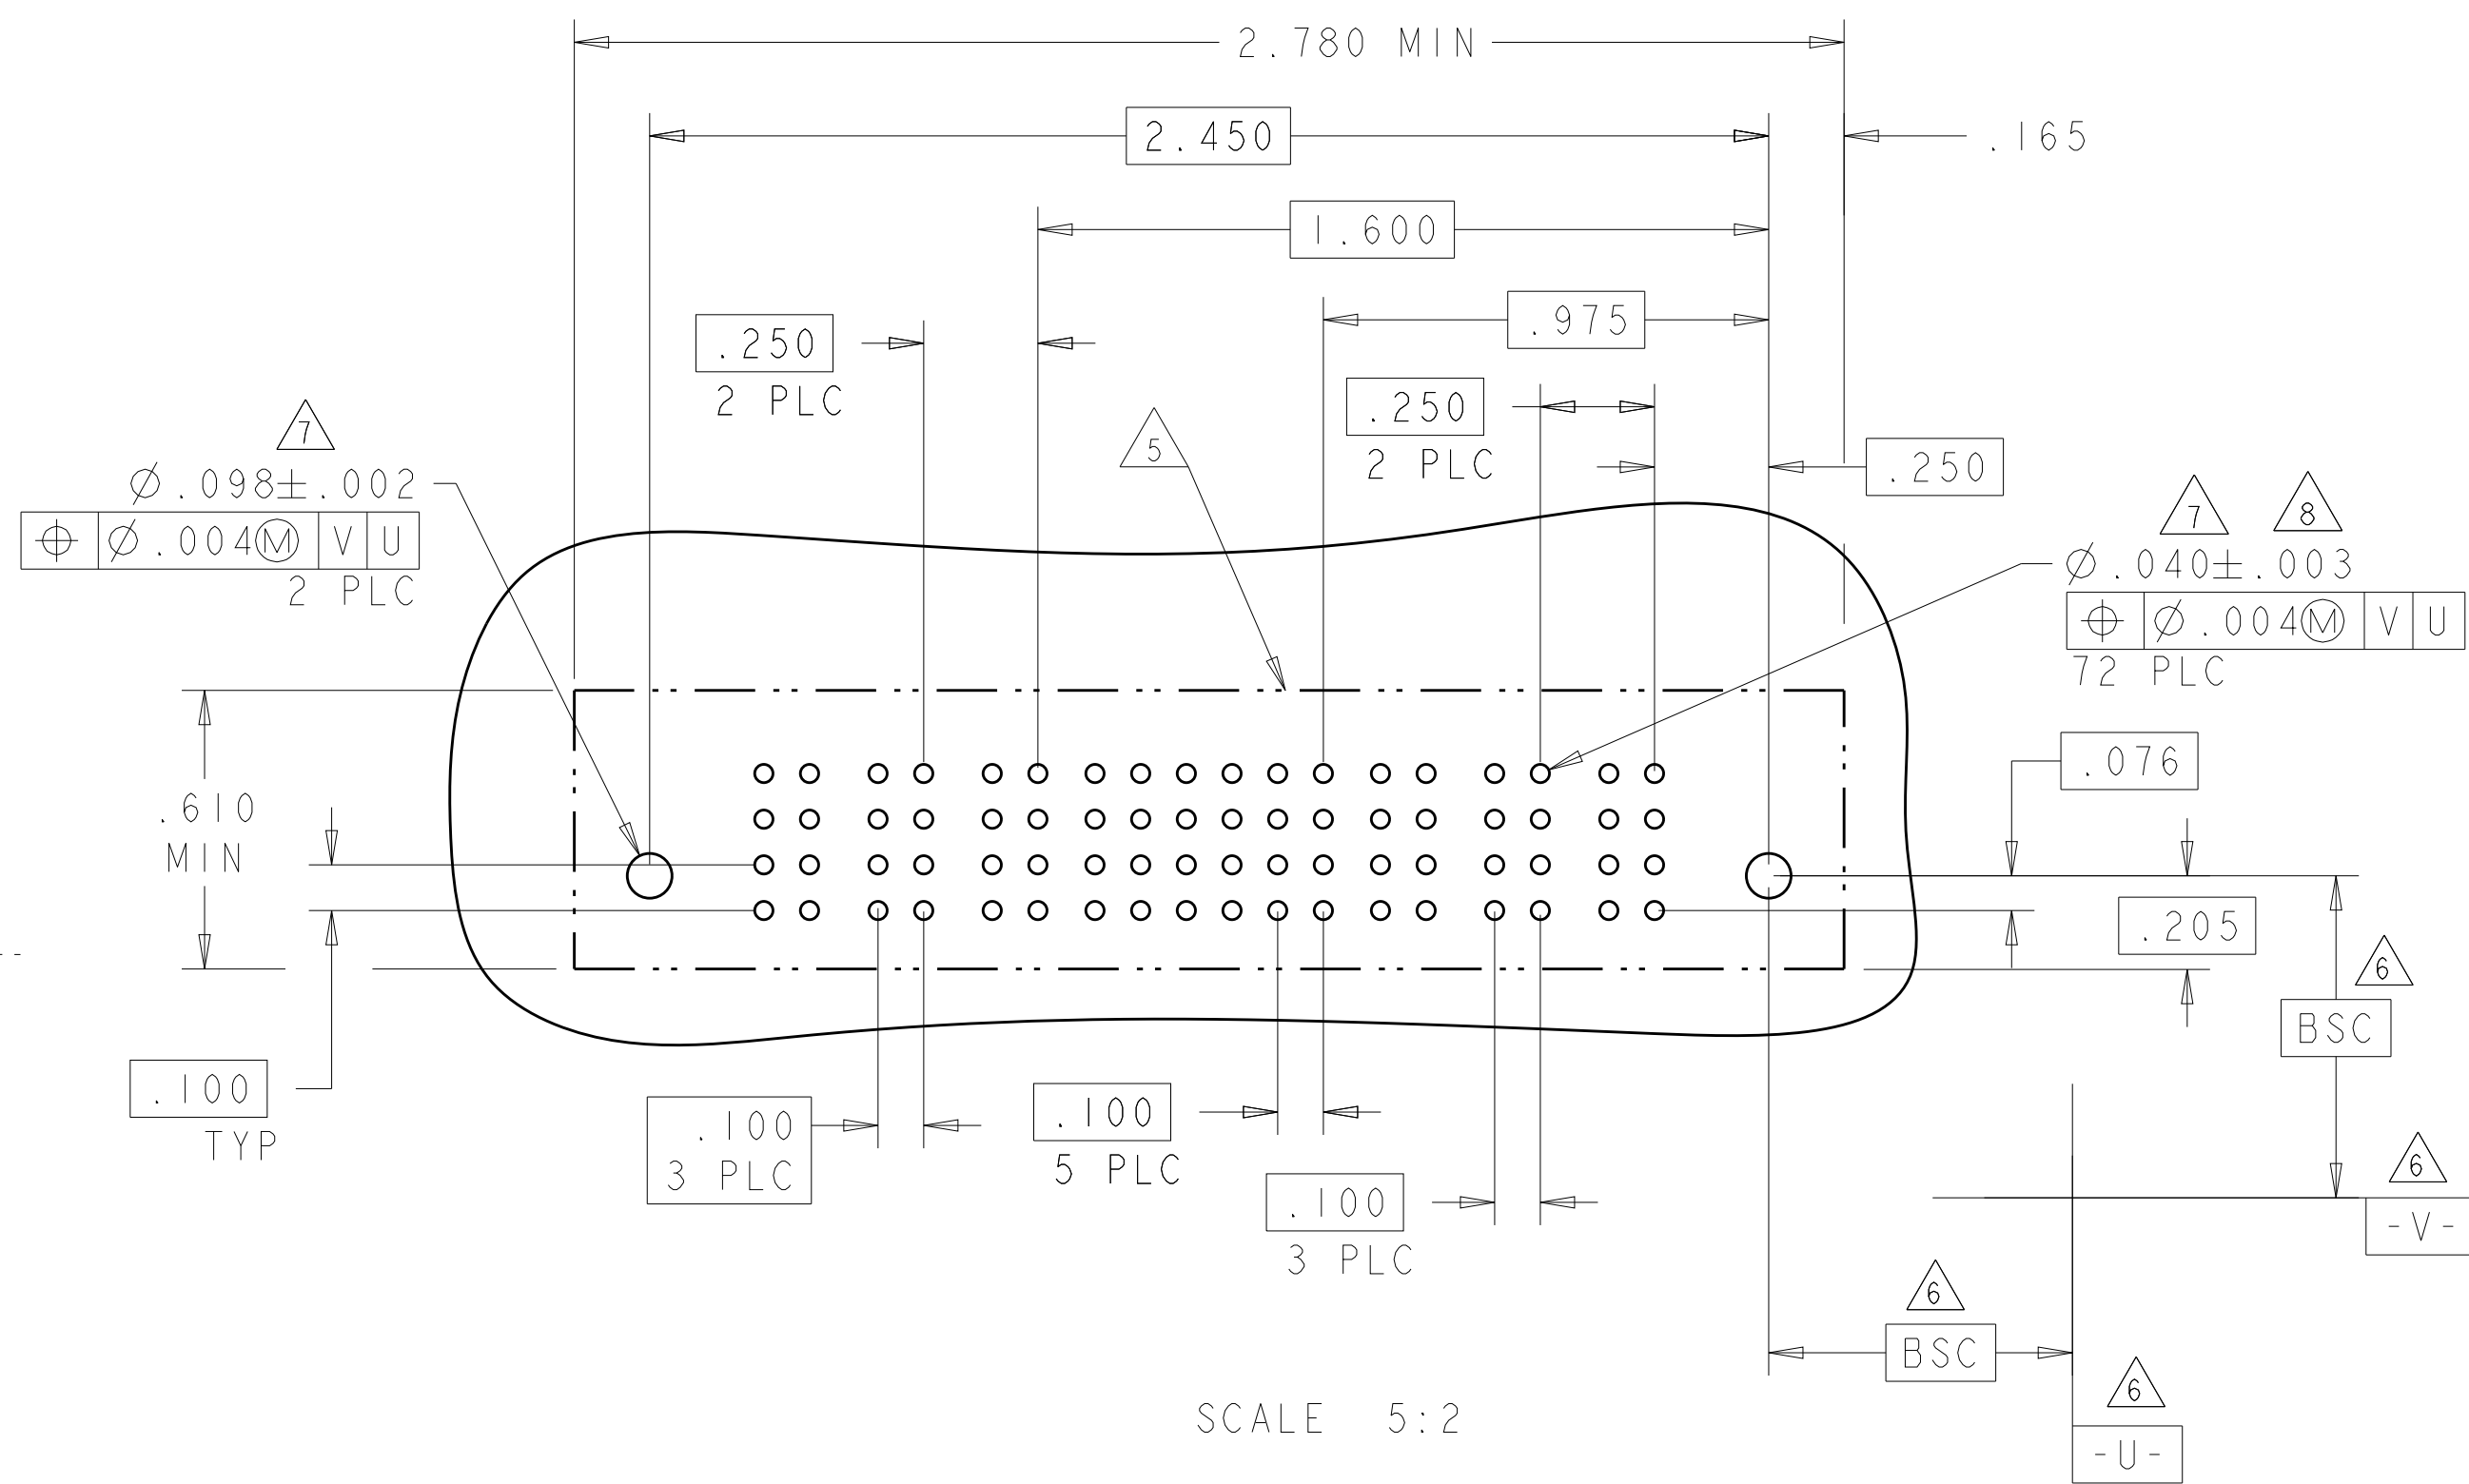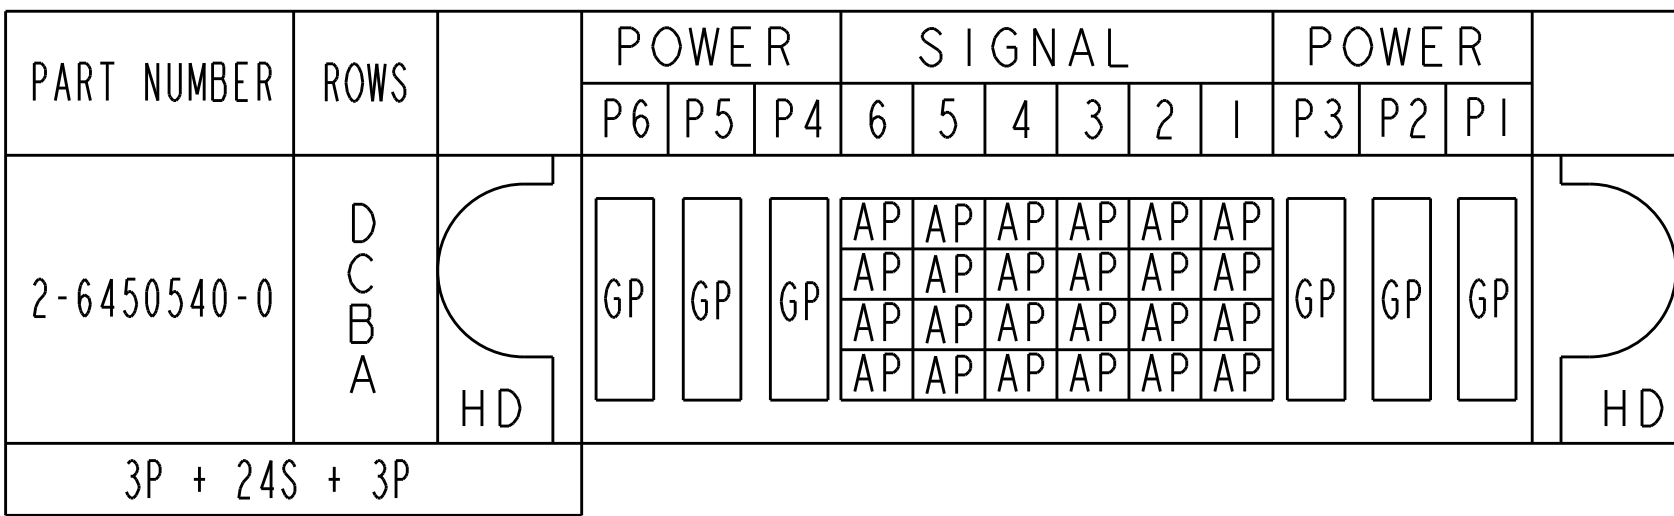

PART NUMBER	ROWS		POWER		SIGNAL					POWER						
			P7	P6	5	4	3	2	1	P5	P4	P3	P2	P1		
4-6450540-3	D C B A	 HD			AP	AP	AP	AP	AP	AP						 HD
5P + 20S + 2P																

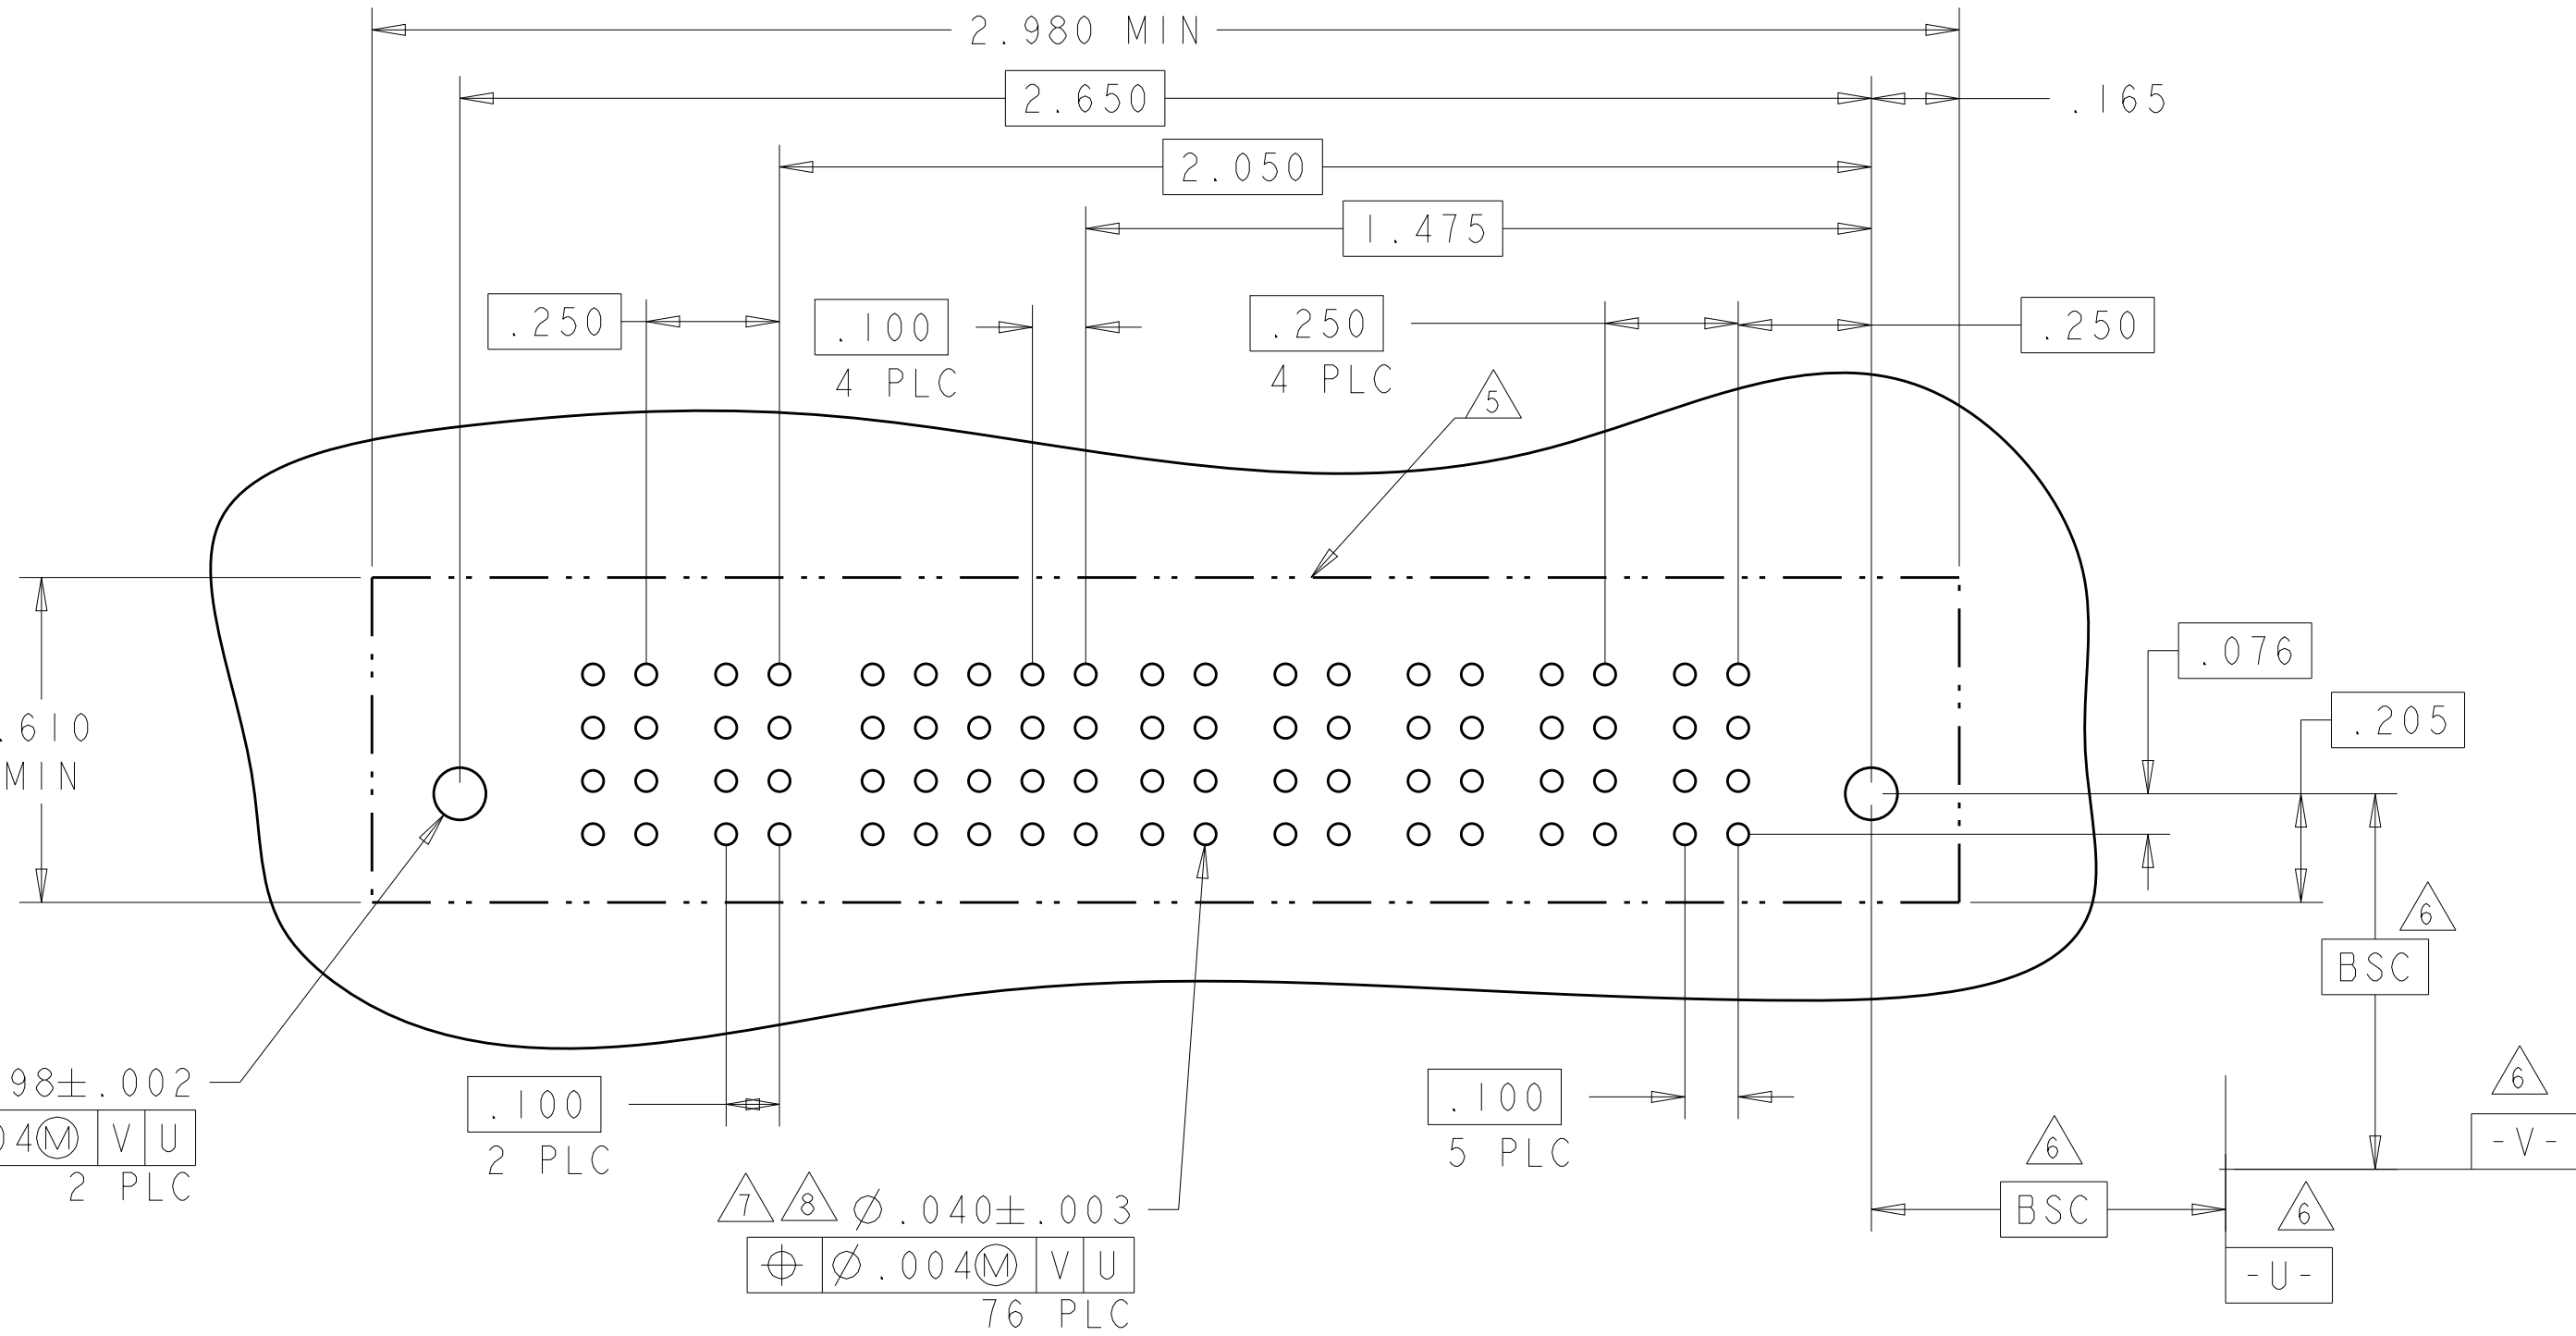

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 29APR05		 TE Connectivity	
DIMENSIONS:		CHW M. PERCERKE 29APR05			
INCHES		APVD M. PERCERKE -		NAME	
		PRODUCT SPEC		VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		108-1973			
		APPLICATION SPEC			
		114-13038			
MATERIAL		WEIGHT -		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
FINISH		A		00779 © 6450540 -	
CUSTOMER DRAWING				SCALE 2:1 SHEET 8 OF 19 REV K9	


Technical drawing of a mechanical part, likely a filter or screen, showing dimensions and tolerances. The part is cylindrical with a central hole and a series of small holes (PLC) along its length. The drawing includes various dimension lines and callouts for tolerances and features.

Key dimensions and features:


- Overall length: 7.500 MIN.
- Inner diameter: $\varnothing .098 \pm .003$ (Feature 6)
- Outer diameter: $\varnothing .004$ (Feature 4)
- Feature 4: $\varnothing .004$ (M) V U
- Feature 6: $\varnothing .098 \pm .003$ (M) V U
- Feature 8: $\varnothing .040 \pm .003$ (M) V U
- Feature 8: 280 PLC
- Feature 9: BSD
- Feature 9: -V-
- Feature 10: -U-
- Feature 11: BSD
- Feature 11: 29 PLC
- Feature 12: BSD
- Feature 12: 9 PLC
- Feature 13: BSD
- Feature 13: 29 PLC
- Feature 14: BSD
- Feature 14: 29 PLC
- Feature 15: BSD
- Feature 15: 29 PLC
- Feature 16: BSD
- Feature 16: 29 PLC
- Feature 17: BSD
- Feature 17: 29 PLC
- Feature 18: BSD
- Feature 18: 29 PLC
- Feature 19: BSD
- Feature 19: 29 PLC
- Feature 20: BSD
- Feature 20: 29 PLC
- Feature 21: BSD
- Feature 21: 29 PLC
- Feature 22: BSD
- Feature 22: 29 PLC
- Feature 23: BSD
- Feature 23: 29 PLC
- Feature 24: BSD
- Feature 24: 29 PLC
- Feature 25: BSD
- Feature 25: 29 PLC
- Feature 26: BSD
- Feature 26: 29 PLC
- Feature 27: BSD
- Feature 27: 29 PLC
- Feature 28: BSD
- Feature 28: 29 PLC
- Feature 29: BSD
- Feature 29: 29 PLC
- Feature 30: BSD
- Feature 30: 29 PLC
- Feature 31: BSD
- Feature 31: 29 PLC
- Feature 32: BSD
- Feature 32: 29 PLC
- Feature 33: BSD
- Feature 33: 29 PLC
- Feature 34: BSD
- Feature 34: 29 PLC
- Feature 35: BSD
- Feature 35: 29 PLC
- Feature 36: BSD
- Feature 36: 29 PLC
- Feature 37: BSD
- Feature 37: 29 PLC
- Feature 38: BSD
- Feature 38: 29 PLC
- Feature 39: BSD
- Feature 39: 29 PLC
- Feature 40: BSD
- Feature 40: 29 PLC
- Feature 41: BSD
- Feature 41: 29 PLC
- Feature 42: BSD
- Feature 42: 29 PLC
- Feature 43: BSD
- Feature 43: 29 PLC
- Feature 44: BSD
- Feature 44: 29 PLC
- Feature 45: BSD
- Feature 45: 29 PLC
- Feature 46: BSD
- Feature 46: 29 PLC
- Feature 47: BSD
- Feature 47: 29 PLC
- Feature 48: BSD
- Feature 48: 29 PLC
- Feature 49: BSD
- Feature 49: 29 PLC
- Feature 50: BSD
- Feature 50: 29 PLC
- Feature 51: BSD
- Feature 51: 29 PLC
- Feature 52: BSD
- Feature 52: 29 PLC
- Feature 53: BSD
- Feature 53: 29 PLC
- Feature 54: BSD
- Feature 54: 29 PLC
- Feature 55: BSD
- Feature 55: 29 PLC
- Feature 56: BSD
- Feature 56: 29 PLC
- Feature 57: BSD
- Feature 57: 29 PLC
- Feature 58: BSD
- Feature 58: 29 PLC
- Feature 59: BSD
- Feature 59: 29 PLC
- Feature 60: BSD
- Feature 60: 29 PLC
- Feature 61: BSD
- Feature 61: 29 PLC
- Feature 62: BSD
- Feature 62: 29 PLC
- Feature 63: BSD
- Feature 63: 29 PLC
- Feature 64: BSD
- Feature 64: 29 PLC
- Feature 65: BSD
- Feature 65: 29 PLC
- Feature 66: BSD
- Feature 66: 29 PLC
- Feature 67: BSD
- Feature 67: 29 PLC
- Feature 68: BSD
- Feature 68: 29 PLC
- Feature 69: BSD
- Feature 69: 29 PLC
- Feature 70: BSD
- Feature 70: 29 PLC
- Feature 71: BSD
- Feature 71: 29 PLC
- Feature 72: BSD
- Feature 72: 29 PLC
- Feature 73: BSD
- Feature 73: 29 PLC
- Feature 74: BSD
- Feature 74: 29 PLC
- Feature 75: BSD
- Feature 75: 29 PLC
- Feature 76: BSD
- Feature 76: 29 PLC
- Feature 77: BSD
- Feature 77: 29 PLC
- Feature 78: BSD
- Feature 78: 29 PLC
- Feature 79: BSD
- Feature 79: 29 PLC
- Feature 80: BSD
- Feature 80: 29 PLC
- Feature 81: BSD
- Feature 81: 29 PLC
- Feature 82: BSD
- Feature 82: 29 PLC
- Feature 83: BSD
- Feature 83: 29 PLC
- Feature 84: BSD
- Feature 84: 29 PLC
- Feature 85: BSD
- Feature 85: 29 PLC
- Feature 86: BSD
- Feature 86: 29 PLC
- Feature 87: BSD
- Feature 87: 29 PLC
- Feature 88: BSD
- Feature 88: 29 PLC
- Feature 89: BSD
- Feature 89: 29 PLC
- Feature 90: BSD
- Feature 90: 29 PLC
- Feature 91: BSD
- Feature 91: 29 PLC
- Feature 92: BSD
- Feature 92: 29 PLC
- Feature 93: BSD
- Feature 93: 29 PLC
- Feature 94: BSD
- Feature 94: 29 PLC
- Feature 95: BSD
- Feature 95: 29 PLC
- Feature 96: BSD
- Feature 96: 29 PLC
- Feature 97: BSD
- Feature 97: 29 PLC
- Feature 98: BSD
- Feature 98: 29 PLC
- Feature 99: BSD
- Feature 99: 29 PLC
- Feature 100: BSD
- Feature 100: 29 PLC
- Feature 101: BSD
- Feature 101: 29 PLC
- Feature 102: BSD
- Feature 102: 29 PLC
- Feature 103: BSD
- Feature 103: 29 PLC
- Feature 104: BSD
- Feature 104: 29 PLC
- Feature 105: BSD
- Feature 105: 29 PLC
- Feature 106: BSD
- Feature 106: 29 PLC
- Feature 107: BSD
- Feature 107: 29 PLC
- Feature 108: BSD
- Feature 108: 29 PLC
- Feature 109: BSD
- Feature 109: 29 PLC
- Feature 110: BSD
- Feature 110: 29 PLC
- Feature 111: BSD
- Feature 111: 29 PLC
- Feature 112: BSD
- Feature 112: 29 PLC
- Feature 113: BSD
- Feature 113: 29 PLC
- Feature 114: BSD
- Feature 114: 29 PLC
- Feature 115: BSD
- Feature 115: 29 PLC
- Feature 116: BSD
- Feature 116: 29 PLC
- Feature 117: BSD
- Feature 117: 29 PLC
- Feature 118: BSD
- Feature 118: 29 PLC
- Feature 119: BSD
- Feature 119: 29 PLC
- Feature 120: BSD
- Feature 120: 29 PLC
- Feature 121: BSD
- Feature 121: 29 PLC
- Feature 122: BSD
- Feature 122: 29 PLC
- Feature 123: BSD
- Feature 123: 29 PLC
- Feature 124: BSD
- Feature 124: 29 PLC
- Feature 125: BSD
- Feature 125: 29 PLC
- Feature 126: BSD
- Feature 126: 29 PLC
- Feature 127: BSD
- Feature 127: 29 PLC
- Feature 128: BSD
- Feature 128: 29 PLC
- Feature 129: BSD
- Feature 129: 29 PLC
- Feature 130: BSD
- Feature 130: 29 PLC
- Feature 131: BSD
- Feature 131: 29 PLC
- Feature 132: BSD
- Feature 132: 29 PLC
- Feature 133: BSD
- Feature 133: 29 PLC
- Feature 134: BSD
- Feature 134: 29 PLC
- Feature 135: BSD
- Feature 135: 29 PLC
- Feature 136: BSD
- Feature 136: 29 PLC
- Feature 137: BSD
- Feature 137: 29 PLC
- Feature 138: BSD
- Feature 138: 29 PLC
- Feature 139: BSD
- Feature 139: 29 PLC
- Feature 140: BSD
- Feature 140: 29 PLC
- Feature 141: BSD
- Feature 141: 29 PLC
- Feature 142: BSD
- Feature 142: 29 PLC
- Feature 143: BSD
- Feature 143: 29 PLC
- Feature 144: BSD
- Feature 144: 29 PLC
- Feature 145: BSD
- Feature 145: 29 PLC
- Feature 146: BSD
- Feature 146: 29 PLC
- Feature 147: BSD
- Feature

[illegible]4805 (3/11)


PART NUMBER	ROWS	POWER										
		P11	P10	P9	P8	P7	P6	P5	P3	P2	P1	
4-6450540-2	D C B A	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	
11HDP												

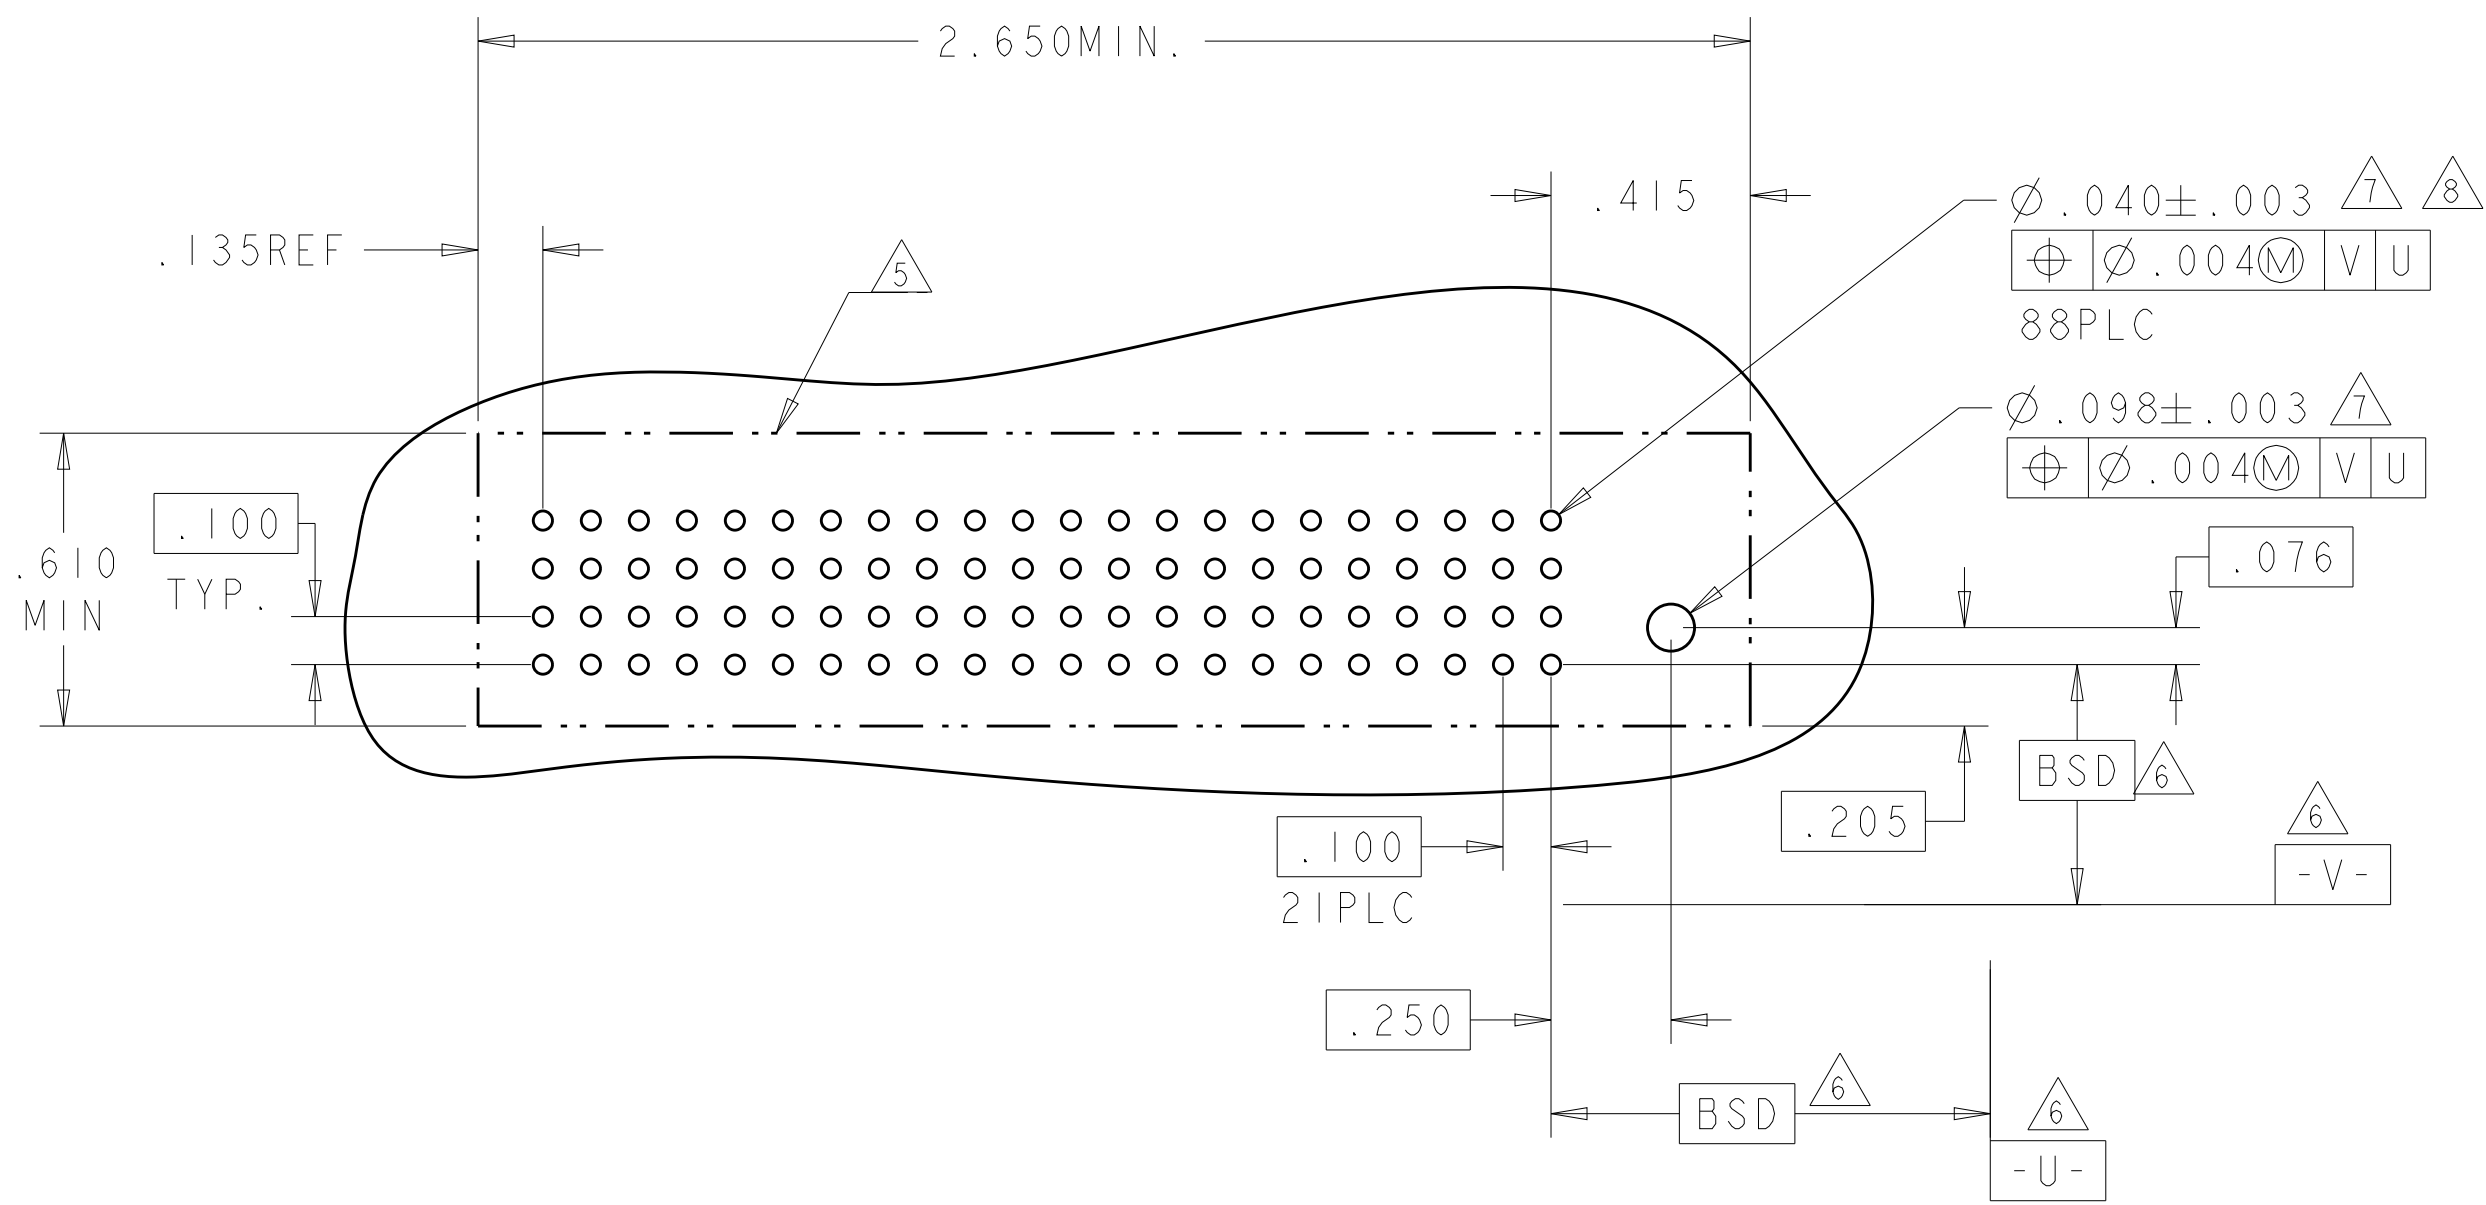4805 (3/11)

PART NUMBER	ROWS	POWER											
		P12	P11	P10	P9	P8	P7	P6	P5	P3	P2		P1
4-6450540-5	DC C B A	GS	GS	GS	GS	GS	GS	GS	GS	GS	GS	GS	HD
12HDP													

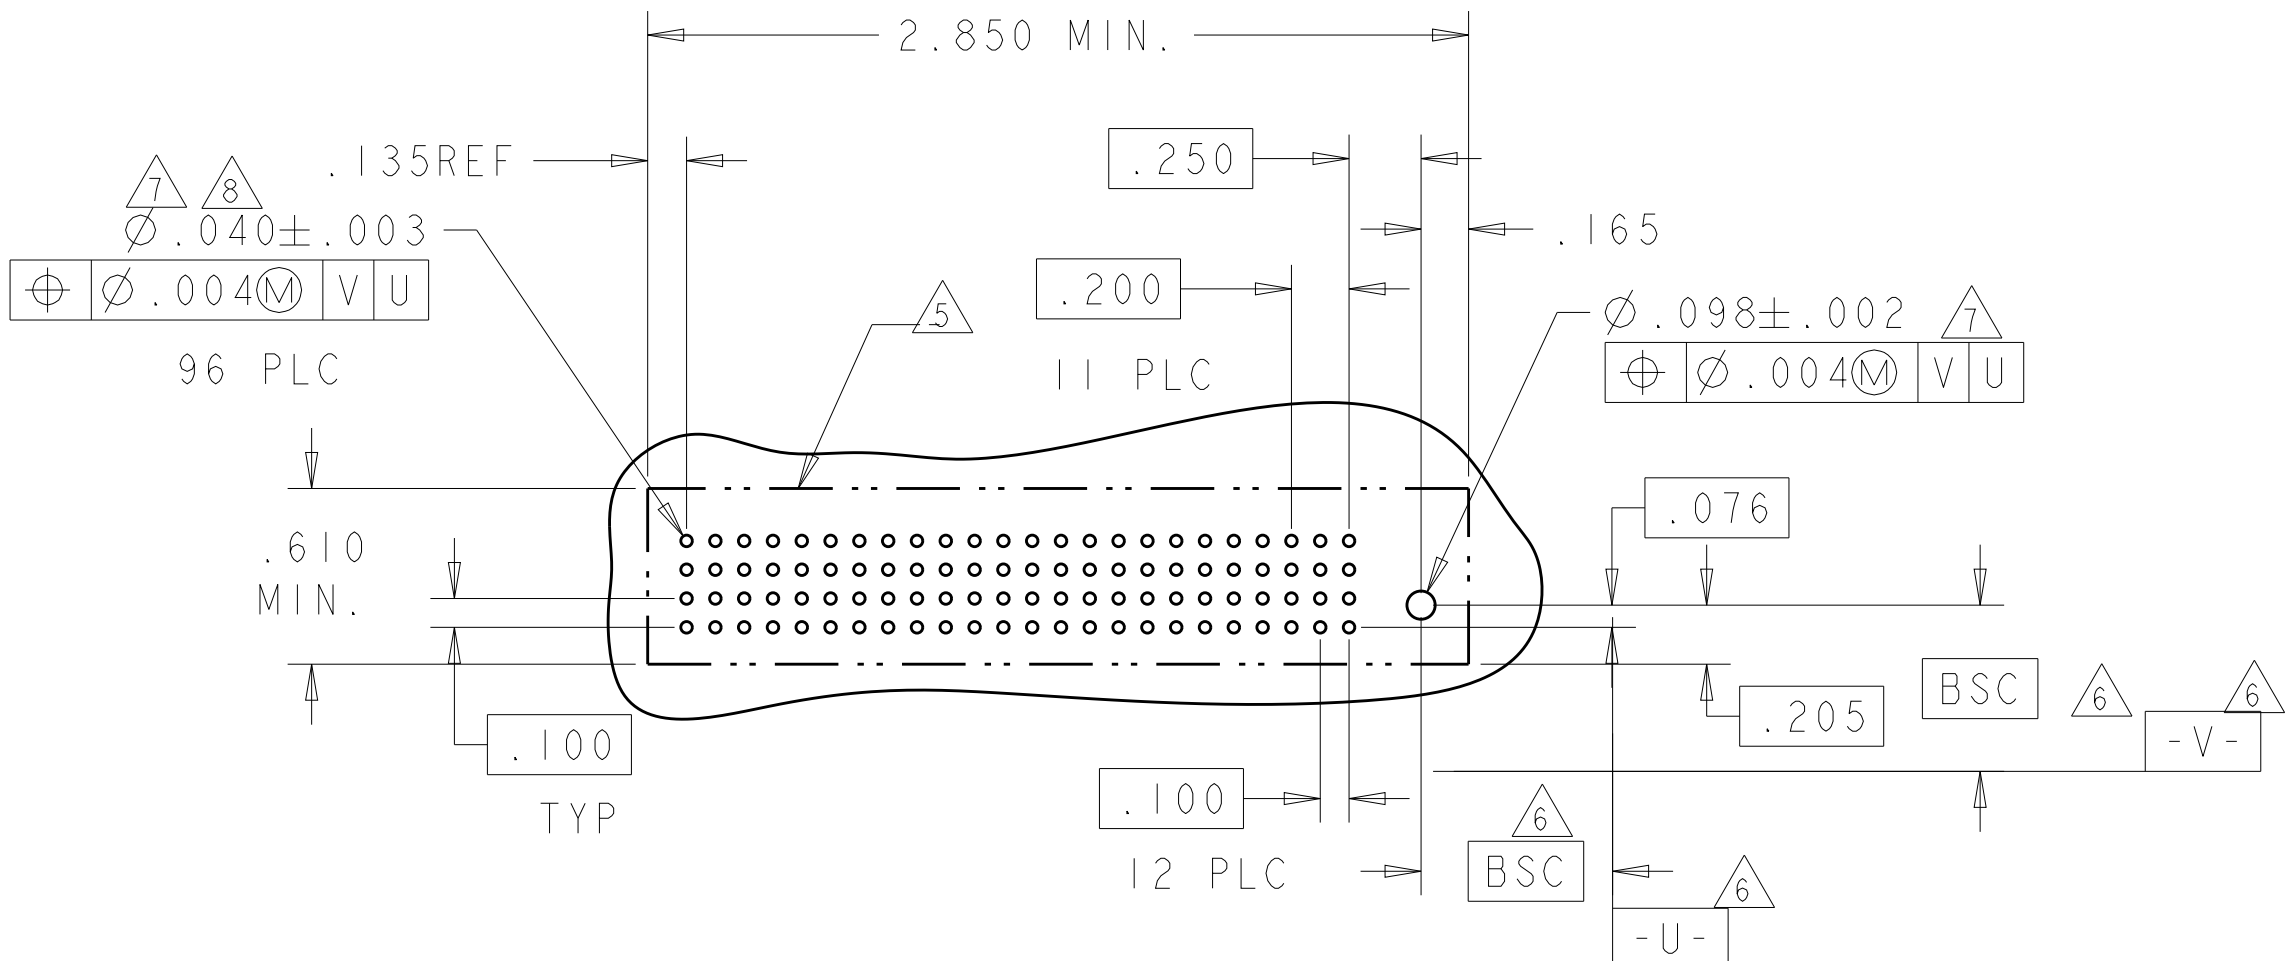




PART NUMBER	ROWS		POWER			SIGNAL		POWER			
			P6	P5	P4	2	1	P3	P2	P1	
4-6450540-7	D C B A										
3P + 8S + 3P											

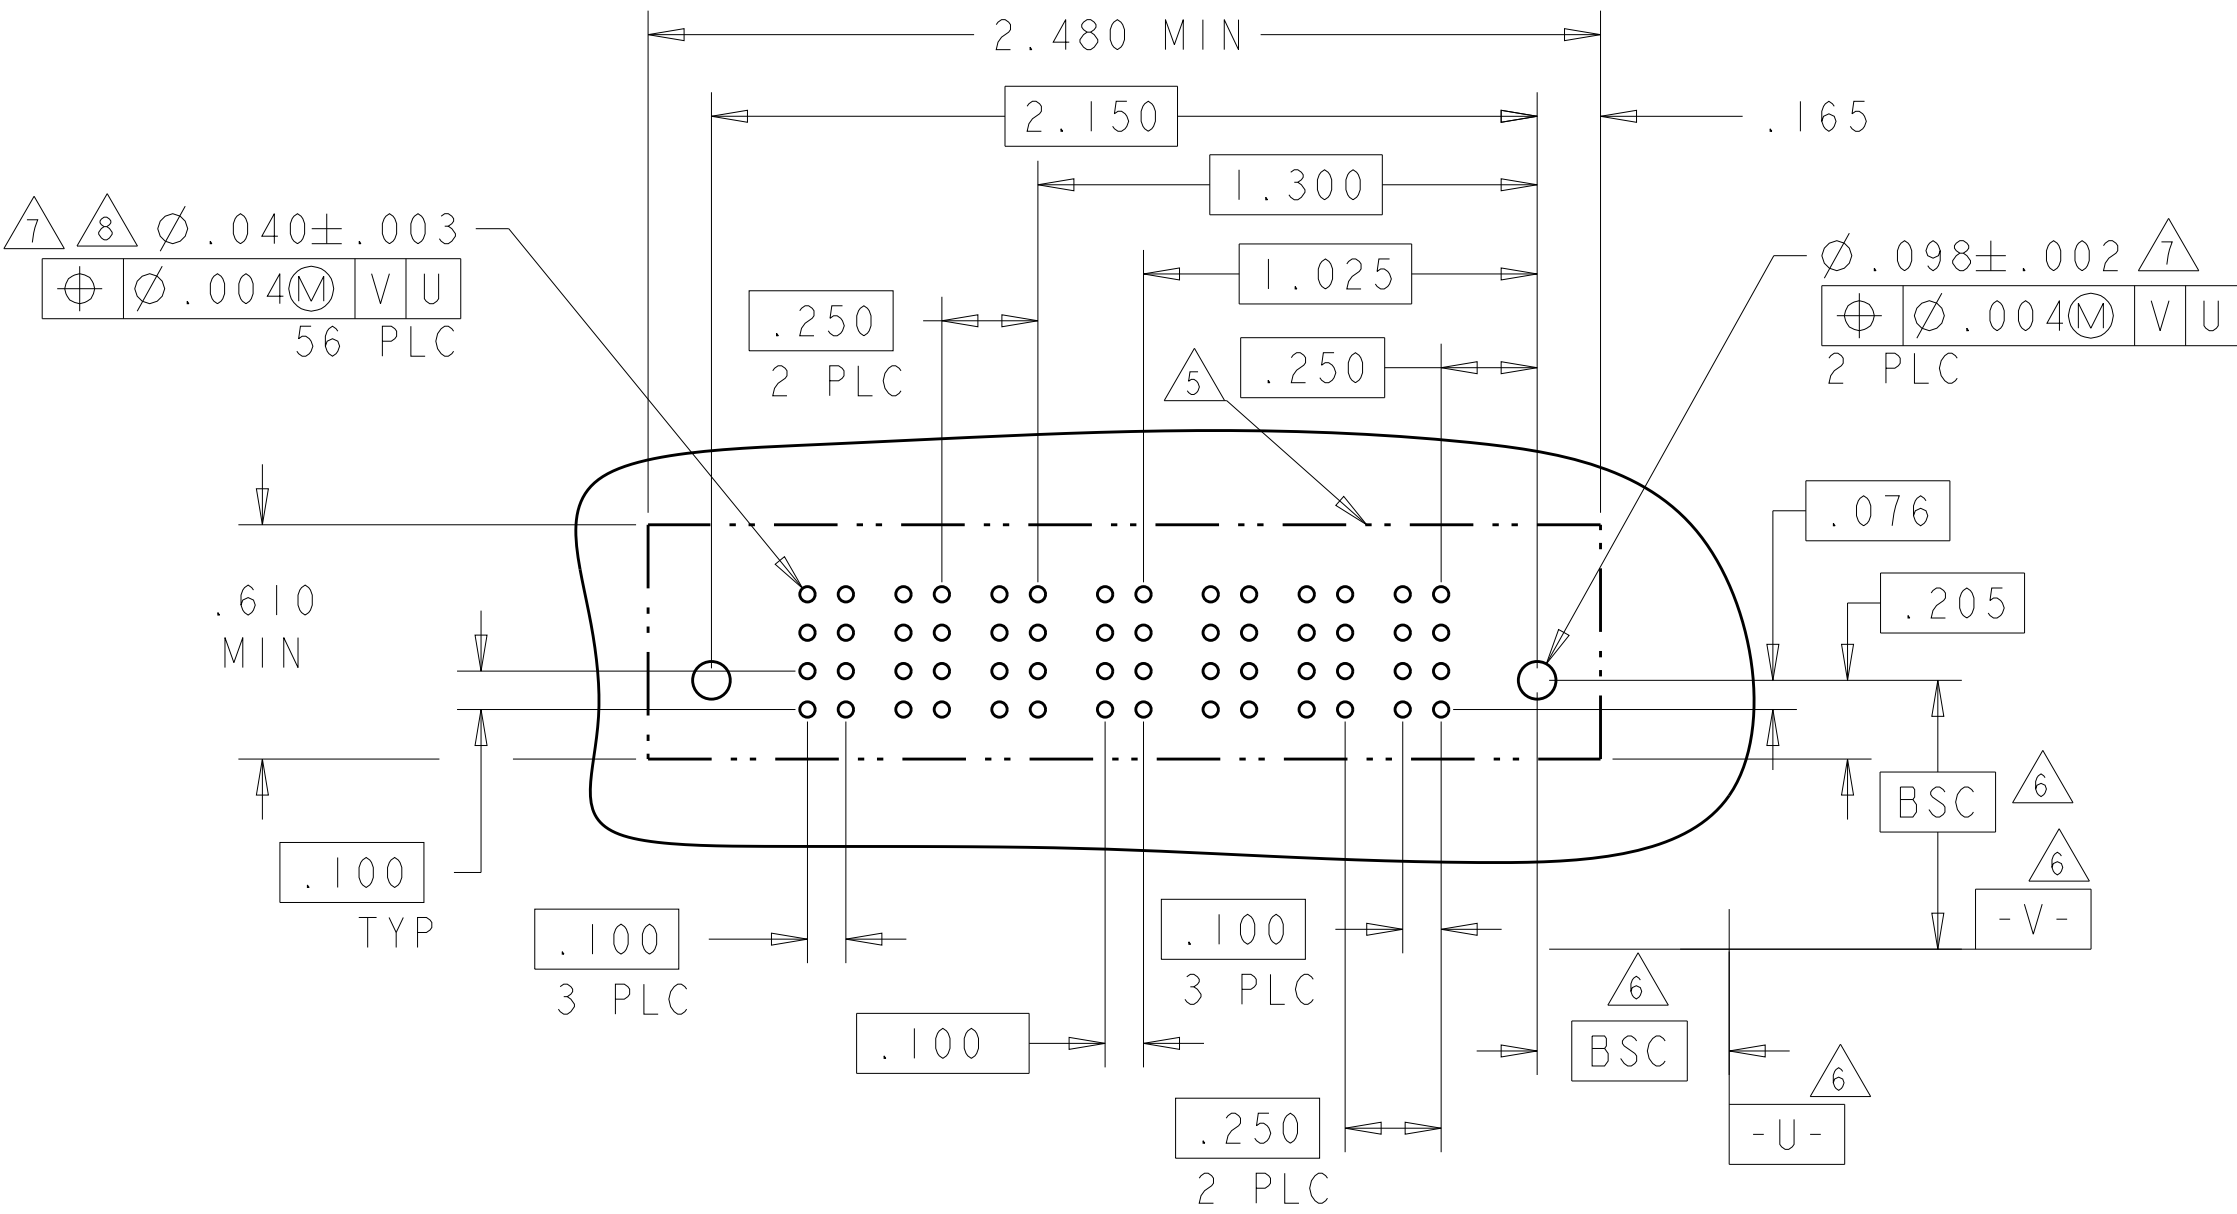4805 (3/11)

LOC		DIST		REVISIONS				
P	LYR	DESCRIPTION			DATE	OWN	APVD	
-	-	SEE SHEET 1			-	-	-	

PART NUMBER	ROWS		POWER	SIGNAL					POWER	
			P2	4	3	2	1	P1		
4-6450540-8	D C B A		GS	AP	AP	AP	AP	GS		
				AP	AP	AP	AP			
				AP	AP	AP	AP			
				AP	AP	AP	AP			
				AP	AP	AP	AP			
IP + 16S + 1P										

PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P4	P3	4	3	2	1	P2	P1	
5-6450540-1	D C B A				AP	AP	AP	AP			
					AP	AP	AP	AP			
					AP	AP	AP	AP			
					AP	AP	AP	AP			
2P + 16S + 2P											

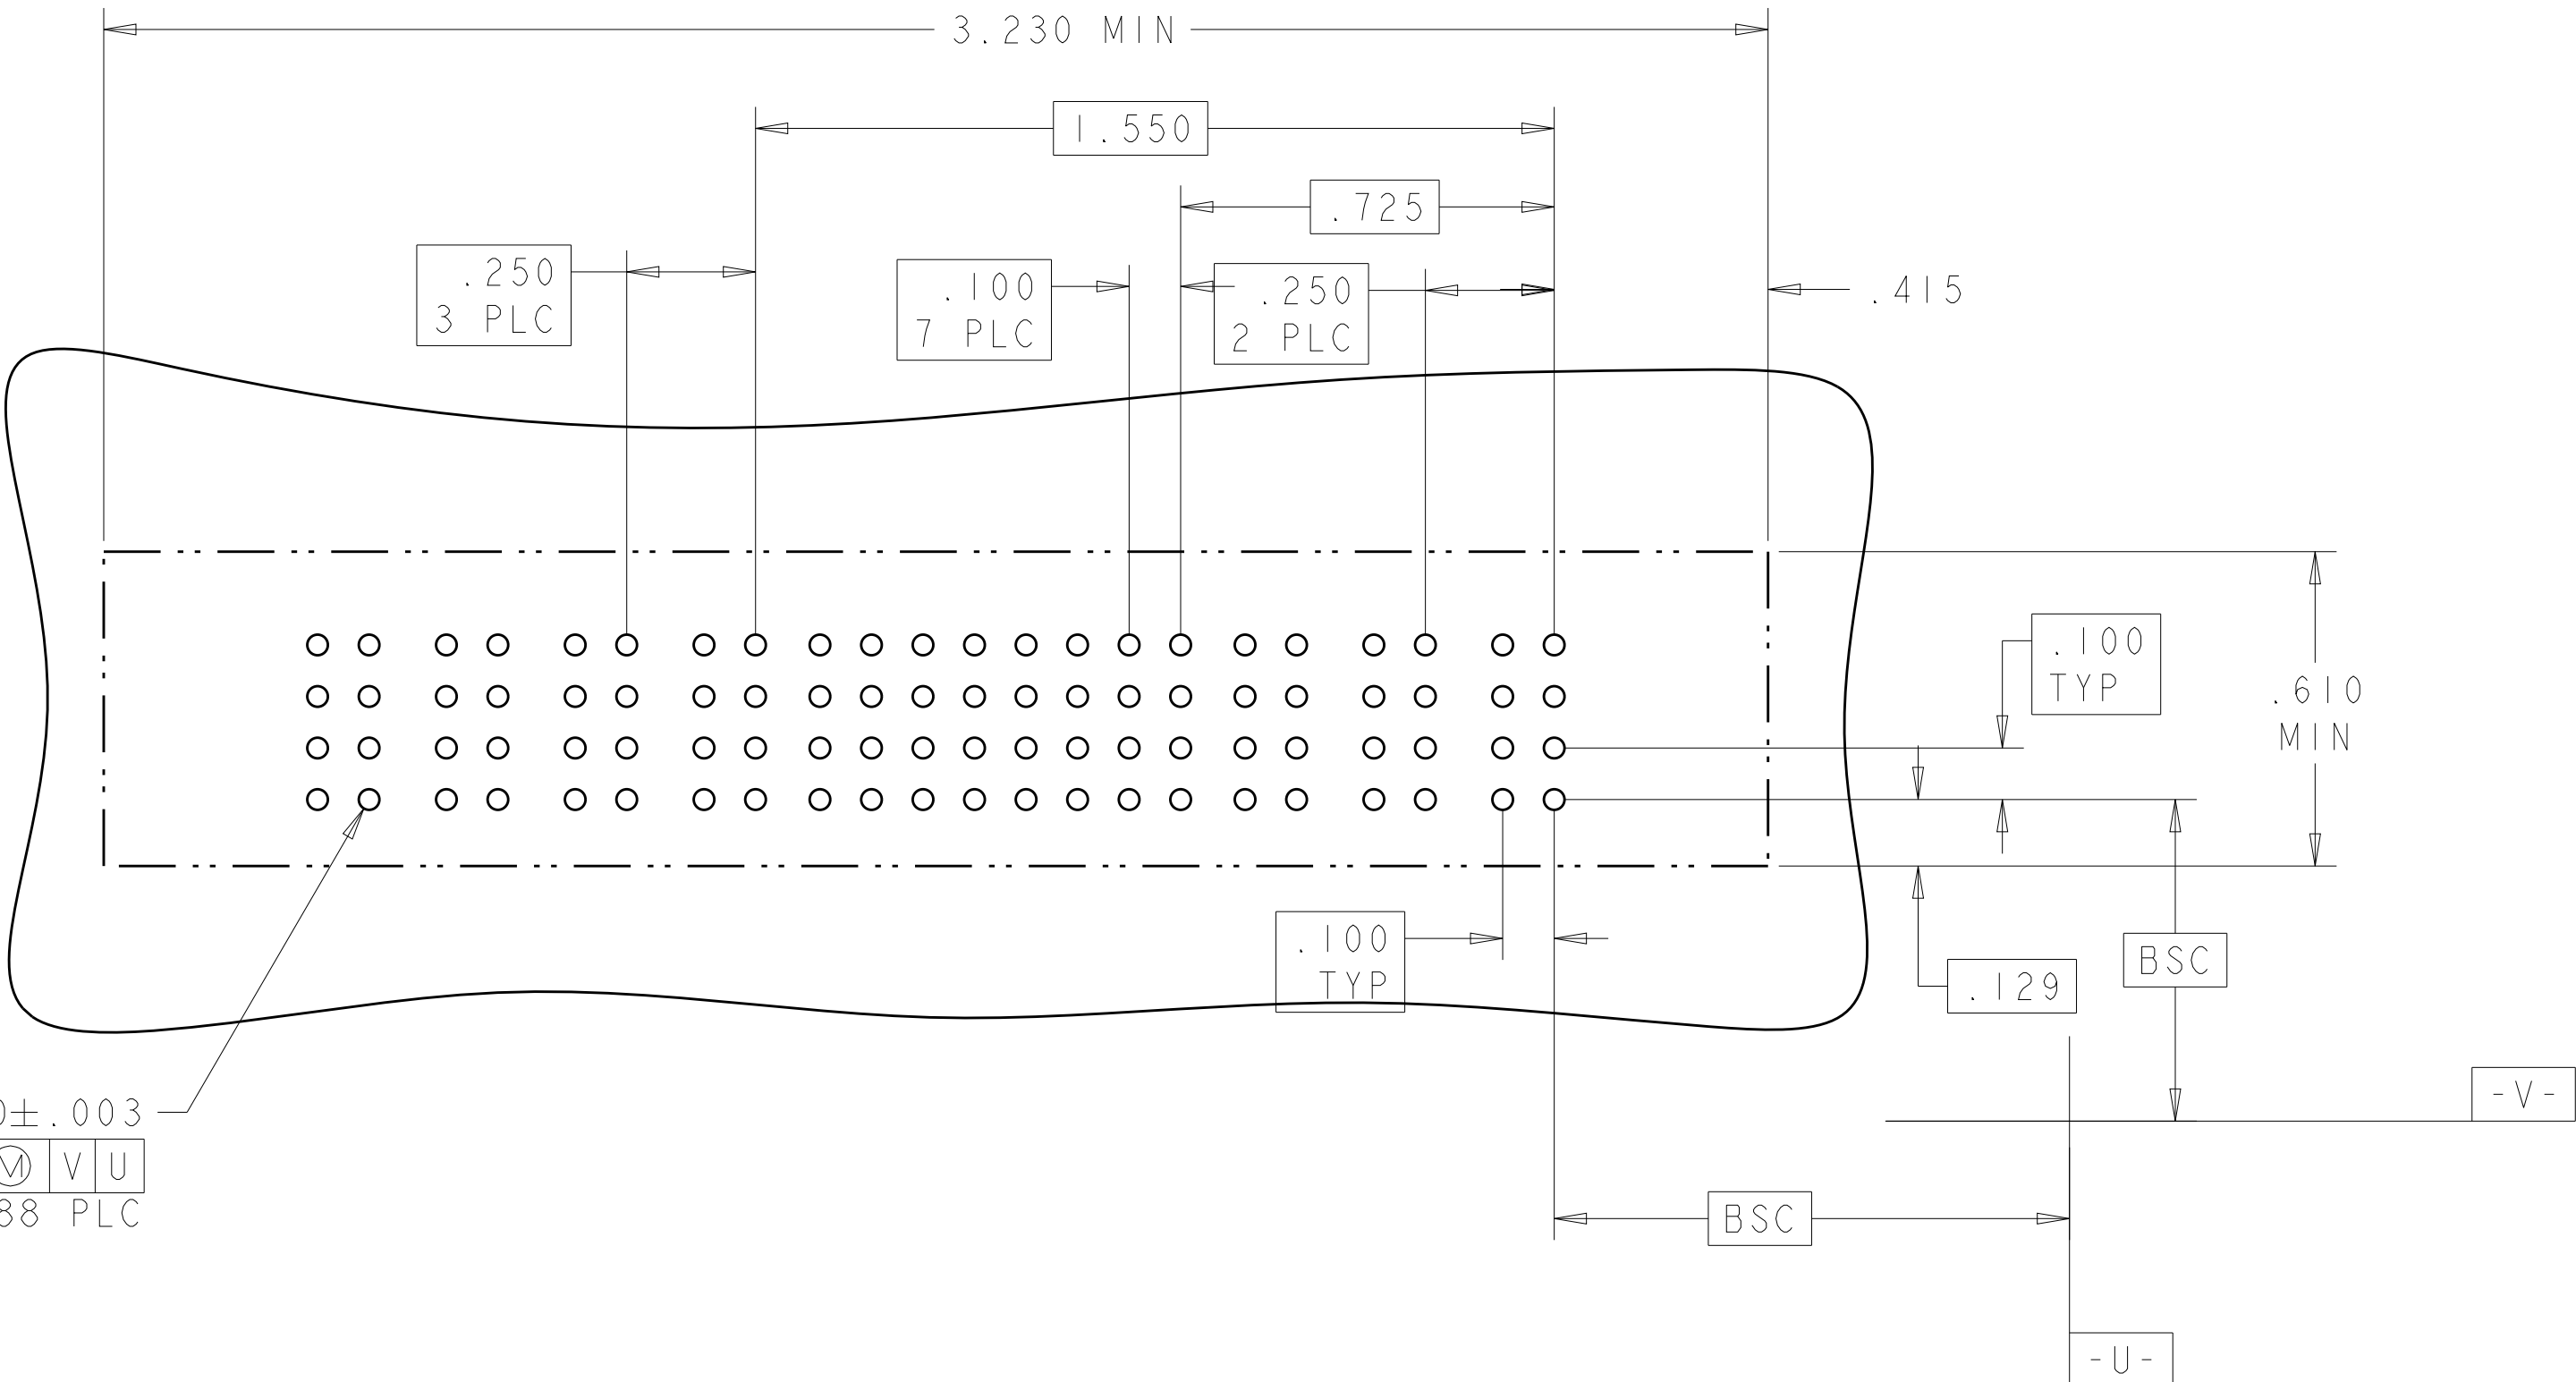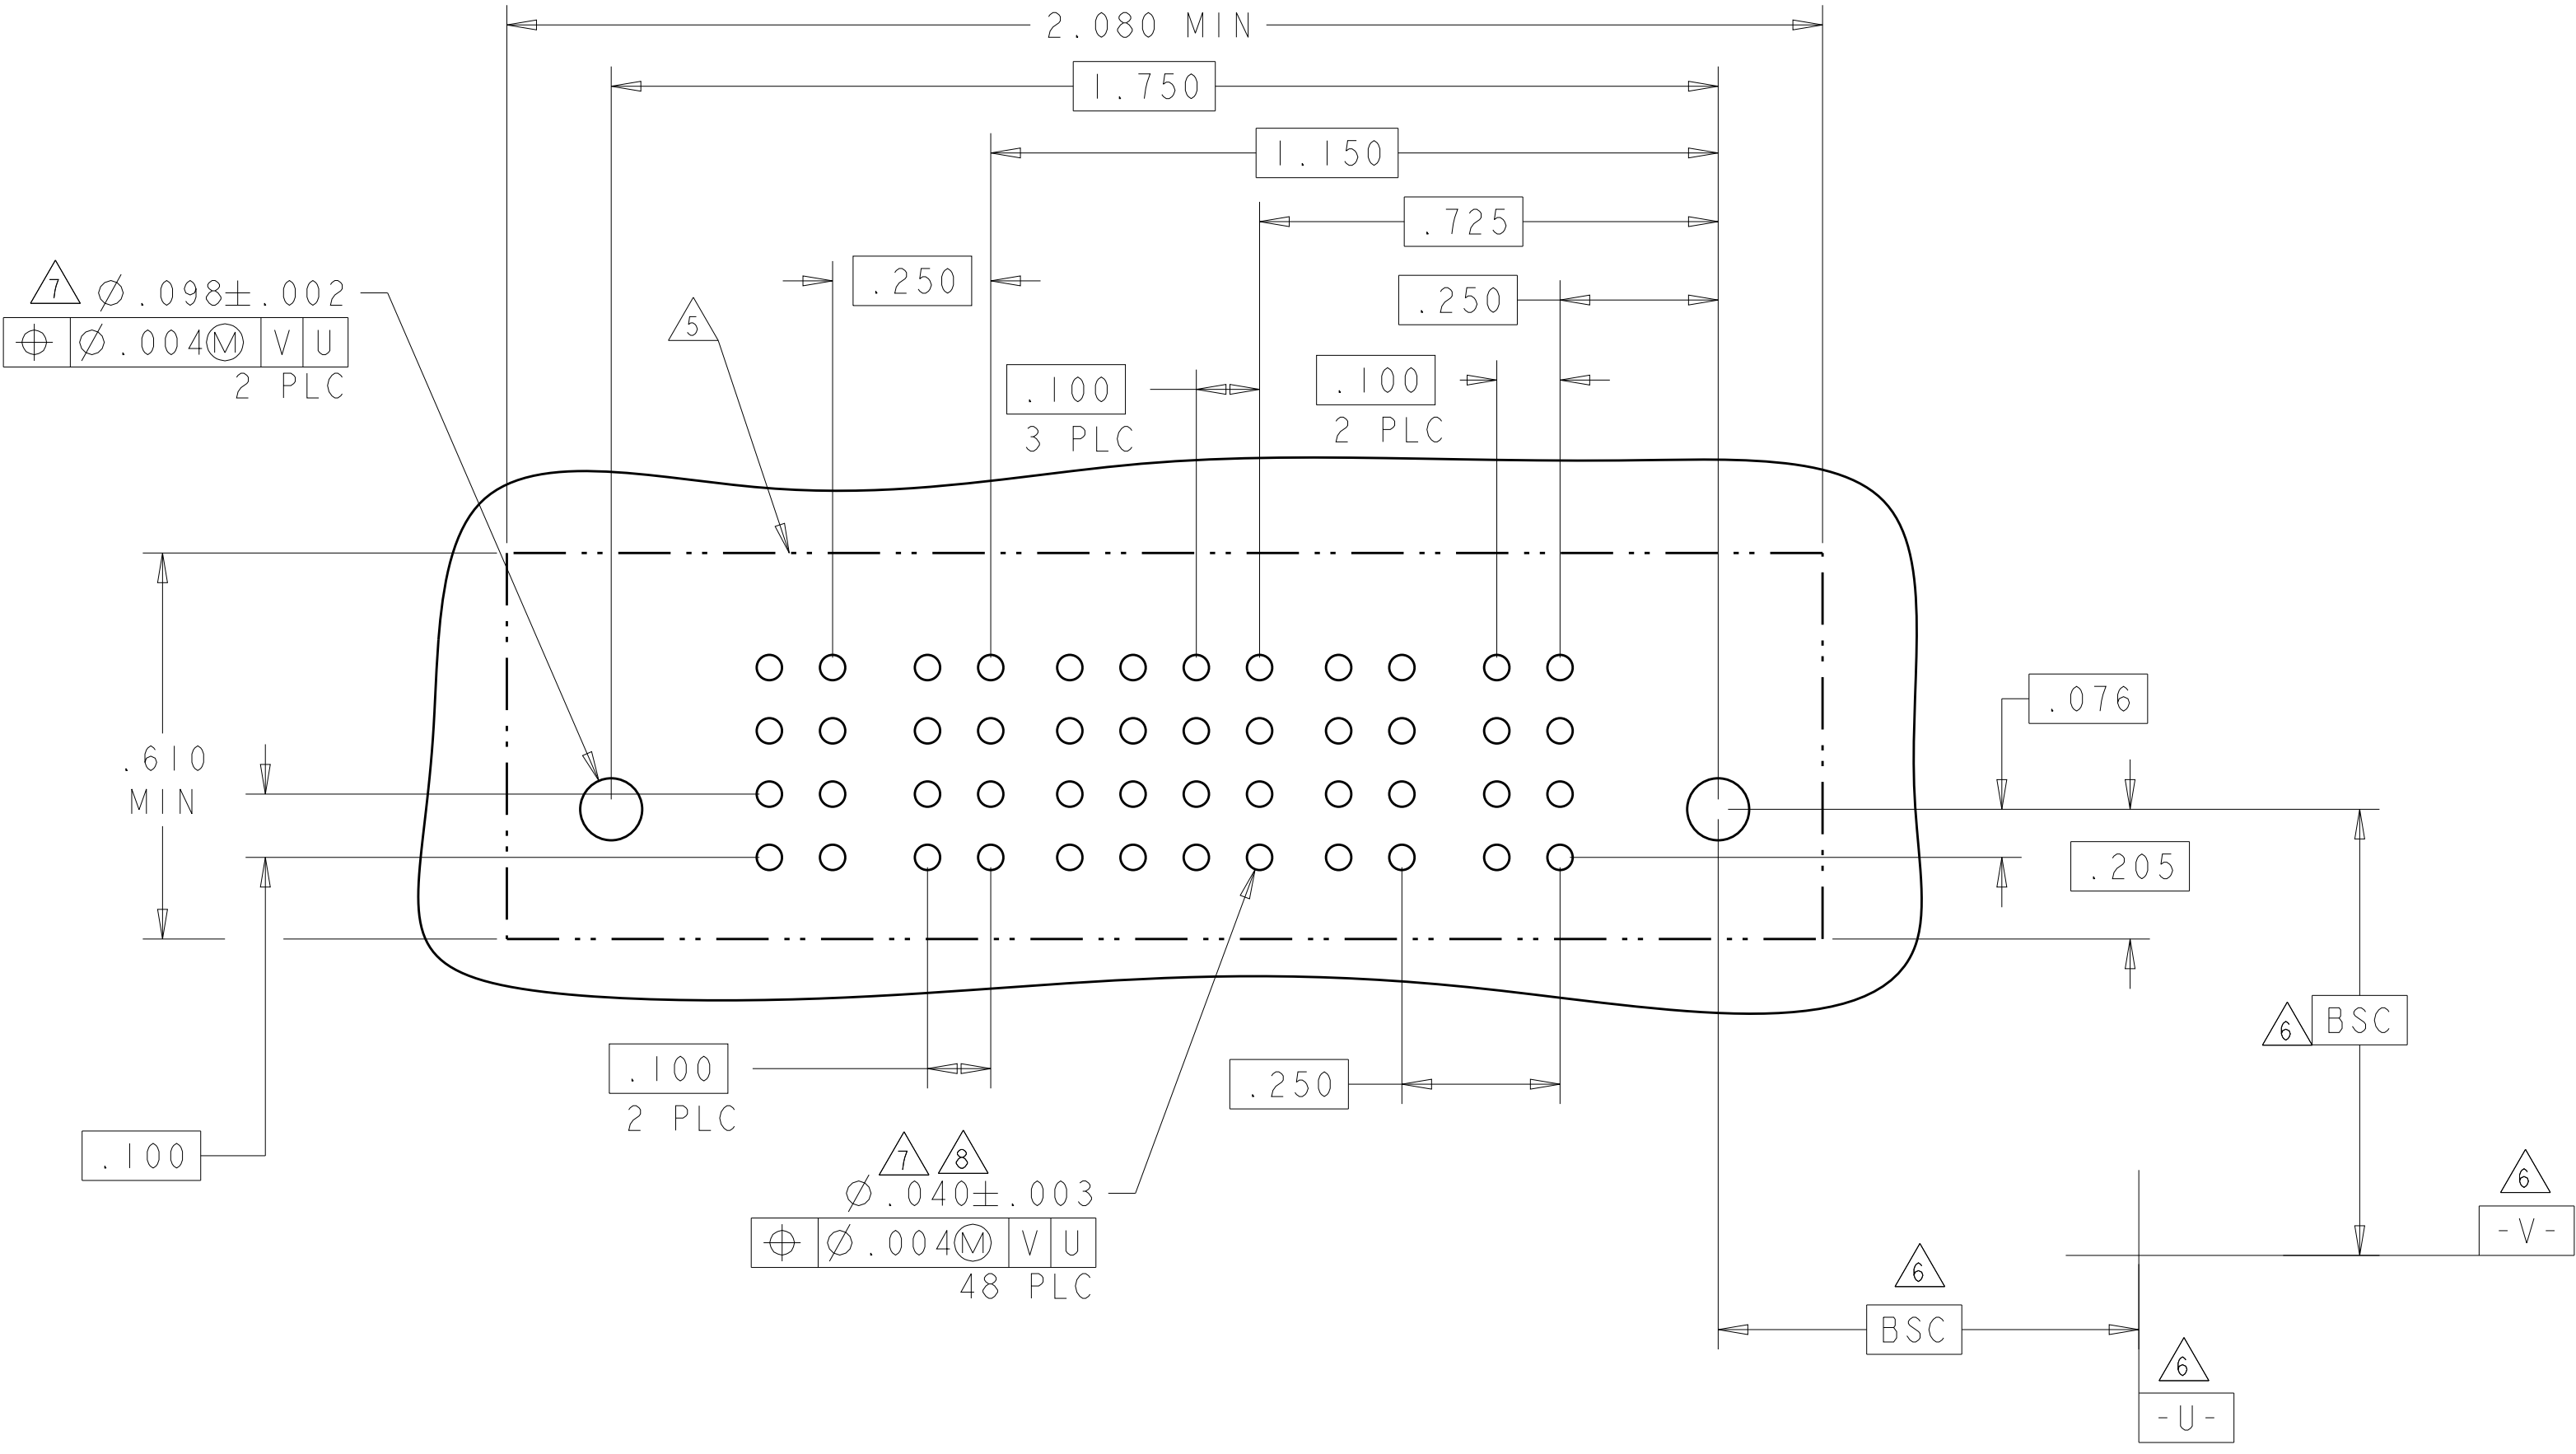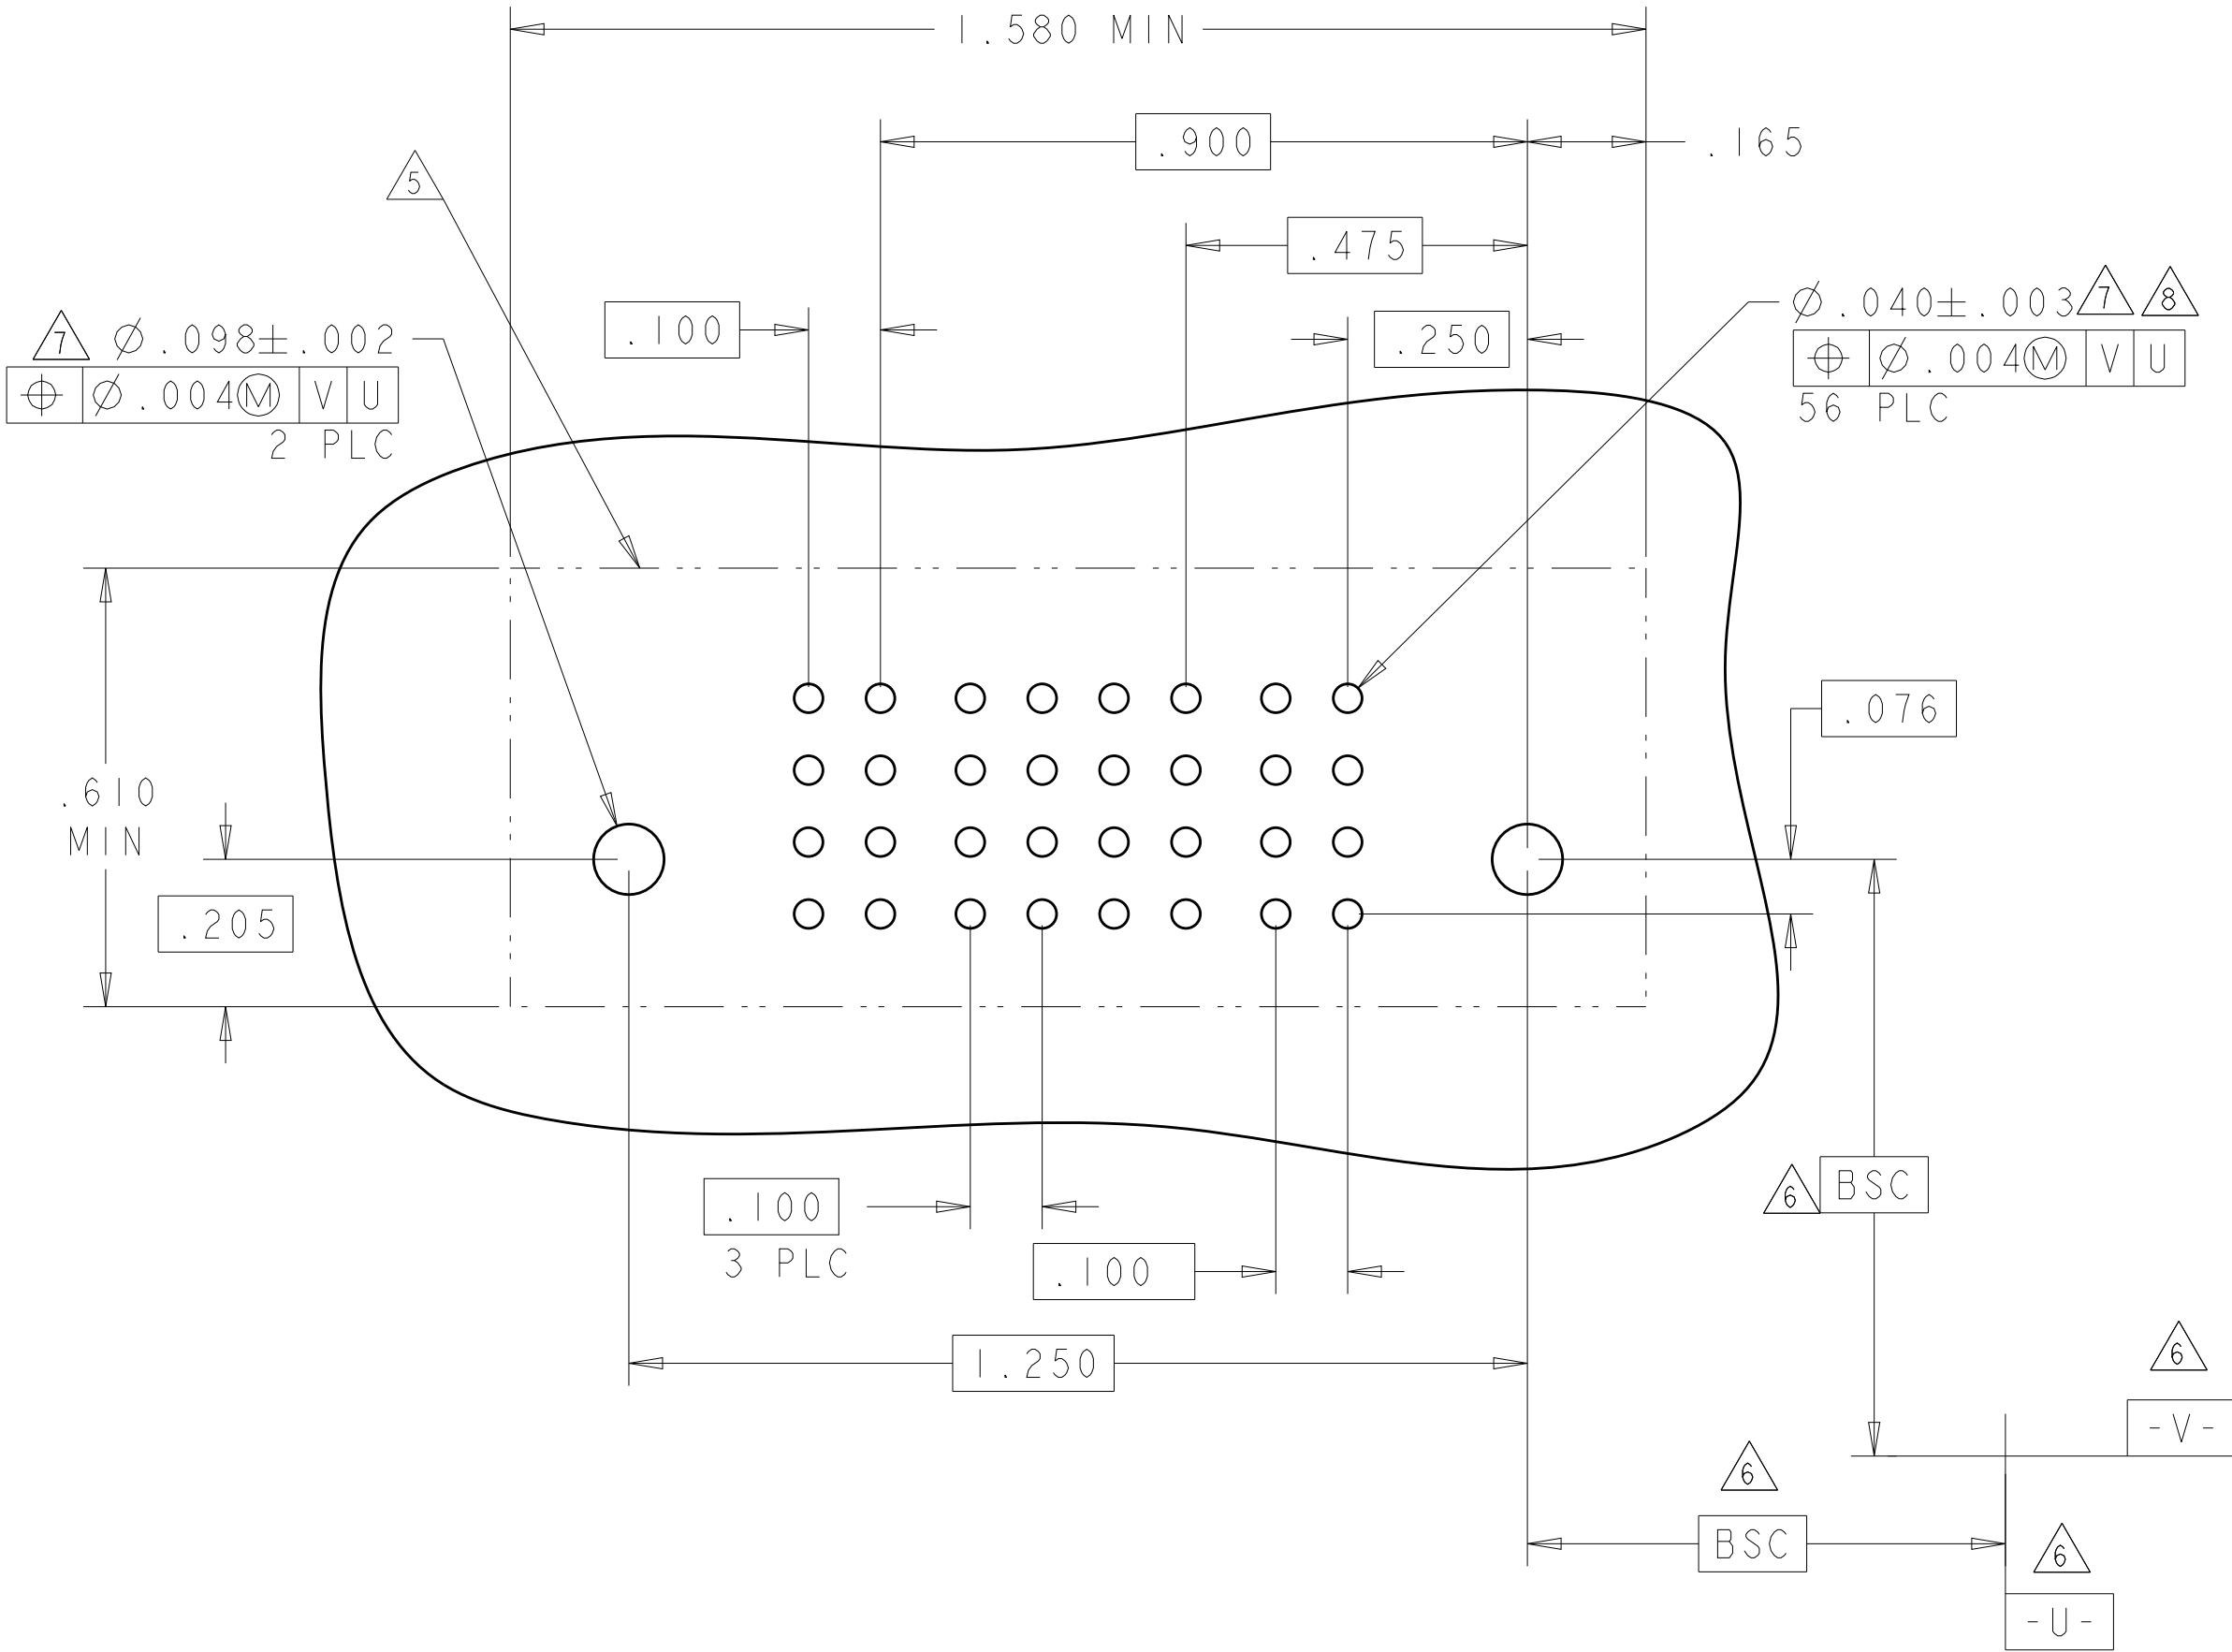

PART NUMBER	ROWS		POWER				SIGNAL								POWER			
			P7	P6	P5	P4	8	7	6	5	4	3	2	1	P3	P2	P1	
1-6450540-1	D C B A						P	P	P	P	P	P	P	P				
							P	P	P	P	P	P	P	P				
							P	P	P	P	P	P	P	P				
							P	P	P	P	P	P	P	P				
3P + 32S + 4P																		

THIS DRAWING IS A CONTROLLED DOCUMENT.

OWN R. GRZYBOWSKI 29APR05
CHK M. PERCHERKE 29APR05
APVD M. PERCHERKE

NAME

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH




PRODUCT SPEC 108-1973
APPLICATION SPEC 114-13038
WEIGHT
CUSTOMER DRAWING


SIZE A1
CAGE CODE 00779
DRAWING NO. 6450540
SCALE 2:1
SHEET 12 OF 19
REV K9


RESTRICTED TO

TE Connectivity


VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

PART NUMBER	ROWS		POWER				SIGNAL						POWER				
			P8	P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1	
5-6450540-3	D C B A					AP	AP	AP	AP	AP	AP						
						AP	AP	AP	AP	AP	AP						
						AP	AP	AP	AP	AP	AP						
						AP	AP	AP	AP	AP	AP						
4P + 24S + 4P																	


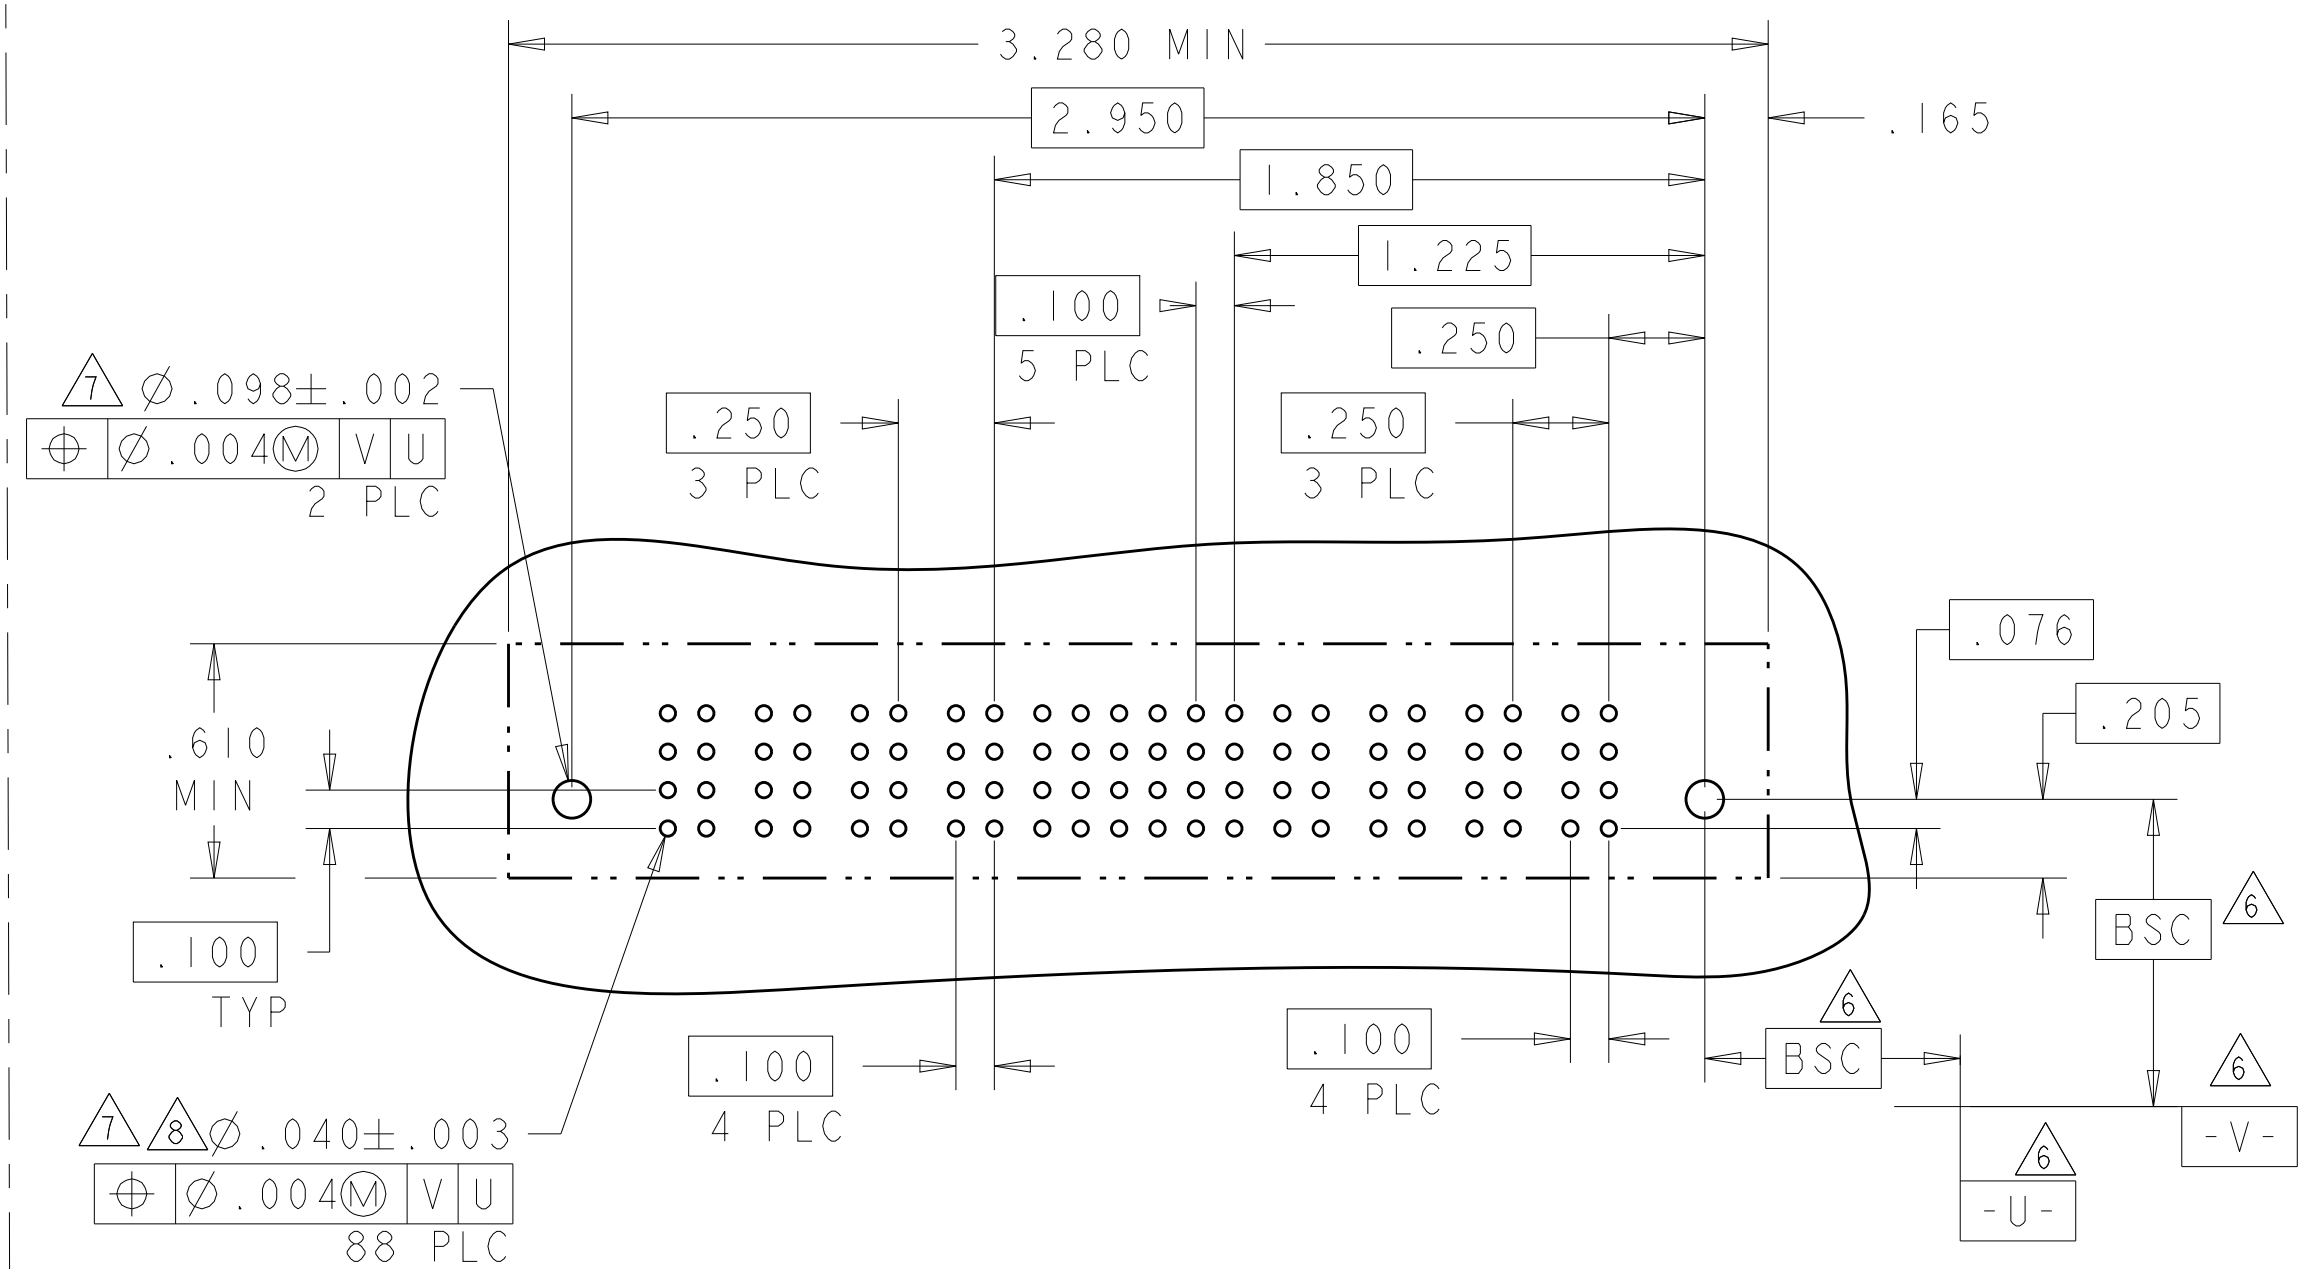


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN : R. GRZYBOWSKI 29APR05		 TE Connectivity	
		CHW : M. PERCHERRE 29APR05			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
INCHES					
		0 P.LC ±.01 1 P.LC ±.01 2 P.LC ±.01 3 P.LC ±.005 4 P.LC ±.0020 ANGLES ±.7°		PRODUCT SPEC 108-1973	
		APPLICATION SPEC 114-13038		SIZE CAGE CODE DRAWING NO RESTRICTED TO A100779 G-6450540 -	
		MATERIAL FINISH WEIGHT -		CUSTOMER DRAWING SCALE 2:1 SHEET 13 OF 19 REV K9	

PART NUMBER	ROWS		POWER			SIGNAL				POWER						
			P7	P6	P5	4	3	2	1	P4	P3	P2	P1			
5-6450540-4	D C B A			VS		VS		VS		VS		VS		VS		
4P + 16S + 3P																

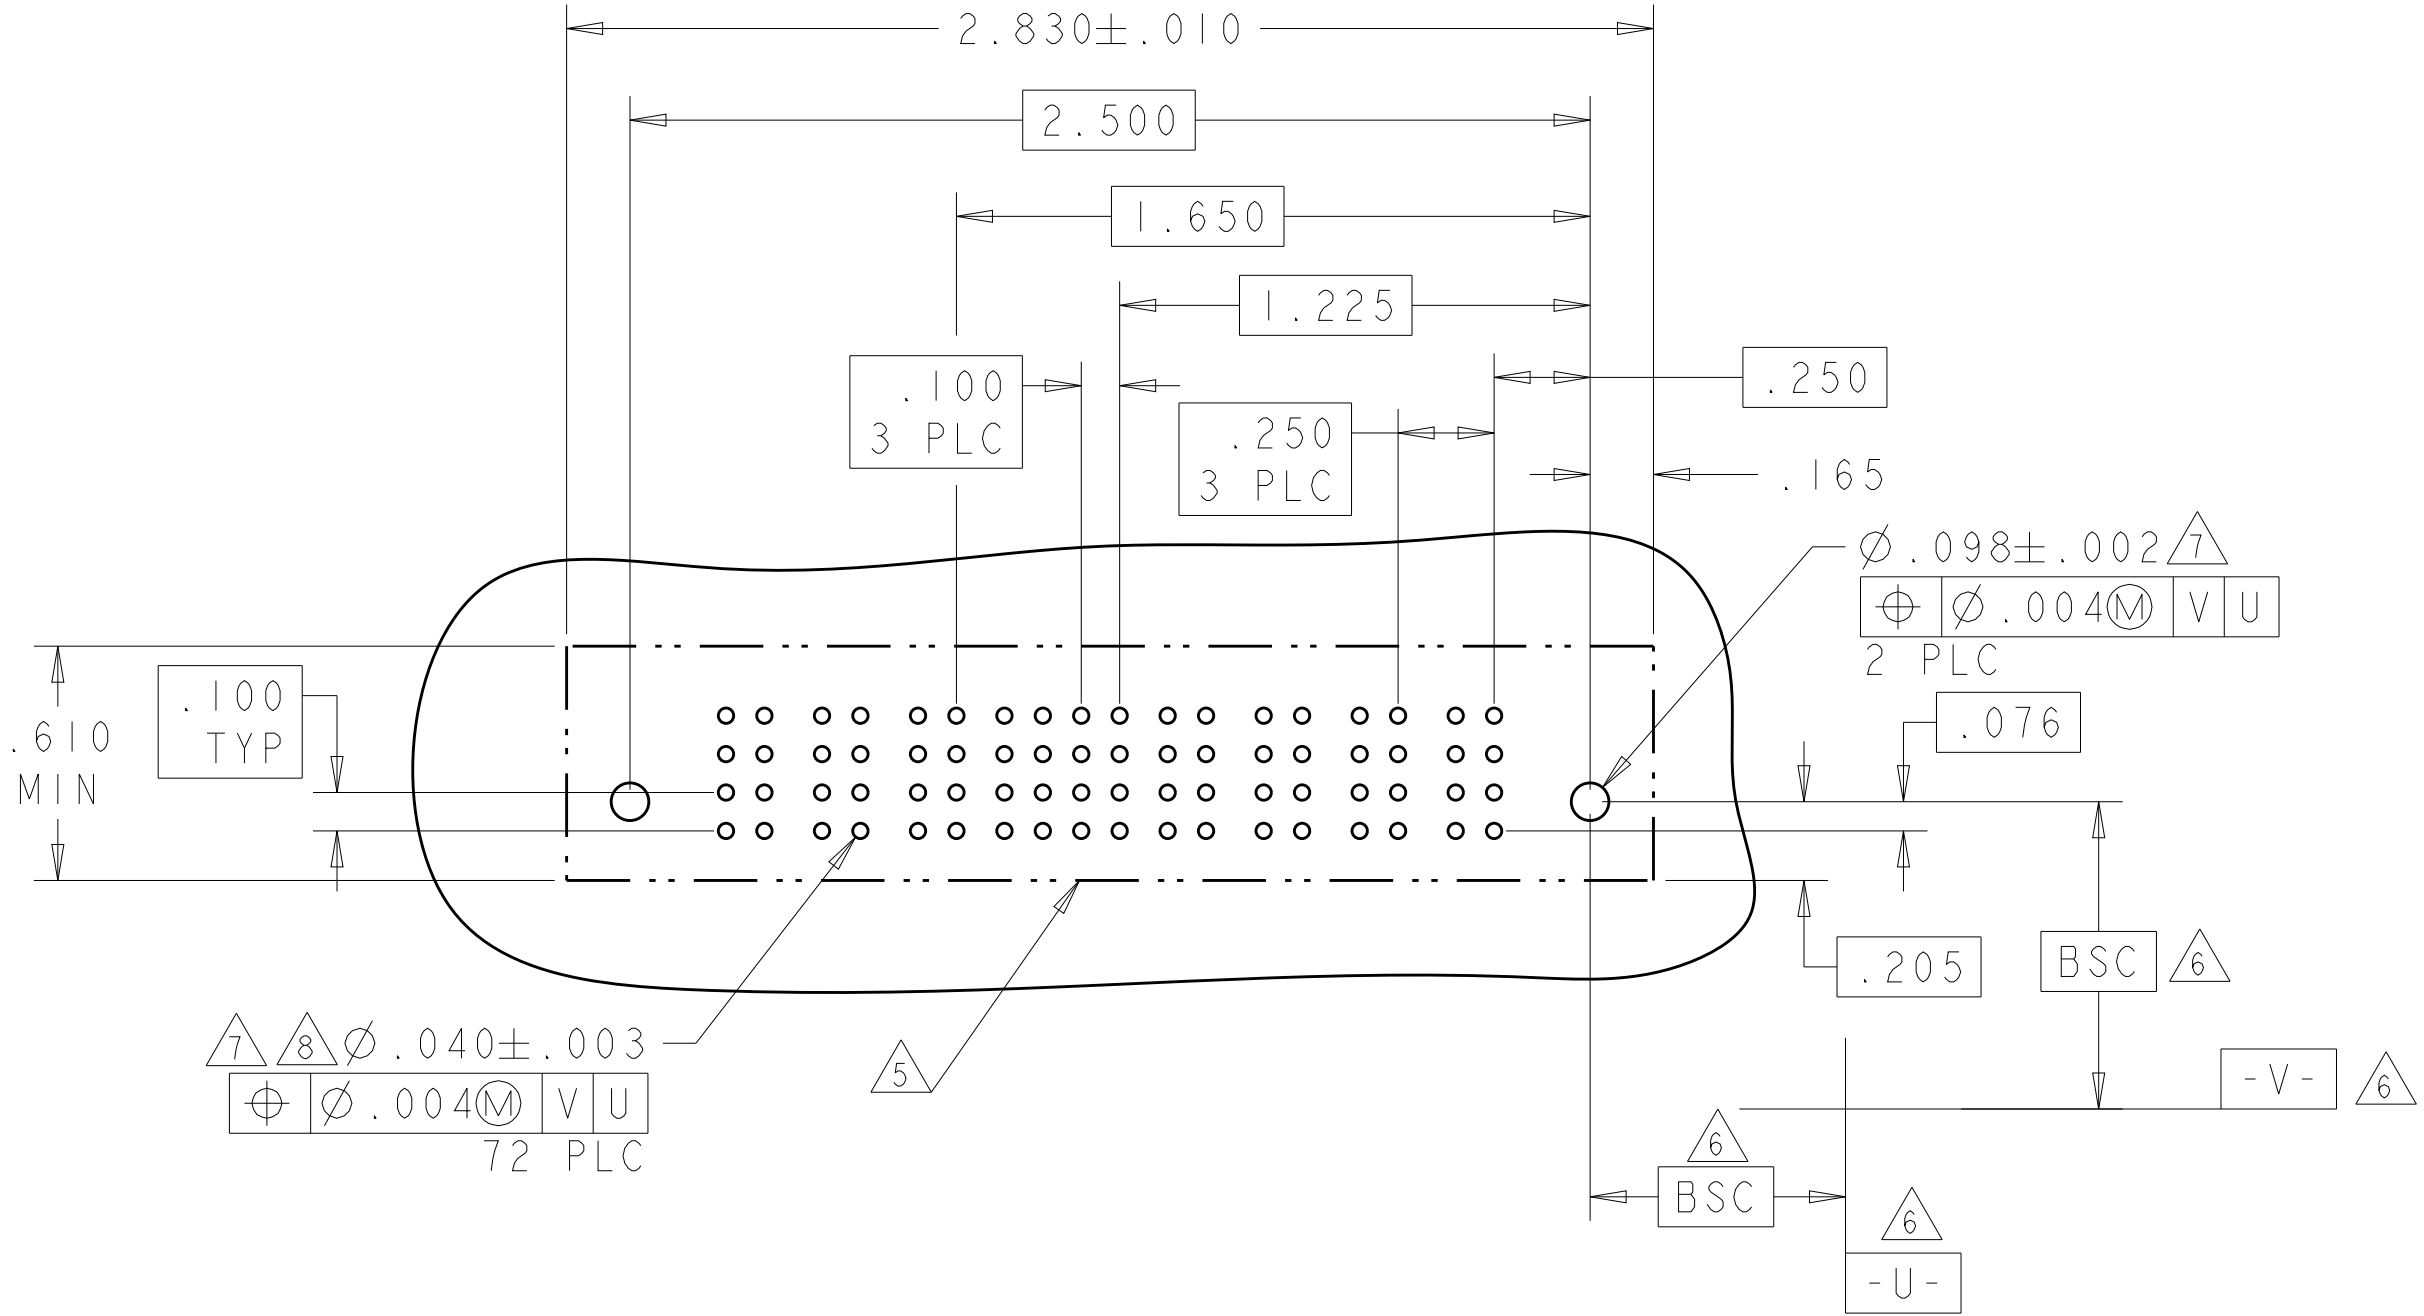

PART NUMBER	ROWS		POWER			SIGNAL		POWER			
			P6	P5	P4	2	1	P3	P2	P1	
5-6450540-5	D C B A	HD				AP	AP				HD
						AP	AP				
						AP	AP				
						AP	AP				
3P + 8S + 3P											

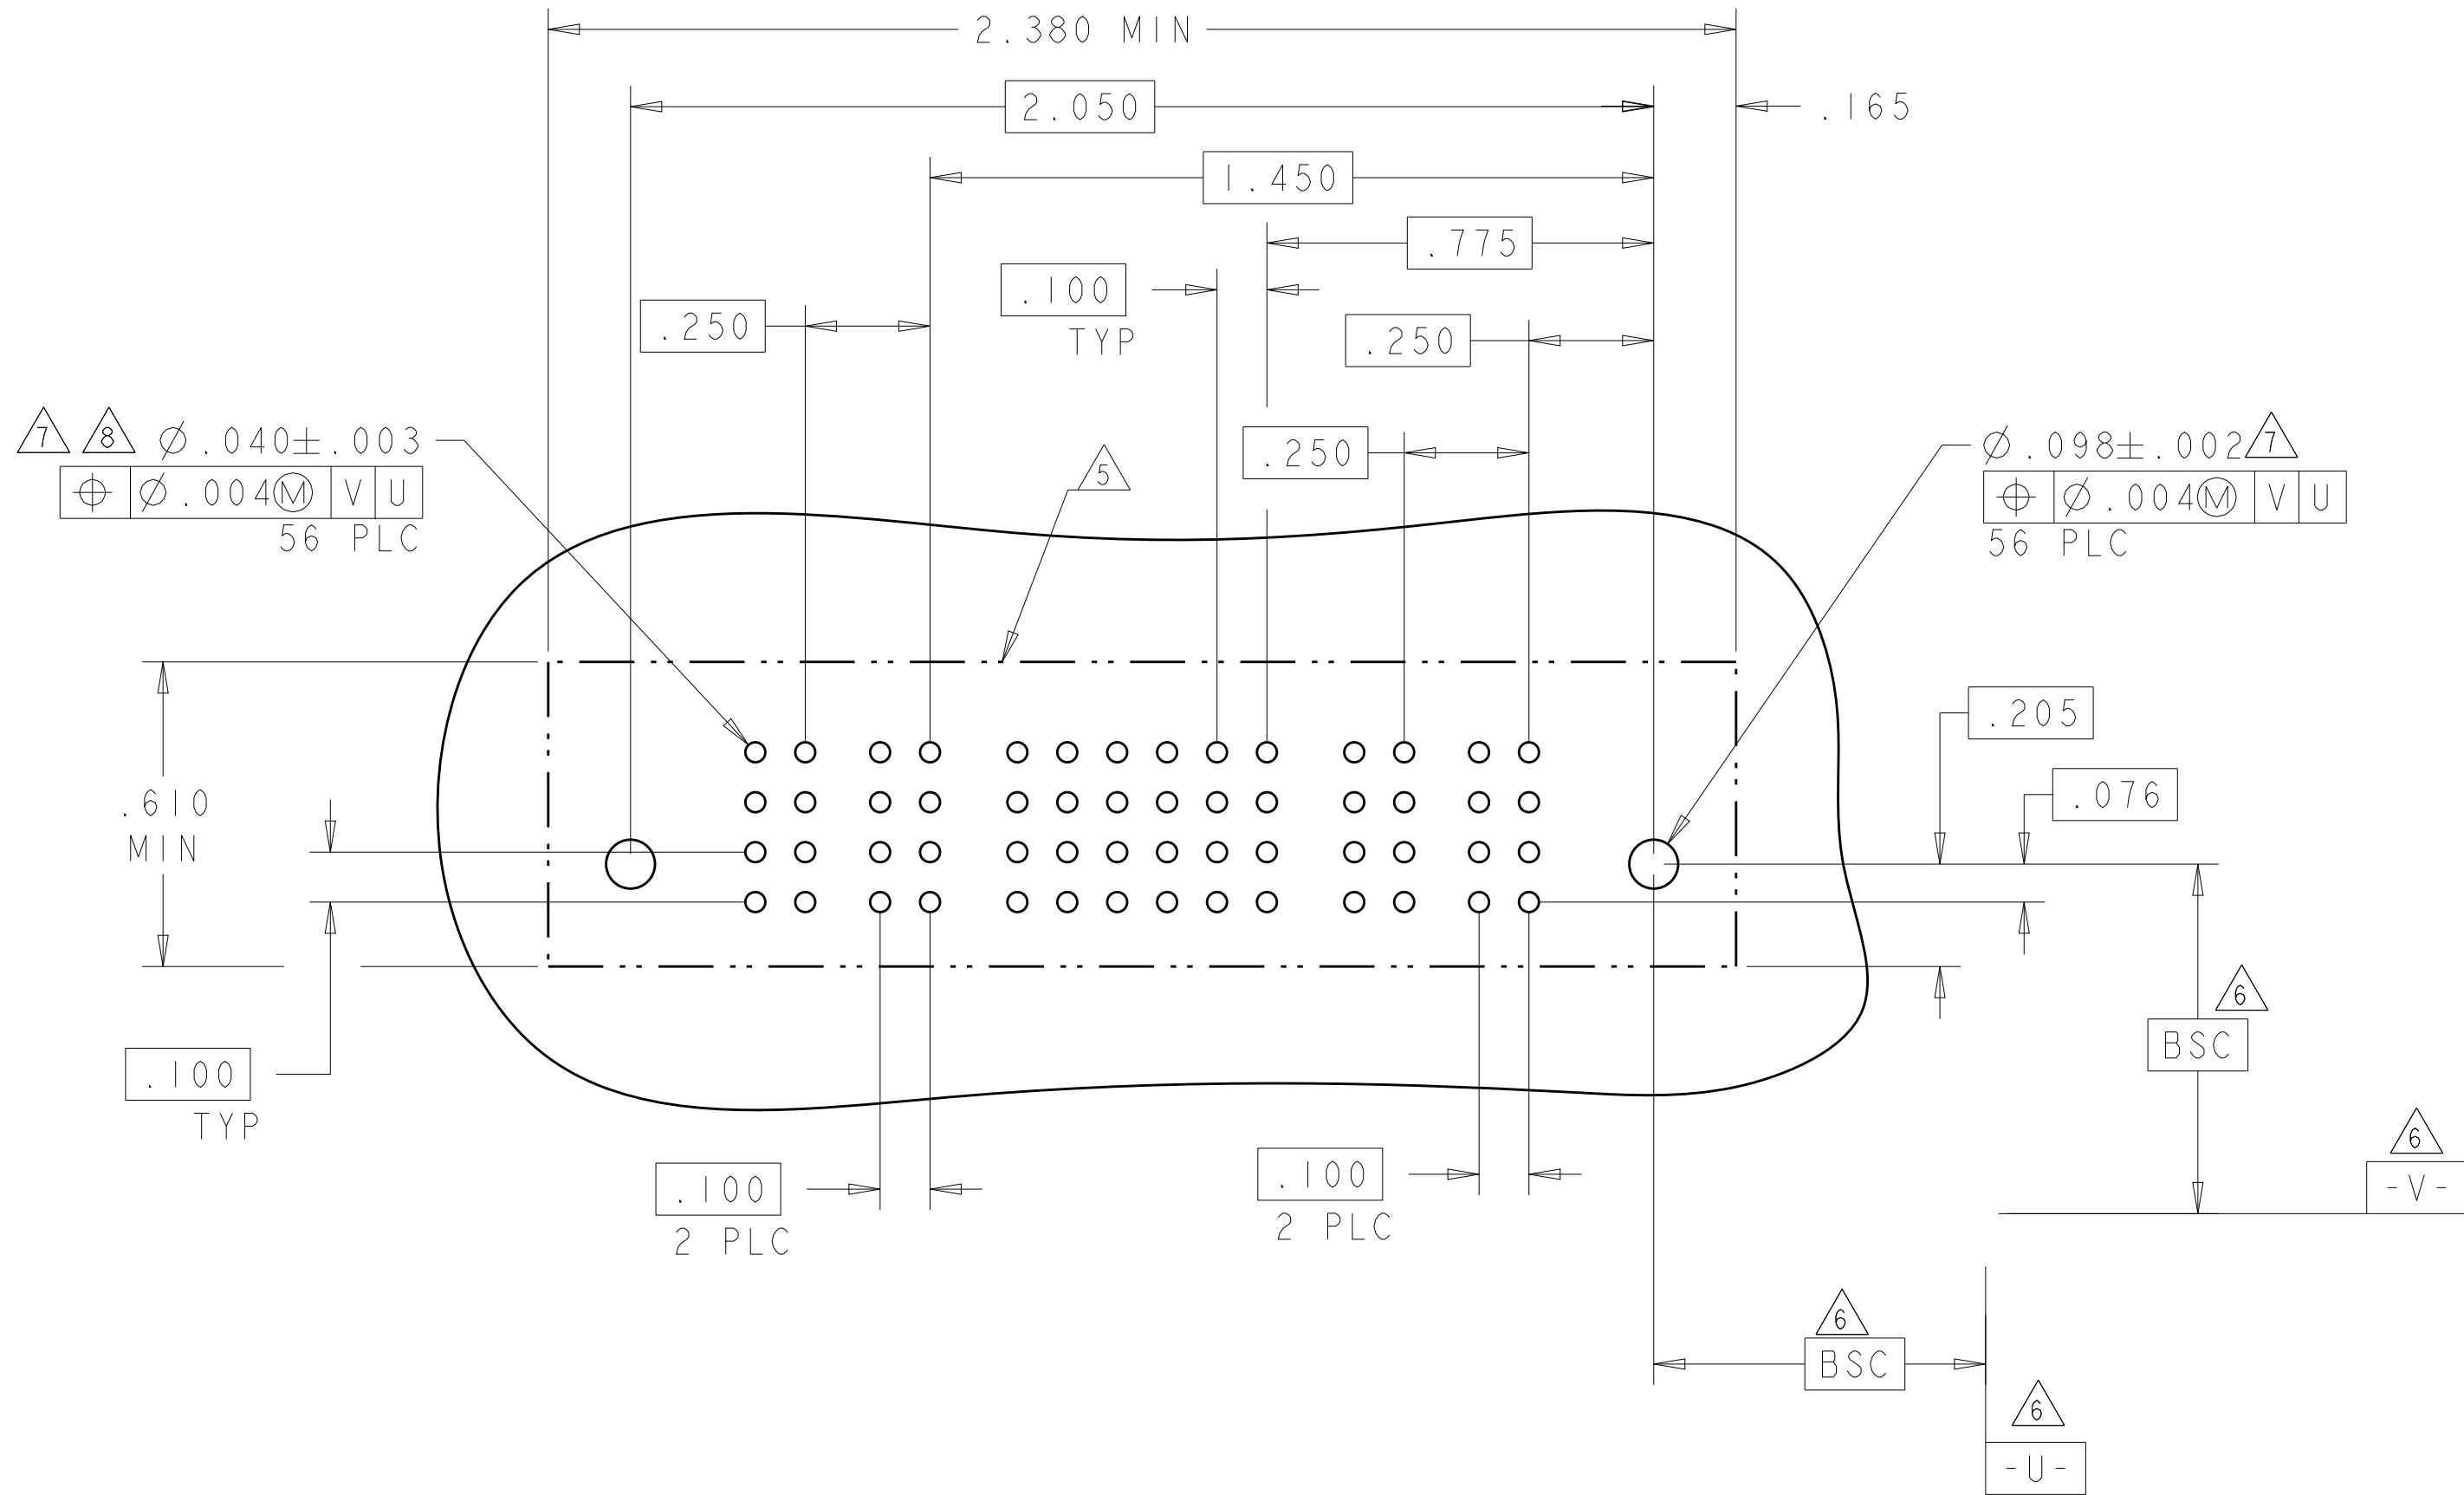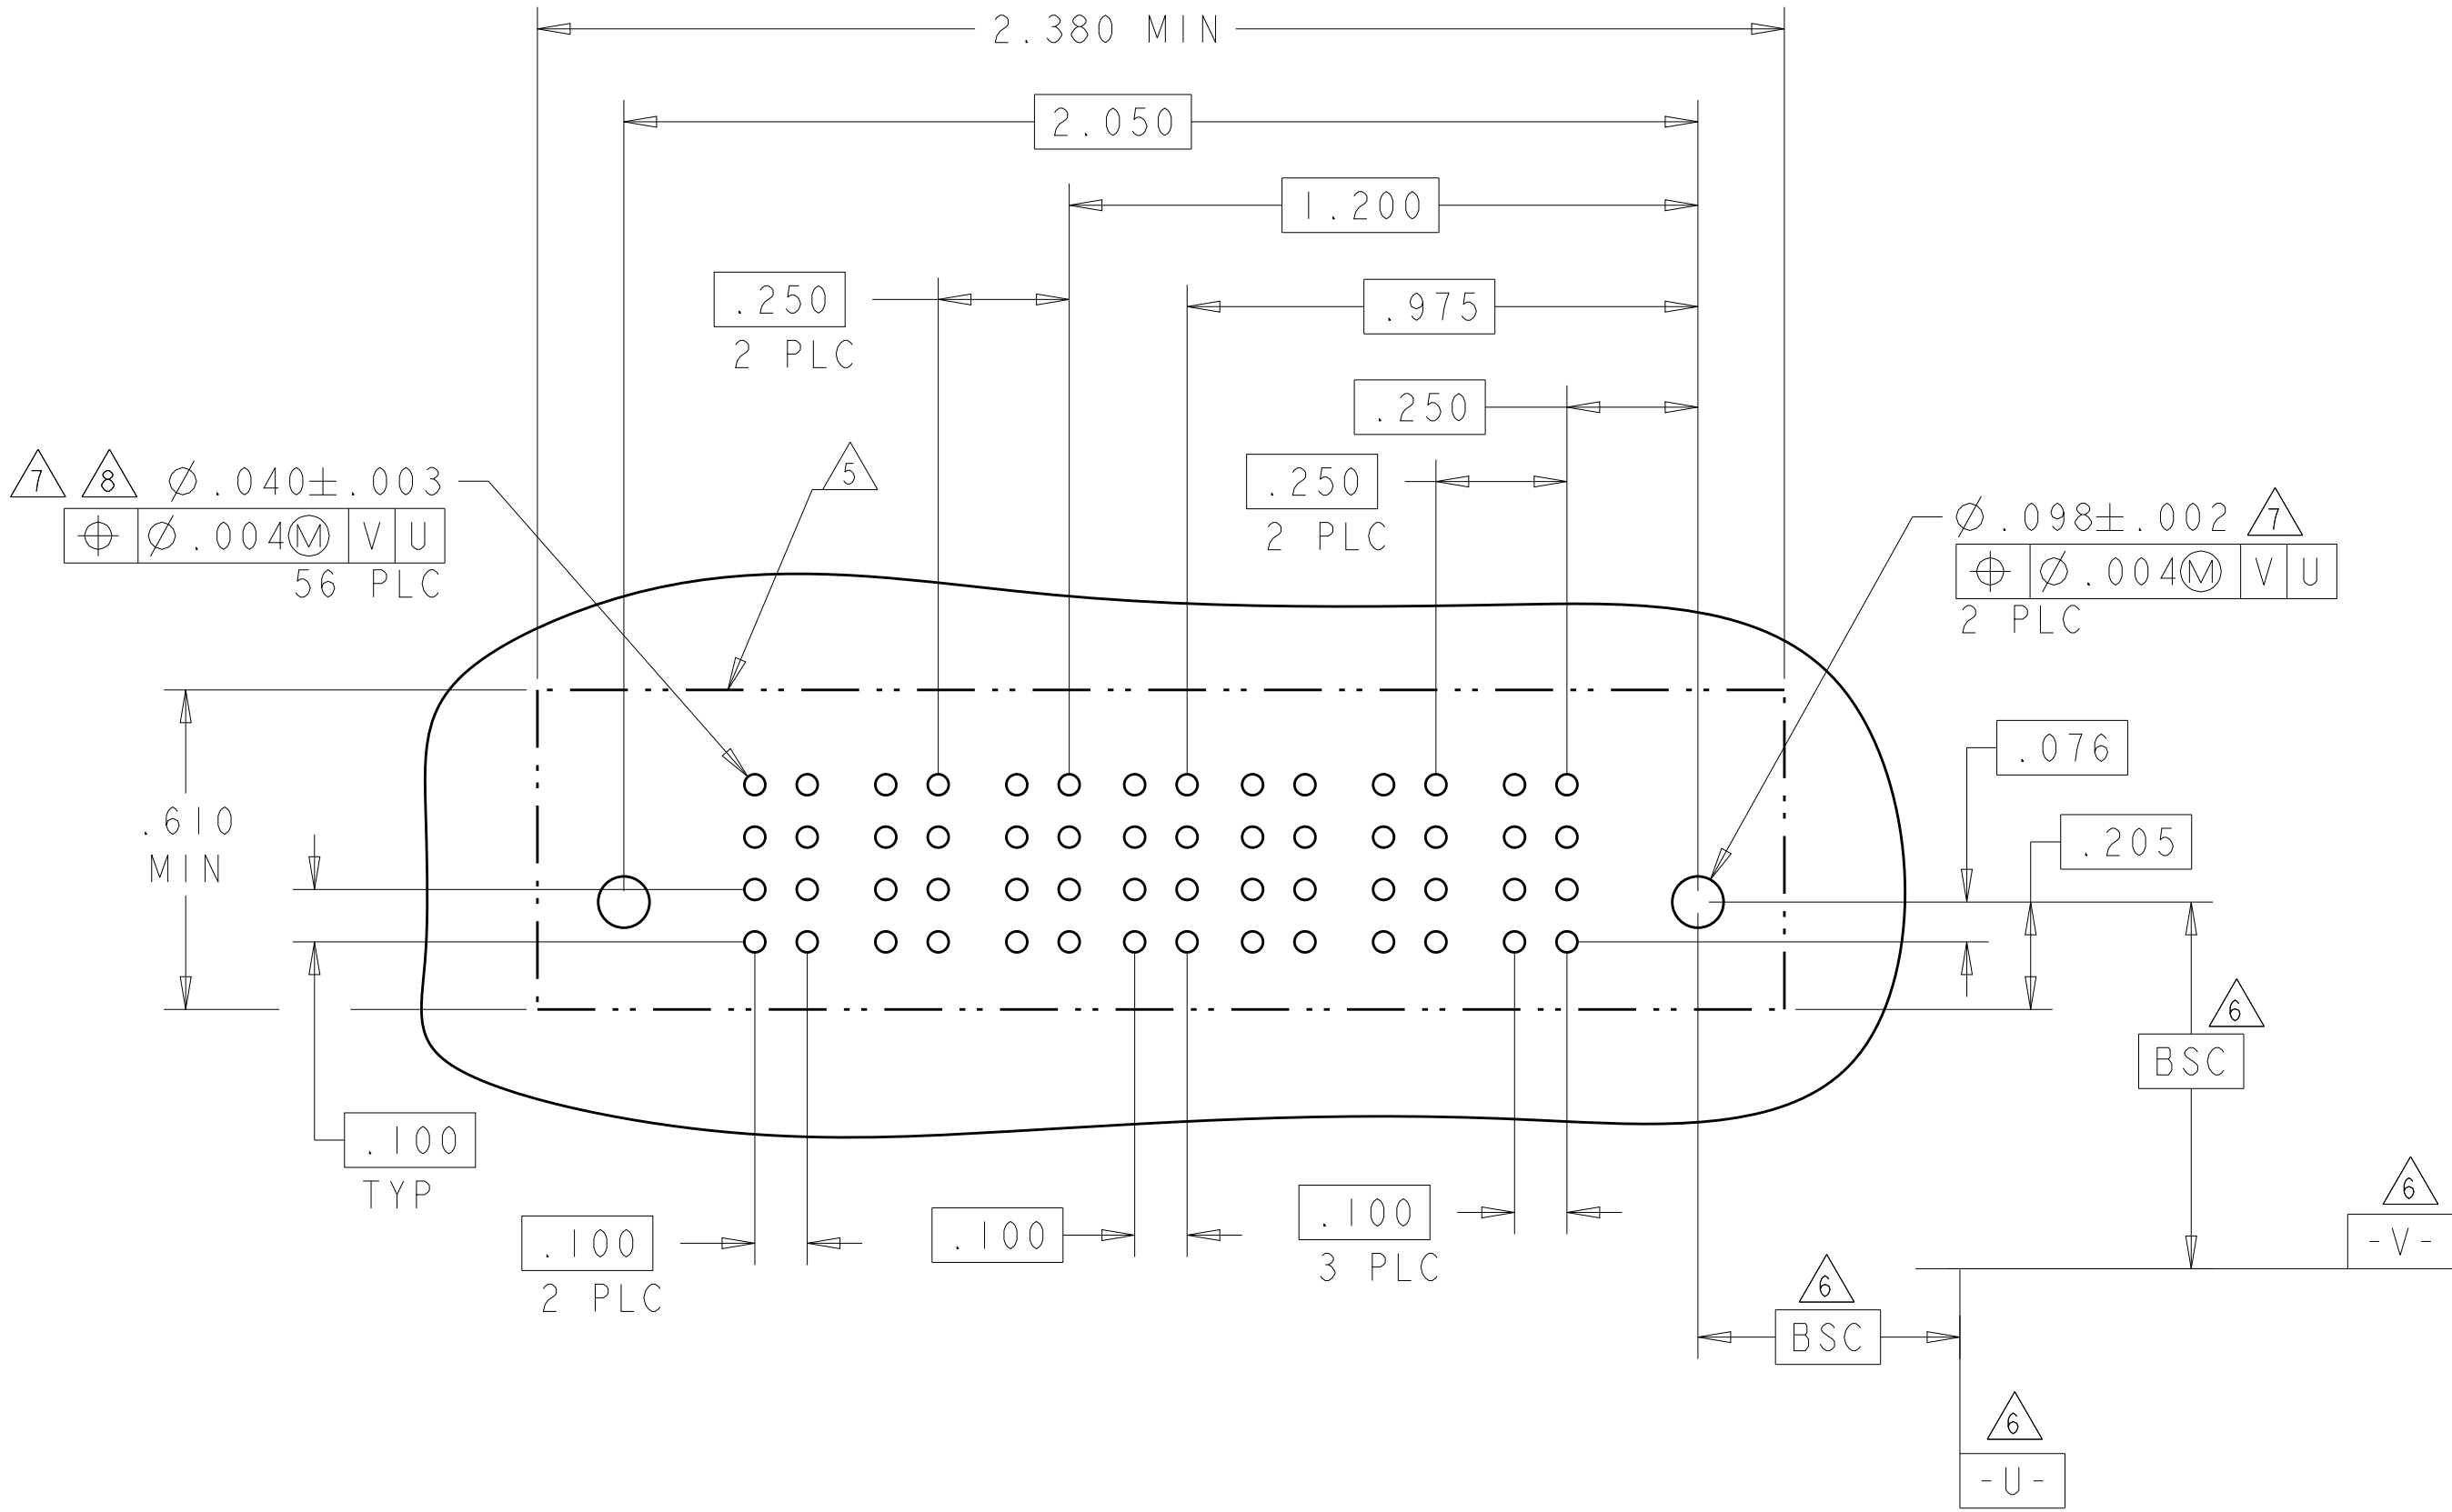


PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P4	P3	6	5	4	3	2	1	P2	P1	
5-6450540-9	D C B A	HD			AP	AP	AP	AP	AP	AP	AP		
					AP	AP	AP	AP	AP	AP			
					AP	AP	AP	AP	AP	AP			
					AP	AP	AP	AP	AP	AP			
2P + 24S + 2P													

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET I	-	-	-


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI CHK M. PERCHERKE APVD M. PERCHERKE	29APR05 29APR05	NAME	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	
		0 PLC ±.01		108-1973	
		1 PLC ±.01		APPLICATION SPEC	
MATERIAL		FINISH		WEIGHT	
				114-13038	
				CUSTOMER DRAWING	
				SCALE 2:1	
				SHEET 14 OF 19	
				REV K9	


Ⓚ

4805 (3/11)

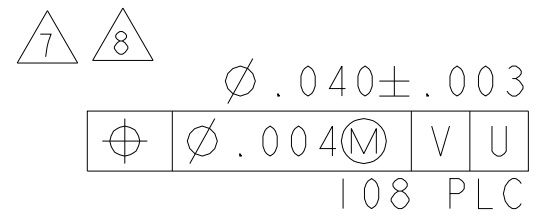
-NO SIGNAL CONTACTS4805 (3/11)


PART NUMBER	ROWS		POWER		SIGNAL					POWER																								
			P2	5	4	3	2	1	P1																									
6-6450540-2	D C B A	 	<table><tr><td rowspan="4">GP</td><td></td><td>AP</td><td>AP</td><td>AP</td><td></td><td rowspan="4">GP</td></tr><tr><td></td><td>AP</td><td>AP</td><td>AP</td><td></td></tr><tr><td></td><td>AP</td><td>AP</td><td>AP</td><td></td></tr><tr><td></td><td>AP</td><td>AP</td><td>AP</td><td></td></tr></table>									GP		AP	AP	AP		GP		AP	AP	AP			AP	AP	AP			AP	AP	AP		 
GP		AP	AP	AP		GP																												
		AP	AP	AP																														
		AP	AP	AP																														
		AP	AP	AP																														
IP + 20S + IP																																		

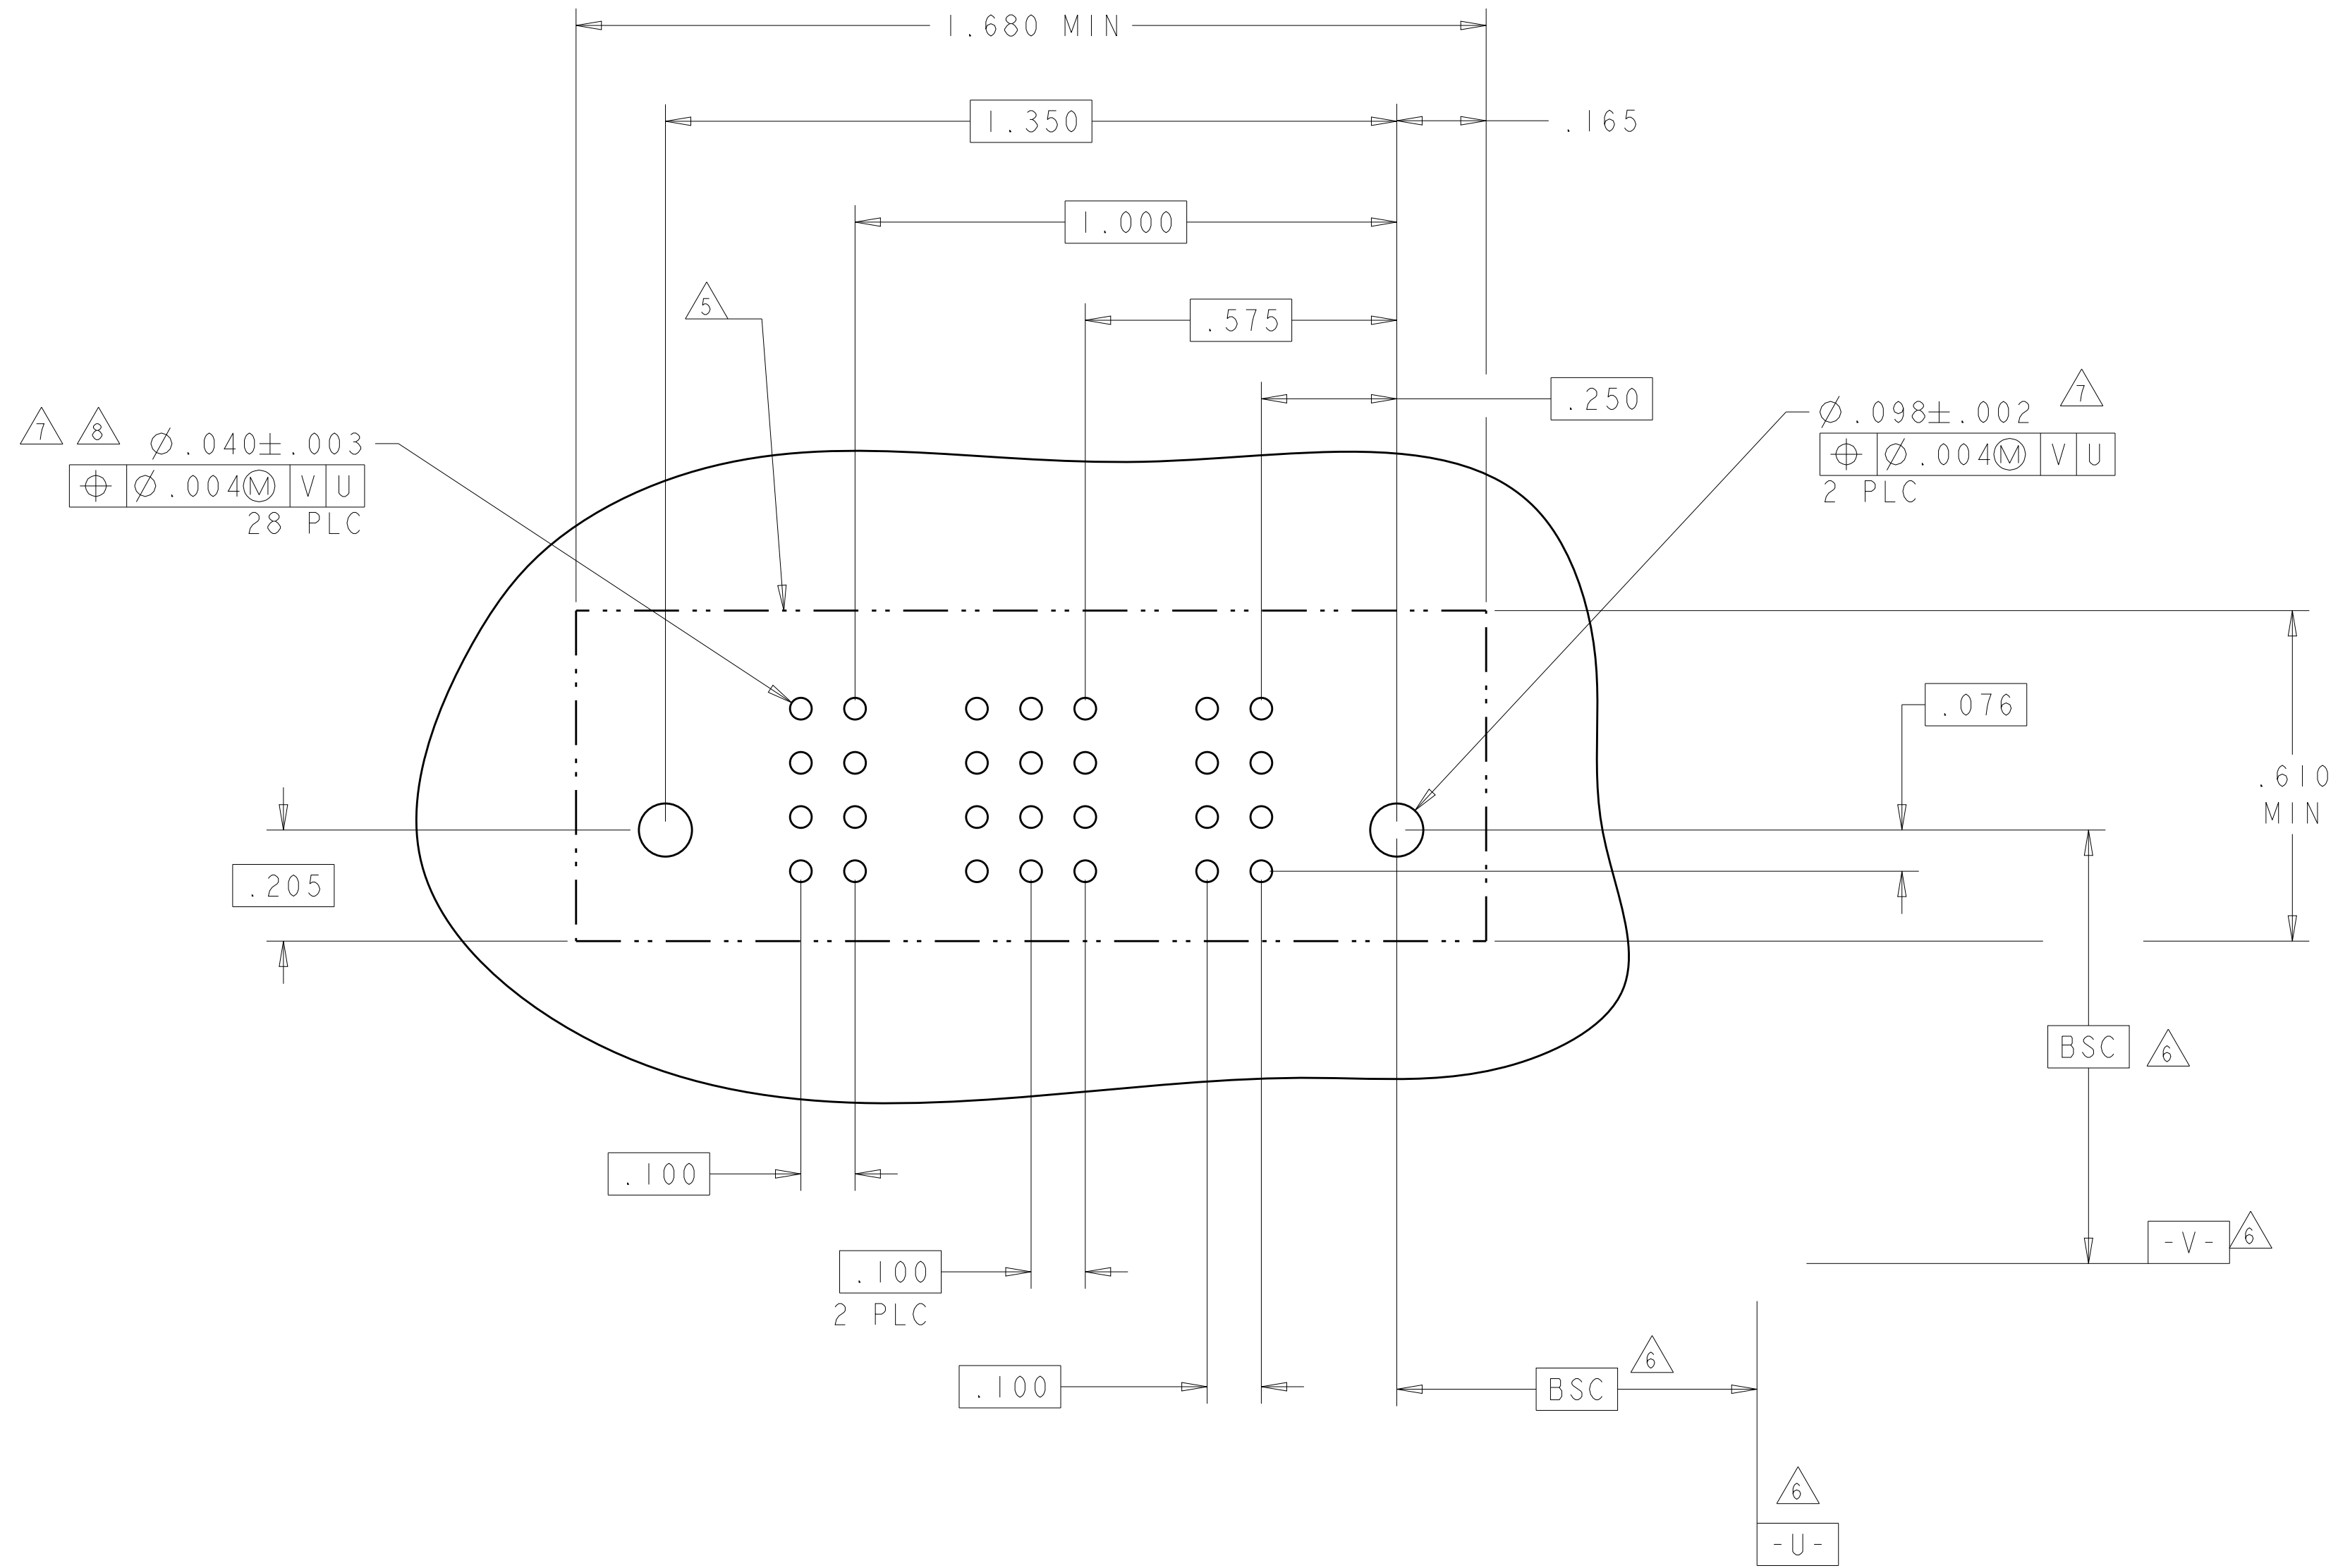


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN GRZYBOWSKI 29APR05		 TE Connectivity	
DIMENSIONS:		CWH M. PERCHERKE 29APR05		NAME VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. PERCHERKE -			
INCHES		PRODUCT SPEC			
		108-1973 APPLICATION SPEC 114-13038			
0 PLC ±. 1 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 <i>7</i> ANGLES		SIZE CAGE CODE DRAWING NO		RESTRICTED TO	
MATERIAL		WEIGHT -		A1 00779 C=6450540 -	
FINISH		CUSTOMER DRAWING		SCALE 2:1 SHEET 17 of 19 REV K9	

PART NUMBER	ROWS		POWER									SIGNAL								POWER									
			P16	P15	P14	P13	P12	P11	P10	P9	8	7	6	5	4	3	2	1	P8	P7	P6	P5	P4	P3	P2	P1			
4-6450540-9	D		GS	GS	GS	GS	GS	GS	GS	GS	AP	AP	AP	AP	AP	AP	AP	GS	GS	GS	GS	GS	GS	GS	GS				
	C										AP	AP	AP	AP	AP	AP	AP										AP		
	B										AP	AP	AP	AP	AP	AP	AP										AP	AP	AP
	A										AP	AP	AP	AP	AP	AP	AP										AP	AP	AP
8P + 32S + 8P																													

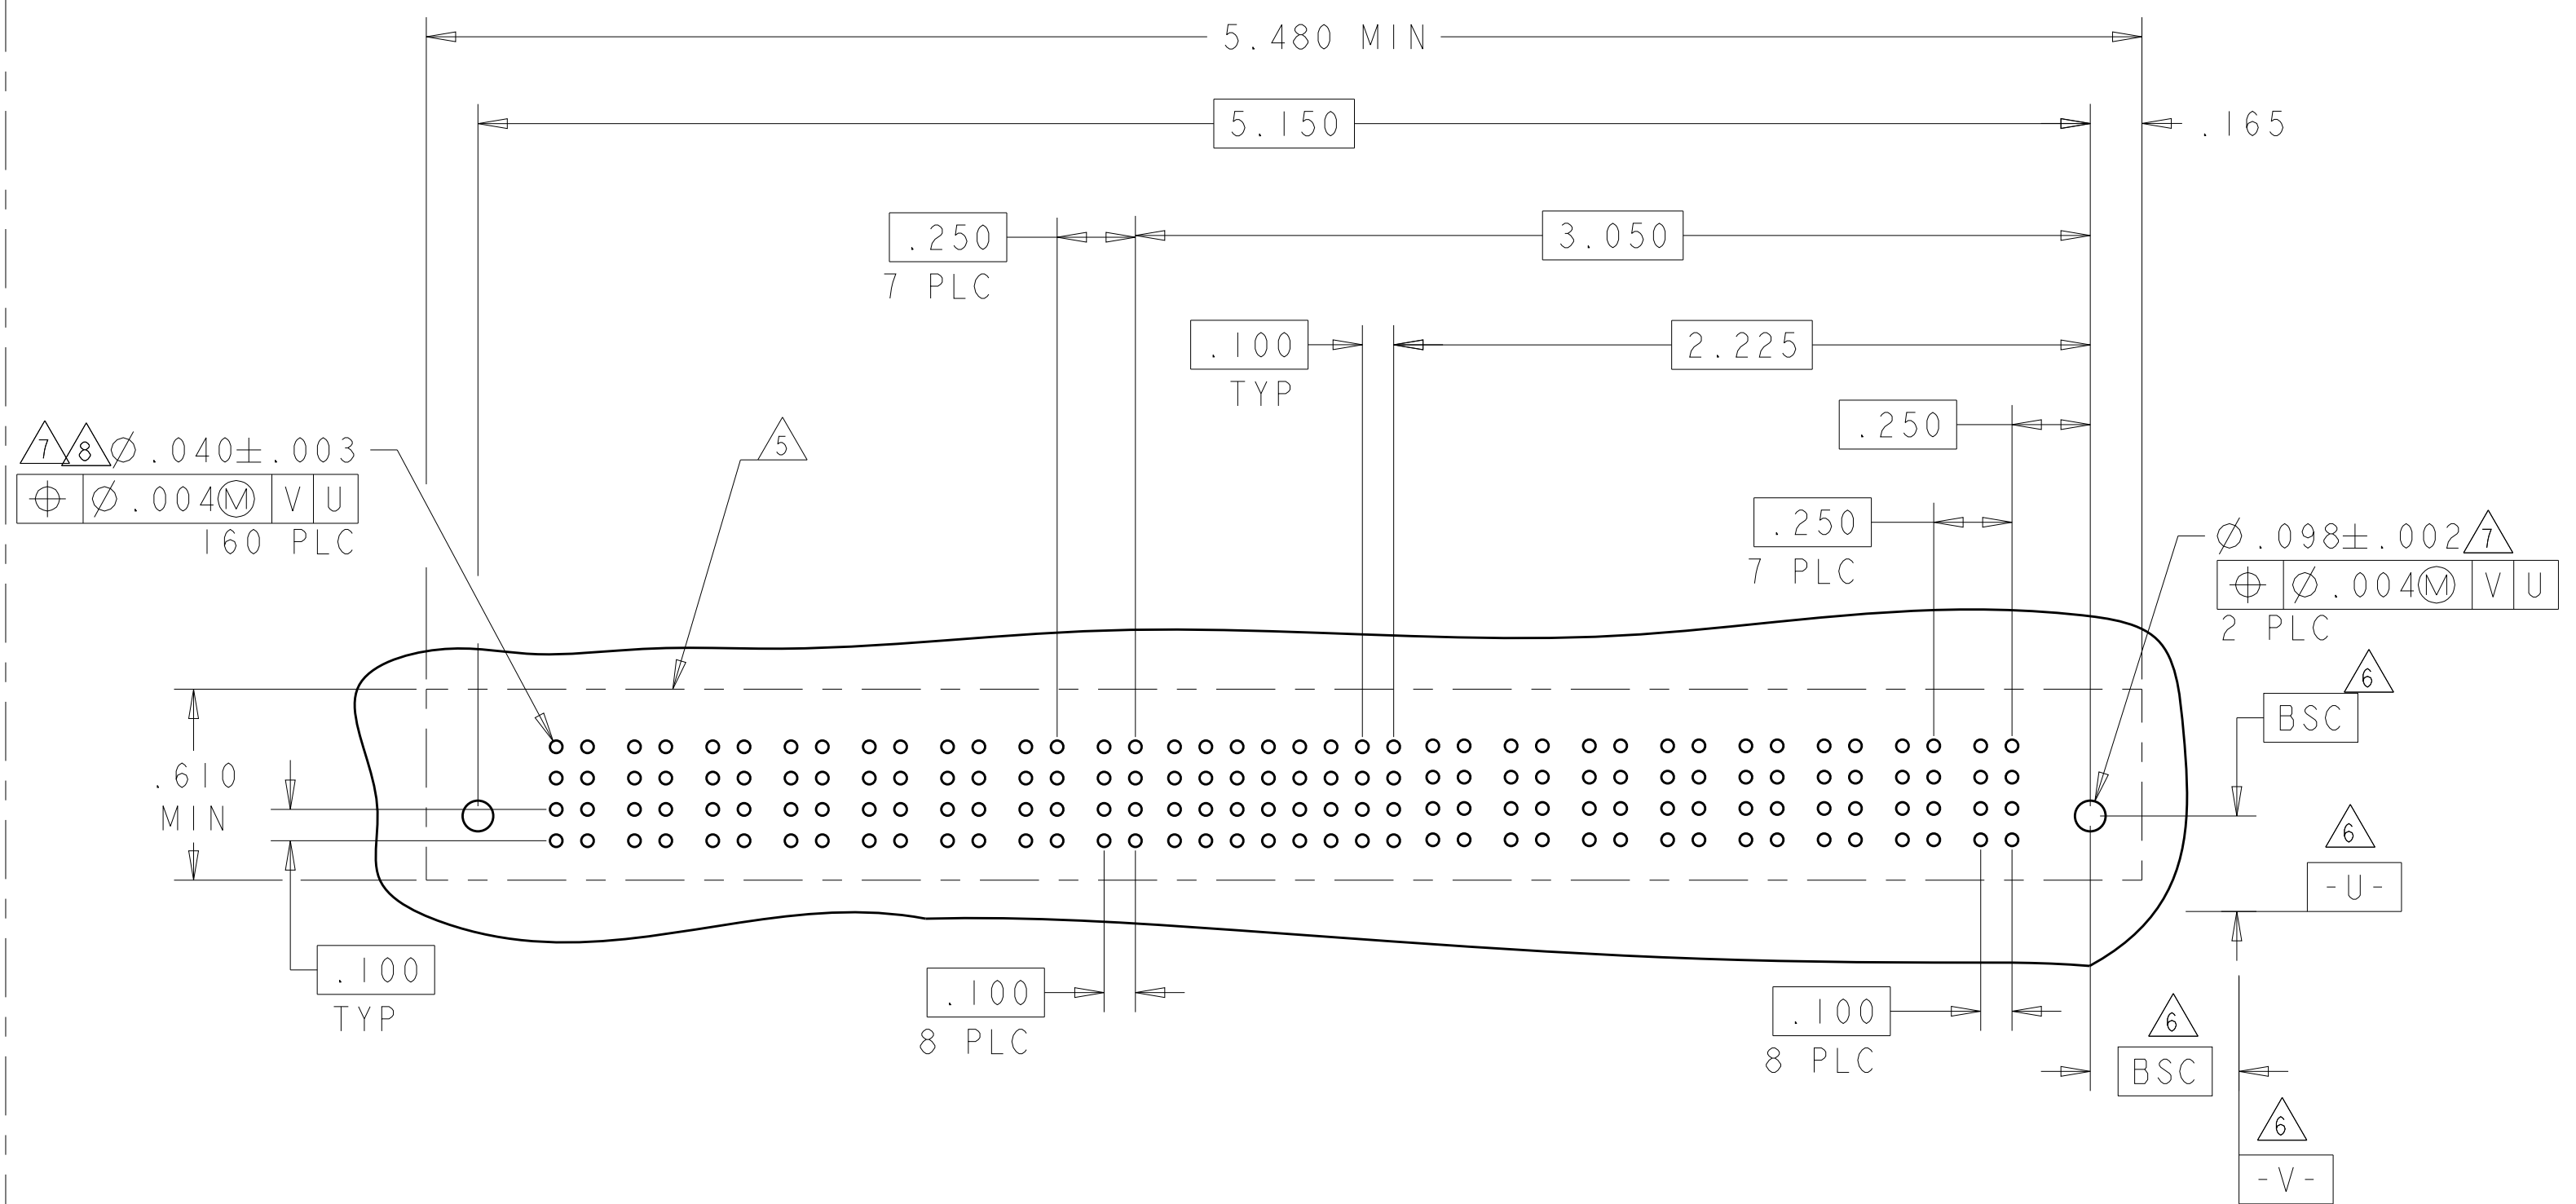4805 (3/11)

PART NUMBER	ROWS		POWER	S I G N A L						POWER																		
			P2	5	4	3	2	1	P1																			
6-6450540-6	D C B A		GS <table><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr></table> GS	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	
AP	AP	AP	AP	AP	AP																							
AP	AP	AP	AP	AP	AP																							
AP	AP	AP	AP	AP	AP																							
AP	AP	AP	AP	AP	AP																							
IP + 20S + IP																												

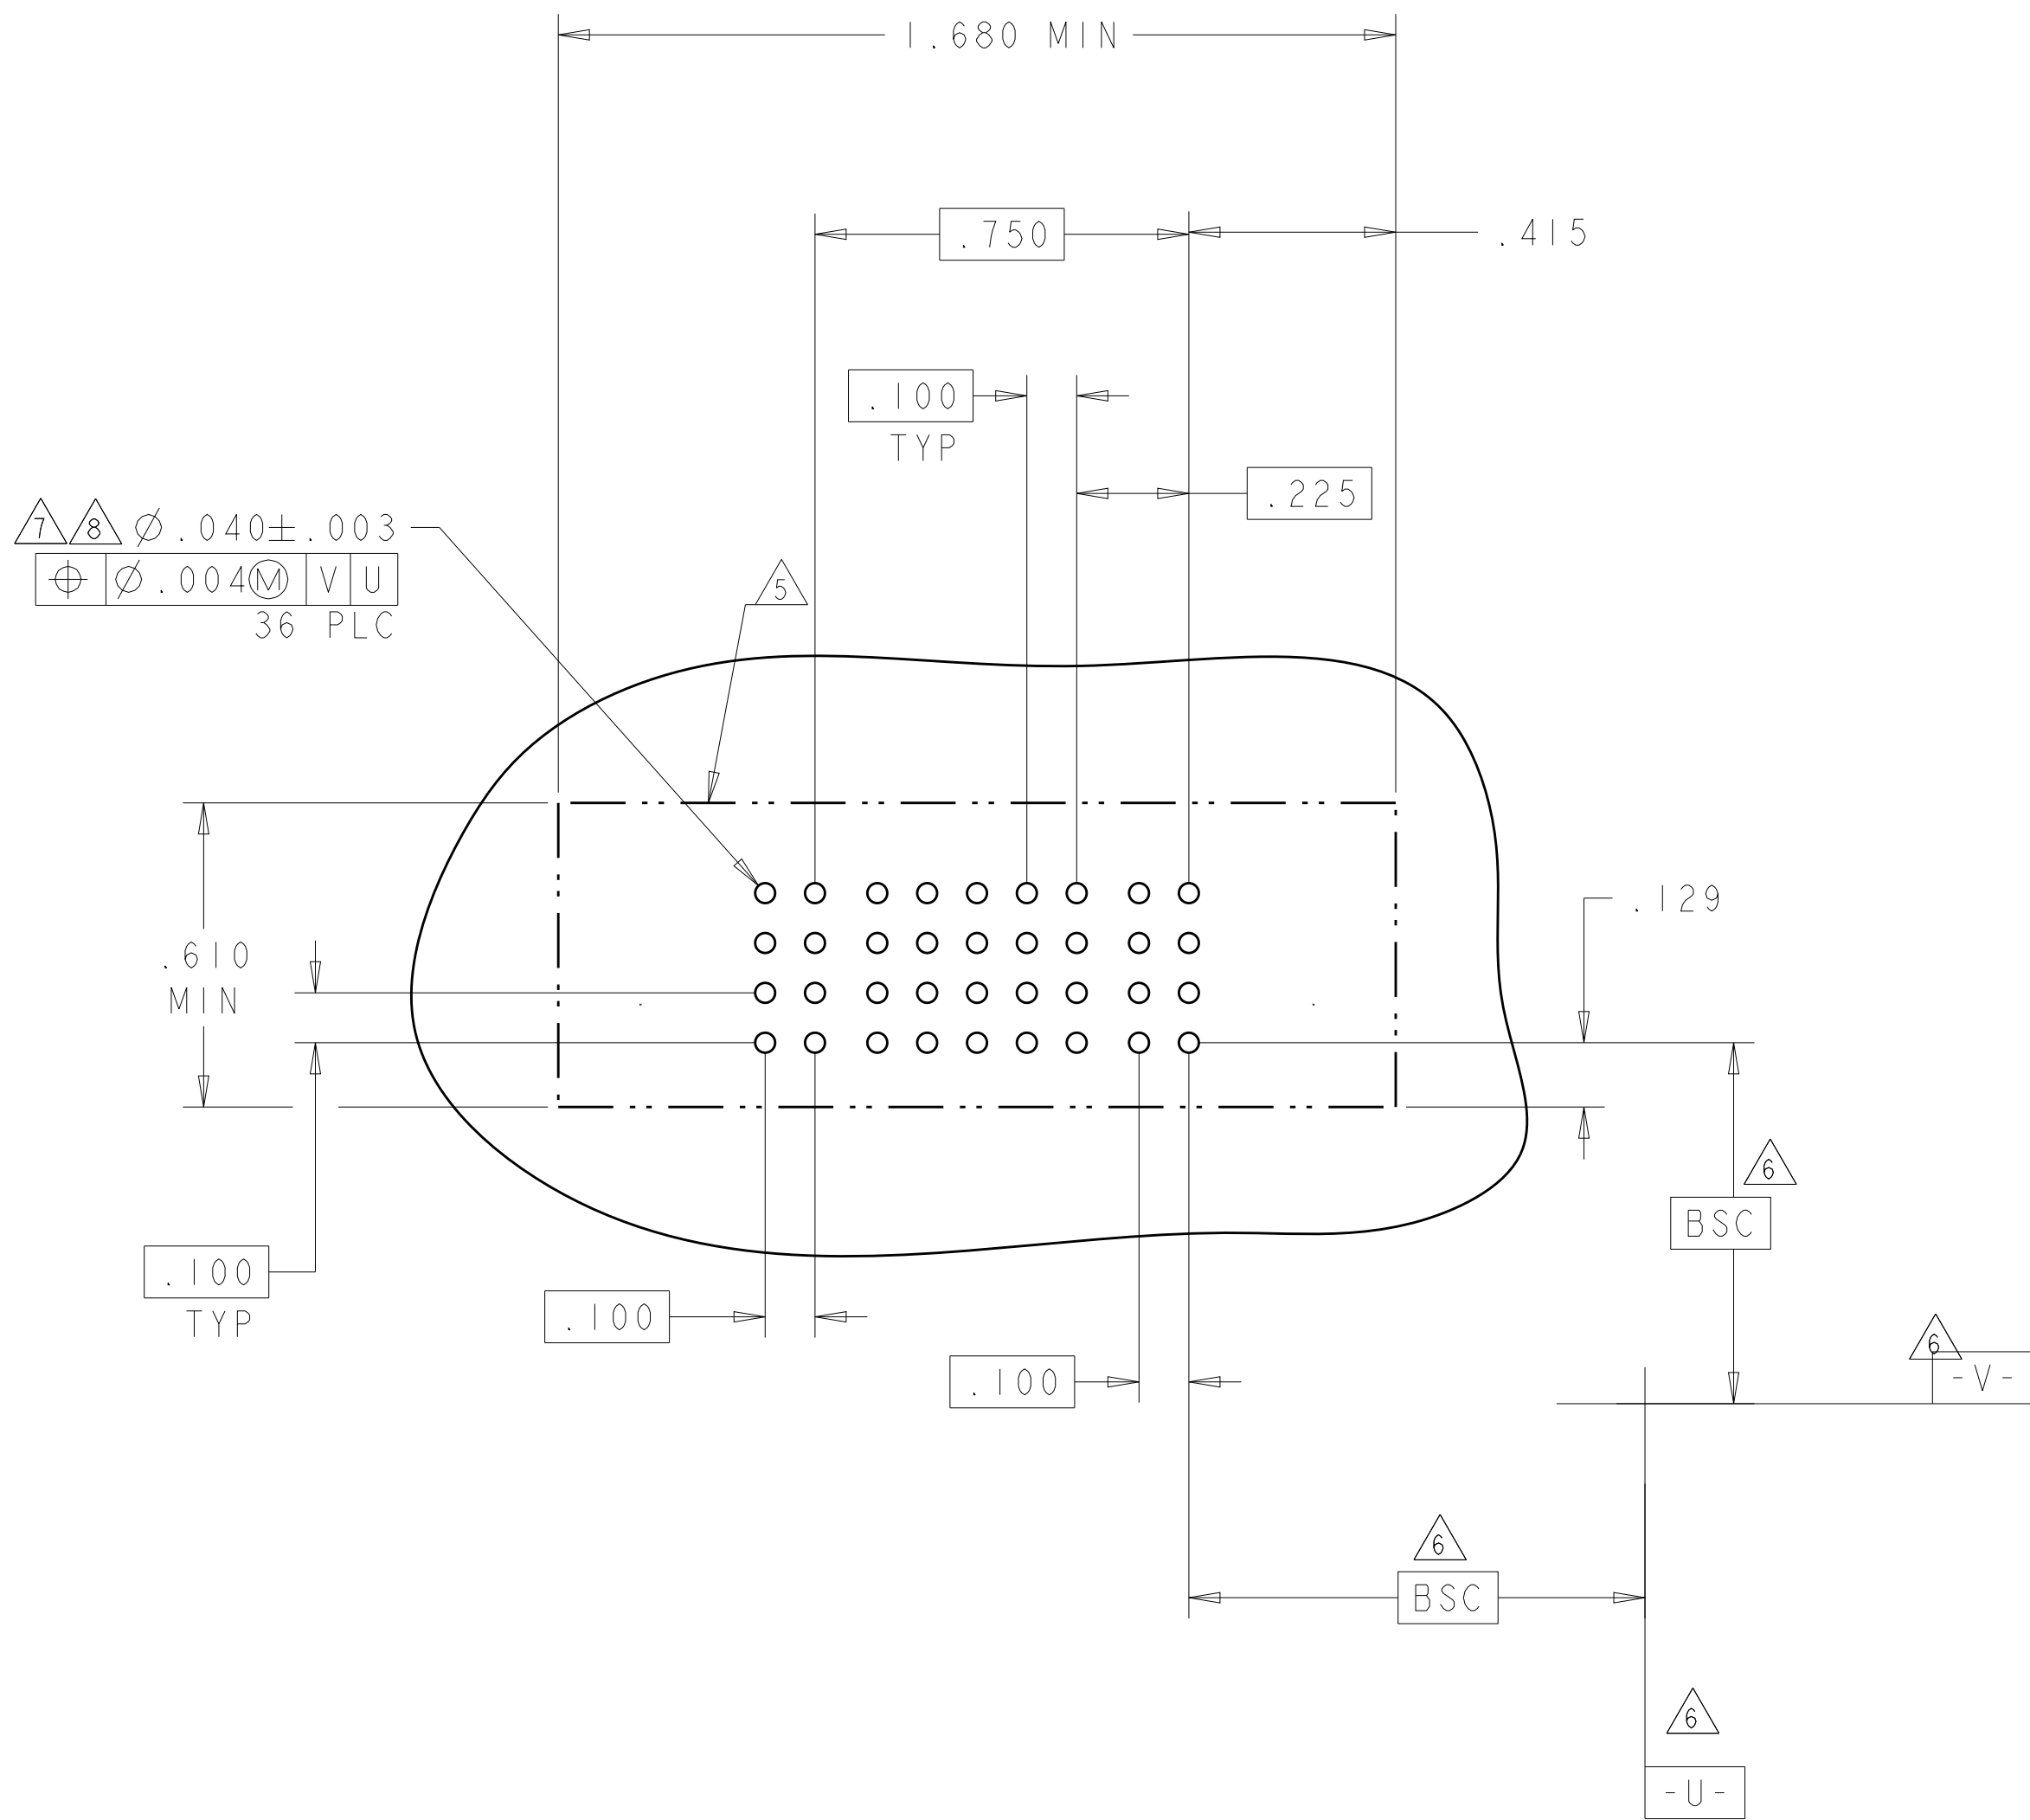4805 (3/11)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9