

## Generation 3

### Sensus™ LED Series

Pure White Targeted COB Arrays  
Below the Black Body Locus (BBBL)



#### Table of Contents

|                                                       |    |
|-------------------------------------------------------|----|
| Technology Overview . . . . .                         | 2  |
| Test Specifications . . . . .                         | 2  |
| Chromaticity Bins . . . . .                           | 3  |
| Product Ordering & Shipping<br>Part Numbers . . . . . | 4  |
| Product Typical Flux Range                            | 5  |
| Operating Characteristics . .                         | 9  |
| Optical and Electrical Character-<br>istics . . . . . | 13 |
| Spectra . . . . .                                     | 21 |
| Mechanical Dimensions . .                             | 22 |
| Packaging Information . . .                           | 23 |
| Handling notes . . . . .                              | 31 |

#### Features:

- Matching the human perception of “Pure white” light
- Designed to provide the look and feel of ceramic metal halide lights
- Wide product range from 1,000lm to over 10,000lm
- 3000K and 3500K, 80 and 90CRI standard
- Highly saturated color rendering version in 3000K and 3500K
- 3 SDCM color binning accuracy
- Excellent optical emission uniformity and color over angle consistency
- Exceptional long term color stability
- Package thermal conductivity more than the industry average
- Environmentally friendly: RoHS and REACH compliant
- UL Recognized, File # E465703



#### Applications

- |                             |                                 |
|-----------------------------|---------------------------------|
| • Retail Shop Lighting      | • Halogen replacement LED lamps |
| • Spotlights/Track Lights   | • Hospitality Lighting          |
| • CMH replacement LED lamps | • Architectural and Specialty   |

## Technology Overview

Luminus Chip-on-Board (COB) LED series offers a complete lighting class solution designed for high performance illumination applications. The Sensus LED series has been specially design for retail shop lighting where enhanced red coloring is a preferred lighting standard. The selection covers a wide lumen range from less than 500lm to over 10,000lm, and is focused on the major market color and CRI of 3000K and both 80 and 90 CRI. These breakthroughs allow illumination engineers and designers to develop beautifully lit spaces without sacrificing efficacy, brightness and overall quality.

### Reliability

Designed from the ground up, the Luminus COB LED is one of the most reliable light sources in the world today. Having passed a rigorous suite of environmental and mechanical stress tests, including mechanical shock, vibration, temperature cycling and humidity. Only then are the devices qualified for use in a wide range of lighting application including some of the most demanding commercial applications. Delivered with fully qualified LM-80 test data and TM-21 lifetime results that certify lumen maintenance at 35,000 hours or more, Luminus COB LEDs are ready for the toughest challenges.

### UL Recognized Compliance

Luminus COB arrays are tested in accordance with ANSI/UL 8750 to ensure safe operation for their intended applications.

### REACH & RoHS Compliance

All LED products manufactured by Luminus are REACH and RoHS compliant and free of hazardous materials, including lead and mercury.

## Understanding Luminus COB LED Test Specifications

Every Luminus LED is fully tested to ensure it meets the high quality standards customers have come to expect from Luminus' products.

### Traceability

Each Luminus COB LED is marked with a 2D bar code that contains a unique serial number. With this serial number, Luminus has the ability to provide customers with actual test data measurements for a specific LED. In addition, the 2D bar code is linked to manufacturing date codes that enables traceability of production processes and materials.

### Chromaticity Bin Range

Chromaticity binning delivers color consistency for every order. Standard products are delivered with a 3-step MacAdam ellipse. This ensures color performance matching in the application. For the most demanding application, Luminus is one of only a few companies that can provide a 2 SDCM. These tightly controlled, small distribution bins provide customers predictable, repeatable colors.

### Testing Temperature

Luminus COB products are measured at temperatures typical for the LED operating in the fixture. Each device is tested at 85°C junction temperature eliminating the need to scale data sheet specifications to real world situations.

## Chromaticity Bin Structure

Chromaticity Bins: 1931 CIE Curve



## Sensus™ LED White Chromaticity Bins

The following tables describe the ANSI bin center points, the orientation angle for the MacAdam ellipse ( $\theta^\circ$ ), and the maximum radii for the ellipses. The ANSI Bin is provided for reference.

| Description | CCT   | Center Point |        | 3-step Bin     |         |         |
|-------------|-------|--------------|--------|----------------|---------|---------|
|             |       | CIEx         | CIEy   | $\theta^\circ$ | a       | b       |
| Standard    | 3000K | 0.4252       | 0.3877 | 53.6           | 0.00834 | 0.00408 |
| Xtreme      |       | 0.4210       | 0.3720 | 53.2           |         |         |
| Standard    | 3500K | 0.4067       | 0.3845 | 54             | 0.00927 | 0.00414 |
| Xtreme      |       | 0.3980       | 0.3660 | 54             |         |         |

\*Note: Luminus maintains a  $\pm 0.005$  tolerance on chromaticity (CIEx and CIEy) measurements.

## Product Ordering and Shipping Part Number Nomenclature

All Sensus LED products are packaged and labeled with part numbers as outlined in the table on page 5. Luminus will include any smaller chromaticity bin that is contained in the larger bin as part of the ordered part. When shipped, each package will contain only a single flux and chromaticity bin. The part number designation is as follows:

**CXM — XX — 30 — 80 — 36 — QQPP — FG — W**

| Product Family                  | Light Emitting Surface Diameter <sup>1</sup> | Color Temperature <sup>2</sup> | Color Rendering Index (CRI) <sup>3</sup> | Voltage (typical)            | Package Configurator | Flux Bin | Chromaticity Bin    |
|---------------------------------|----------------------------------------------|--------------------------------|------------------------------------------|------------------------------|----------------------|----------|---------------------|
| CIM/ CLM/<br>CXM: Chip on Board | XX: LES Diameter (mm) Approximate            | CCT                            | XX                                       | Volts Also 54V in some cases | AA32 (Basic package) | Lumens   | See page 3 for bins |

**Note 1:** XX nomenclature corresponds to the following:

9 = 9.6 mm  
 11 = 11.6 mm  
 14 = 14.3 mm  
 18 = 17.5 mm  
 22 = 22 mm  
 27 = 26.5 mm

**Note 2:** CT Nomenclature corresponds to the following

30 is 3000K  
 35 is 3500K

**Note 3:** XX Color Rendering nomenclature corresponds to the following

80 = 80 CRI  
 90 = 90 CRI

**Note 4:** AA32 is the Standard Sensus and a standard substrate size

AA34 is the Xtreme Sensus and a standard substrate size

AC32 and XD22 is the Standard Sensus and alternative substrate size

AC34 is the Xtreme Sensus and an alternative substrate size

## Color Temperature, CRI and R9 Values

| Color Temperatures | XX Value | CRI | R9  |
|--------------------|----------|-----|-----|
| 3000K, 3500K       | 80       | >80 | >0  |
|                    | 90       | >90 | >50 |

**Note:** Luminus part numbers may be accompanied by prefixes or suffixes. The most common is the "Rev01" suffix indicating a part is fully released and carries a full warranty. These additional characters may appear on shipping labels, packing slips and invoices. In all cases the basic part number described above will always be included.

**Sensus™ LED Series Part Numbers**

The following tables describe products with typical flux and minimum flux measured at typical currents and specified at 85°C. The values at 25°C are calculated and shown for reference only. All product is measured and specified at 85°C junction temperature.

| Output Flux (lm) |             |                          | LES Diameter (mm) | Typ. Current (mA) | Ordering Part Number     |
|------------------|-------------|--------------------------|-------------------|-------------------|--------------------------|
| Typ. (85°C)      | Min. (85°C) | Typ. (calculated) (25°C) |                   |                   | 3 SDCM                   |
| 665              | 620         | 715                      | 6.3               | 150               | CXM-6-30-80-36-AA32-F4-3 |
| 560              | 525         | 605                      |                   |                   | CXM-6-30-90-36-AA32-F4-3 |
| 685              | 635         | 735                      |                   |                   | CXM-6-35-80-36-AA32-F4-3 |
| 570              | 530         | 615                      |                   |                   | CXM-6-35-90-36-AA32-F4-3 |
| 665              | 620         | 715                      |                   |                   | CXM-6-30-80-36-AC32-F4-3 |
| 560              | 525         | 605                      |                   |                   | CXM-6-30-90-36-AC32-F4-3 |
| 685              | 635         | 735                      |                   |                   | CXM-6-35-80-36-AC32-F4-3 |
| 570              | 530         | 615                      |                   |                   | CXM-6-35-90-36-AC32-F4-3 |
| 665              | 620         | 715                      | 6.3               | 300               | CXM-6-30-80-18-AA32-F4-3 |
| 560              | 525         | 605                      |                   |                   | CXM-6-30-90-18-AA32-F4-3 |
| 685              | 635         | 735                      |                   |                   | CXM-6-35-80-18-AA32-F4-3 |
| 570              | 530         | 615                      |                   |                   | CXM-6-35-90-18-AA32-F4-3 |
| 860              | 800         | 925                      | 9.6               | 180               | CIM-9-30-80-36-AC32-F4-3 |
| 720              | 670         | 780                      |                   |                   | CIM-9-30-90-36-AC32-F4-3 |
| 885              | 820         | 955                      |                   |                   | CIM-9-35-80-36-AC32-F4-3 |
| 735              | 685         | 795                      |                   |                   | CIM-9-35-90-36-AC32-F4-3 |
| 1,155            | 1,075       | 1,245                    | 9.6               | 240               | CLM-9-30-80-36-AA32-F4-3 |
| 970              | 905         | 1,050                    |                   |                   | CLM-9-30-90-36-AA32-F4-3 |
| 1,190            | 1,105       | 1,285                    |                   |                   | CLM-9-35-80-36-AA32-F4-3 |
| 990              | 920         | 1,070                    |                   |                   | CLM-9-35-90-36-AA32-F4-3 |
| 1,155            | 1,075       | 1,245                    |                   |                   | CLM-9-30-80-36-AC32-F4-3 |
| 970              | 905         | 1,050                    |                   |                   | CLM-9-30-90-36-AC32-F4-3 |
| 1,190            | 1,105       | 1,285                    |                   |                   | CLM-9-35-80-36-AC32-F4-3 |
| 990              | 920         | 1,070                    |                   |                   | CLM-9-35-90-36-AC32-F4-3 |

\*Note: Luminus maintains a +/- 6% tolerance on flux measurements.

Luminus maintains a +/- 2% tolerance on CRI measurements.

**Sensus™ LED Series Part Numbers**

The following tables describe products with typical flux and minimum flux measured at typical currents and specified at 85°C. The values at 25°C are calculated and shown for reference only. All product is measured and specified at 85°C junction temperature.

| Output Flux (lm) |             |                          | LES Diameter (mm) | Typ. Current (mA) | Ordering Part Number      |
|------------------|-------------|--------------------------|-------------------|-------------------|---------------------------|
| Typ. (85°C)      | Min. (85°C) | Typ. (calculated) (25°C) |                   |                   | 3 SDCM                    |
| 1,690            | 1,570       | 1,860                    | 9.6               | 360               | CXM-9-30-80-36-AC32-F4-3  |
| 1,425            | 1,325       | 1,565                    |                   |                   | CXM-9-30-90-36-AC32-F4-3  |
| 1,745            | 1,620       | 1,915                    |                   |                   | CXM-9-35-80-36-AC32-F4-3  |
| 1,450            | 1,350       | 1,595                    |                   |                   | CXM-9-35-90-36-AC32-F4-3  |
| 1,605            | 1,490       | 1,735                    | 9.6               | 360               | CHM-9-30-80-36-XD22-F4-3  |
| 1,350            | 1,255       | 1,455                    |                   |                   | CHM-9-30-90-36-XD22-F4-3  |
| 1,655            | 1,540       | 1,780                    |                   |                   | CHM-9-35-80-36-XD22-F4-3  |
| 1,380            | 1,285       | 1,485                    |                   |                   | CHM-9-35-90-36-XD22-F4-3  |
| 2,165            | 1,990       | 2,315                    | 11.6              | 450               | CXM-11-30-80-36-AA32-F4-3 |
| 1,820            | 1,675       | 1,950                    |                   |                   | CXM-11-30-90-36-AA32-F4-3 |
| 2,230            | 2,050       | 2,385                    |                   |                   | CXM-11-35-80-36-AA32-F4-3 |
| 1,860            | 1,710       | 1,985                    |                   |                   | CXM-11-35-90-36-AA32-F4-3 |
| 2,165            | 1,990       | 2,315                    |                   |                   | CXM-11-30-80-36-AC32-F4-3 |
| 1,820            | 1,675       | 1,950                    |                   |                   | CXM-11-30-90-36-AC32-F4-3 |
| 2,230            | 2,050       | 2,385                    |                   |                   | CXM-11-35-80-36-AC32-F4-3 |
| 1,860            | 1,710       | 1,985                    |                   |                   | CXM-11-35-90-36-AC32-F4-3 |
| 2,215            | 2,055       | 2,390                    | 14.3              | 450               | CIM-14-30-80-36-AC32-F4-3 |
| 1,860            | 1,735       | 2,010                    |                   |                   | CIM-14-30-90-36-AC32-F4-3 |
| 2,280            | 2,125       | 2,460                    |                   |                   | CIM-14-35-80-36-AC32-F4-3 |
| 1,900            | 1,765       | 2,050                    |                   |                   | CIM-14-35-90-36-AC32-F4-3 |
| 2,415            | 2,235       | 2,590                    | 14.3              | 500               | CLM-14-30-80-36-AA32-F4-3 |
| 2,030            | 1,875       | 2,180                    |                   |                   | CLM-14-30-90-36-AA32-F4-3 |
| 2,480            | 2,300       | 2,670                    |                   |                   | CLM-14-35-80-36-AA32-F4-3 |
| 2,065            | 1,915       | 2,225                    |                   |                   | CLM-14-35-90-36-AA32-F4-3 |
| 2,415            | 2,235       | 2,590                    |                   |                   | CLM-14-30-80-36-AC32-F4-3 |
| 2,030            | 1,875       | 2,180                    |                   |                   | CLM-14-30-90-36-AC32-F4-3 |
| 2,480            | 2,300       | 2,670                    |                   |                   | CLM-14-35-80-36-AC32-F4-3 |
| 2,065            | 1,915       | 2,225                    |                   |                   | CLM-14-35-90-36-AC32-F4-3 |

\*Note: Luminus maintains a +/- 6% tolerance on flux measurements.  
Luminus maintains a +/- 2% tolerance on CRI measurements.

**Sensus™ LED Series Part Numbers**

The following tables describe products with typical flux and minimum flux measured at typical currents and specified at 85°C. The values at 25°C are calculated and shown for reference only. All product is measured and specified at 85°C junction temperature.

| Output Flux (lm) |             |                          | LES Diameter (mm) | Typ. Current (mA) | Ordering Part Number      |
|------------------|-------------|--------------------------|-------------------|-------------------|---------------------------|
| Typ. (85°C)      | Min. (85°C) | Typ. (calculated) (25°C) |                   |                   | 3 SDCM                    |
| 3,420            | 3,120       | 3,620                    | 14.3              | 720               | CXM-14-30-80-36-AA32-F4-3 |
| 2,880            | 2,620       | 3,050                    |                   |                   | CXM-14-30-90-36-AA32-F4-3 |
| 3,525            | 3,210       | 3,730                    |                   |                   | CXM-14-35-80-36-AA32-F4-3 |
| 2,935            | 2,675       | 3,105                    |                   |                   | CXM-14-35-90-36-AA32-F4-3 |
| 3,420            | 3,120       | 3,620                    |                   |                   | CXM-14-30-80-36-AC32-F4-3 |
| 2,880            | 2,620       | 3,050                    |                   |                   | CXM-14-30-90-36-AC32-F4-3 |
| 3,525            | 3,210       | 3,730                    |                   |                   | CXM-14-35-80-36-AC32-F4-3 |
| 2,935            | 2,675       | 3,105                    |                   |                   | CXM-14-35-90-36-AC32-F4-3 |
| 4,375            | 4,070       | 4,725                    | 17.5              | 900               | CXM-18-30-80-36-AA32-F4-3 |
| 3,680            | 3,420       | 3,975                    |                   |                   | CXM-18-30-90-36-AA32-F4-3 |
| 4,505            | 4,190       | 4,865                    |                   |                   | CXM-18-35-80-36-AA32-F4-3 |
| 3,750            | 3,490       | 4,055                    |                   |                   | CXM-18-35-90-36-AA32-F4-3 |
| 5465             | 5085        | 5895                     | 22                | 1,100             | CLM-22-30-80-36-AC32-F4-3 |
| 4595             | 4275        | 4955                     |                   |                   | CLM-22-30-90-36-AC32-F4-3 |
| 5625             | 5230        | 6065                     |                   |                   | CLM-22-35-80-36-AC32-F4-3 |
| 4690             | 4360        | 5060                     |                   |                   | CLM-22-35-90-36-AC32-F4-3 |
| 7,870            | 7,320       | 8,505                    | 22                | 1,100             | CXM-22-30-80-54-AC32-F4-3 |
| 6,620            | 6,155       | 7,150                    |                   |                   | CXM-22-30-90-54-AC32-F4-3 |
| 8,105            | 7,540       | 8,755                    |                   |                   | CXM-22-35-80-54-AC32-F4-3 |
| 6,750            | 6,280       | 7,290                    |                   |                   | CXM-22-35-90-54-AC32-F4-3 |
| 11,780           | 10,955      | 12,720                   | 26.5              | 1,600             | CXM-27-30-80-54-AB32-F4-3 |
| 9,910            | 9,215       | 10,700                   |                   |                   | CXM-27-30-90-54-AB32-F4-3 |
| 12,130           | 11,280      | 13,100                   |                   |                   | CXM-27-35-80-54-AB32-F4-3 |
| 10,110           | 9,400       | 10,915                   |                   |                   | CXM-27-35-90-54-AB32-F4-3 |

\*Note: Luminus maintains a +/- 6% tolerance on flux measurements.

Luminus maintains a +/- 2% tolerance on CRI measurements.

**Xtreme Sensus™ LED Series Part Numbers**

The following tables describe products with typical flux and minimum flux measured at typical currents and specified at 85°C. The values at 25°C are calculated and shown for reference only. All product is measured and specified at 85°C junction temperature.

| Output Flux (lm) |             |                          | LES Diameter (mm) | Typ. Current (mA) | Ordering Part Number      |
|------------------|-------------|--------------------------|-------------------|-------------------|---------------------------|
| Typ. (85°C)      | Min. (85°C) | Typ. (calculated) (25°C) |                   |                   | 3 SDCM                    |
| 620              | 580         | 670                      | 9.6               | 180               | CIM-9-30-90-36-AC34-F4-3  |
| 635              | 590         | 685                      |                   |                   | CIM-9-35-90-36-AC34-F4-3  |
| 1,235            | 1,150       | 1,240                    | 9.6               | 360               | CXM-9-30-90-36-AC34-F4-3  |
| 1,260            | 1,170       | 1,260                    |                   |                   | CXM-9-35-90-36-AC34-F4-3  |
| 1,580            | 1,470       | 1,585                    | 11.6              | 450               | CXM-11-30-90-36-AC34-F4-3 |
| 1,615            | 1,500       | 1,620                    |                   |                   | CXM-11-35-90-36-AC34-F4-3 |
| 1,580            | 1,470       | 1,585                    |                   |                   | CXM-11-30-90-36-AA34-F4-3 |
| 1,615            | 1,500       | 1,620                    |                   |                   | CXM-11-35-90-36-AA34-F4-3 |
| 1,605            | 1,495       | 1,735                    | 14.3              | 450               | CIM-14-30-90-36-AC34-F4-3 |
| 1,640            | 1,520       | 1,765                    |                   |                   | CIM-14-35-90-36-AC34-F4-3 |
| 1,640            | 1,520       | 1,765                    | 14.3              | 500               | CLM-14-30-90-36-AC34-F4-3 |
| 1,670            | 1,555       | 1,800                    |                   |                   | CLM-14-35-90-36-AC34-F4-3 |
| 1,640            | 1,520       | 1,765                    |                   |                   | CLM-14-30-90-36-AA34-F4-3 |
| 1,670            | 1,555       | 1,800                    |                   |                   | CLM-14-35-90-36-AA34-F4-3 |
| 2,520            | 2,345       | 2,530                    | 14.3              | 720               | CXM-14-30-90-36-AC34-F4-3 |
| 2,570            | 2,390       | 2,580                    |                   |                   | CXM-14-35-90-36-AC34-F4-3 |
| 2,520            | 2,345       | 2,530                    |                   |                   | CXM-14-30-90-36-AA34-F4-3 |
| 2,570            | 2,390       | 2,580                    |                   |                   | CXM-14-35-90-36-AA34-F4-3 |
| 3,575            | 3,325       | 3,590                    | 17.5              | 900               | CXM-18-30-90-36-AA34-F4-3 |
| 3,645            | 3,390       | 3,660                    |                   |                   | CXM-18-35-90-36-AA34-F4-3 |
| 3,750            | 3,490       | 3,765                    | 22                | 1100              | CLM-22-30-90-36-AC34-F4-3 |
| 3,830            | 3,565       | 3,845                    |                   |                   | CLM-22-35-90-36-AC34-F4-3 |

\*Note: Luminus maintains a +/- 6% tolerance on flux measurements.

Luminus maintains a +/- 2% tolerance on CRI measurements.

**CXM-6 Operating Characteristics<sup>1</sup>**
**Optical and Electrical Characteristics**

| Parameter                               | Symbol        | Minimum | Typical | Maximum | Unit   |
|-----------------------------------------|---------------|---------|---------|---------|--------|
| Forward Current (36V) <sup>2</sup>      | $I_f$         |         | 150     | 325     | mA     |
| Forward Current (18V) <sup>2</sup>      | $I_f$         |         | 300     | 650     | mA     |
| Forward Voltage (36V) <sup>3</sup>      | $V_f$         | 31      | 34.6    | 37      | V      |
| Forward Voltage(18V) <sup>3</sup>       | $V_f$         | 15.5    | 17.3    | 18.5    | V      |
| Power                                   |               |         | 5.2     | 11.8    | W      |
| Operating Case Temperature <sup>4</sup> | $T_c$         |         |         | 105     | °C     |
| Light Emitting Surface Diameter         | LES           |         | 6.3     |         | mm     |
| Thermal Resistance (junction-to-case)   | $\Theta_{jc}$ |         | 0.96    |         | °C/W   |
| Junction Temperature                    | $T_j$         |         |         | 140     | °C     |
| Viewing Angle                           |               |         | 120     |         | Degree |

**CIM-9 Operating Characteristics<sup>1</sup>**
**Optical Characteristics**

| Parameter                               | Symbol        | Minimum | Typical | Maximum | Unit   |
|-----------------------------------------|---------------|---------|---------|---------|--------|
| Forward Current <sup>2</sup>            | $I_f$         |         | 180     | 360     | mA     |
| Forward Voltage <sup>3</sup>            | $V_f$         | 31.8    | 33.8    | 35.8    | V      |
| Power                                   |               |         | 6.1     | 13.2    | W      |
| Operating Case Temperature <sup>4</sup> | $T_c$         |         |         | 105     | °C     |
| Light Emitting Surface Diameter         | LES           |         | 9.6     |         | mm     |
| Thermal Resistance (junction-to-case)   | $\Theta_{jc}$ |         | 0.9     |         | °C/W   |
| Junction Temperature                    | $T_j$         |         |         | 140     | °C     |
| Viewing Angle                           |               |         | 120     |         | Degree |

**CLM-9 Operating Characteristics<sup>1</sup>**
**Optical and Electrical Characteristics**

| Parameter                               | Symbol        | Minimum | Typical | Maximum | Unit   |
|-----------------------------------------|---------------|---------|---------|---------|--------|
| Forward Current <sup>2</sup>            | $I_f$         |         | 240     | 540     | mA     |
| Forward Voltage <sup>3</sup>            | $V_f$         | 31      | 33.8    | 37      | V      |
| Power                                   |               |         | 8.2     | 20      | W      |
| Operating Case Temperature <sup>4</sup> | $T_c$         |         |         | 105     | °C     |
| Light Emitting Surface Diameter         | LES           |         | 9.6     |         | mm     |
| Thermal Resistance (junction-to-case)   | $\Theta_{jc}$ |         | 0.65    |         | °C/W   |
| Junction Temperature                    | $T_j$         |         |         | 140     | °C     |
| Viewing Angle                           |               |         | 120     |         | Degree |

**CXM-9 Operating Characteristics<sup>1</sup>**
**Optical and Electrical Characteristics**

| Parameter                               | Symbol        | Minimum | Typical | Maximum | Unit   |
|-----------------------------------------|---------------|---------|---------|---------|--------|
| Forward Current <sup>2</sup>            | $I_f$         |         | 360     | 720     | mA     |
| Forward Voltage <sup>3</sup>            | $V_f$         | 31      | 34      | 37      | V      |
| Power                                   |               |         | 12.2    | 27      | W      |
| Operating Case Temperature <sup>4</sup> | $T_c$         |         |         | 100     | °C     |
| Light Emitting Surface Diameter         | LES           |         | 9.6     |         | mm     |
| Thermal Resisistance (junction-to-case) | $\Theta_{jc}$ |         | 0.5     |         | °C/W   |
| Junction Temperature                    | $T_j$         |         |         | 140     | °C     |
| Viewing Angle                           |               |         | 120     |         | Degree |

**CHM-9 Operating Characteristics<sup>1</sup>**
**Optical and Electrical Characteristics**

| Parameter                               | Symbol        | Minimum | Typical | Maximum | Unit   |
|-----------------------------------------|---------------|---------|---------|---------|--------|
| Forward Current <sup>2</sup>            | $I_f$         |         | 360     | 960     | mA     |
| Forward Voltage <sup>3</sup>            | $V_f$         | 31      | 34      | 37      | V      |
| Power                                   |               |         | 12.2    | 37.4    | W      |
| Operating Case Temperature <sup>4</sup> | $T_c$         |         |         | 105     | °C     |
| Light Emitting Surface Diameter         | LES           |         | 9.6     |         | mm     |
| Thermal Resisistance (junction-to-case) | $\Theta_{jc}$ |         | 0.5     |         | °C/W   |
| Junction Temperature                    | $T_j$         |         |         | 140     | °C     |
| Viewing Angle                           |               |         | 120     |         | Degree |

**CXM-11 Operating Characteristics<sup>1</sup>**
**Optical and Electrical Characteristics**

| Parameter                               | Symbol        | Minimum | Typical | Maximum | Unit   |
|-----------------------------------------|---------------|---------|---------|---------|--------|
| Forward Current <sup>2</sup>            | $I_f$         |         | 450     | 1,080   | mA     |
| Forward Voltage <sup>3</sup>            | $V_f$         | 31      | 33.8    | 37      | V      |
| Power                                   |               |         | 15.2    | 40.5    | W      |
| Operating Case Temperature <sup>4</sup> | $T_c$         |         |         | 105     | °C     |
| Light Emitting Surface Diameter         | LES           |         | 11.6    |         | mm     |
| Thermal Resisistance (junction-to-case) | $\Theta_{jc}$ |         | 0.35    |         | °C/W   |
| Junction Temperature                    | $T_j$         |         |         | 140     | °C     |
| Viewing Angle                           |               |         | 120     |         | Degree |

**CIM-14 Operating Characteristics<sup>1</sup>**
**Optical and Electrical Characteristics**

| Parameter                               | Symbol        | Minimum | Typical | Maximum | Unit   |
|-----------------------------------------|---------------|---------|---------|---------|--------|
| Forward Current <sup>2</sup>            | $I_f$         |         | 450     | 1,080   | mA     |
| Forward Voltage <sup>3</sup>            | $V_f$         | 31      | 34      | 37      | V      |
| Power                                   |               |         | 15      | 40      | W      |
| Operating Case Temperature <sup>4</sup> | $T_c$         |         |         | 105     | °C     |
| Light Emitting Surface Diameter         | LES           |         | 14.3    |         | mm     |
| Thermal Resisistance (junction-to-case) | $\Theta_{jc}$ |         | 0.32    |         | °C/W   |
| Junction Temperature                    | $T_j$         |         |         | 140     | °C     |
| Viewing Angle                           |               |         | 120     |         | Degree |

**CLM-14 Operating Characteristics<sup>1</sup>**
**Optical and Electrical Characteristics**

| Parameter                               | Symbol        | Minimum | Typical | Maximum | Unit   |
|-----------------------------------------|---------------|---------|---------|---------|--------|
| Forward Current <sup>2</sup>            | $I_f$         |         | 500     | 1,260   | mA     |
| Forward Voltage <sup>3</sup>            | $V_f$         | 31      | 33.8    | 37      | V      |
| Power                                   |               |         | 17      | 47      | W      |
| Operating Case Temperature <sup>4</sup> | $T_c$         |         |         | 105     | °C     |
| Light Emitting Surface Diameter         | LES           |         | 14.3    |         | mm     |
| Thermal Resisistance (junction-to-case) | $\Theta_{jc}$ |         | 0.31    |         | °C/W   |
| Junction Temperature                    | $T_j$         |         |         | 140     | °C     |
| Viewing Angle                           |               |         | 120     |         | Degree |

### CXM-14 Operating Characteristics<sup>1</sup>

#### Optical and Electrical Characteristics

| Parameter                               | Symbol        | Minimum | Typical | Maximum | Unit   |
|-----------------------------------------|---------------|---------|---------|---------|--------|
| Forward Current <sup>2</sup>            | $I_f$         |         | 720     | 1,440   | mA     |
| Forward Voltage <sup>3</sup>            | $V_f$         | 31      | 34      | 37      | V      |
| Power                                   |               |         | 24.5    | 54      | W      |
| Operating Case Temperature <sup>4</sup> | $T_c$         |         |         | 105     | °C     |
| Light Emitting Surface Diameter         | LES           |         | 14.3    |         | mm     |
| Thermal Resisistance (junction-to-case) | $\Theta_{jc}$ |         | 0.27    |         | °C/W   |
| Junction Temperature                    | $T_j$         |         |         | 140     | °C     |
| Viewing Angle                           |               |         | 120     |         | Degree |

### CXM-18 Operating Characteristics<sup>1</sup>

#### Optical and Electrical Characteristics

| Parameter                               | Symbol        | Minimum | Typical | Maximum | Unit   |
|-----------------------------------------|---------------|---------|---------|---------|--------|
| Forward Current <sup>2</sup>            | $I_f$         |         | 900     | 1,800   | mA     |
| Forward Voltage <sup>3</sup>            | $V_f$         | 31      | 34      | 37      | V      |
| Power                                   |               |         | 30.6    | 64      | W      |
| Operating Case Temperature <sup>4</sup> | $T_c$         |         |         | 105     | °C     |
| Light Emitting Surface Diameter         | LES           |         | 17.5    |         | mm     |
| Thermal Resisistance (junction-to-case) | $\Theta_{jc}$ |         | 0.21    |         | °C/W   |
| Junction Temperature                    | $T_j$         |         |         | 140     | °C     |
| Viewing Angle                           |               |         | 120     |         | Degree |

### CLM-22 Operating Characteristics<sup>1</sup>

#### Optical and Electrical Characteristics

| Parameter                               | Symbol        | Minimum | Typical | Maximum | Unit   |
|-----------------------------------------|---------------|---------|---------|---------|--------|
| Forward Current <sup>2</sup>            | $I_f$         |         | 1,100   | 2,200   | mA     |
| Forward Voltage <sup>3</sup>            | $V_f$         | 31      | 33.8    | 37      | V      |
| Power                                   |               |         | 37.2    | 82      | W      |
| Operating Case Temperature <sup>4</sup> | $T_c$         |         |         | 105     | °C     |
| Light Emitting Surface Diameter         | LES           |         | 22      |         | mm     |
| Thermal Resisistance (junction-to-case) | $\Theta_{jc}$ |         | 0.19    |         | °C/W   |
| Junction Temperature                    | $T_j$         |         |         | 140     | °C     |
| Viewing Angle                           |               |         | 120     |         | Degree |

**CXM-22 Operating Characteristics<sup>1</sup>**
**Optical and Electrical Characteristics**

| Parameter                               | Symbol        | Minimum | Typical | Maximum | Unit   |
|-----------------------------------------|---------------|---------|---------|---------|--------|
| Forward Current <sup>2</sup>            | $I_f$         |         | 1,100   | 2,200   | mA     |
| Forward Voltage <sup>3</sup>            | $V_f$         | 50      | 51      | 55      | V      |
| Power                                   |               |         | 56.1    | 125     | W      |
| Operating Case Temperature <sup>4</sup> | $T_c$         |         |         | 105     | °C     |
| Light Emitting Surface Diameter         | LES           |         | 22      |         | mm     |
| Thermal Resisistance (junction-to-case) | $\Theta_{jc}$ |         | 0.17    |         | °C/W   |
| Junction Temperature                    | $T_j$         |         |         | 140     | °C     |
| Viewing Angle                           |               |         | 120     |         | Degree |

**CXM-27 Operating Characteristics<sup>1</sup>**
**Optical and Electrical Characteristics**

| Parameter                               | Symbol        | Minimum | Typical | Maximum | Unit   |
|-----------------------------------------|---------------|---------|---------|---------|--------|
| Forward Current <sup>2</sup>            | $I_f$         |         | 1,600   | 3,200   | mA     |
| Forward Voltage <sup>3</sup>            | $V_f$         | 48      | 51      | 56      | V      |
| Power                                   |               |         | 82      | 180     | W      |
| Operating Case Temperature <sup>4</sup> | $T_c$         |         |         | 105     | °C     |
| Light Emitting Surface Diameter         | LES           |         | 26.5    |         | mm     |
| Thermal Resisistance (junction-to-case) | $\Theta_{jc}$ |         | 0.15    |         | °C/W   |
| Junction Temperature                    | $T_j$         |         |         | 140     | °C     |
| Viewing Angle                           |               |         | 120     |         | Degree |

**Operating Characteristics Notes**

Note 1: Ratings are based on operation at a constant junction temperature  $T_j = 85^\circ\text{C}$ .


Note 2: To prevent damage refer to operating conditions and derating curves for appropriate maximum operating conditions





Note 3: Forward voltage is rated at typical forward current. For voltage at different forward currents, refer to the voltage versus current performance graphs.

Note 4: COB LEDs are designed for operation to a minimum of 20% of the typical forward current value. Operation at currents lower than this value will not harm the device but may result in uneven light emission across the LES surface.

Note 5: Luminus may change any specifications without prior notice. Please refer to the company web site for the latest data sheet revision

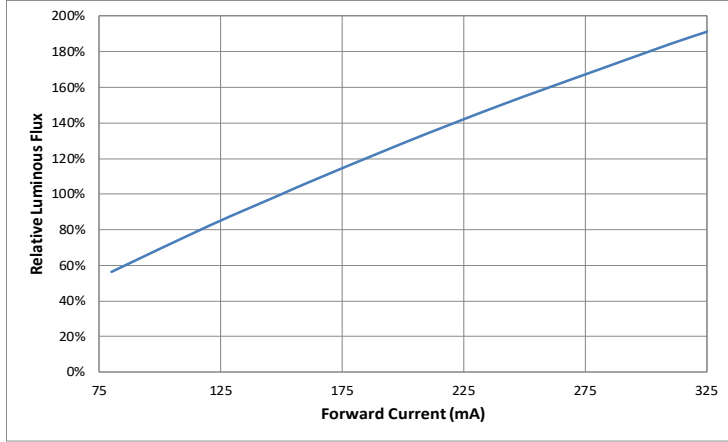Note 6: Caution must be taken not to stare at the light emitted from these LEDs. Under special circumstances, the high intensity could damage the eye.

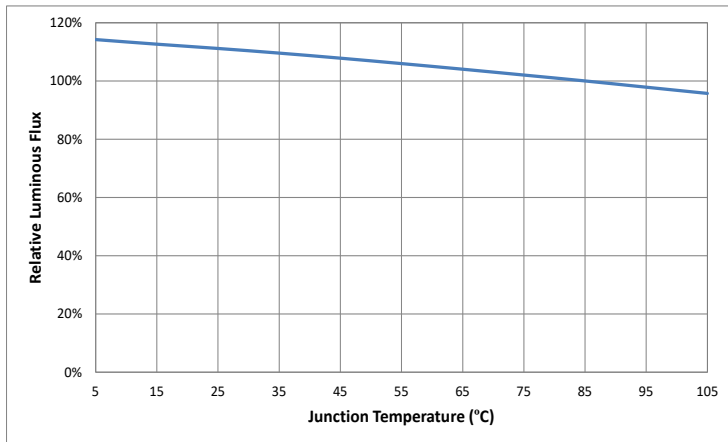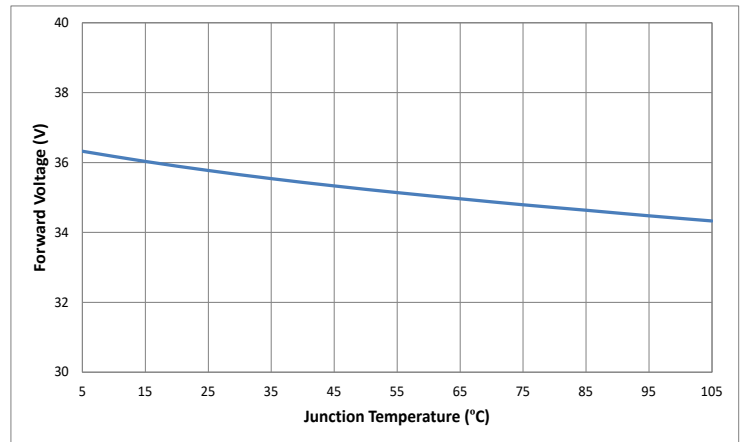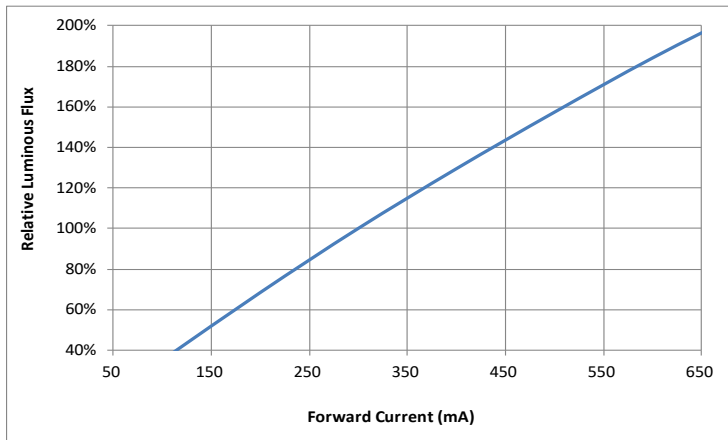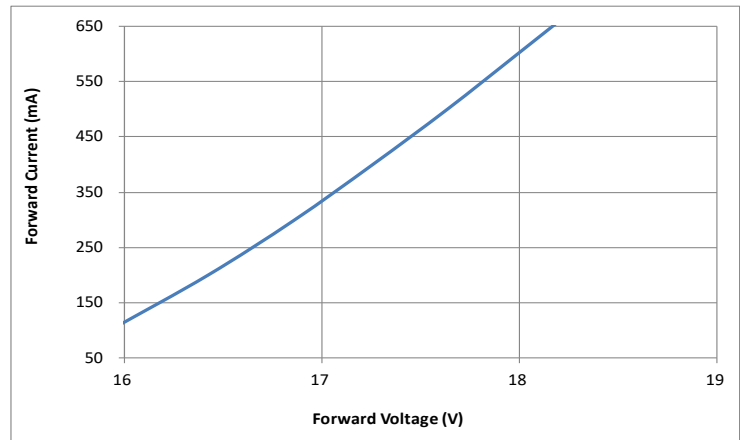**CXM-6, 36V Optical & Electrical Characteristics**
**Relative Output Flux vs. Forward Current @ 85°C**

**Forward Current vs. Forward Voltage @ 85°C**

**Relative Output Flux vs. Junction Temperature**

**Change in Voltage vs. Junction Temperature**

**CXM-6, 18V Optical & Electrical Characteristics**
**Relative Output Flux vs. Forward Current @ 85°C**

**Forward Current vs. Forward Voltage @ 85°C**


**CXM-6, 18V Optical & Electrical Characteristics**
**Relative Output Flux vs. Junction Temperature**

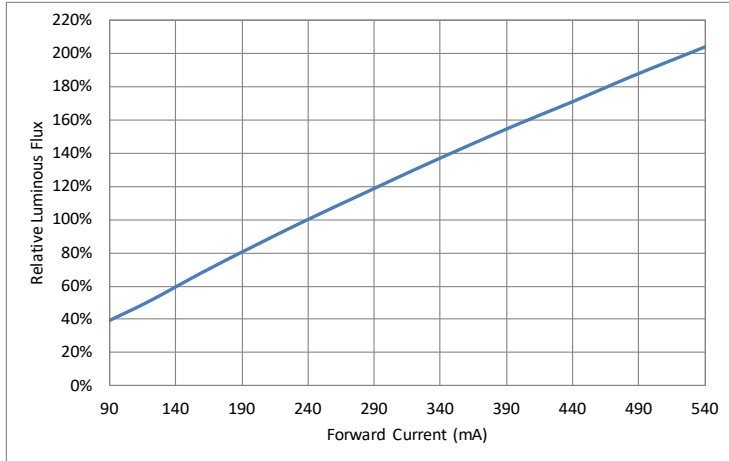
**Change in Voltage vs. Junction Temperature**


**CIM-9 Optical & Electrical Characteristics**
**Relative Output Flux vs. Forward Current @ 85°C**


**Forward Current vs. Forward Voltage @ 85°C**

**Relative Output Flux vs. Junction Temperature**

**Change in Voltage vs. Junction Temperature**

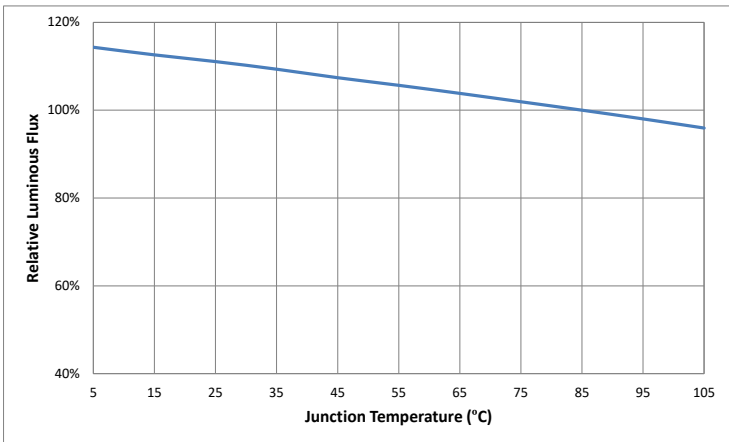
**CLM-9 Optical & Electrical Characteristics**
**Relative Output Flux vs. Forward Current @ 85°C**

**Forward Current vs. Forward Voltage @ 85°C**

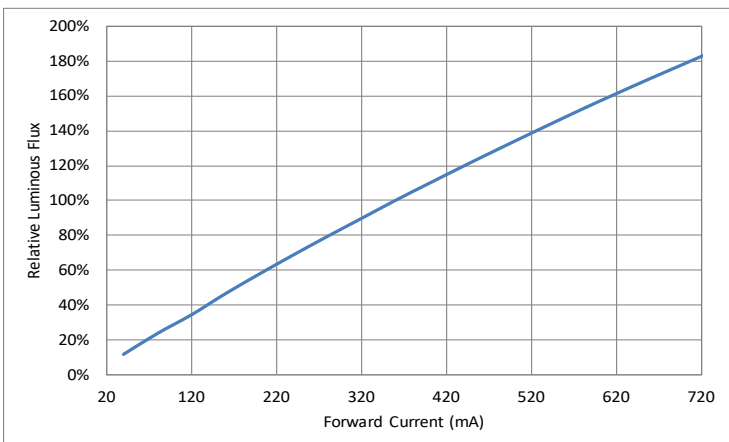**Relative Output Flux vs. Junction Temperature**

**Change in Voltage vs. Junction Temperature**

**CXM-9 Optical & Electrical Characteristics**
**Relative Output Flux vs. Forward Current @ 85°C**

**Forward Current vs. Forward Voltage @ 85°C**


**CXM-9 Optical & Electrical Characteristics**
**Relative Output Flux vs. Junction Temperature**

**Change in Voltage vs. Junction Temperature**

**CHM-9 Optical & Electrical Characteristics**
**Relative Output Flux vs. Forward Current @ 85°C**

**Forward Current vs. Forward Voltage @ 85°C**

**Relative Output Flux vs. Junction Temperature**

**Change in Voltage vs. Junction Temperature**


**CXM-11 Optical & Electrical Characteristics**
**Relative Output Flux vs. Forward Current @ 85°C**

**Forward Current vs. Forward Voltage @ 85°C**

**Relative Output Flux vs. Junction Temperature**

**Change in Voltage vs. Junction Temperature**

**CIM-14 Optical & Electrical Characteristics**
**Relative Output Flux vs. Forward Current @ 85°C**

**Forward Current vs. Forward Voltage @ 85°C**


**CIM-14 Optical & Electrical Characteristics**
**Relative Output Flux vs. Junction Temperature**

**Change in Voltage vs. Junction Temperature**

**CLM-14 Optical & Electrical Characteristics**
**Relative Output Flux vs. Forward Current @ 85°C**

**Forward Current vs. Forward Voltage @ 85°C**

**Relative Output Flux vs. Junction Temperature**

**Change in Voltage vs. Junction Temperature**


**CXM-14 Optical & Electrical Characteristics**
**Relative Output Flux vs. Forward Current @ 85°C**

**Forward Current vs. Forward Voltage @ 85°C**

**Relative Output Flux vs. Junction Temperature**

**Change in Voltage vs. Junction Temperature**

**CXM-18 Optical & Electrical Characteristics**
**Relative Output Flux vs. Forward Current @ 85°C**

**Forward Current vs. Forward Voltage @ 85°C**


**CXM-18 Optical & Electrical Characteristics**
**Relative Output Flux vs. Junction Temperature**

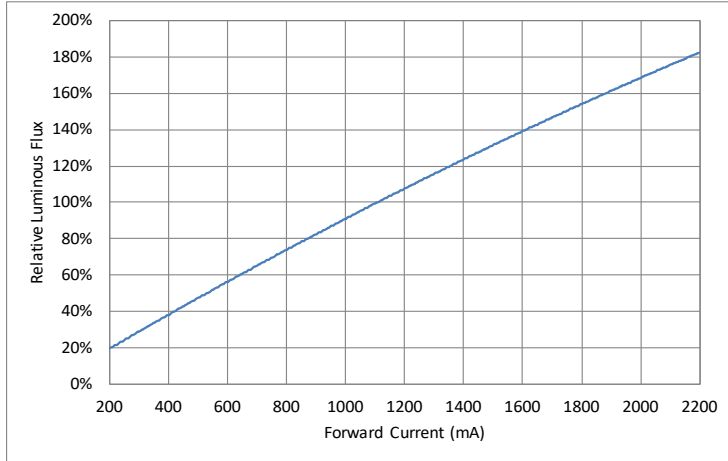
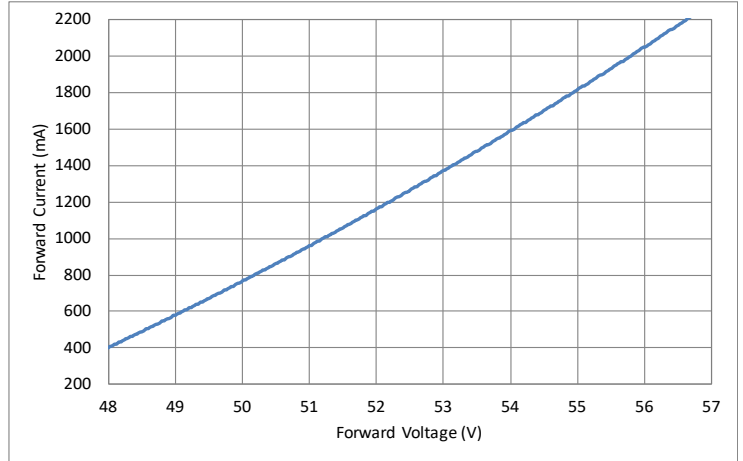
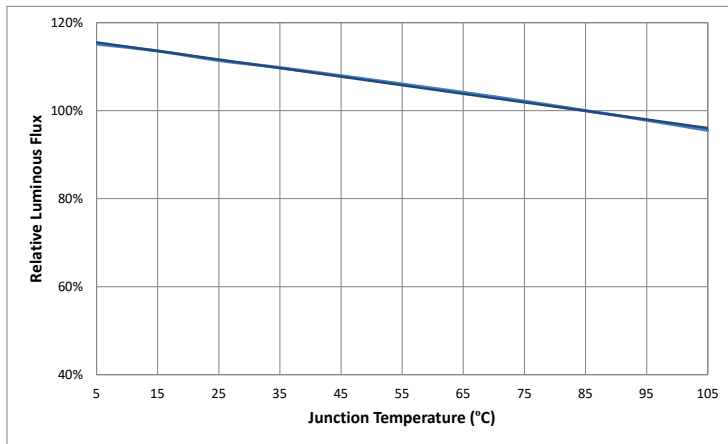
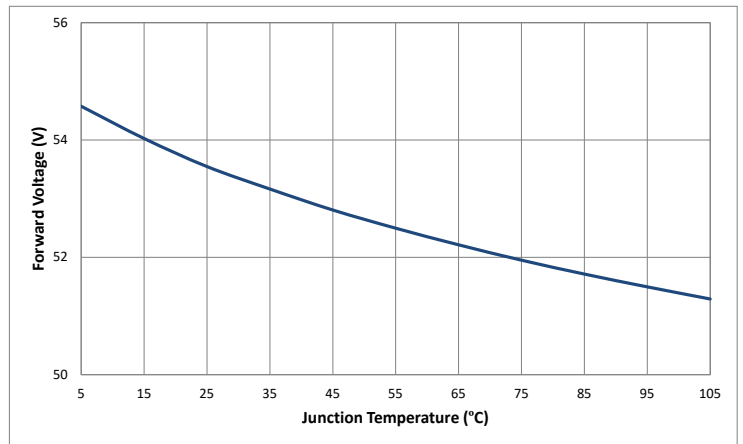
**Change in Voltage vs. Junction Temperature**

**CLM-22 Optical & Electrical Characteristics**
**Relative Output Flux vs. Forward Current @ 85°C**

**Forward Current vs. Forward Voltage @ 85°C**

**Relative Output Flux vs. Junction Temperature**

**Change in Voltage vs. Junction Temperature**


**CXM-22 Optical & Electrical Characteristics**
**Relative Output Flux vs. Forward Current @ 85°C**

**Forward Current vs. Forward Voltage @ 85°C**

**Relative Output Flux vs. Junction Temperature**

**Change in Voltage vs. Junction Temperature**


**CXM-27 Optical & Electrical Characteristics**
**Relative Output Flux vs. Forward Current @ 85°C**

**Forward Current vs. Forward Voltage @ 85°C**

**Relative Output Flux vs. Junction Temperature**

**Change in Voltage vs. Junction Temperature**


## Optical & Electrical Characteristics

### Typical Spectrum



### Change CIE<sub>x</sub> vs. Junction Temperature (3000K, 80CRI)



### Change CIE<sub>y</sub> vs. Junction Temperature (3000K, 80CRI)



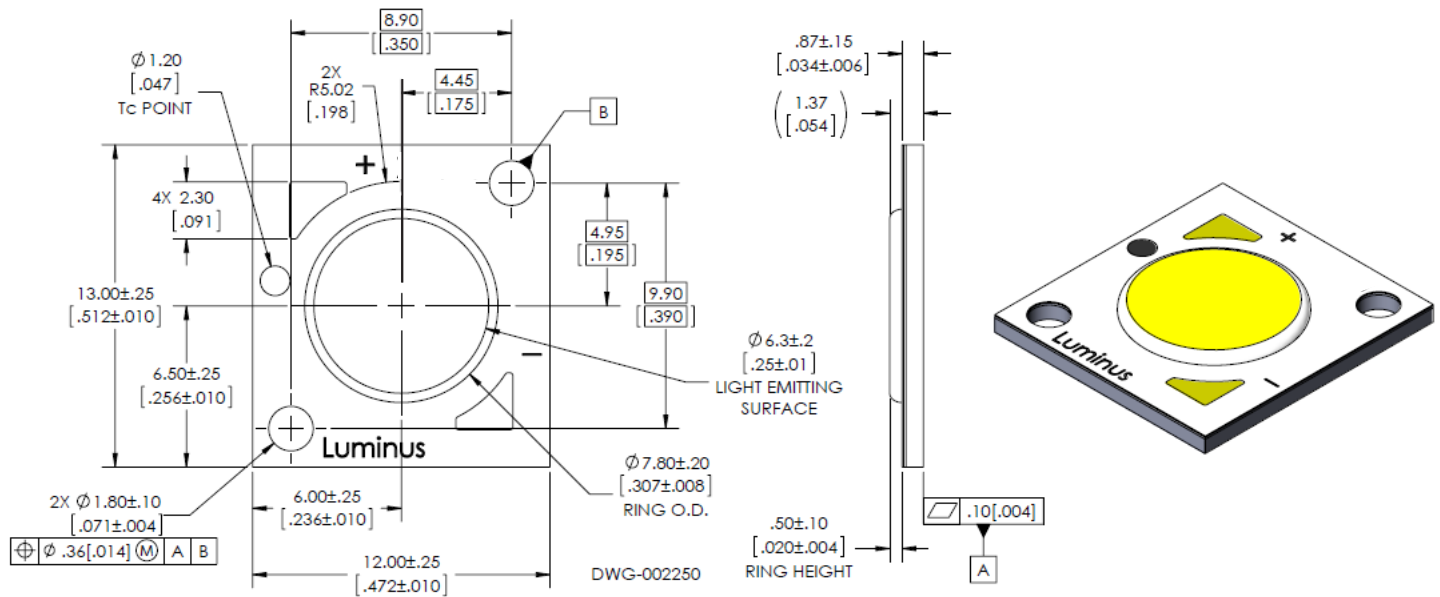
### Typical Polar Radiation Pattern




### Typical Angular Radiation Pattern




### Mechanical Dimensions (CXM-6-AA)



### Mechanical Dimensions (CXM-6-AC)

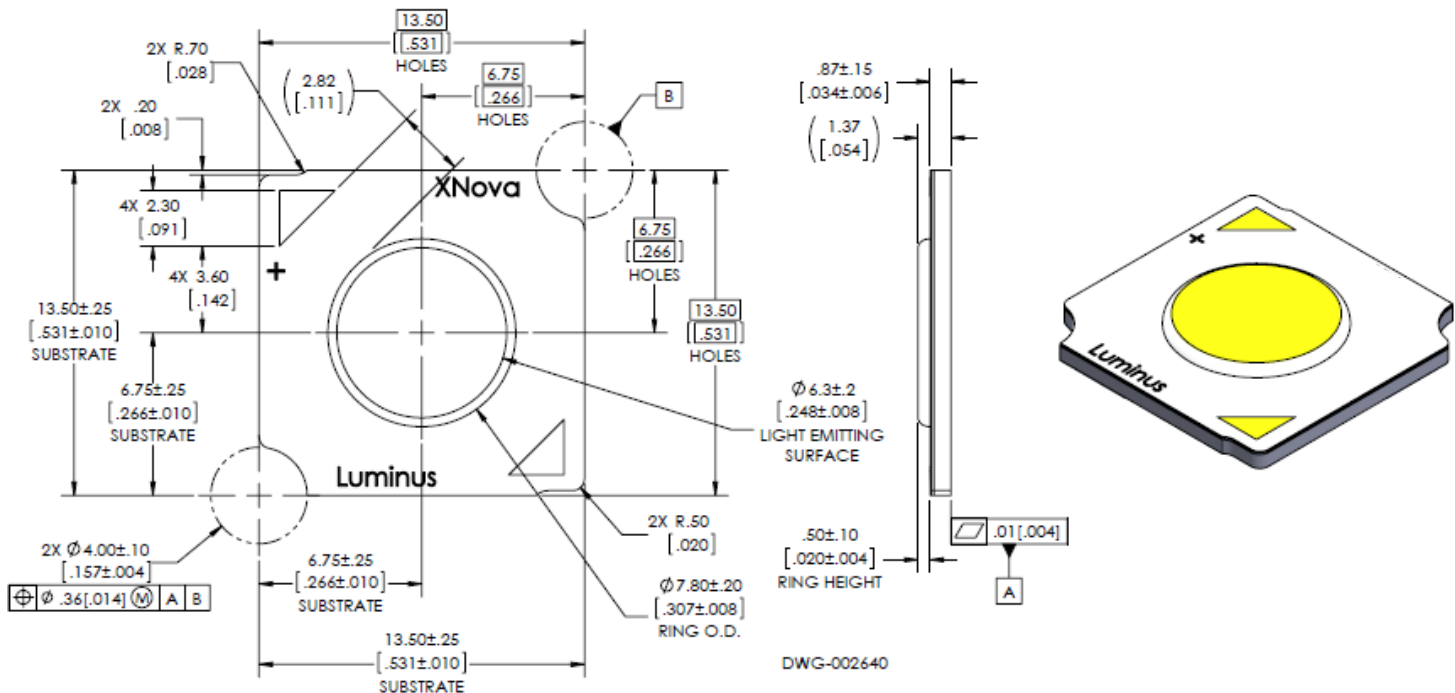

### Mechanical Dimensions (CIM/ CLM/CXM-9 -AC)

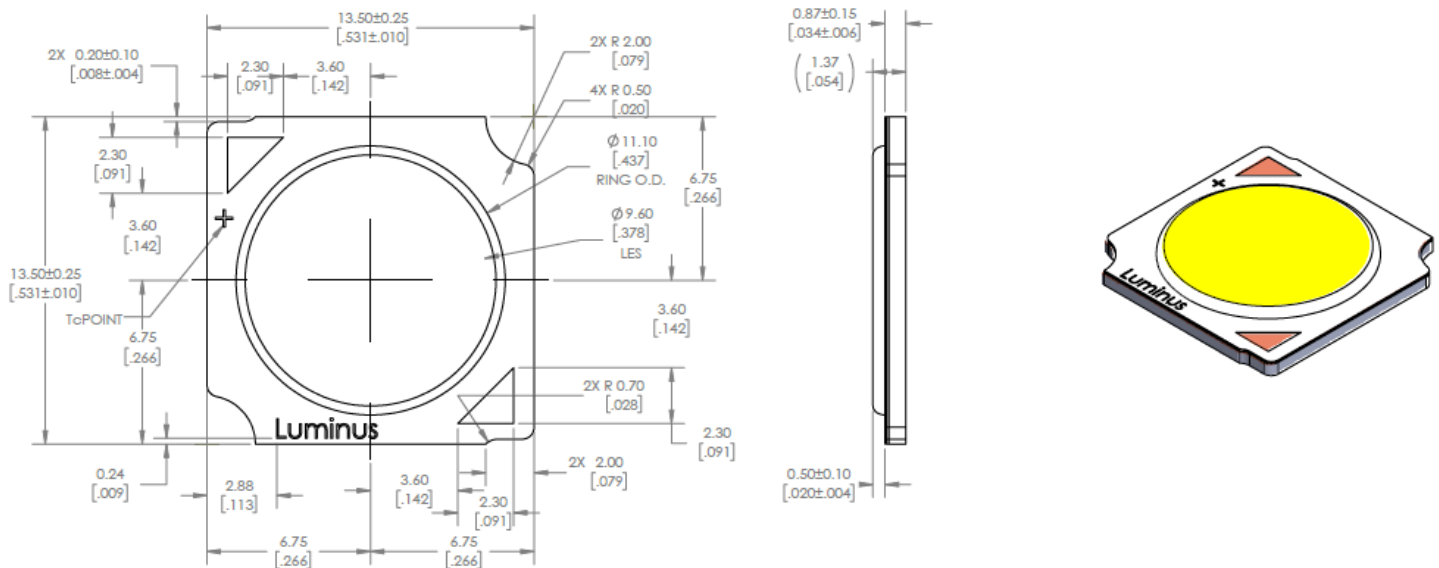

### Shipping Container (CXM-6-AA/ AC & CIM/ CLM/ CXM-9-AC)



400 pcs per box  
Each bag is boxed for  
easier storage/ stacking



Trays are sealed in  
an anti-static bag



80 pcs per tray  
5 trays are stacked together  
with separate cover



Luminus Label Model:

| LUMINUS                                            |          | Luminus Devices Inc |  |
|----------------------------------------------------|----------|---------------------|--|
| XXXXXX-XX-XX (Manufacturer Part Number & Bin Kits) | Rev XX   | RoHS Compliant      |  |
| Bar code                                           | Bar code |                     |  |
| XXX-XX-XX-XX-XX-XXXX-XX-X (Customer Part Number)   |          |                     |  |
| XXXXXXXXXXXXXXXX (Box ID)                          | Qty: XX  |                     |  |
| Bar code                                           | Bar code |                     |  |

Technical drawing of the Luminus LED module showing top, side, and isometric views with dimensions in inches and millimeters.

**Top View Dimensions:**

- Overall width:  $15.00 \pm 0.25$  [ $.591 \pm .010$ ]
- Overall height:  $15.00$  [ $.591$ ]
- Distance from top edge to centerline:  $7.50 \pm 0.25$  [ $.295 \pm .010$ ]
- Distance from left edge to centerline:  $7.50 \pm 0.25$  [ $.295 \pm .010$ ]
- Distance from top edge to mounting hole center:  $2X \ 1.60$  [ $.063$ ]
- Distance from left edge to mounting hole center:  $2X \ 1.60$  [ $.063$ ]
- Distance from centerline to mounting hole center:  $2X \ 5.90$  [ $.232$ ]
- Distance from centerline to mounting hole center:  $2X \ 5.95$  [ $.234$ ]
- Mounting hole diameter:  $\phi 1.20$  [ $.047$ ]
- Mounting hole type: Tc-POINT
- LED diameter:  $2X \ \phi 1.80 \pm 0.10$  [ $.071 \pm .004$ ]
- LED diameter:  $\phi 9.60 \pm 0.20$  [ $.378 \pm .008$ ]
- LED diameter:  $\phi 11.10 \pm 0.20$  [ $.437 \pm .008$ ]
- LED type: LES
- Ring outer diameter: RING OD
- Ring height:  $0.50 \pm 0.10$  [ $.020 \pm .004$ ]
- Ring height: RING HEIGHT
- Corner radius:  $6X \ R \ 0.20$  [ $.008$ ]
- Corner radius:  $4X \ 2.12$  [ $.083$ ]

**Side View Dimensions:**

- Overall height:  $0.87 \pm 0.15$  [ $.034 \pm .006$ ]
- Distance from top edge to mounting hole center:  $1.37$  [ $.054$ ]

**Isometric View:**

- LED diameter:  $\phi 11.10 \pm 0.20$  [ $.437 \pm .008$ ]
- LED type: LES
- Ring outer diameter: RING OD
- Ring height:  $0.50 \pm 0.10$  [ $.020 \pm .004$ ]
- Ring height: RING HEIGHT
- Corner radius:  $6X \ R \ 0.20$  [ $.008$ ]
- Corner radius:  $4X \ 2.12$  [ $.083$ ]

Technical drawing of the TO-1107 package. The top view (left) shows a square package with a central grid of circular and square features. Dimensions are provided in millimeters and inches: overall width 240.0 [9.45], overall height 240.0 [9.45], and a central square area of 25.00 [0.984] by 25.00 [0.984]. The isometric view (right) shows the package's 3D structure, including the central grid and the surrounding raised areas. The package is labeled "TO-1107".




**LUMINUS**

**Luminus Devices Inc**

XXXXXXXX-XX-XX (Manufacturer Part Number & Bin Kits)

Rev XX

Bar code

XXX-XX-XX-XX-XX-XXXX-XX-X (Customer Part Number)

Qty: XX

Bar code

XXXXXXXXXXXXXXXXXX (Box ID)

Bar code

RoHS Compliant

**RoHS Compliant**

Technical drawing of the Luminus component showing dimensions and tolerances. The drawing includes a central circular feature with a diameter of  $\varnothing 11.70$  LES  $[\text{.461}]$  and an outer ring with a diameter of  $\varnothing 13.20$  RING O.D.  $[\text{.520}]$ . The component has a total width of  $19.00 \pm 0.25$   $[\text{.748} \pm 0.010]$  and a total height of  $19.00 \pm 0.25$   $[\text{.748} \pm 0.010]$ . Key features include two holes with a diameter of  $\varnothing 1.20$   $[\text{.047}]$  and two holes with a diameter of  $\varnothing 1.60$   $[\text{.063}]$ . The drawing also shows various chamfers and radii, such as  $2X 0.80$   $[\text{.031}]$ ,  $2X 3.20$   $[\text{.126}]$ ,  $2XR 2.00$   $[\text{.079}]$ ,  $4XR 0.50$   $[\text{.020}]$ ,  $2X 9.50$   $[\text{.374}]$ ,  $2X 8.70$   $[\text{.343}]$ , and  $R0.70$   $[\text{.028}]$ . The component is labeled "Luminus" and includes a "TcPOINT" feature.



Technical drawing of the Luminus LED module showing dimensions and tolerances. The drawing includes the following specifications:

- Overall width:  $19.00 \pm 0.25$  [ $.748 \pm .010$ ]
- Overall height:  $19.00 \pm 0.25$  [ $.748 \pm .010$ ]
- Top edge features:
  - 2X 0.80 [ $.031$ ]
  - 2X 3.20 [ $.126$ ]
  - 2X 1.08 [ $.043$ ]
  - 2XR 2.00 [ $.079$ ]
  - 4XR 0.50 [ $.020$ ]
- Internal features:
  - 2X 1.60 [ $.063$ ]
  - $\phi 1.20$  [ $.047$ ]
  - To POINT
  - $\phi 14.30$  LES [ $.563$ ]
  - $\phi 15.80$  [ $.622$ ]
  - RING O.D.
- Bottom edge features:
  - 2X 9.50 [ $.374$ ]
  - HOLES
  - 2X 8.70 [ $.343$ ]
  - 2X 0.20 [ $.008$ ]
- Other features:
  - RO.70 [ $.028$ ]
  - Luminus



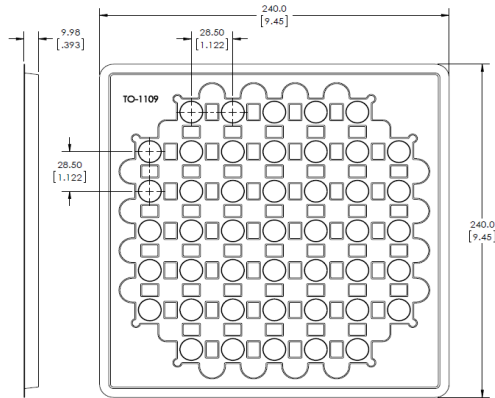
### Mechanical Dimensions (CXM-11-AA)



### Mechanical Dimensions (CLM/CXM-14-AA)



## Shipping Container (CXM-11 & CIM/ CLM/CXM-14)



**225 pcs per box**  
Each bag is boxed for  
easier storage/ stacking



Trays are sealed in  
an anti-static bag



**45 pcs per tray**  
5 trays are stacked together  
with separate cover




**Luminus Label Model:**

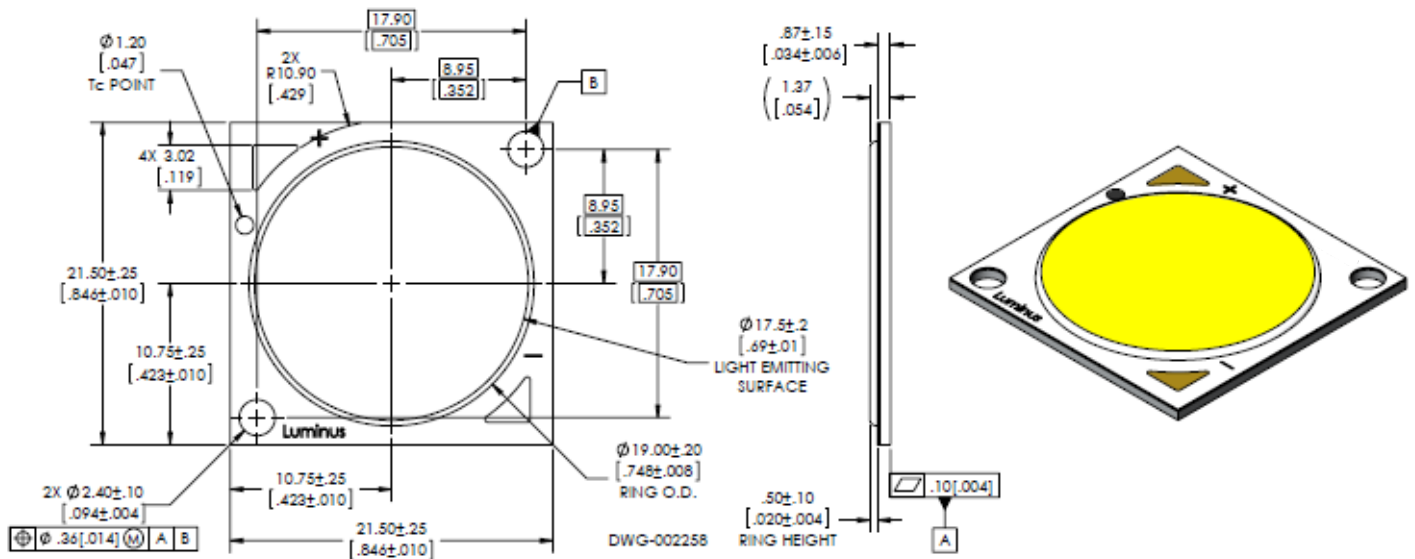
|  <b>LUMINUS</b> |  | <b>Luminus Devices Inc</b> |  |
|----------------------------------------------------------------------------------------------------|--|----------------------------|--|
| XXXXXX-XX-XX (Manufacturer Part Number & Bin Kits)                                                 |  | Rev XX                     |  |
| <div>Bar code</div>                                                                                |  | <div>Bar code</div>        |  |
| XXX-XX-XX-XX-XX-XXXX-XX-X (Customer Part Number)                                                   |  |                            |  |
| XXXXXXXXXXXXXXXX (Box ID)                                                                          |  | Qty: XX                    |  |
| <div>Bar code</div>                                                                                |  | <div>Bar code</div>        |  |

**RoHS Compliant**

## Mechanical Dimensions (CXM-18)



## Shipping Container (CXM-18)

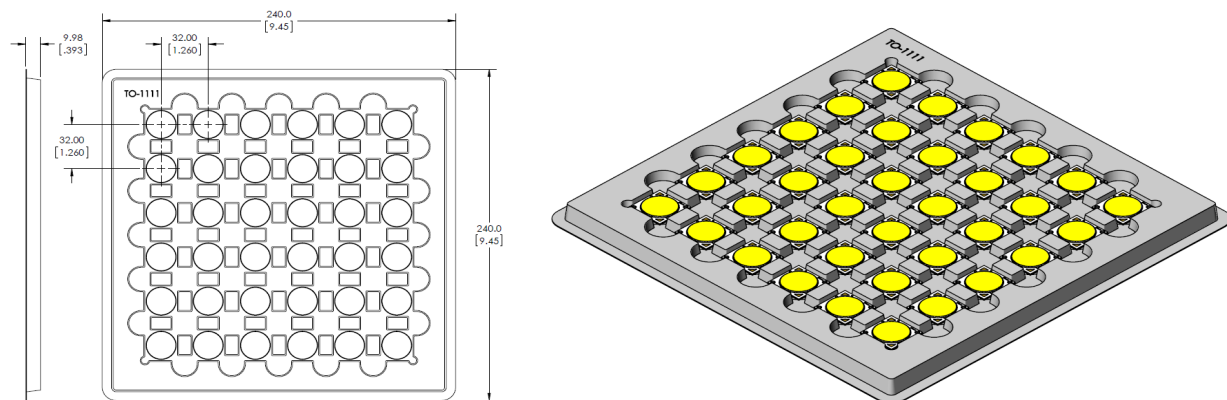

**180 pcs per box**  
**Each bag is boxed for**  
**easier storage/ stacking**

**Trays are sealed in an anti-static bag**

**36 pcs per tray**  
**5 trays are stacked together**  
**with separate cover**



**Luminus Label Model:**


**LUMINUS**

**Luminus Devices Inc**

XXXXXXXX-XX-XX (Manufacturer Part Number & Bin Kits)

Rev XX

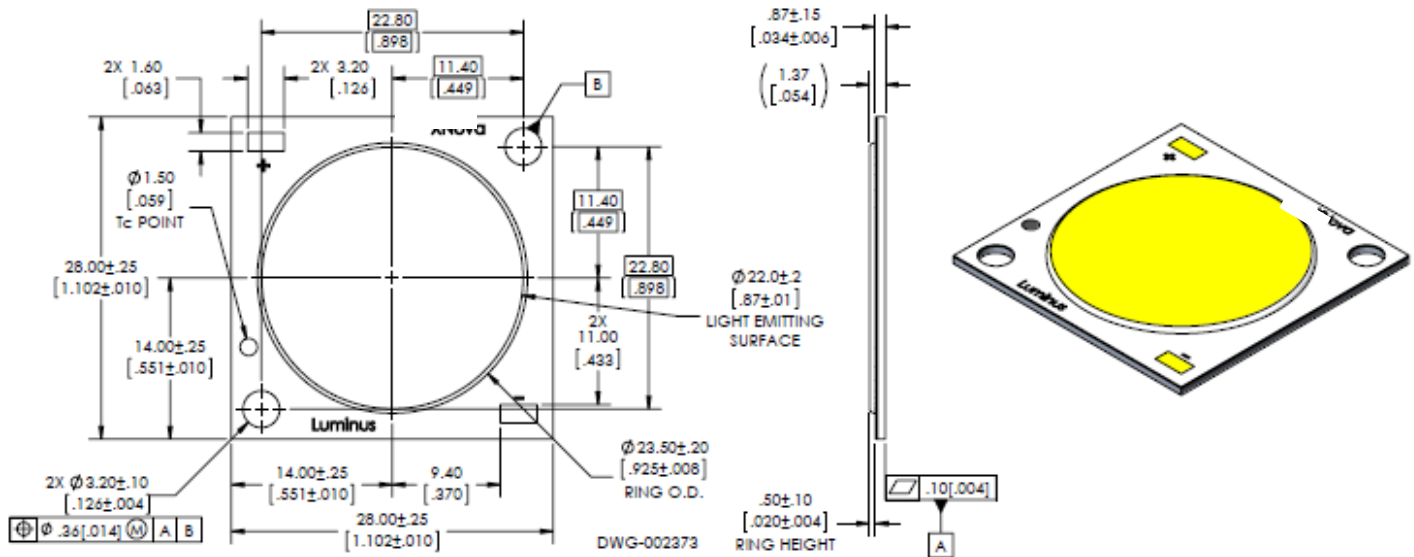
XXX-XX-XX-XX-XX-XXXX-XX-X (Customer Part Number)

Qty: XX



XXXXXXXXXXXXXXXXXX (Box ID)

RoHS Compliant

## Mechanical Dimensions (CLM/CXM-22)





## Shipping Container (CLM/CXM-22)

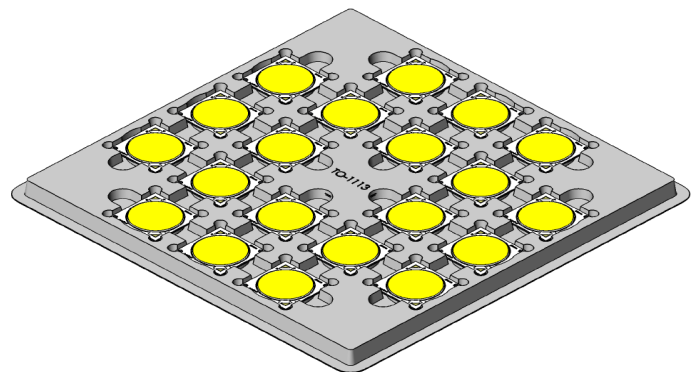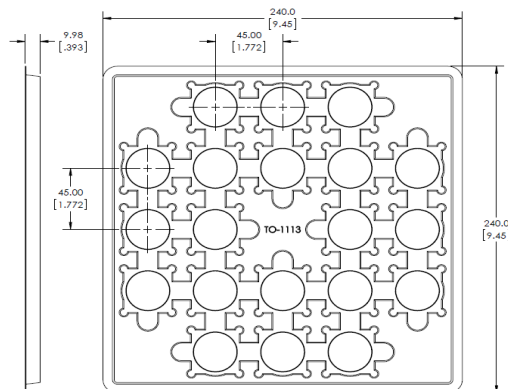

**100 pcs per box**  
**Each bag is boxed for**  
**easier storage/ stacking**

**Trays are sealed in an anti-static bag**

**20 pcs per tray**  
**5 trays are stacked together**  
**with separate cover**



**Luminus Label Model:**



**Luminus Devices Inc**

XXXXXX-XX-XX (Manufacturer Part Number & Bin Kits)

Rev XX

Bar code

Bar code

XXX-XX-XX-XX-XX-XXXX-XX-X (Customer Part Number)

r)

XXXXXXXXXXXXXXXX (Box ID)

Qty: **XX**

Bar code

Bar code

**RoHS Compliant**

## Mechanical Dimensions (CXM-27)



## Shipping Container (CXM-27)



100 pcs per box  
Each bag is boxed for  
easier storage/ stacking

Trays are sealed in  
an anti-static bag

20 pcs per tray  
5 trays are stacked together  
with separate cover



Luminus Label Model:

| LUMINUS                                            |  | Luminus Devices Inc |  |
|----------------------------------------------------|--|---------------------|--|
| XXXXXX-XX-XX (Manufacturer Part Number & Bin Kits) |  | Rev XX              |  |
| Bar code                                           |  | Bar code            |  |
| XXX-XX-XX-XX-XXXX-XX-X (Customer Part Number)      |  | Qty: XX             |  |
| XXXXXXXXXXXXXXX (Box ID)                           |  | Bar code            |  |

RoHS Compliant

## Handling Notes for Luminus COBs

Luminus products are designed for robust performance in general lighting application. However, care must be taken when handling and assembling the LEDs into their fixtures. To avoid damaging Luminus COBs please follow these guide lines.

The following is an overview of the application notes detailing some of the practices to follow when working with these devices. More detailed information is available on the Luminus web site at [www.luminus.com](http://www.luminus.com).

### General Handling

Devices are made to be lifted or carried with tweezers on two adjacent corners opposite the contact pads. At no time should the devices be handled by or should anything come in contact with the light emitting surface (LES) area. This area includes the yellow colored circular area and the ring surrounding it. There are electrical connections under the LES which if damaged will cause the device to fail.

In addition, the ring frame itself should not be used for moving, lifting or carrying the device. Also do not attach any optics or mechanical holders to the ring as it is not capable to handle the mechanical stress.

### Static Electricity

Luminus COBs are electronic devices which can be damaged by electrostatic discharge (ESD). Please use appropriate measures to assure the devices do not experience ESD during their handling and or storage. ESD protection guidelines should be used at all times when working with Luminus COBs.

**Storage:** Luminus products are delivered in ESD shielded bags and should be stored in these bags until used.

**Assembly:** Individuals handling Luminus COBs during assembly should be trained in ESD protection practices. Assemblers should maintain constant conductive contact with a path to ground by means of a wrist strap, ankle straps, mat or other ESD protection system.

**Transporting:** When transporting the devices from one assembly area to another, ESD shielded carts and carriers should be used.

### Electrical Contact

Luminus COBs are designed with contact pads on their top surface. These pads are clearly marked with + and – polarity. Wires can be soldered to the contact pads for electrical connections or other solderless connector products are available.

If wires are being soldered to the COB product, we recommend attaching these wires prior to mounting the devices to a heat sink. Please contact Luminus for specific recommendations on how to solder wires if not familiar with the standard practice. Luminus can also offer design recommendations for jigs to allow easily soldering multiple products in rapid succession.

### Chemical Compatibility

The resin material used to form the LES can getter hydrocarbons from the surrounding environment. As a results, certain chemical compounds are not recommended for use with the Luminus products. Use of these compounds can cause damage to the light output of the device and may permanently damage the device. Please refer to [www.luminus.com](http://www.luminus.com) for a list of the compounds not recommended for use with the Luminus COB products.

### Thermal Interface Material (TIM)

Proper thermal management is critical for successful operation of any LED system. Excess operating temperature can reduce the light output of the device. And excessive heating can cause permanent damage to the device. Proper TIM material is a crucial component for effective heat transfer away from the LED during normal operation. Please refer to [www.luminus.com](http://www.luminus.com) for specific recommendations for TIM solutions.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9