

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0039532294

Status:

Active

Overview:

Description:

1.25mm (.049") Pitch FFC/FPC Connector, Through-Hole, Right Angle, ZIF, Top Contact Style, 29 Circuits, Lead-free

Agency Certification

UL

E29179

General

Product Family

FFC/FPC Connectors

Series

5597

Overview

ffc_fpc_throughhole

Product Name

N/A

Physical

Circuits (Loaded)

29

Color - Resin

Natural

Contact Position

Top

Durability (mating cycles max)

30

Entry Angle

90° Angle

Flammability

94V-0

Mated Height (in)

0.197 In

Mated Height (mm)

5.00 mm

Material - Metal

Phosphor Bronze

Material - Plating Mating

Tin-Bismuth

Material - Plating Termination

Tin-Bismuth

Material - Resin

Polyester

Number of Rows

1

Orientation

Right Angle

PC Tail Length (in)

0.138 In

PC Tail Length (mm)

3.50 mm

PCB Locator

No

PCB Retention

None

Packaging Type

Tray

Pitch - Mating Interface (in)

0.049 In

Pitch - Mating Interface (mm)

1.25 mm

Plating min: Mating (µin)

40

Plating min: Mating (µm)

1

Plating min: Termination (µin)

40

Plating min: Termination (µm)

1

Polarized to PCB

No

Stackable

No

Surface Mount Compatible (SMC)

No

Temperature Range - Operating

-20°C to +80°C

Termination Interface: Style

Through Hole

Wire/Cable Type

FFC/FPC

Electrical

Current - Maximum per Contact

1A

Voltage - Maximum

200V

Material Info

Old Part Number

5597-29APB7F

Reference - Drawing Numbers

Packaging Specification

SPK-5597-003

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

5597Series

Product Specification

Sales Drawing

PS-5597-004, RPS-5597-005, RPS-5597-006,
RPS-5597-008, RPS-5597-013, RPS-5597-014,
RPS-5597-015
SD-5597-011

This document was generated on 06/04/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

F



E

D

C

B

A

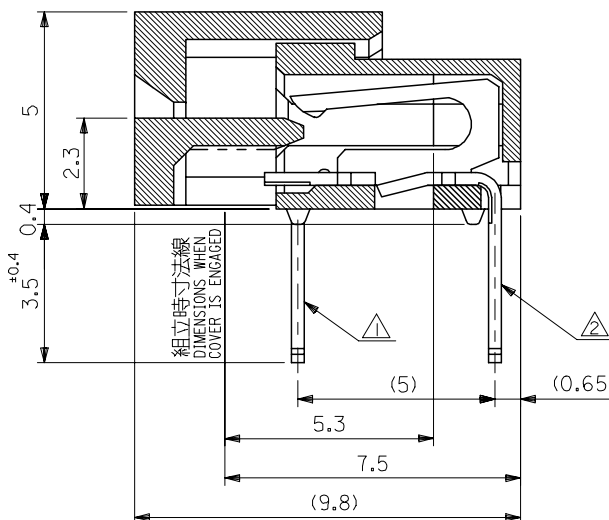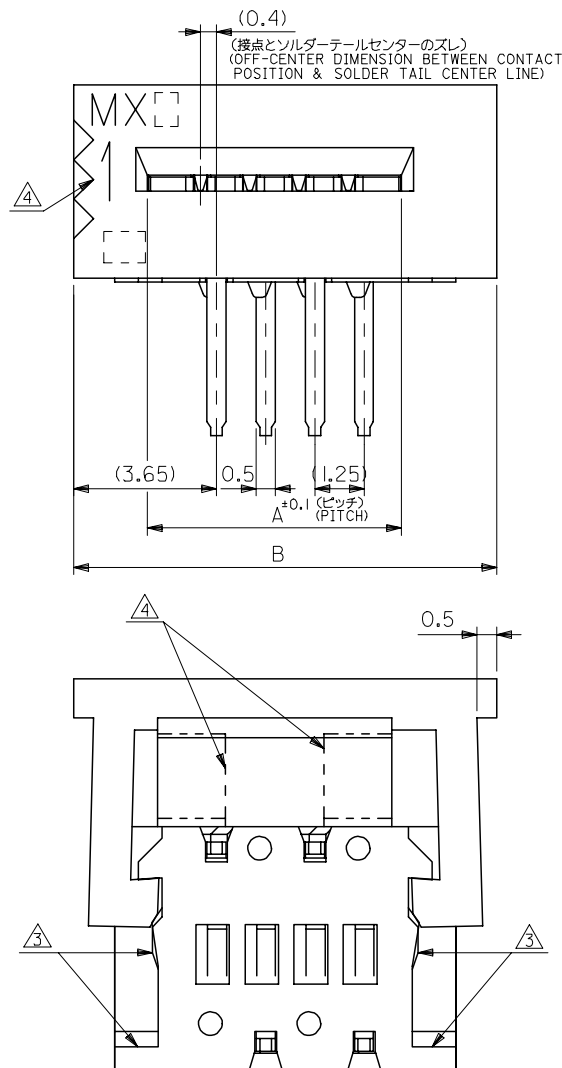

注記 NOTES

- △ MX J側を基準に奇数番目の極におけるソルダテール。
SOLDER TAIL OF ODD CKTS, MXJ MARK AS BASIC.
- △ MX J側を基準に偶数番目の極におけるソルダテール。
SOLDER TAIL OF EVEN CKTS, MXJ MARK AS BASIC.
- △ 3極～10極に適用。APPLY FOR 3-10 CKTS.
- △ 3極～19極に適用。APPLY FOR 3-19 CKTS.
- 5. () 内寸法は、参考値。
() DIMENSION IS FOR REFERENCE.
- 6. ソルダテールは、先端が取付推奨穴にガイドされること。
SOLDER TAILS MAY BE CHECKED BY INSERTION FOR RECOMMENDED PCB BOARD HOLES.
- 7. 本製品は5597-NAPBの鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 5597-NAPB.

48.25	43.95	39-53-2344	5597-34APB7F	34
47.00	42.70	-2334	-33APB7F	33
45.75	41.45	-2324	-32APB7F	32
44.50	40.20	-2314	-31APB7F	31
43.25	38.95	-2304	-30APB7F	30
42.00	37.70	-2294	-29APB7F	29
40.75	36.45	-2284	-28APB7F	28
39.50	35.20	-2274	-27APB7F	27
38.25	33.95	-2264	-26APB7F	26
37.00	32.70	-2254	-25APB7F	25
35.75	31.45	-2244	-24APB7F	24
34.50	30.20	-2234	-23APB7F	23
33.25	28.95	-2224	-22APB7F	22
32.00	27.70	-2214	-21APB7F	21
30.75	26.45	-2204	-20APB7F	20
29.50	25.20	-2194	-19APB7F	19
28.25	23.95	-2184	-18APB7F	18
27.00	22.70	-2174	-17APB7F	17
25.75	21.45	-2164	-16APB7F	16
24.50	20.20	-2154	-15APB7F	15
23.25	18.95	-2144	-14APB7F	14
22.00	17.70	-2134	-13APB7F	13
20.75	16.45	-2124	-12APB7F	12
19.50	15.20	-2114	-11APB7F	11
18.25	13.95	-2104	-10APB7F	10
17.00	12.70	-2094	-09APB7F	9
15.75	11.45	-2084	-08APB7F	8
14.50	10.20	-2074	-07APB7F	7
13.25	8.95	-2064	-06APB7F	6
12.00	7.70	-2054	-05APB7F	5
10.75	6.45	-2044	-04APB7F	4
9.50	5.20	39-53-2034	5597-03APB7F	3
B	A	EDP NO.	ENG NO.	極数 CKT.

MODEL NO. 5597-NAPB7F

材料 MATERIAL HOUSING, ACTUATOR : PBTP, UL94V-0 TERMINAL : PHOSPHOR-BRONZE THK : 0.3t
仕上げ FINISH TIN-BISMUTH : 10 MICROMETER MINIMUM OVER NICKEL PLATING : 10 MICROMETER MINIMUM
適用電線範囲 WIRE RANGE
被覆外径 INS. RANGE

REVISED	EC NO: J2007-2876	2007/04/19
DRW:KSAIT001	2007/04/19	
CHKD:THARUYAMA	2007/04/19	
APPR:NUKITA	2007/04/20	
DESCRIPTION		
REV	B	

GENERAL TOLERANCES (UNLESS SPECIFIED)	
10 UNDER	± 0.2
10 OVER 30 UNDER	± 0.25
30 OVER	± 0.3
ANGULAR	± 3 °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE MM ONLY	
DRAWN BY	DATE
M. NAGATA	'04/05/10
CHECKED BY	DATE
K. TOJO	'04/05/10
APPROVED BY	DATE
M. SASAO	'04/05/10
MATERIAL NO.	
SIZE	
A3	

SCALE ---	DESIGN UNITS METRIC	MODEL NO. 5597-011	THIRD ANGLE PROJECTION
TITLE 1.25 FPC CONNECTOR ASSY ZIF -LEAD FREE-			
MOLEX INCORPORATED			
DOCUMENT NO. SD-5597-011			SHEET NO. 1 OF 2
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			



適合FPC/FFC推奨寸法
RECOMMENDED FPC/FFC
厚さ THK : 0.3±0.05

(公差非累積)
(TOL. NON-CUMULATIVE)
1.25 ±0.1
(ピッチ)
(PITCH)
5 ±0.1
CIRCUIT NO.1
基板取付穴推奨寸法 (t=1.6)
RECOMMENDED P.C. BOARD
HOLE DIMENSION

FPC/FFCについて:
打抜き方向は導体側から補強板側を推奨いたします。
導体膜については軟銅箔35マイクロメートルまたは50マイクロメートルを推奨いたします。
ABOUT FPC/FFC
RECOMMENDED PUNCHER DIRECTION : FROM CONDUCTOR SIDE TO STIFFENER FILM SIDE.
RECOMMENDED CONDUCTOR SPEC :
THICKNESS OF SOFT COPPER FOIL : 35 MICROMETER OR 50 MICROMETER.
FPCについて:
補強フィルム材質はポリイミドを推奨します。
接着剤は熱硬化接着剤を推奨します。
ABOUT FPC
RECOMMENDED MATERIAL :
STIFFENER FILM : POLYIMIDE
BONDING AGENT : THERMOSETTING BONDING AGENT

REVISED		EC NO: J2007-2876		2007/04/19		DRWG:SAITOO1		2007/04/19		CHKD:THARUYAMA		2007/04/19		APPR:NUKITA		2007/04/20		DESCRIPTION		REV	
GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION		MODEL NO. 5597-NAPB7F		TITLE		1.25 FPC CONNECTOR ASSY ZIF -LEAD FREE-		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
10 UNDER		± 0.2		DRAWN BY		DATE		M. NAGATA		'04/05/10		CHECKED BY		DATE		K. TOJO		'04/05/10		APPROVED BY	
10 OVER 30 UNDER		± 0.25		M. SASAO		'04/05/10		M. SASAO		'04/05/10		MATERIAL NO.		DOCUMENT NO.		SD-5597-011		SHEET NO.		2 OF 2	
30 OVER		± 0.3		ANGULAR		± 3 °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE		A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		MOLEX INCORPORATED		SD-5597-011		2 OF 2	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9