


Panasonic
ideas for life

8 A MINIATURE POWER RELAY IN DS RELAY SERIES

DSP RELAYS

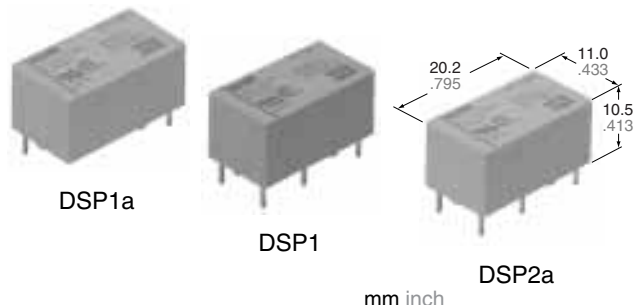

FEATURES

- Power types added to DS relay series
- High switching capacity: 1a: 8 A 250 V AC / 1a1b, 2a: 5 A 250 V AC
- High sensitivity: 190 mW pick-up power
- High contact welding resistance
- Latching types available
- High breakdown voltage 3,000 Vrms between contacts and coil 1,000 Vrms between open contacts Meeting FCC Part 68
- Sealed types are standard

SPECIFICATIONS (at 20°C 68°F)

Contact

Arrangement		1a	1a1b	2a
Contact material		Gold flash over silver alloy		
Initial contact resistance, max. (By voltage drop 6 V DC 1A)		30 mΩ		
Nominal switching capacity		8A 250 VAC 5A 30 VDC	5A 250 VAC 5A 30 VDC	
Rating (resistive)	Max. switching power	2,000 VA 150 W	1,250 VA 150 W	
	Max. switching voltage	250 V AC, 30 V DC		
	Max. switching current	8 A	5 A	
	Min. switching capacity#1	10 mA, 5 V DC		
Expected life (min. operations)	Mechanical (at 180 cpm)	5×10 ⁷		
	Electrical	10 ⁵		

Coil (polarized) (at 20°C 68°F)

Minimum operating power	Single side stable	192 mW
	2 coil latching	192 mW
Nominal operating power	Single side stable	300 mW
	2 coil latching	300 mW

Note: All specifications are based on the condition of 25°C 77°F, 50% R.H. unless otherwise specified.

#1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

Remarks

- * Specifications will vary with foreign standards certification ratings.
- *1 Measurement at same location as "Initial breakdown voltage" section
- *2 Detection current: 10mA
- *3 Excluding contact bounce time
- *4 Half-wave pulse of sine wave: 11ms; detection time: 10μs
- *5 Half-wave pulse of sine wave: 6ms
- *6 Detection time: 10μs
- *7 Refer to 6. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT

Characteristics

Max. operating speed		30 cps. at rated load
Initial insulation resistance*1		Min. 1,000 MΩ at 500 V DC
Initial breakdown voltage*2	Between open contacts	1,000 Vrms
	Between contact sets	2,000 Vrms (1a1b, 2a)
	Between contacts and coil	3,000 Vrms
Surge voltage between contacts and coil		Min. 5,000 V
Set time*3 (at nominal voltage)		Max. 10 ms (Approx. 5 ms)
Reset time*3 (at nominal voltage)		Max. 10 ms (Approx. 4 ms)
Operate time*3 (at nominal voltage)		Max. 10 ms (Approx. 5 ms)
Release time(without diode)*3 (at nominal voltage)		Max. 5 ms (Approx. 4 ms)
Temperature rise		Max. 40°C (1a1b type) Max. 55°C (1a, 2a types)
Soldering temperature		250°C (10 s) 300°C (5 s), 350°C (3 s)
Shock resistance	Functional*4	Min. 196 m/s ² {20 G}
	Destructive*5	Min. 980 m/s ² {100 G}
Vibration resistance	Functional*6	117.6 m/s ² {12 G}, 10 to 55 Hz at double amplitude of 2 mm
	Destructive	205.8 m/s ² {21 G}, 10 to 55 Hz at double amplitude of 3.5 mm
Conditions for operation, transport and storage*7 (Not freezing and condensing at low temperature)		−40°C to +65°C − 40°F 149°F
Unit weight		Approx. 4.3 g .15 oz

TYPICAL APPLICATIONS

Office and industrial electronic devices

- Terminal devices of information processing equipment, such as printer, data recorder.
- Office equipment (copier, facsimile)
- Measuring instruments
- NC machines, temperature controllers and programmable logic controllers.

ORDERING INFORMATION

Ex. DSP	1	L	DC12V	R	F
Contact arrangement	Operating function	Coil voltage	Polarity	Environmental support	
1: 1a1b 1a: 1a 2a: 2a	Nil: Single side stable L2: 2 coil latching	DC: 3, 5, 6, 9, 12, 24 V	Nil: Standard polarity R: Reverse polarity	• RoHS Directive conforming type (AgSnO ₂ type) F: 1a1b Nil: 1a, 2a • RoHS Directive non-conforming type (AgCdO type) Nil: 1a1b	

(Notes) 1. Standard packing—Carton: 50 pcs.; Case: 500 pcs.
UL/CSA, VDE approved type is standard.
2. 1 coil latching type available.

TYPES AND COIL DATA (at 20°C 68°F)

Single side stable

Type	Part No.	Nominal voltage, V DC	Pick-up voltage, V DC (max.)	Drop-out voltage, V DC (min.)	Nominal operating current, mA	Nominal operating power, mW	Coil resistance, Ω ($\pm 10\%$)	Max. allowable voltage, at 50°C, V DC
Single side stable	DSP□-DC3V (-F)	3	2.4	0.3	100	300	30	3.9
	DSP□-DC5V (-F)	5	4.0	0.5	60	300	83	6.5
	DSP□-DC6V (-F)	6	4.8	0.6	50	300	120	7.8
	DSP□-DC9V (-F)	9	7.2	0.9	33.3	300	270	11.7
	DSP□-DC12V (-F)	12	9.6	1.2	25	300	480	15.6
	DSP□-DC24V (-F)	24	19.2	2.4	12.5	300	1,920	31.2

2 coil latching

Type	Part No.	Nominal voltage, V DC	Set voltage, V DC (max.)	Reset voltage, V DC (max.)	Nominal operating current, mA	Nominal operating power, mW	Coil resistance, Ω ($\pm 10\%$)	Max. allowable voltage, at 50°C, V DC
2 coil latching	DSP□-L2-DC3V (-F)	3	2.4	2.4	100	300	30	3.9
	DSP□-L2-DC5V (-F)	5	4.0	4.0	60	300	83	6.5
	DSP□-L2-DC6V (-F)	6	4.8	4.8	50	300	120	7.8
	DSP□-L2-DC9V (-F)	9	7.2	7.2	33.3	300	270	11.7
	DSP□-L2-DC12V (-F)	12	9.6	9.6	25.5	300	480	15.6
	DSP□-L2-DC24V (-F)	24	19.2	19.2	12.5	300	1,920	31.2

Note: Insert 1a, 1 or 2a in, 2 □ for contact form required.


DIMENSIONS

mm inch

1a type (DSP1a)


Single side stable
1 coil latching

2 coil latching

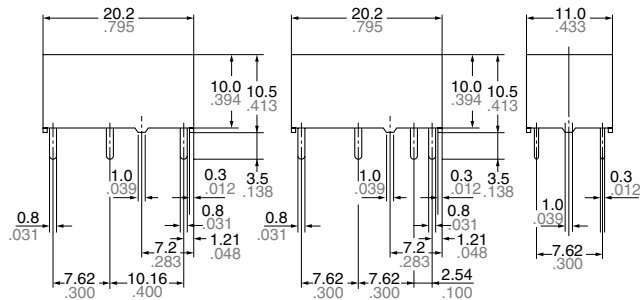

General tolerance: $\pm 0.3 \pm .012$

PC board pattern (Copper-side view)
Single side stable 2 coil latching

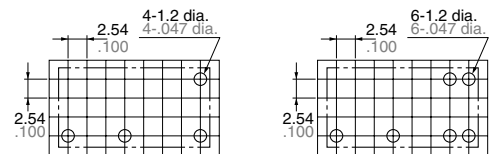


Tolerance: $\pm 0.1 \pm .004$


Schematic (Bottom view)

Single side stable

2 coil latching



(Deenergized condition)




(Reset condition)

1a1b type (DSP1)


Single side stable
1 coil latching

2 coil latching

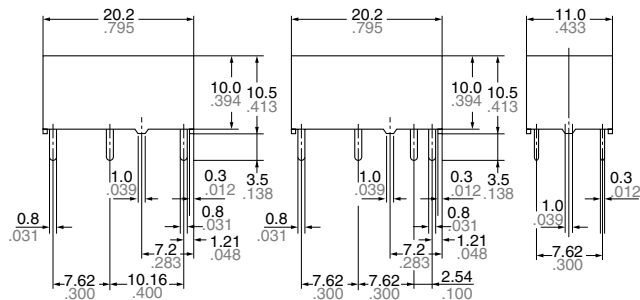

General tolerance: $\pm 0.3 \pm .012$

PC board pattern (Copper-side view)
Single side stable 2 coil latching

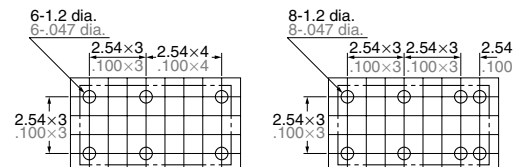


Tolerance: $\pm 0.1 \pm .004$


Schematic (Bottom view)

Single side stable

2 coil latching



(Deenergized condition)




(Reset condition)




Single side stable
1 coil latching

2 coil latching

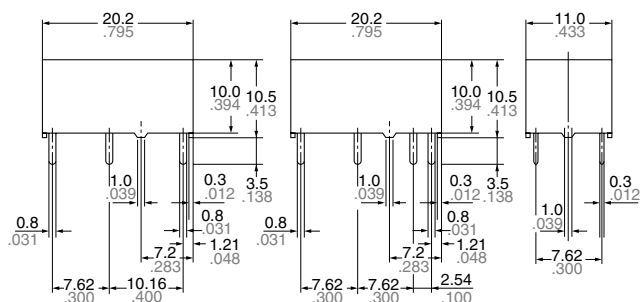

PC board pattern (Copper-side view)
Single side stable 2 coil latching

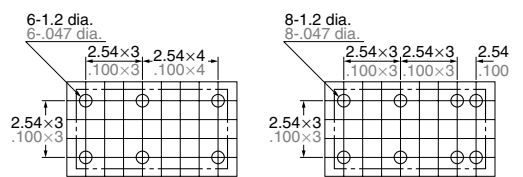

Tolerance: $\pm 0.1 \pm 0.004$

Schematic (Bottom view)

Single side stable

2 coil latching




(Deenergized condition)


(Reset condition)

REFERENCE DATA


1. Max. switching capacity

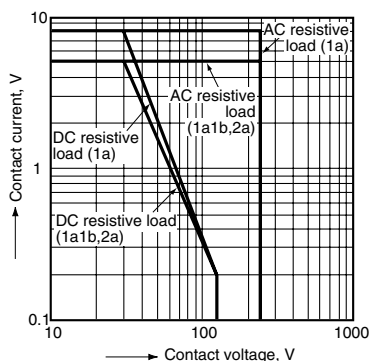

2.-(1) Life curve (1a1b type)

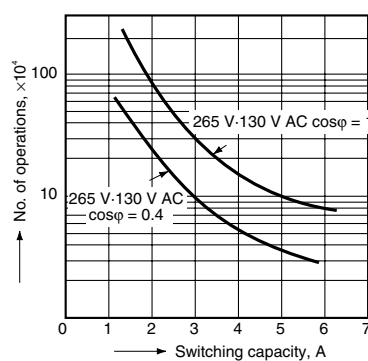


2.-(2) Life curve (1a1b type)

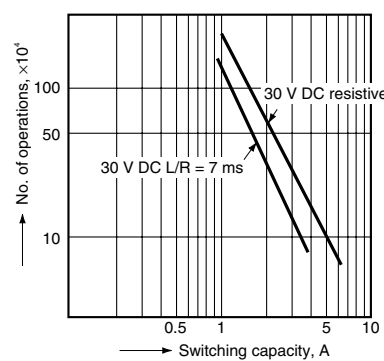


3.-(1) Coil temperature rise (1a type)

Sample: DSP1a-DC12V, 5 pcs.

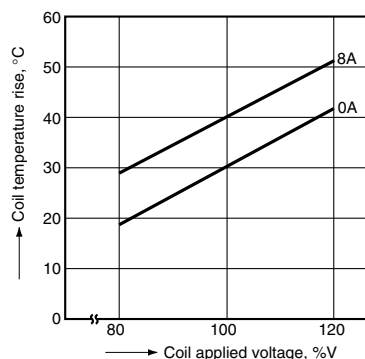


3.-(2) Coil temperature rise (1a1b type)

Sample: DSP1-DC12V, 5 pcs.

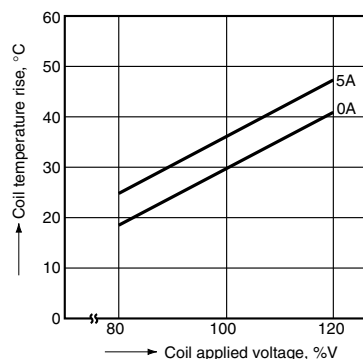


3.-(3) Coil temperature rise (2a type)

Sample: DSP2a-DC12V, 5 pcs.

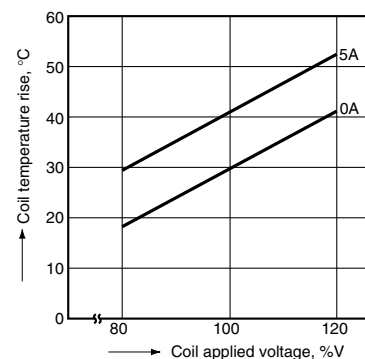


4.-(1) Operate & release time
(without diode, 1a type)

Sample: DSP1a-DC12V, 5 pcs.

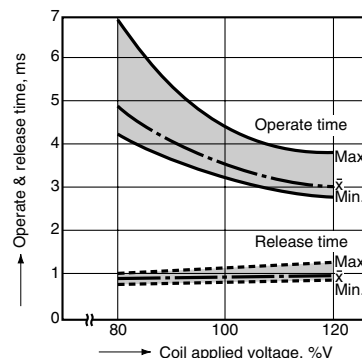


4.-(2) Operate & release time
(without diode, 1a1b type)

Sample: DSP1-DC12V, 5 pcs.

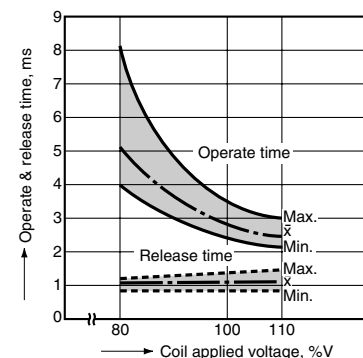


4.-(3) Operate & release time
(without diode, 2a type)

Sample: DSP2a-DC12V, 5 pcs.)

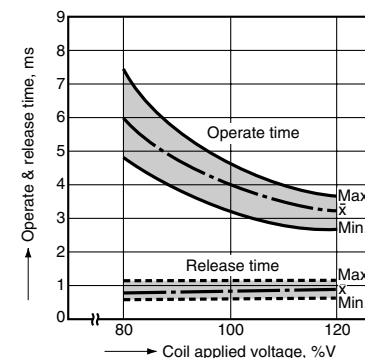


4.-(4) Operate & release time
(with diode, 1a type)

Sample: DSP1a-DC12V, 5 pcs.

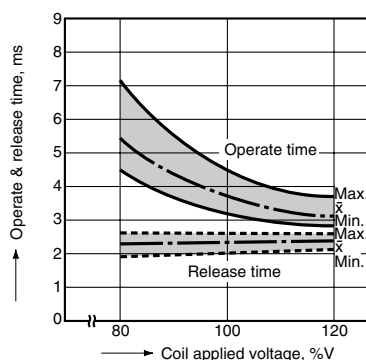


4.-(5) Operate & release time
(with diode, 1a1b type)

Sample: DSP1-DC12V, 5 pcs.

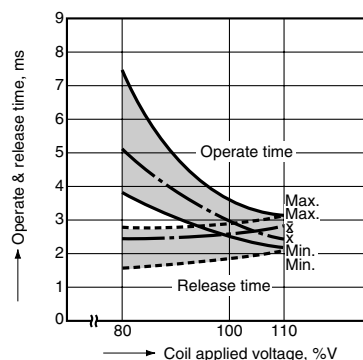


4.-(6) Operate & release time
(with diode, 2a type)

Sample: DSP2a-DC12V, 5 pcs.

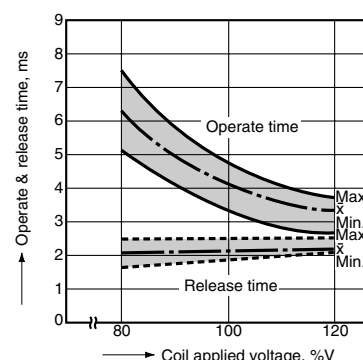


5.-(1) Change of pick-up and drop-out voltage
(1a type)

Sample: DSP1a-DC12V, 5 pcs.




5.-(2) Change of pick-up and drop-out voltage
(1a1b type)

Sample: DSP1-DC12V, 5 pcs.




5.-(3) Change of pick-up and drop-out voltage
(2a type)

Sample: DSP2a-DC12V, 5 pcs.




6.-(1) Influence of adjacent mounting
(1a type)

Sample: DSP1a-DC12V, 5 pcs.

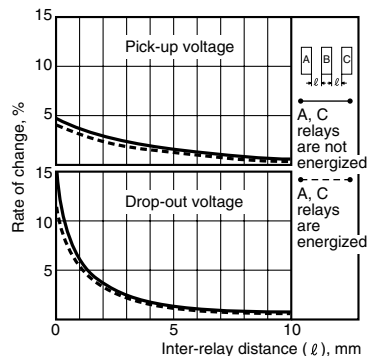


6.-(2) Influence of adjacent mounting
(1a1b type)

Sample: DSP1-DC12V, 5 pcs.

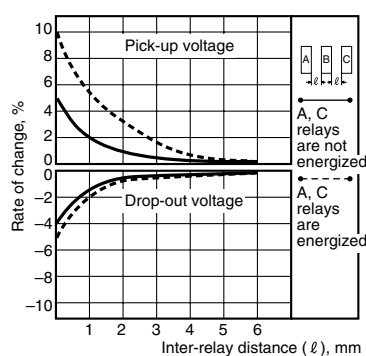

6.-(3) Influence of adjacent mounting
(2a type)

Sample: DSP2a-DC12V, 5 pcs.

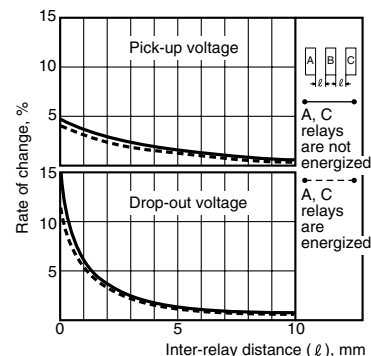

NOTES

Soldering should be done under the following conditions:


250°C 482°F within 10 s

300°C 572°F within 5 s

350°C 662°F within 3 s

For Cautions for Use, see Relay Technical Information

SOCKETS FOR DSP RELAYS

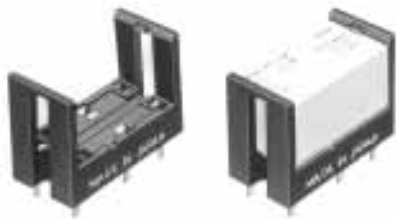

SPECIFICATIONS



Item	Specifications
Breakdown voltage	3,000 Vrms between terminals (Except for the portion between coil terminals)
Insulation resistance	1,000 MΩ between terminals at 500 V
Heat resistance	150°C for 1 hour
Max. continuous current	1a: 8 A 2a: 5 A

TYPES AND APPLICABLE RELAYS

Applicable relays \ Type No.	For DSP1a		For DSP1a, DSP1, DSP2a	
	DSP1a-PS	DSP1a-PSL2	DSP2a-PS	DSP2a-PSL2
DSP1a relays	OK	OK	OK	OK
DSP1a-L2 relays		OK		OK
DSP1 relays			OK	OK
DSP1-L2 relays				OK
DSP2a relays			OK	OK
DSP2a-L2 relays				OK


DIMENSIONS

mm inch

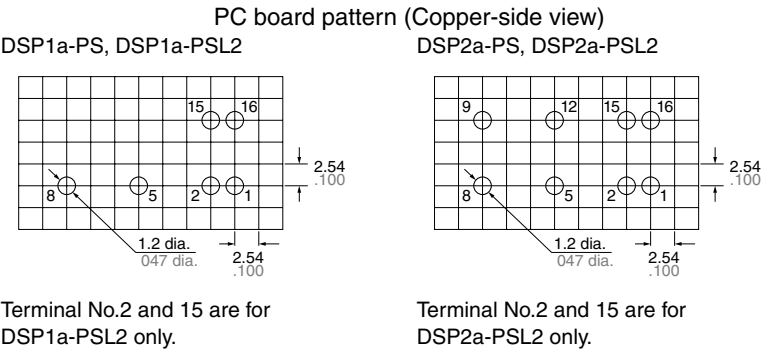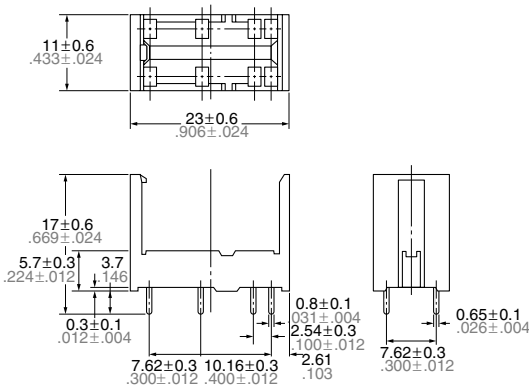


FIXING AND REMOVAL METHOD

1. Match the direction of relay and socket.




2. Both ends of relays are fixed so surely that the socket hooks on the top surface of relays.




Good No good

3. Remove the relay, applying force in the direction shown below.



4. In case there is not enough space for finger to pick relay up, use screw drivers in the way shown below.



Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9