

Hi-performance Regulator IC Series for PCs

Termination Regulators

for DDR-SDRAMs


BD3539FVM, BD3539NUX

No.09030EAT24

●Description

BD3539FVM/NUX is a termination regulator compatible with JEDEC DDR1-SDRAM, DDR2-SDRAM, DDR3-SDRAM which functions as a linear power supply incorporating an N-channel MOSFET and provides a sink/source current capability up to 1A respectively. A built-in high-speed OP-AMP specially designed offers an excellent transient response. Requires 3.3 volts (DDR2, DDR3) or 5.0 volts (DDR1, DDR2, DDR3) as a bias power supply to drive the N-channel MOSFET. Has an independent reference voltage input pin (VDDQ) and an independent feedback pin (VTTS) to maintain the accuracy in voltage required by JEDEC, and offers an excellent output voltage accuracy and load regulation. Also has a reference power supply output pin (VREF) for DDR-SDRAM or a memory controller. When EN pin turns to "Low", VTT output becomes "Hi-Z" while VREF output is kept unchanged, compatible with "Self Refresh" state of DDR-SDRAM.

●Features

- 1) Incorporates a push-pull power supply for termination (VTT)
- 2) Incorporates a reference voltage circuit (VREF)
- 3) Incorporates an enabler
- 4) Incorporates an under voltage lockout (UVLO)
- 5) Employs MSOP8 package : 2.9 × 4.0 × 0.9(mm) : BD3539FVM
- 6) Employs VSON008X2030 package : 2.0 × 3.0 × 0.6(mm) : BD3539NUX
- 7) Incorporates a thermal shutdown protector (TSD)
- 8) Operates with input voltage from 2.7 to 5.5 volts
- 9) Compatible with Dual Channel (DDR1, DDR2, DDR3)
- 10) Usable ceramic capacitor at output

●Use

Power supply for DDR1- SDRAM (VCC=5V only)
 Power supply for DDR2-SDRAM (VCC=3.3V or 5V)
 Power supply for DDR3-SDRAM (VCC=3.3V or 5V)

●ABSOLUTE MAXIMUM RATINGS

| Parameter | Symbol | Limit | | Unit |
|------------------------------|--------|---------------------|---------------------|------|
| | | BD3539FVM | BD3539NUX | |
| Input Voltage | VCC | 7 ^{*1*2} | | V |
| Enable Input Voltage | VEN | 7 ^{*1*2} | | V |
| Termination Input Voltage | VTT_IN | 7 ^{*1*2} | | V |
| VDDQ Reference Voltage | VDDQ | 7 ^{*1*2} | | V |
| Output Current | ITT | 1 | | A |
| Power Dissipation1 | Pd1 | 387.4 ^{*3} | 242.0 ^{*4} | mW |
| Power Dissipation2 | Pd2 | 587.4 ^{*4} | 515.0 ^{*5} | mW |
| Power Dissipation3 | Pd3 | - | 877.2 ^{*6} | mW |
| Operating Temperature Range | Topr | -30~+100 | | °C |
| Storage Temperature Range | Tstg | -55~+150 | | °C |
| Maximum Junction Temperature | Tjmax | +150 | | °C |

*1 Should not exceed Pd.

*2 Instantaneous surge voltage, back electromotive force and voltage under less than 10% duty cycle.

*3 With Ta ≥ 25°C (With no heat sink) θja=322.6°C/W

*4 With Ta ≥ 25°C when mounting a 70mm × 70mm × 1.6mm glass-epoxy substrate, with no heat sink θja=212.8°C/W

*5 With Ta ≥ 25°C (With no heat sink) θja=516.5°C/W

*6 With Ta ≥ 25°C when mounting a 70mm × 70mm × 1.6mm glass-epoxy substrate 1-layer board, θja=242.7°C/W

*7 With Ta ≥ 25°C when mounting a 70mm × 70mm × 1.6mm glass-epoxy substrate 4-layer board (copper foil density: 5505mm² (copper foil area in each layer)), θja=142.5°C/W

●Operating Conditions (Ta=25°C)

| Parameter | Symbol | Limit | | Unit |
|---------------------------|--------|-------|------|------|
| | | MIN | MAX | |
| Input Voltage | VCC | 2.7 | 5.5 | V |
| Termination Input Voltage | VTT_IN | 1.0 | 5.5 | V |
| VDDQ Reference Voltage | VDDQ | 1.0 | 2.75 | V |
| Enable Input Voltage | VEN | -0.3 | 5.5 | V |

●Electrical Characteristics (Unless otherwise noted, Ta=25°C, VCC=3.3V, VEN=3V, VDDQ=1.5V, VTT_IN=1.5V)

| Parameter | Symbol | Limit | | | Unit | Condition |
|-----------------------------------|----------------|-------------------------|-------------------|-------------------------|------|--|
| | | MIN | TYP | MAX | | |
| Standby Current | IST | - | 0.5 | 1.0 | mA | VEN=0V |
| Bias Current | ICC | - | 2 | 4 | mA | VEN=3V |
| [Enable] | | | | | | |
| High Level Enable Input Voltage | VENHIGH | 2.3 | - | 5.5 | V | |
| Low Level Enable Input Voltage | VENLOW | -0.3 | - | 0.8 | V | |
| Enable Pin Input Current | IEN | - | 7 | 10 | μA | VEN=3V |
| [Termination] | | | | | | |
| Termination Output Voltage (DDR3) | VTT3 | $1/2 \times VDDQ - 15m$ | $1/2 \times VDDQ$ | $1/2 \times VDDQ + 15m$ | V | ITT=-1.0A to 1.0A Ta=0°C to 100°C |
| Termination Output Voltage (DDR2) | VTT2 | $1/2 \times VDDQ - 30m$ | $1/2 \times VDDQ$ | $1/2 \times VDDQ + 30m$ | V | VCC = 3.3V, VDDQ = 1.8V VTT_IN = 1.8V ITT=-1.0A to 1.0A Ta=0°C to 100°C |
| Termination Output Voltage (DDR1) | VTT1 | $1/2 \times VDDQ - 30m$ | $1/2 \times VDDQ$ | $1/2 \times VDDQ + 30m$ | V | VCC = 5.0V, VDDQ = 2.5V VTT_IN = 2.5V ITT=-1.0A to 1.0A Ta=0°C to 100°C |
| Source current | ITT+ | 1.0 | - | - | A | |
| Sink current | ITT- | - | - | -1.0 | A | |
| Load Regulation | ΔVTT | - | - | 30 | mV | ITT=-1.0A to 1.0A |
| Upper Side ON Resistance | HRON | - | 0.35 | 0.65 | Ω | |
| Lower Side ON Resistance | LRON | - | 0.35 | 0.65 | Ω | |
| [VDDQ] | | | | | | |
| Input Impedance | ZVDDQ | 140 | 200 | 260 | kΩ | |
| [VREF] | | | | | | |
| Output Voltage | VREF | $1/2 \times VDDQ - 15m$ | $1/2 \times VDDQ$ | $1/2 \times VDDQ + 15m$ | V | IREF=-25mA to 25mA Ta=0°C to 100°C |
| [UVLO] | | | | | | |
| Threshold Voltage | VUVLO | 2.30 | 2.45 | 2.60 | V | VCC : sweep up |
| Hysteresis Voltage | $\Delta VUVLO$ | 100 | 160 | 220 | mV | VCC : sweep down |

●Reference Data




Fig.1 DDR3 (-1A→1A)




Fig.2 DDR3 (1A→-1A)

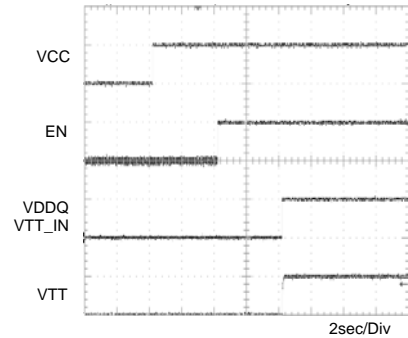


Fig.3 Input Sequence1

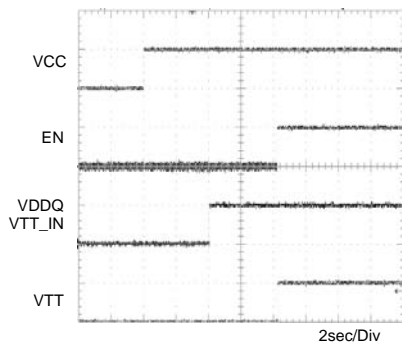


Fig.4 Input Sequence 2

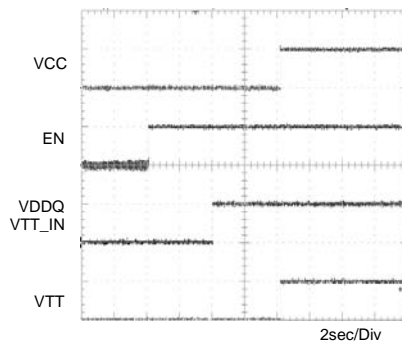


Fig.5 Input Sequence 3

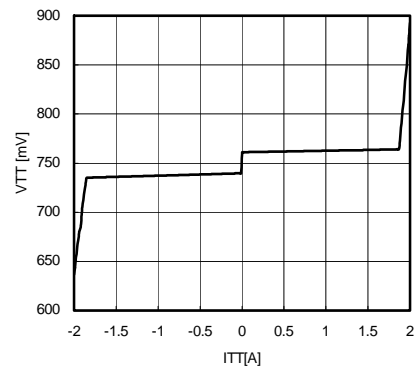


Fig.6 ITT-VTT (DDR3)

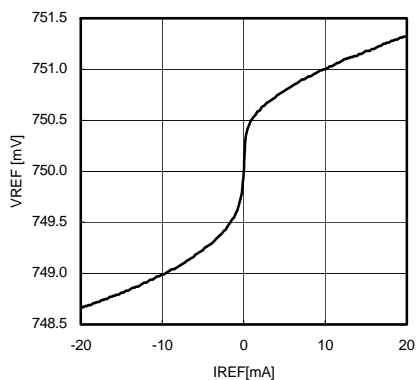


Fig.7 IREF-VREF (DDR3)

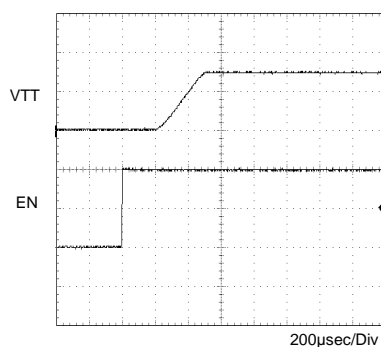


Fig.8 EN Soft Start


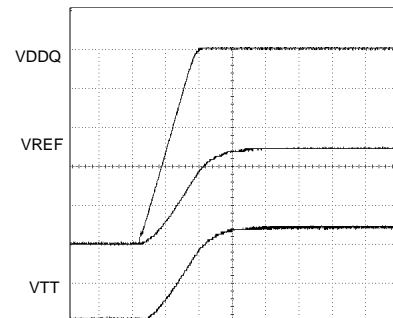


Fig.9 VDDQ Soft Start


●Block Diagram

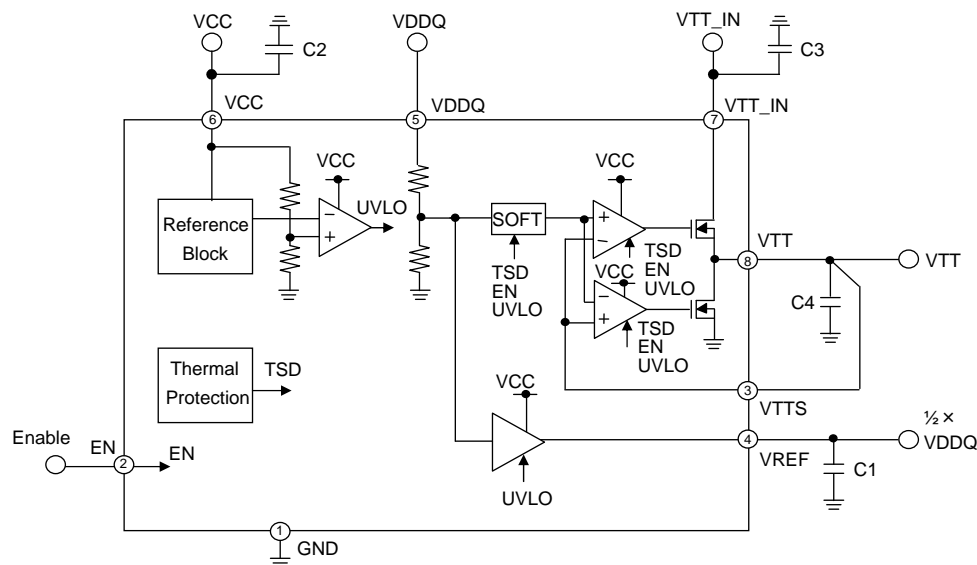

●PIN Configuration


●PIN Function

OFVM

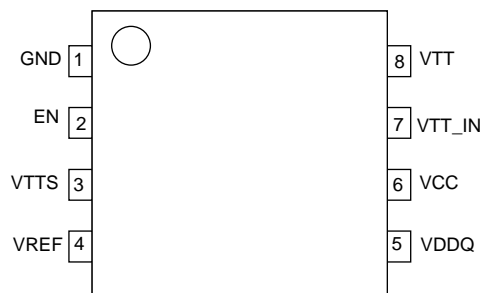

| PIN No. | PIN NAME | PIN FUNCTION |
|---------|----------|--------------------------------------|
| 1 | GND | Ground Pin |
| 2 | EN | Enable Input Pin |
| 3 | VTTS | Detector Pin for Termination Voltage |
| 4 | VREF | Reference Voltage Output Pin |
| 5 | VDDQ | Reference Voltage Input Pin |
| 6 | VCC | VCC Pin |
| 7 | VTT_IN | Termination Input Pin |
| 8 | VTT | Termination Output Pin |

ONUX

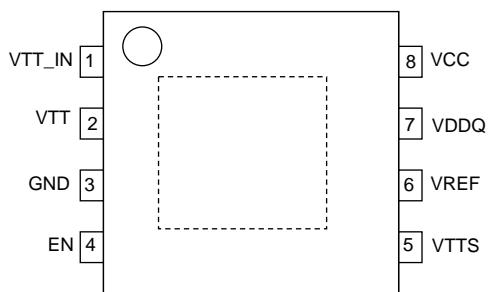

| PIN No. | PIN NAME | PIN FUNCTION |
|---------|----------|--------------------------------------|
| 1 | VTT_IN | Termination Input Pin |
| 2 | VTT | Termination Output Pin |
| 3 | GND | Ground Pin |
| 4 | EN | Enable Input Pin |
| 5 | VTTS | Detector Pin for Termination Voltage |
| 6 | VREF | Reference Voltage Output Pin |
| 7 | VDDQ | Reference Voltage Input Pin |
| 8 | VCC | VCC Pin |
| Bottom | FIN | Substrate (Connected to GND) |

●Description of operations

• VCC

In BD3539FVM/NUX, an independent power input pin is provided for an internal circuit operation of the IC. This is used to drive the amplifier circuit of the IC, and its maximum current rating is 4mA. The power supply voltage is 2.7 to 5.5 volts. It is recommended to connect a bypass capacitor of 1μF or so to VCC.

• VDDQ

Reference input pin for the output voltage that may be used to satisfy the JEDEC requirement for DDR3-SDRAM ($V_{REF}=V_{TT} = 1/2V_{DDQ}$) by dividing the voltage inside the IC with two 100kΩ voltage-divider resistors.

For BD3539FVM/NUX, care must be taken to an input noise to VDDQ pin because this IC also cuts such noise input into half and provides it with the voltage output divided in half. Such noise may be reduced with an RC filter consisting of such resistance and capacitance (220Ω and 2.2μF, for instance) that may not give significant effect to voltage dividing inside the IC.

• VTT_IN

VTT_IN is a power supply input pin for VTT output. Voltage in the range between 1.0 and 5.5 volts may be supplied to this VTT_IN terminal, but care must be taken to the current limitation due to on-resistance of the IC and the change in allowable loss due to input/output voltage difference.

Generally, the following voltages are supplied:

- DDR3 VTT_IN=1.5V

Higher impedance of the voltage input at VTT_IN may result in oscillation or degradation in ripple rejection, which must be noted. To VTT_IN terminal, it is recommended to use a 10μF capacitor characterized with less change in capacitance. But it may depend on the characteristics of the power supply input and the impedance of the pc board wiring, which must be carefully checked before use.

• VREF

In BD3539FVM/NUX, a reference voltage output pin independent from VTT output is given to provide a reference input for a memory controller and a DRAM. Even if EN pin turns to "Low" level, VREF output is kept unchanged, compatible with "Self Refresh" state of DRAM. The maximum current capability of VREF is 10mA, and a suitable capacitor is needed to stabilize the output voltage. It is recommended to use a combination of a 1.0 to 2.2μF ceramic capacitor characterized with less change in capacitance. For an application where VREF current is low, a capacitor of lower capacitance may be used. If VREF current is 1mA or less, it is possible to secure a phase margin with a ceramic capacitor of 1μF more or less.

• VTTS

An independent pin provided to improve load regulation of VTT output. In case that longer wiring is needed to the load at VTT output, connecting VTTS from the load side may improve the load regulation.


• VTT

A DDR memory termination output pin. BD3539FVM/NUX has a sink/source current capability of ±1.0A respectively. The output voltage tracks the voltage divided in half at VDDQ pin. VTT output is turned to OFF when VCC UVLO or thermal shutdown protector is activated with EN pin level turned to "Low". Do not fail to connect a capacitor to VTT output pin for a loop gain phase compensation and a reduction in output voltage variation in the event of sudden change in load. Insufficient capacitance may cause an oscillation. High ESR (Equivalent Series Resistance) of the capacitor may result in increase in output voltage variation in the event of sudden change in load. It is recommended to use a 10μF or so ceramic capacitor, though it depends on ambient temperature and other conditions.

• EN

With an input of 2.3 volts or higher, the level at EN pin turns to "High" to provide VTT output. If the input is lowered to 0.8 volts or less, the level at EN pin turns to "Low" and VTT status turns to Hi-Z. But if VCC and VDDQ are established, VREF output is maintained.

●Evaluation Board

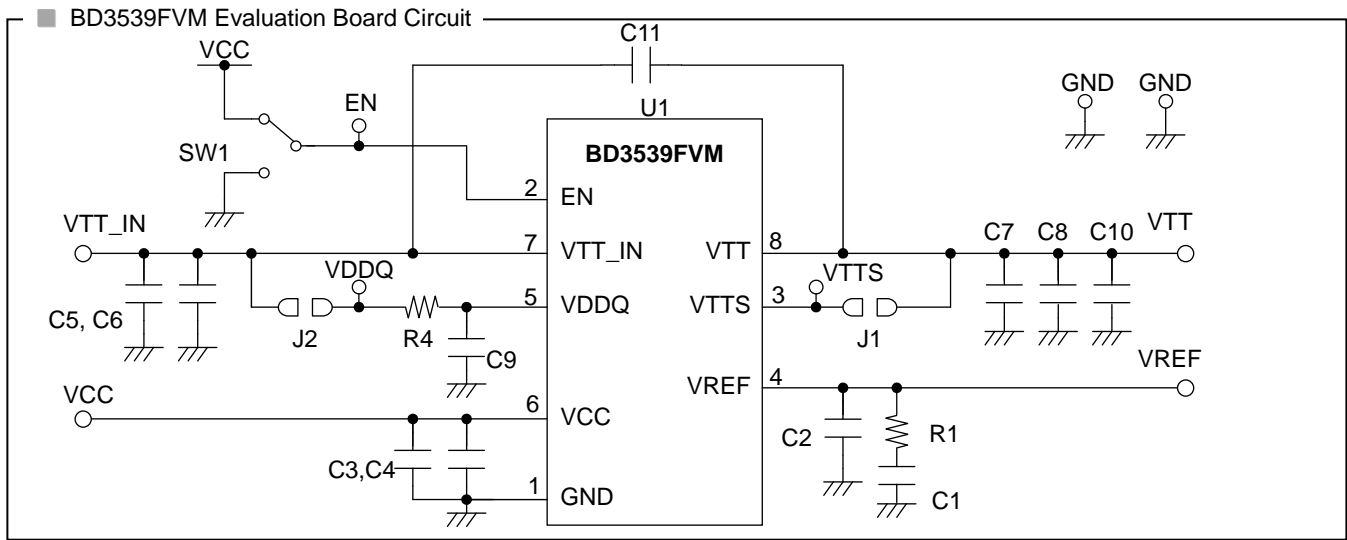


■ BD3539FVM Evaluation Board Application Components


| Part No | Value | Company | Parts Name |
|---------|-------|---------|---------------|
| U1 | - | ROHM | BD3539FVM |
| R1 | - | - | - |
| R4 | 220Ω | ROHM | MCR032200 |
| J1 | 0Ω | - | - |
| J2 | 0Ω | - | - |
| C1 | - | - | - |
| C2 | 1μF | KYOCERA | CM105B105K06A |
| C3 | 1μF | KYOCERA | CM105B105K06A |

| Part No | Value | Company | Parts Name |
|---------|-------|---------|---------------|
| C4 | - | - | - |
| C5 | 10μF | KYOCERA | CM21B106M06A |
| C6 | - | - | - |
| C7 | 10μF | KYOCERA | CM21B106M06A |
| C8 | - | - | - |
| C9 | 2.2μF | KYOCERA | CM105B225K06A |
| C10 | - | - | - |
| C11 | - | - | - |


■ BD3539FVM Evaluation Board Layout

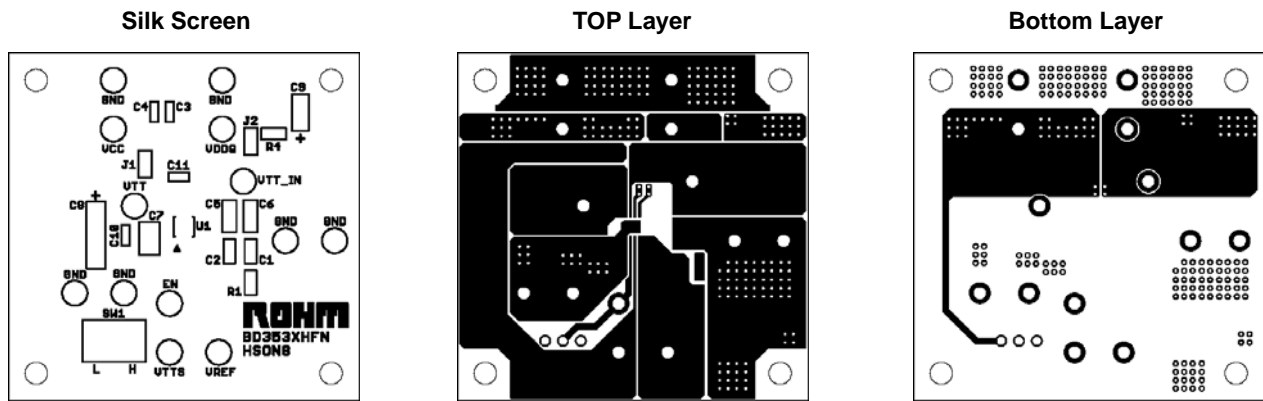

●Example of layout pattern

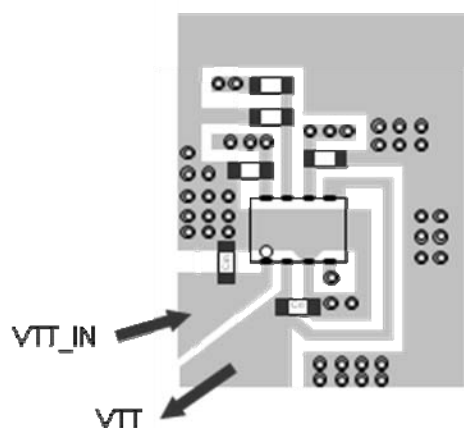

[Example of board layout pattern]



[Pin configuration]

Input capacitor C_{in} of VTT_IN should be placed close to VTT_IN pin as possible, and VTT output capacitor should also be placed close to IC pin as possible. And, as for wiring pattern, pin above and GND pattern should be designed widely as possible.

If connected to inner GND plane, several through hole should be used.

Because VTTS pin has comparatively high impedance, floating capacity should be minimum as possible, and design layout at upper layer pattern. Please be careful in drawing.

Please take GND pattern space widely, and design layout to be able to increase radiation efficiency.

●Note for Use

1. Absolute maximum ratings

For the present product, thoroughgoing quality control is carried out, but in the event that applied voltage, working temperature range, and other absolute maximum rating are exceeded, the present product may be destroyed. Because it is unable to identify the short mode, open mode, etc., if any special mode is assumed, which exceeds the absolute maximum rating, physical safety measures are requested to be taken, such as fuses, etc.

2. GND potential

Bring the GND terminal potential to the minimum potential in any operating condition.

3. Thermal design

Consider allowable loss (Pd) under actual working condition and carry out thermal design with sufficient margin provided.

4. Terminal-to-terminal short-circuit and erroneous mounting

When the present IC is mounted to a printed circuit board, take utmost care to direction of IC and displacement. In the event that the IC is mounted erroneously, IC may be destroyed. In the event of short-circuit caused by foreign matter that enters in a clearance between outputs or output and power-GND, the IC may be destroyed.

5. Operation in strong electromagnetic field

The use of the present IC in the strong electromagnetic field may result in maloperation, to which care must be taken.

6. Built-in thermal shutdown protection circuit

The present IC incorporates a thermal shutdown protection circuit (TSD circuit). The working temperature is 175°C (standard value) and has a -15°C (standard value) hysteresis width. When the IC chip temperature rises and the TSD circuit operates, the output terminal is brought to the OFF state. The built-in thermal shutdown protection circuit (TSD circuit) is first and foremost intended for interrupt IC from thermal runaway, and is not intended to protect and warrant the IC. Consequently, never attempt to continuously use the IC after this circuit is activated or to use the circuit with the activation of the circuit premised.

7. Capacitor across output and GND

In the event a large capacitor is connected across output and GND, when Vcc and VIN are short-circuited with 0V or GND for some kind of reasons, current charged in the capacitor flows into the output and may destroy the IC. Use a capacitor smaller than 1000 μF between output and GND.

8. Inspection by set substrate


In the event a capacitor is connected to a pin with low impedance at the time of inspection with a set substrate, there is a fear of applying stress to the IC. Therefore, be sure to discharge electricity for every process. As electrostatic measures, provide grounding in the assembly process, and take utmost care in transportation and storage. Furthermore, when the set substrate is connected to a jig in the inspection process, be sure to turn OFF power supply to connect the jig and be sure to turn OFF power supply to remove the jig.

9. Inputs to IC terminals

This device is a monolithic IC with P⁺ isolation between P-substrate and each element as illustrated below. This P-layer and the N-layer of each element form a PN junction which works as:

- a diode if the electric potentials at the terminals satisfy the following relationship; $\text{GND} > \text{Terminal A} > \text{Terminal B}$, or
- a parasitic transistor if the electric potentials at the terminals satisfy the following relationship; $\text{Terminal B} > \text{GND} > \text{Terminal A}$.

The structure of the IC inevitably forms parasitic elements, the activation of which may cause interference among circuits, and/or malfunctions contributing to breakdown. It is therefore requested to take care not to use the device in such manner that the voltage lower than GND (at P-substrate) may be applied to the input terminal, which may result in activation of parasitic elements.

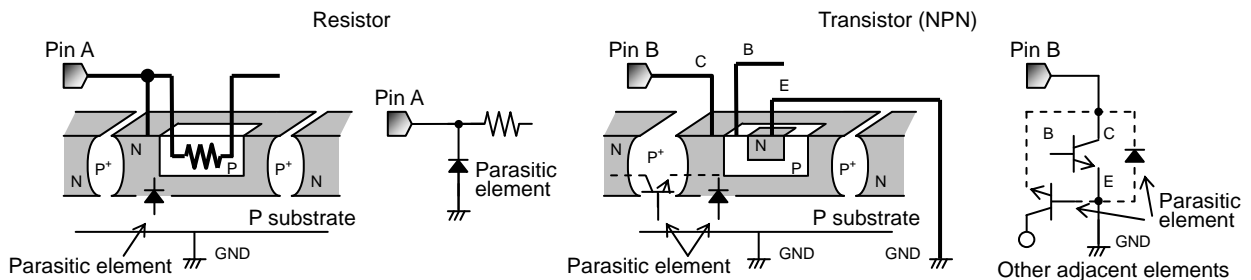

10. GND wiring pattern

When both a small-signal GND and high current GND are present, single-point grounding (at the set standard point) is recommended, in order to separate the small-signal and high current patterns, and to be sure the voltage change stemming from the wiring resistance and high current does not cause any voltage change in the small-signal GND. In the same way, care must be taken to avoid wiring pattern fluctuations in any connected external component GND.

11. Output capacitor, resistor (C1/block diagram)

Do not fail to connect a output capacitor to VREF output terminal for stabilization of output voltage. The capacitor connected to VREF output terminal works as a loop gain phase compensator. Insufficient capacitance may cause an oscillation. It is recommended to use a low temperature coefficient 1-10 μ F ceramic capacitor, though it depends on ambient temperature and load conditions. It is therefore requested to carefully check under the actual temperature and load conditions to be applied.

12. Output capacitor (C4)

Do not fail to connect a capacitor to VTT output pin for stabilization of output voltage. This output capacitor works as a loop gain phase compensator and an output voltage variation reducer in the event of sudden change in load. Insufficient capacitance may cause an oscillation. And if the equivalent series resistance (ESR) of this capacitor is high, the variation in output voltage increases in the event of sudden change in load. It is recommended to use a 10 μ F or so ceramic capacitor, though it depends on ambient temperature and load conditions. It is therefore requested to carefully check under the actual temperature and load conditions to be applied.

13. Input capacitors setting (C2 and C3)

These input capacitors are used to reduce the output impedance of power supply to be connected to the input terminals (VCC and VTT_IN). Increase in the power supply output impedance may result in oscillation or degradation in ripple rejecting characteristics. It is recommended to use a low temperature coefficient 1 μ F (for VCC) and 10 μ F (for VTT_IN) capacitor, but it depends on the characteristics of the power supply input, and the capacitance and impedance of the pc board wiring pattern. It is therefore requested to carefully check under the actual temperature and load conditions to be applied.

14. Input terminals (VCC, VDDQ, VTT_IN and EN)

VCC, VDDQ, VTT_IN and EN terminals of this IC are made up independent one another. To VCC terminal, the UVLO function is provided for malfunction protection. Irrespective of the input order of the inputs terminals, VTT output is activated to provide the output voltage when NUXLO and EN voltages reach the threshold voltage while VREF output is activated when NUXLO voltage reaches the threshold. If VDDQ and VTT_IN terminals have equal potential and common impedance, any change in current at VTT_IN terminal may result in variation of VTT_IN voltage, which affects VDDQ terminal and may cause variation in the output voltage. It is therefore required to perform wiring in such manner that VDDQ and VTT_IN terminals may not have common impedance. If impossible, take appropriate corrective measures including suitable CR filter to be inserted between VDDQ and VTT_IN terminals.

15. VTTS terminal

A terminal used to improve load regulation of VTT output. Connection with VTT terminal must be done not to have common impedance with high current line, which may offer better load regulation of VTT output.

16. Operating range

Within the operating range, the operation and function of the circuits are generally guaranteed at an ambient temperature within the range specified. The values specified for electrical characteristics may not be guaranteed, but drastic change may not occur to such characteristics within the operating range.


17. Allowable loss Pd

For the allowable loss, the thermal derating characteristics are shown in the Exhibit, which should be used as a guide. Any uses that exceed the allowable loss may result in degradation in the functions inherent to IC including a decrease in current capability due to chip temperature increase. Use within the allowable loss.

18. The use in the strong electromagnetic field may sometimes cause malfunction, to which care must be taken.

In the event that load containing a large inductance component is connected to the output terminal, and generation of back-EMF at the start-up and when output is turned OFF is assumed, it is requested to insert a protection diode.

19. In the event that load containing a large inductance component is connected to the output terminal, and generation of back-EMF at the start-up and when output is turned OFF is assumed, it is requested to insert a protection diode.

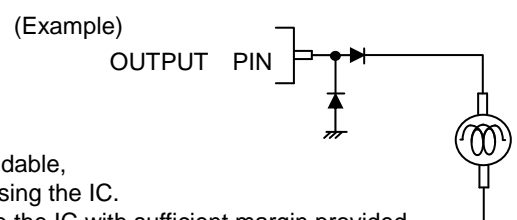

20. We are certain that examples of applied circuit diagrams are recommendable,

but you are requested to thoroughly confirm the characteristics before using the IC.

In addition, when the IC is used with the external circuit changed, decide the IC with sufficient margin provided while consideration is being given not only to static characteristics but also variations of external parts and our IC including transient characteristics.

●Heat loss

Thermal design must be conducted with the operation under the conditions listed below (which are the guaranteed temperature range requiring consideration on appropriate margins etc);

1: Ambient temperature T_a : 100°C or lower

2: Chip junction temperature T_j : 150°C or lower

The chip junction temperature T_j can be considered as follows:

① Calculation based on IC surface temperature T_c , mounted on a board
 $T_j = T_c + \theta_{j-c} \times W$

<Reference example>

θ_{j-c} : MSOP-8 46.0°C/W

PCB size: 70 × 70 × 1.6mm

(Board copper foil area: 70 × 70mm²)

② Calculation based on ambient temperature T_a

$T_j = T_a + \theta_{j-a} \times W$

<Reference example>

| | | |
|-------------------------------|---|--|
| θ_{j-a} : MSOP-8 | 212.8°C/W | With no heat sink |
| | 322.6°C/W | 1-layer board(copper foil area :70 × 70mm ²) |
| θ_{j-a} : VSON008X2030 | 516.5°C/W | With no heat sink |
| | 242.7°C/W | 1-layer board(copper foil area:70 × 70mm ²) |
| | 142.5°C/W | 4-layer board(copper foil area:70 × 70mm ²) |
| | PCB size: 70 × 70 × 1.6mm ³ (with thermal via) | |

Because package with FIN is used at IC bottom side, package power changes considerably by copper foil area, which is connected. Please radiate heat by taking enough area for board surface or using many through hole to inner layer pattern. Most of heat loss in BD3539FVM/NUX occurs at the output N-channel FET. The power lost is determined by multiplying the voltage between V_{IN} and V_o by the output current. As this IC employs the power PKG, the thermal derating characteristics significantly depends on the pc board conditions. When designing, care must be taken to the size of a pc board to be used.


$$\text{Power consumption (W)} = \text{Input voltage (V}_{TT_IN}) - \text{Output voltage (V}_{TT \div \frac{1}{2}} \text{VDDQ)} \times I_o(\text{Ave})$$

Example) Where $V_{TT_IN}=1.5\text{V}$, $VDDQ=1.5\text{V}$, $I_o(\text{Ave})=0.5\text{A}$

$$\begin{aligned} \text{Power consumption(W)} &= \{1.5(\text{V}) - 0.75(\text{V})\} \times 0.5(\text{A}) \\ &= 0.375(\text{W}) \end{aligned}$$


●Heat dissipation characteristics [Tc]

◎MSOP8

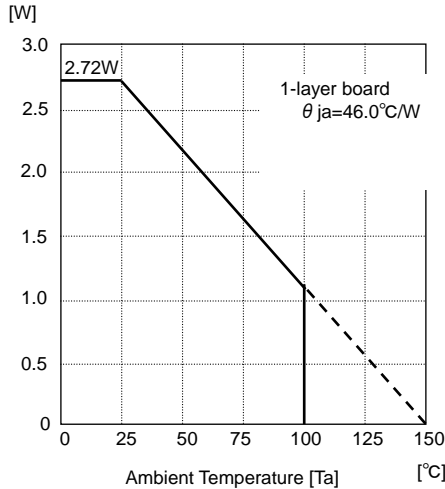


●Heat dissipation characteristics [Ta]

◎MSOP8

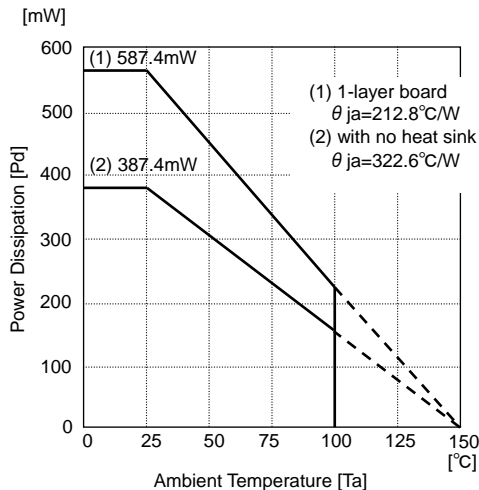

◎VSON008X2030

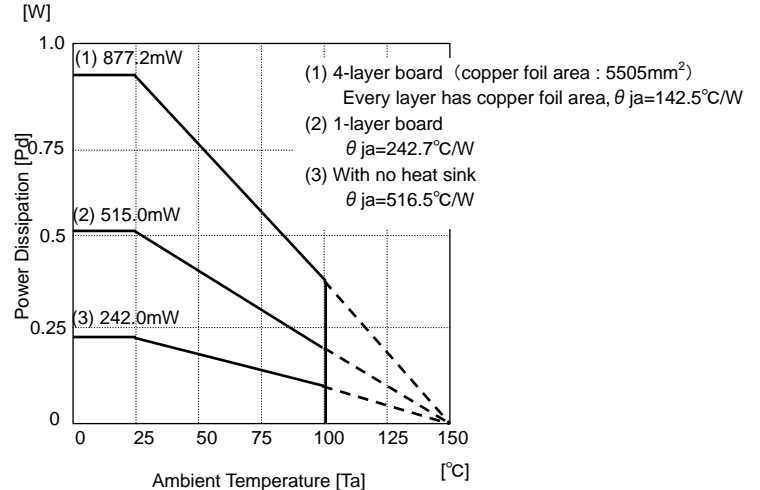

●Ordering part number

| | |
|---|---|
| B | D |
|---|---|

Part No.

| | | | |
|---|---|---|---|
| 3 | 5 | 3 | 9 |
|---|---|---|---|

Part No.
3539


| | | |
|---|---|---|
| F | V | M |
|---|---|---|

Package
FVM: MSOP8
NUX: VSON008X2030

| | |
|---|---|
| T | R |
|---|---|


Packaging and forming specification
TR: Embossed tape and reel

MSOP8

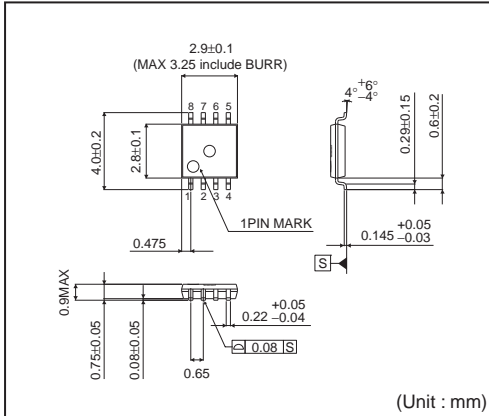


<Tape and Reel information>

| | |
|-------------------|--|
| Tape | Embossed carrier tape |
| Quantity | 3000pcs |
| Direction of feed | TR (The direction is the 1pin of product is at the upper right when you hold reel on the left hand and you pull out the tape on the right hand) |

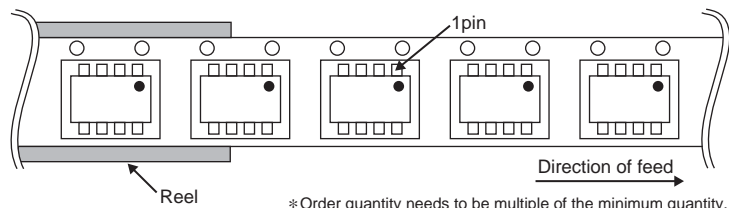


VSON008X2030

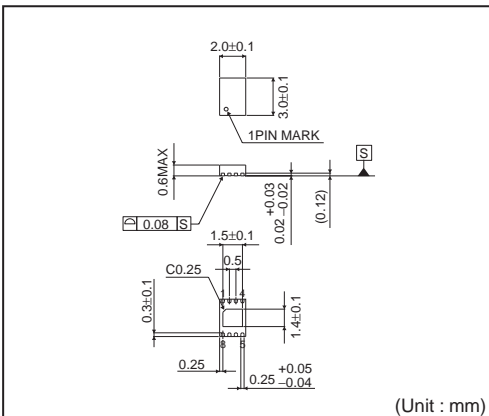

<Tape and Reel information>

| | |
|-------------------|--|
| Tape | Embossed carrier tape |
| Quantity | 4000pcs |
| Direction of feed | TR (The direction is the 1pin of product is at the upper right when you hold reel on the left hand and you pull out the tape on the right hand) |

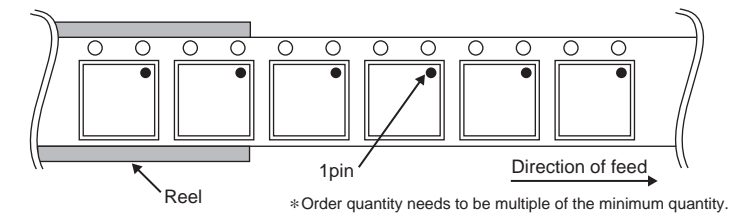

Notes

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM Co.,Ltd.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products specified in this document are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.



Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

<http://www.rohm.com/contact/>

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9