



Doc. No: 411-121000  
Issue: 3  
Date: Aug' 2013

## Cable Marker Installation Guide

| APPROVALS               | NAME          | Signed                              | DATE      |
|-------------------------|---------------|-------------------------------------|-----------|
| TECHNICAL               | Mario Appello | Document is approved electronically | Aug' 2013 |
| PRODUCT MANAGEMENT - UK | Alan Mitchell | Document is approved electronically | Aug' 2013 |

## Table of Contents

|            |                                                  |          |
|------------|--------------------------------------------------|----------|
| <b>1.0</b> | <b>PURPOSE .....</b>                             | <b>2</b> |
| <b>2.0</b> | <b>SCOPE .....</b>                               | <b>2</b> |
| <b>3.0</b> | <b>REMOVAL OF MARKERS FROM THE BACKBONE.....</b> | <b>3</b> |
| <b>4.0</b> | <b>MARKER INSTALLATION.....</b>                  | <b>4</b> |

*The information contained within this document is the property of TE Connectivity. It is supplied in confidence and the commercial security of the contents must be maintained. It must not be used for any purpose other than that for which it is supplied nor may any information contained in it be disclosed to unauthorised persons. It must not be reproduced in whole or in part without obtaining written permission from TE Connectivity.*

Author: A Kean  
Issue date: Aug' 2013  
Page: 1 of 4

While TE Connectivity has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.  
If this document is printed it becomes uncontrolled

## Cable Marker Installation Guide

### 1.0 Purpose

- 1.1 To ensure that the integrity of the cable marker is not compromised when it is removed from the backbone and during installation.
- 1.2 Failure to follow this procedure could lead to the Marker being damaged.


### 2.0 Scope

- 2.1 Cable markers that have a perforation along the length of the product should be removed from the backbone as detailed in section 3;  
**“Removal of Markers from the Backbone”**, see figures 1 and 2.

Product descriptions covered by this procedure begin with:

- CM-SCE-...
- CM-SCE-TP-...
- HTCM-SCE-...
- HTCM-SCE-TP-...

**Figure 1:** Perforation of CM-SCE-1/2-4H-4

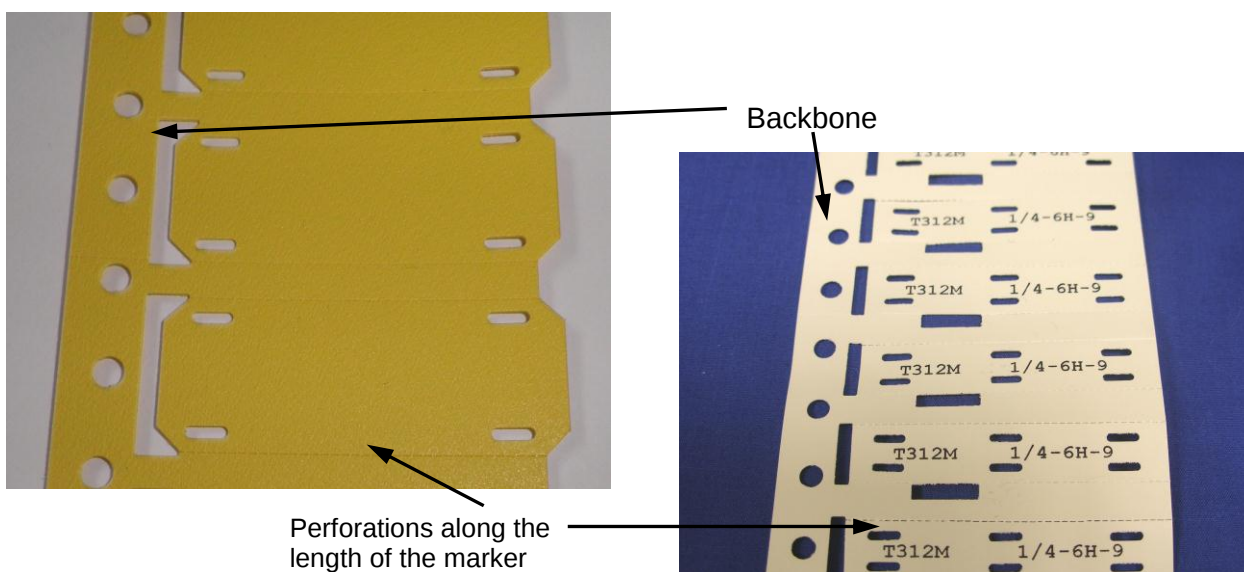


**Figure 2:** Perforation of CM-SCE-1/4-TP-4H-9

- 2.2 All Cable markers should be installed as shown in Section 4 **“Marker Installation”**.


### 3.0 Removal of Markers from the Backbone

- 3.1 The following procedure should be followed to prevent tearing of the cable marker whilst removing from the backbone.
- 3.2 Procedure
  - 3.2.1 Grip cable marker by the end closest to the backbone.
  - 3.2.2 For thermal transfer products have the smooth side up; for dot matrix printed products have the rough surface should be upwards.
  - 3.2.3 Gently pull the marker away from the backbone as shown in figures 3 and 4.

**Figure 3:** Removal of CM-SCE-1/2-4H-4 from backbone

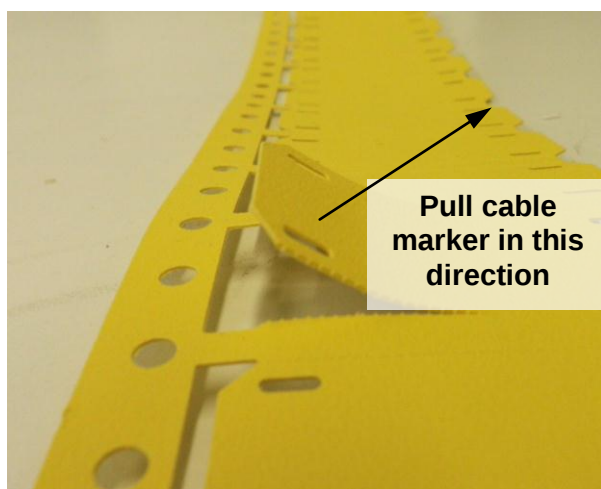

**Figure 4:** Removal of CM-SCE-TP-1/4-9 from backbone

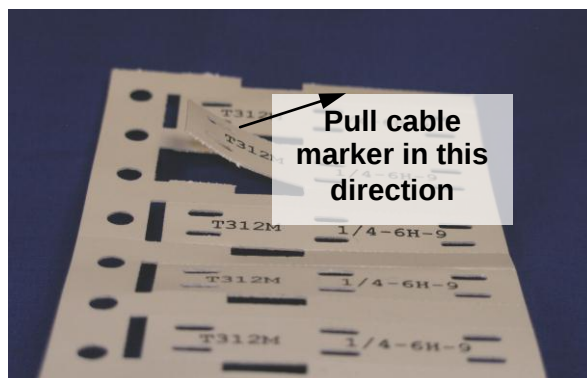

- 3.3 The procedure ensures that the force is applied across both of the perforations, thus preventing the product from tearing into the cable tie holes.

## 4.0 Marker Installation

### 4.1 Products descriptions start with:


- CM-SCE...
- TMS-CM...
- HLX...
- HL...
- HTTMS-CM...
- HT-CM-SCE...

4.2 To prevent tearing of the cable marker during installation, the cable ties must be applied correctly. Incorrect use of the cable ties exerts undue stress to the edges of the cable-tie holes.


4.3 It is recommended that the cable marker is installed in its final desired position and **not** slid after fixing along the cable into the final position.

4.4 Note correct positioning of cable ties in photos below.

**Figure 5:** CM-SCE-TP-1/4 Fixing

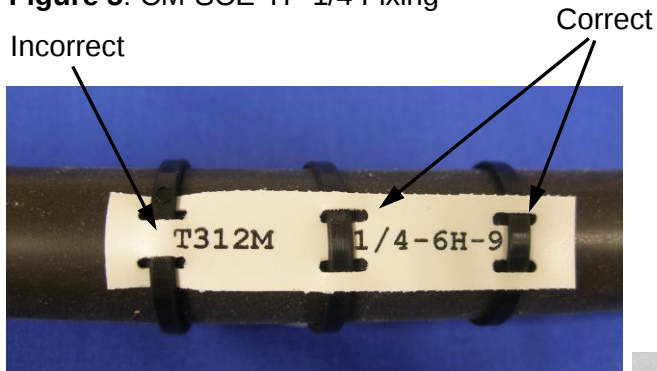

**Figure 6:** CM-SCE-TP-1/2 Fixing

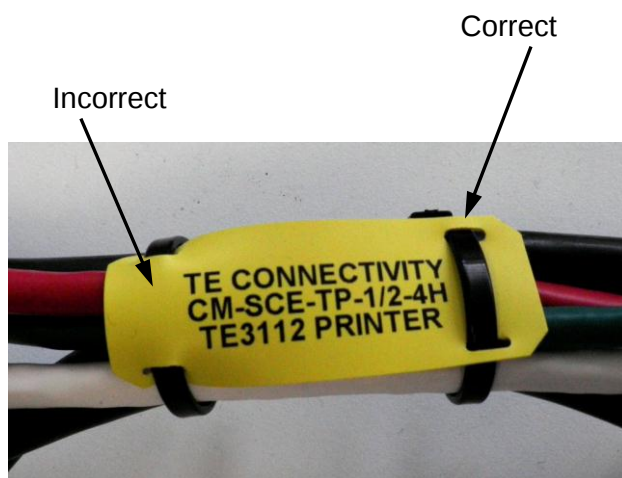

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9