
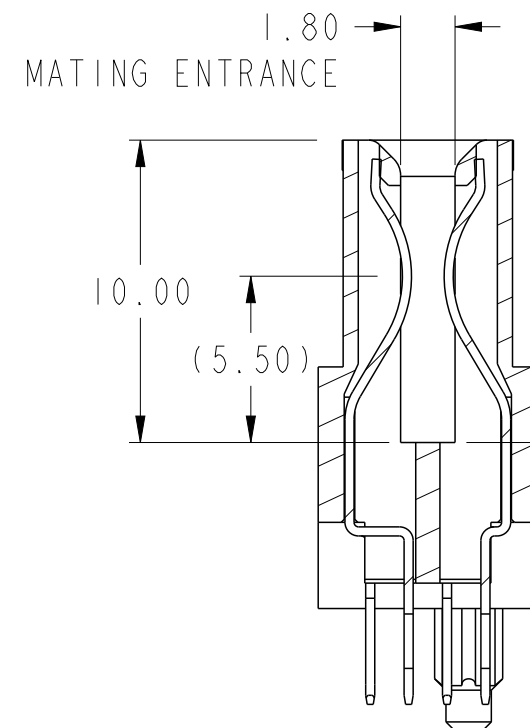
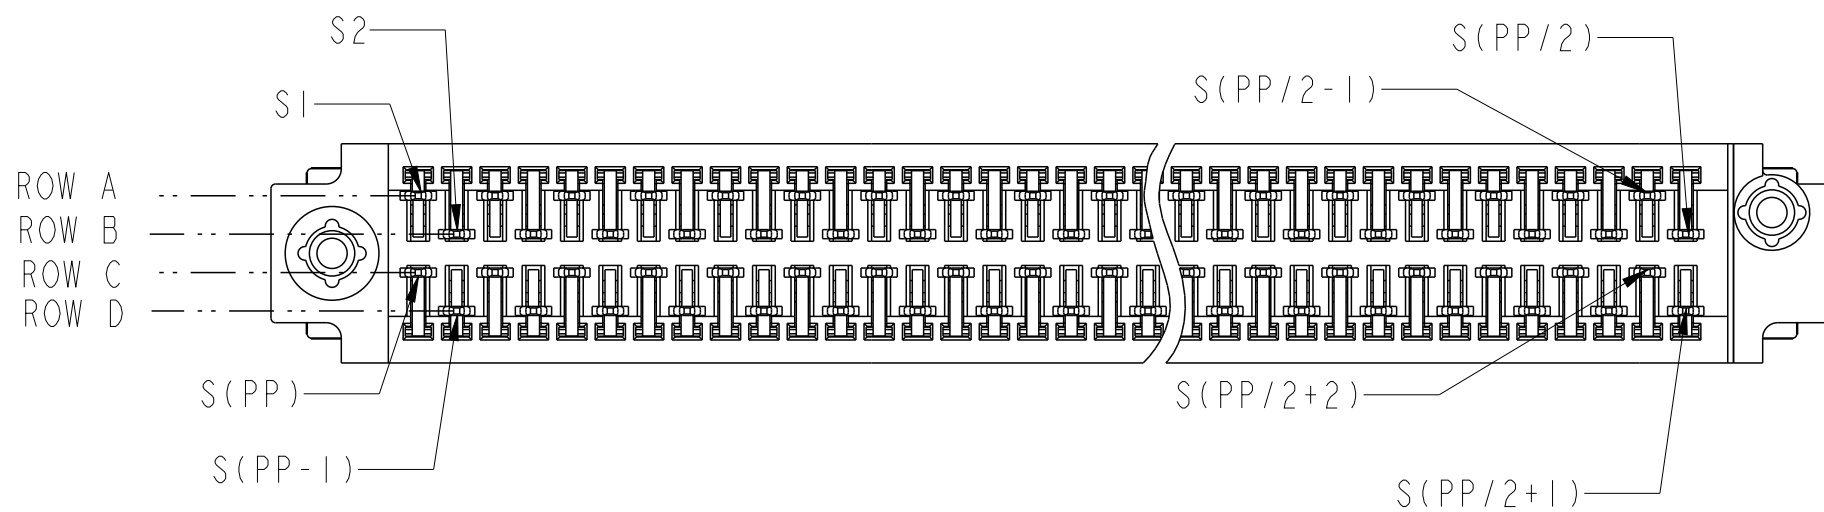
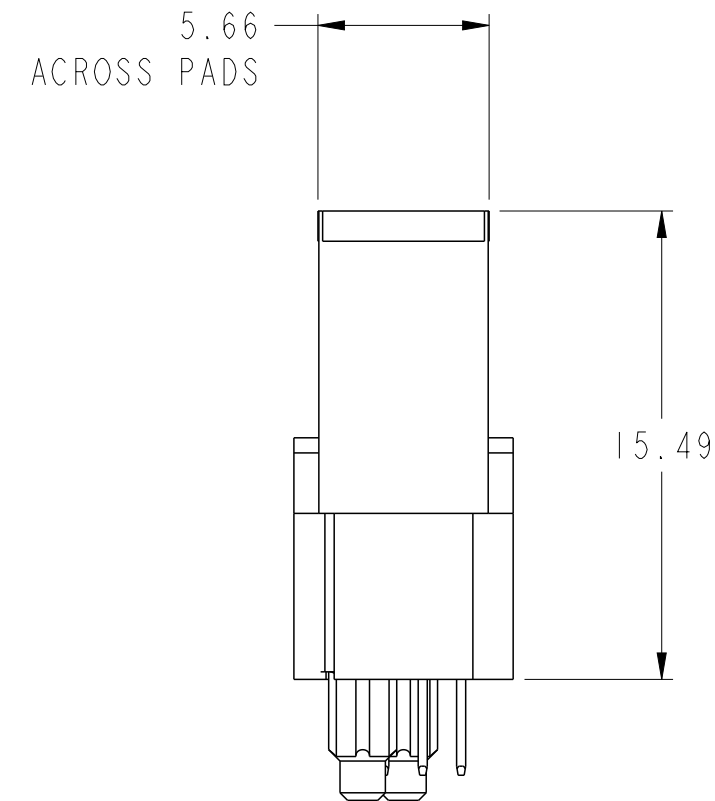
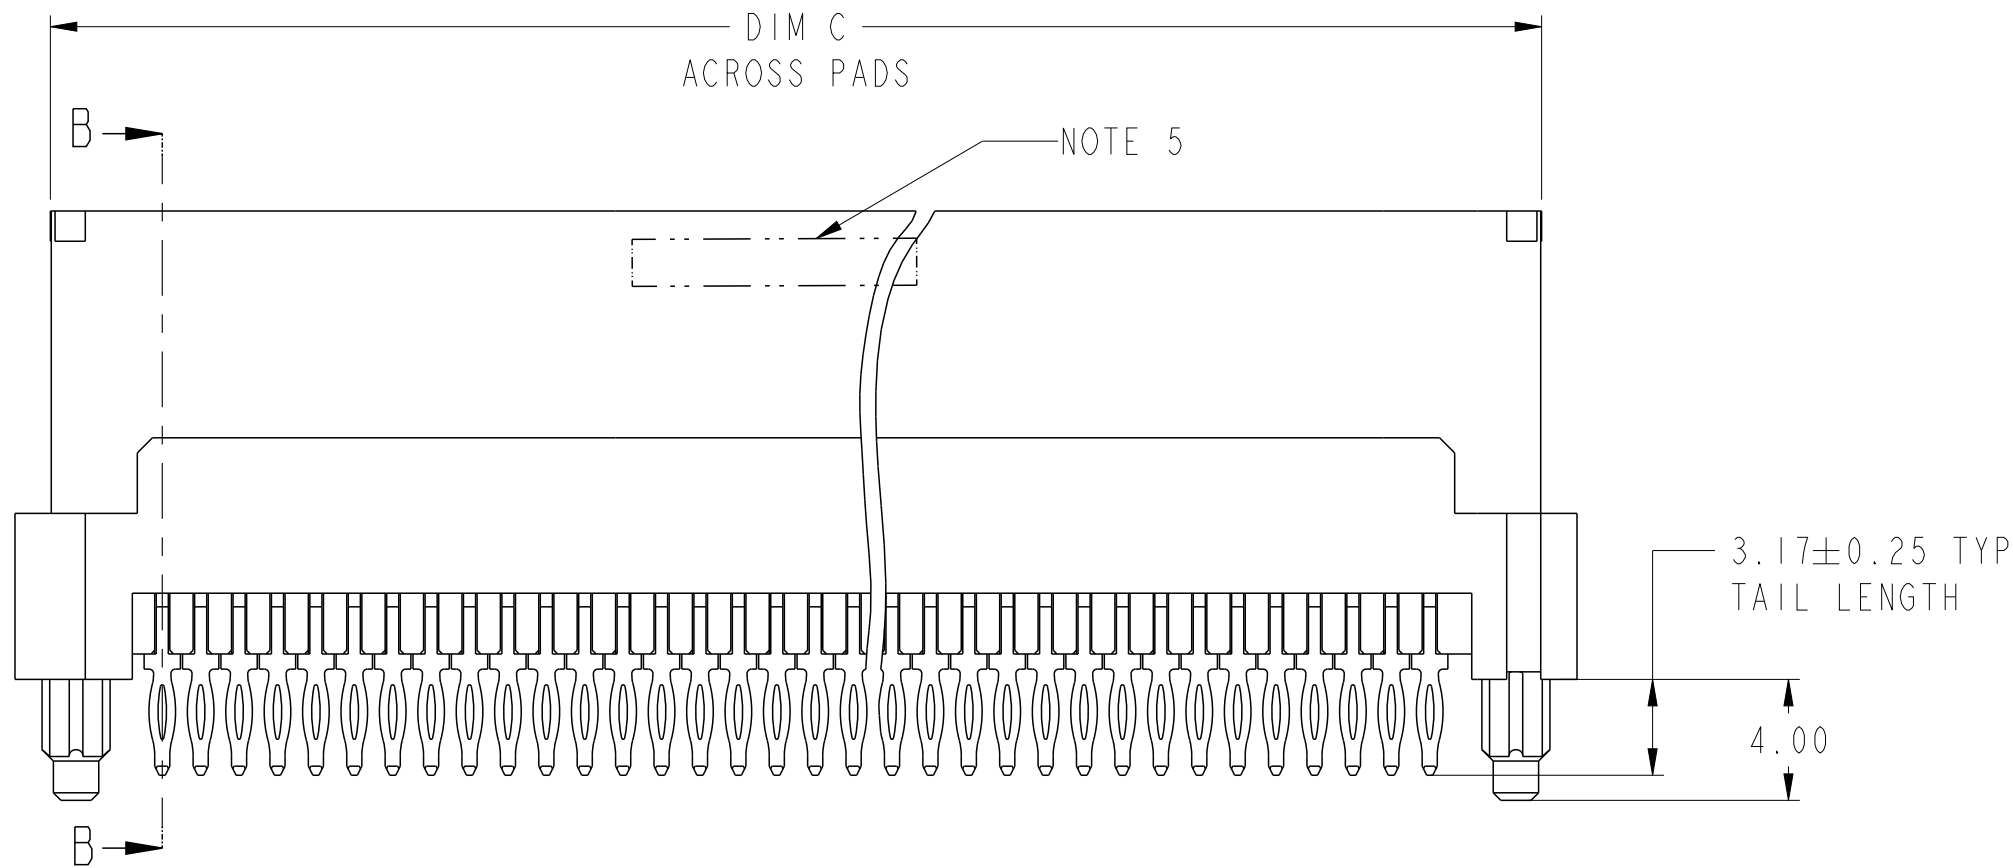


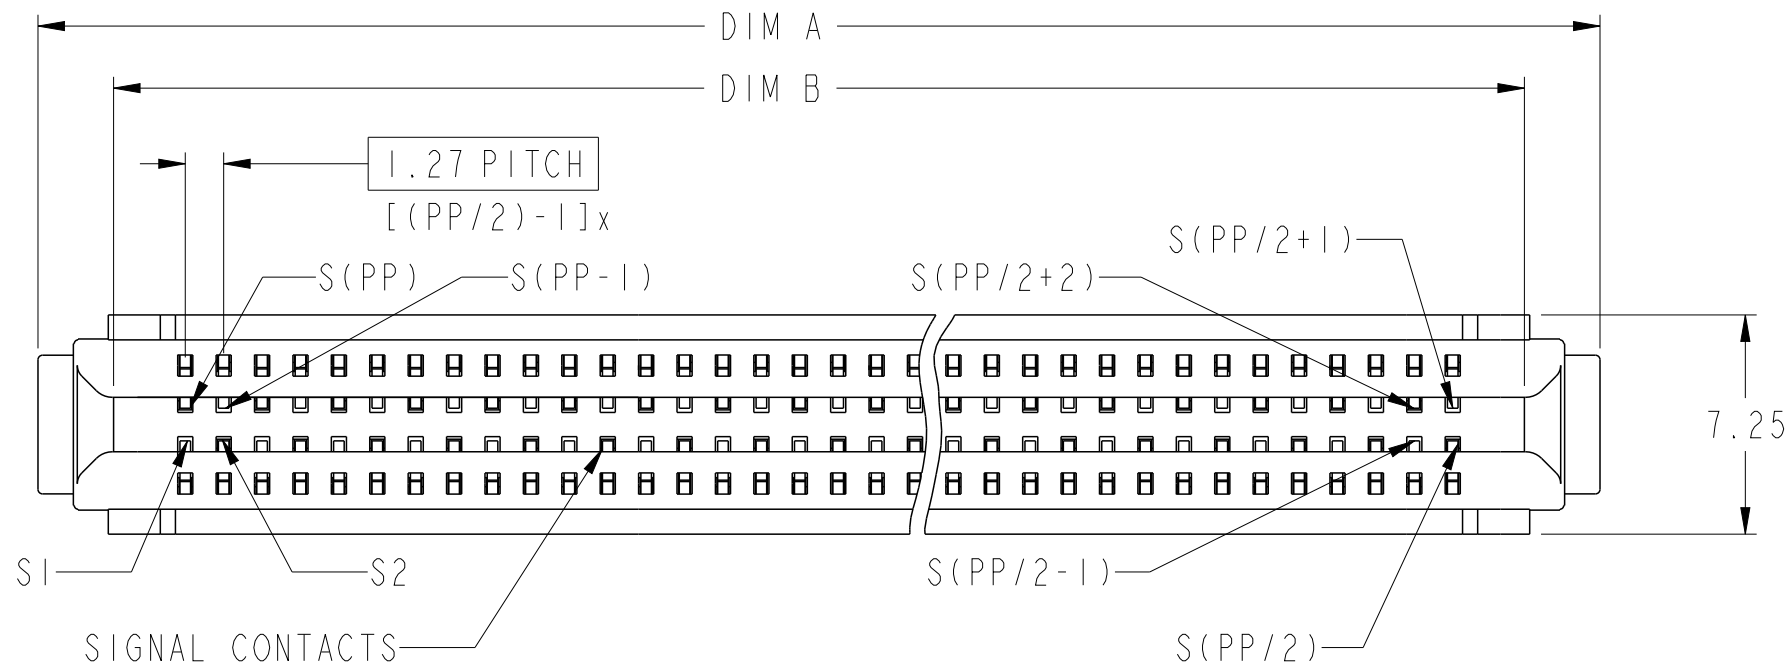


SECTION B-B
SCALE 4:1


spec ref		-		dr	Eric Jiang	2013/02/04	projection 	MM 	size	A2	scale	4:1	
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Sunny2 Liu	2016/05/05			ecn no	ELX-DG-24036-1			
ASME Y14.5				chr	Terris Liu	2016/05/20			product family	rel level	Released		
				appr	Pei-Ming Zheng	2016/05/24							
surface		linear	0.X	±0.50	Amphenol FCi	title	VERT RECT (ALL SIGNAL PINS) HIGH POWER CARD EDGE			dwg no	10123730	rev	B
			0.XX	±0.25									
			0.XXX	±0.10									
ASME Y14.5	angular	0°	±2°		cat. no.	Product - Customer Drw			sheet 1 of 4				

CONTACT TYPE	TOP LAYER DESCRIPTION	TABLE 1 (HPCE / SOLDER TAILS) PLATED THROUGH-HOLE REQUIREMENTS				
		DRILLED HOLE DIAMETER	COPPER THICKNESS	TIN-LEAD THICKNESS	TIN THICKNESS	FINISHED HOLE DIAMETER
POWER & SIGNAL	TIN-LEAD	1.10-1.16 (1.15 DRILL)	0.025 - 0.050	0.005 - 0.015	--	0.94 - 1.10
	IMMERSION TIN	1.10-1.16 (1.15 DRILL)	0.025 - 0.050	--	0.9 - 1.5um	0.94 - 1.10
	COPPER (SEE NOTE 8)	1.10-1.16 (1.15 DRILL)	0.025 - 0.050	--	--	0.94 - 1.10

CONTACT TYPE	TOP LAYER DESCRIPTION	TABLE 2 (HPCE / PRESS-FIT TAILS) PLATED THROUGH-HOLE REQUIREMENTS				
		DRILLED HOLE DIAMETER	COPPER THICKNESS	TIN-LEAD THICKNESS	TIN THICKNESS	FINISHED HOLE DIAMETER
POWER & SIGNAL	TIN-LEAD	0.81-0.86 (0.85 DRILL)	0.025 - 0.050	0.005 - 0.015	--	0.65 - 0.80
	IMMERSION TIN	0.81-0.86 (0.85 DRILL)	0.025 - 0.050	--	0.9 - 1.5um	0.70 - 0.80
	COPPER (SEE NOTE 8)	0.81-0.86 (0.85 DRILL)	0.025 - 0.050	--	--	0.70 - 0.80


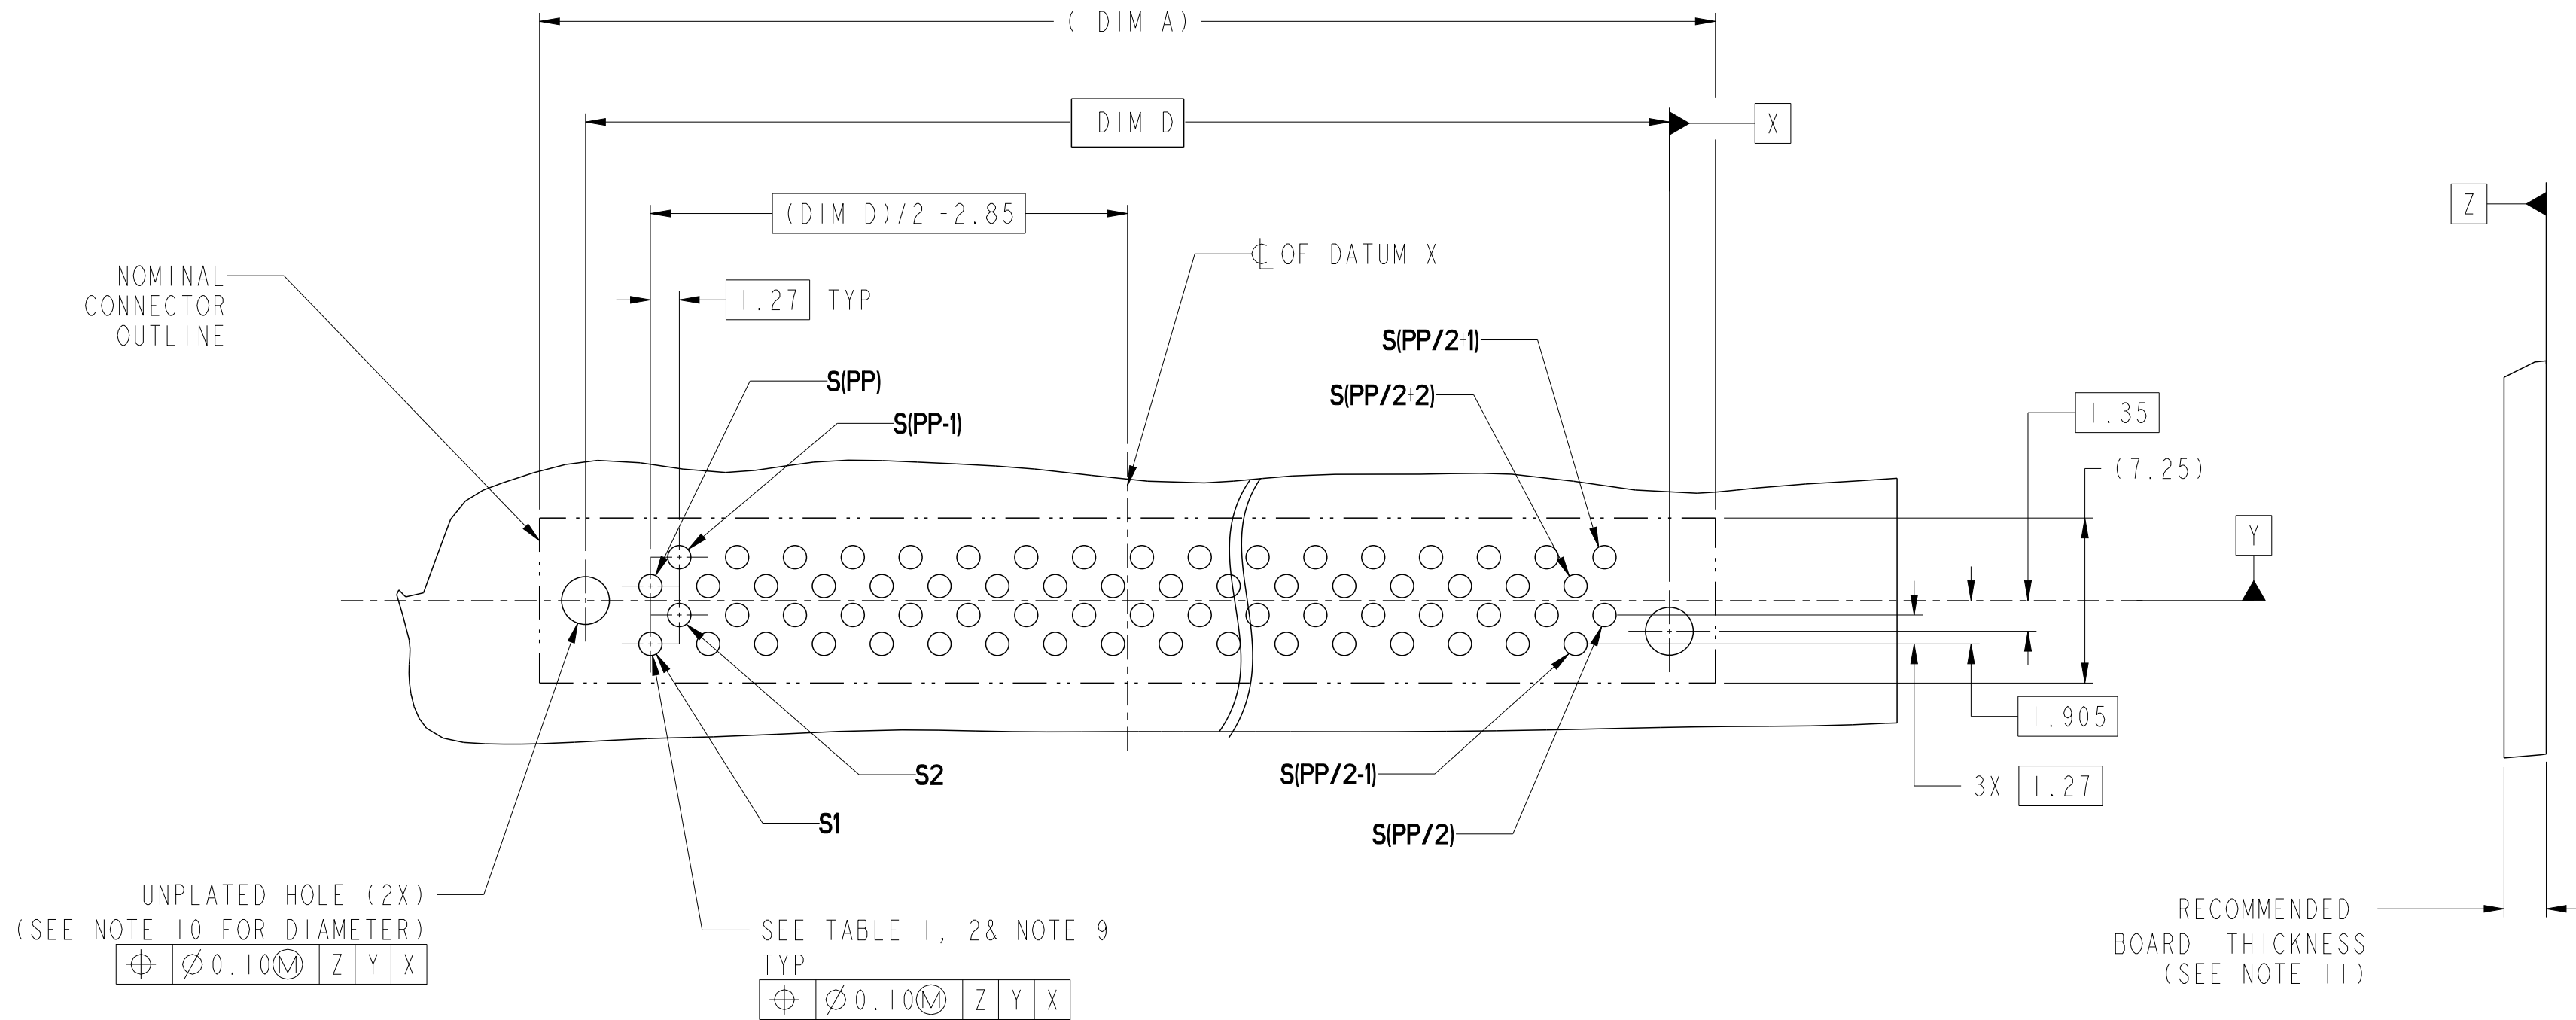


spec ref		-		dr	Eric Jiang	2013/02/04	projection		MM	size	A2	scale	4:1
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng	Sunny2 Liu	2016/05/05				ecn no	ELX-DG-24036-1		
ASME Y14.5				chr	Terris Liu	2016/05/20	product family			rel level	Released		
				appr	Pei-Ming Zheng	2016/05/24							
surface	linear	0.X	±0.50	Amphenol FCI	title	VERT RECT (ALL SIGNAL PINS) HIGH POWER CARD EDGE				dwg no	10123730		rev
		0.XX	±0.25										
		0.XXX	±0.10										
ASME Y14.5	angular	0°	±2°		cat. no.	Product - Customer Drw				sheet 2 of 4		B	

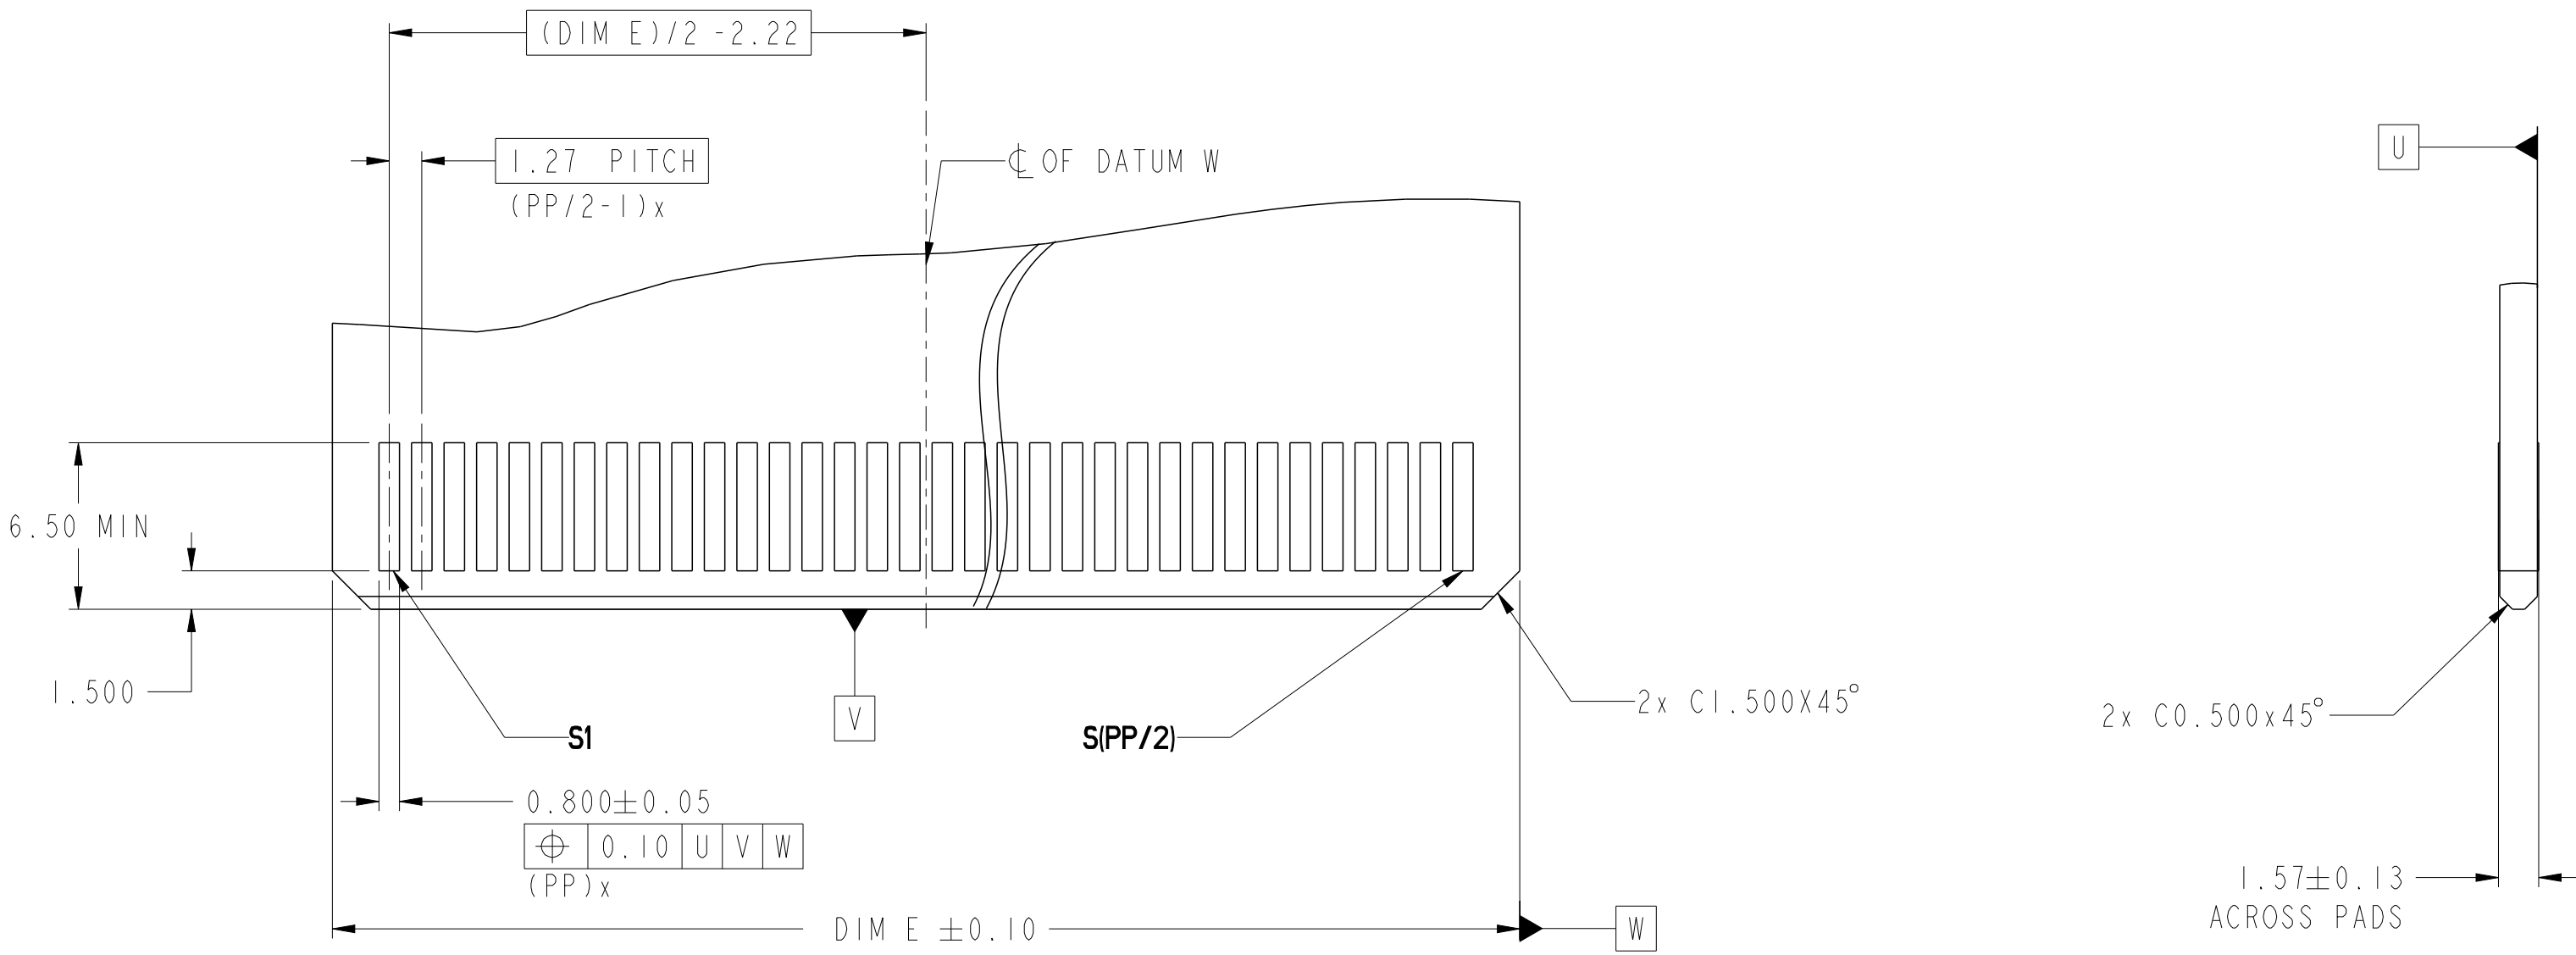

spec ref -				dr Eric Jiang		2013/02/04		projection		MM		size A2		scale 4:1	
tolerance std ASME Y14.5				TOLERANCES UNLESS OTHERWISE SPECIFIED				eng Sunny2 Liu		2016/05/05				ecn no ELX-DG-24036-1	
ASME Y14.5		TOLERANCES UNLESS OTHERWISE SPECIFIED		chr Terris Liu		2016/05/20		product family		rel level Released					
				appr Pei-Ming Zheng		2016/05/24									
surface		linear		Amphenol FCI		title VERT RECT (ALL SIGNAL PINS) HIGH POWER CARD EDGE		dwg no 10123730		rev B					
		0.X ±0.50													
		0.XX ±0.25													
ASME Y14.5		angular													
		0° ±2°													
cat. no.				Product - Customer Drw				sheet 3 of 4							

A
B
C
D
E
F

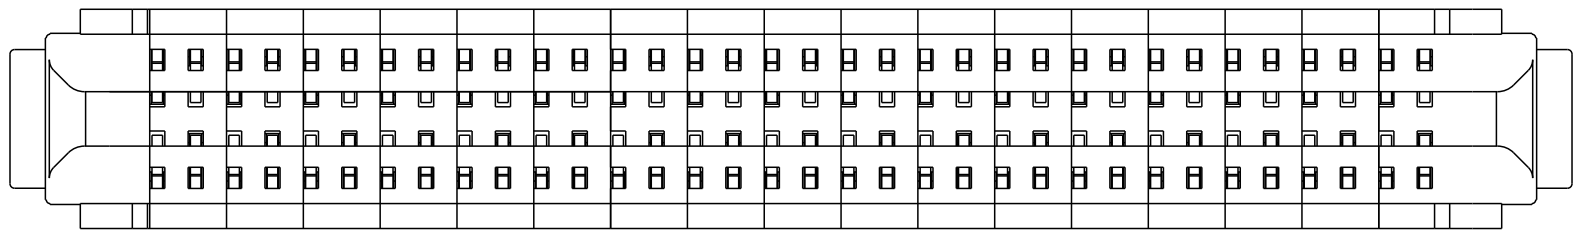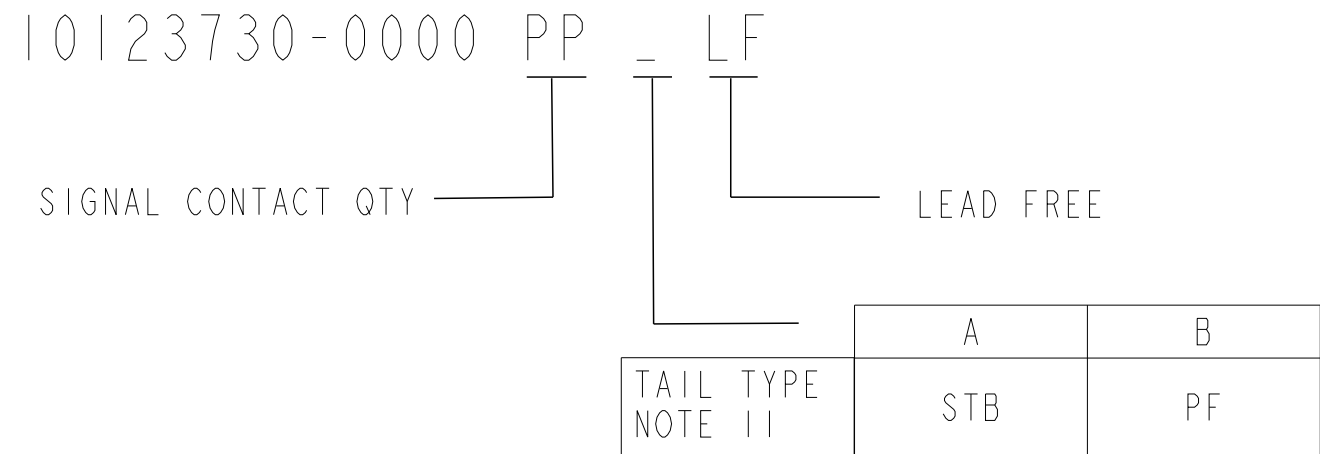


EXAMPLE: THE CONFIGURATION ABOVE IS 10123730-000068ALF
STB VERT REC 68S

TABLE 3: PART NUMBER CODE, HPCE STD VERT REC S CONFIG

NOTES:

1. CONNECTOR MATERIALS:
- HOUSING: HIGH TEMPERATURE THERMAL PLASTIC, BLACK
UL 94V-0 COMPLIANT
- CONTACTS: HIGH PERFORMANCE COPPER ALLOY.
2. CONTACT FINISH REF. GS-12-604 SECTION 5.2.
3. PRODUCT SPECIFICATION: GS-12-604.
4. APPLICATION SPECIFICATION: GS-20-128.
5. PRODUCT MARKING ON HOUSING IN AREA SHOWN MEETS AFCI SPECIFICATION: GS-24-007.
6. PACKAGING MEETS FCI SPECIFICATION GS-14-937.
7. HOUSING COMPONENT WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 60 SECONDS IN A CONVECTION, INFRA-RED, OR VAPOR PHASE REFLOW OVEN.
8. COPPER PLATING THICKNESS IN CENTER OF VIA-HOLE CAN BE NO MORE THAN 0.003 LESS THAN OTHER AREAS.
9. ALL HOLE SIZES ARE FINISHED HOLE SIZES.
10. MOUNTING HOLES ARE UNPLATED
Ø 2.40 +/- 0.1 FOR PRESS-FIT TAILS
Ø 2.18 +/- 0.03 FOR SOLDER TAILS
11. STB=SOLDER TO BOARD, 1.57-2.38mm PCB THICKNESS.
PF=PRESS FIT, 1.57mm MINIMUM PCB THICKNESS.
12. A SYMBOL  WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

DIM	TABLE 2 LENGTH FORMULAS
DIM A	(PP/2)X1.27+8.47
DIM B	DIM A -5.00
DIM C	DIM A -2.34
DIM D	DIM A -4.04
DIM E	DIM A -5.30

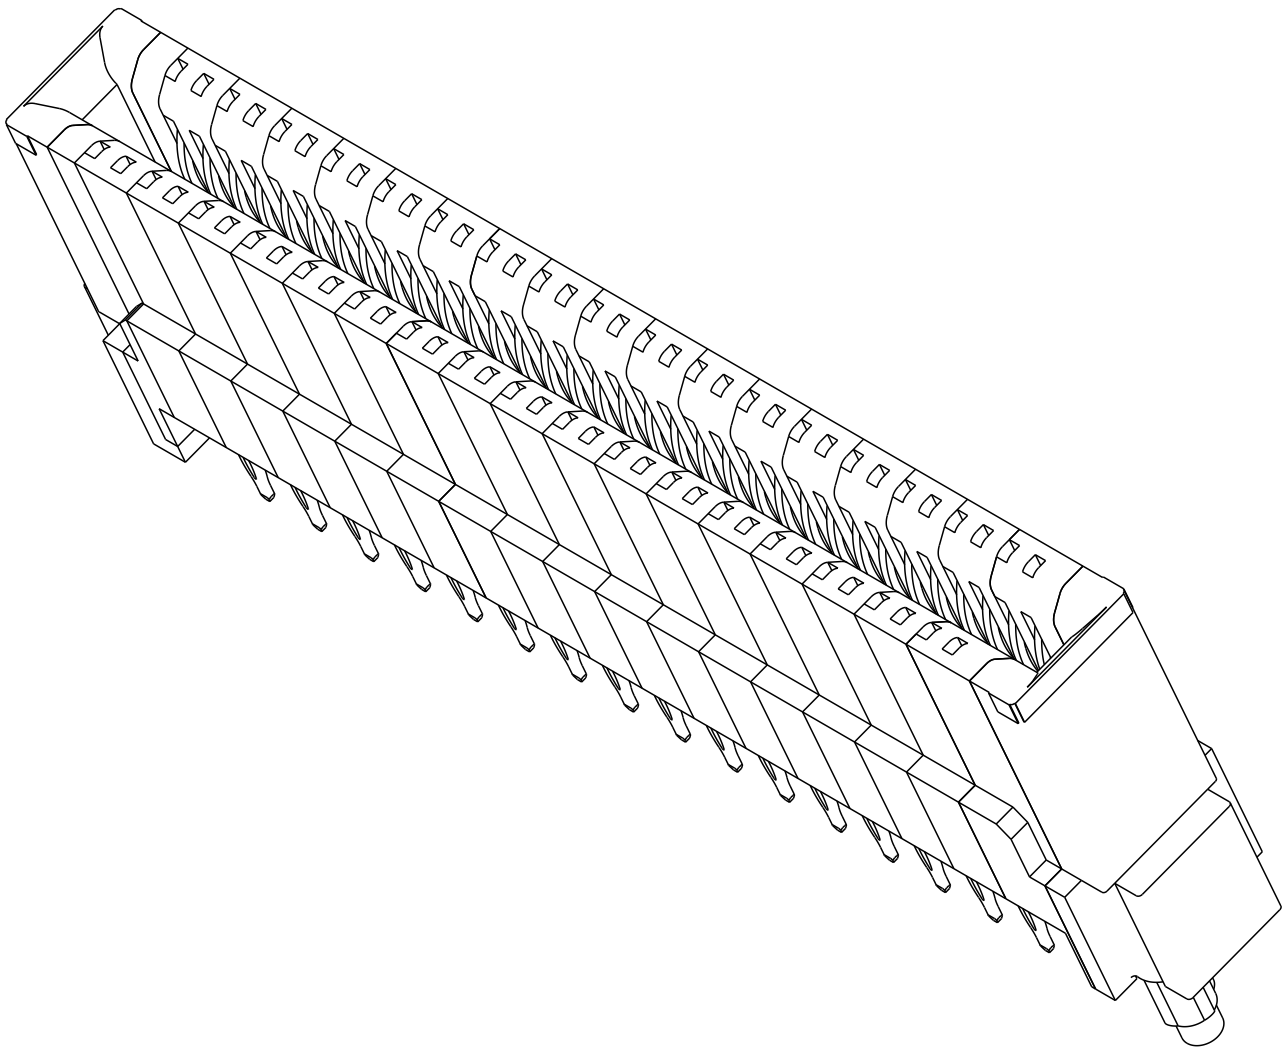

spec ref	-	dr	Eric Jiang	2013/02/04	projection	MM	size	A2	scale	4:1
tolerance std	ASME Y14.5	eng	Sunny2 Liu	2016/05/05	chr	Terris Liu	ecn no	ELX-DG-24036-1	rel level	Released
surface	linear	0.X	±0.50	0.XX	±0.25	0.XXX	±0.10	angular	0°	±2°
Amphenol FCI	VERT RECT (ALL SIGNAL PINS)	cat. no.	10123730	Product - Customer Drw	sheet 4 of 4	rev	B			

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9