

# ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

**CZ**

Chip Type, High Reliability.  
Low temperature ESR specification.  
series



For SMD



Long Life



Anti-Solvent  
Feature

Upgrade

- Chip type, high temperature range, for +125°C use.
- Added ESR specification after the test at -40°C.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2002/95/EC).

CZ Low ESR Long Life CJ




## Specifications


| Item                          | Performance Characteristics                                                                                                                                                                                                             |                 |      |      |      |                    |      |                                                   |      |     |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|------|------|------|--------------------|------|---------------------------------------------------|------|-----|
| Category Temperature Range    | -40 to +125°C                                                                                                                                                                                                                           |                 |      |      |      |                    |      |                                                   |      |     |
| Rated Voltage Range           | 10 to 100V                                                                                                                                                                                                                              |                 |      |      |      |                    |      |                                                   |      |     |
| Rated Capacitance Range       | 10 to 470 μF                                                                                                                                                                                                                            |                 |      |      |      |                    |      |                                                   |      |     |
| Capacitance Tolerance         | ±20% at 120Hz, 20°C                                                                                                                                                                                                                     |                 |      |      |      |                    |      |                                                   |      |     |
| Leakage Current               | After 2 minutes' application of rated voltage, leakage current is not more than 0.01CV or 3(μA), whichever is greater.                                                                                                                  |                 |      |      |      |                    |      |                                                   |      |     |
| Tangent of loss angle (tan δ) | Measurement frequency : 120Hz at 20°C                                                                                                                                                                                                   |                 |      |      |      |                    |      |                                                   |      |     |
|                               | Rated voltage (V)                                                                                                                                                                                                                       | 10              | 16   | 25   | 35   | 50                 | 63   | 80                                                | 100  |     |
|                               | tan δ (MAX.)                                                                                                                                                                                                                            | 0.30            | 0.23 | 0.18 | 0.16 | 0.16               | 0.12 | 0.12                                              | 0.10 |     |
| Stability at Low Temperature  | Measurement frequency : 120Hz                                                                                                                                                                                                           |                 |      |      |      |                    |      |                                                   |      |     |
|                               | Rated voltage (V)                                                                                                                                                                                                                       |                 | 10   | 16   | 25   | 35                 | 50   | 63                                                | 80   | 100 |
|                               | Impedance ratio<br>ZT / Z20 (MAX.)                                                                                                                                                                                                      | Z-40°C / Z+20°C | 12   | 8    | 6    | 4                  | 4    | 3                                                 | 3    | 3   |
| Endurance                     | After 3000 hours (1000hours for φ6.3 × 5.8L, 2000hours for φD=6.3 × 7.7L) application of rated voltage at 125°C, capacitors meet the characteristics requirements listed below.                                                         |                 |      |      |      | Capacitance Change |      | Within ± 30% of the initial capacitance value     |      |     |
|                               |                                                                                                                                                                                                                                         |                 |      |      |      | tan δ              |      | 300% or less than the initial specified value     |      |     |
|                               |                                                                                                                                                                                                                                         |                 |      |      |      | Leakage current    |      | Less than or equal to the initial specified value |      |     |
| Shelf Life                    | After storing the capacitors under no load at 125°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above. |                 |      |      |      |                    |      |                                                   |      |     |
| Resistance to soldering heat  | The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.               |                 |      |      |      | Capacitance Change |      | Within ±10% of the initial capacitance value      |      |     |
|                               |                                                                                                                                                                                                                                         |                 |      |      |      | tan δ              |      | Less than or equal to the initial specified value |      |     |
|                               |                                                                                                                                                                                                                                         |                 |      |      |      | Leakage current    |      | Less than or equal to the initial specified value |      |     |
| Marking                       | Black print on the case top.                                                                                                                                                                                                            |                 |      |      |      |                    |      |                                                   |      |     |

## Chip Type


( $\phi 6.3$ ) 【Standard】 ※ please contact us for vibration resistance.

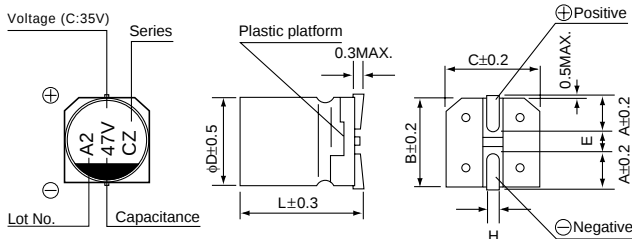


## Type numbering system (Example : 35V 47 $\mu$ F)

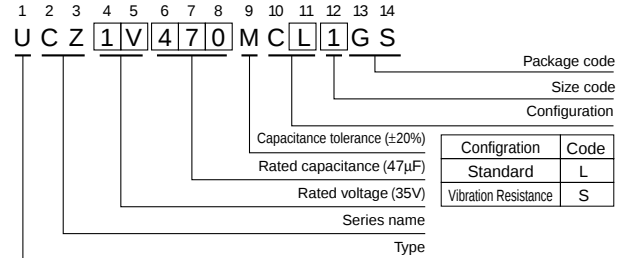

## ( $\phi 8$ to $\phi 10$ ) 【Standard】

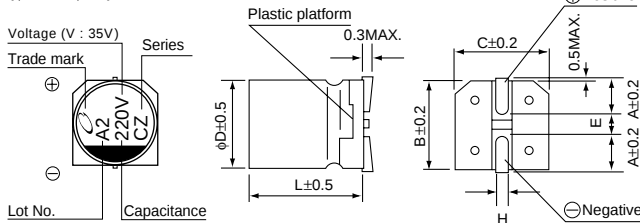

## ( $\phi 8$ to $\phi 10$ ) 【Vibration Resistance】

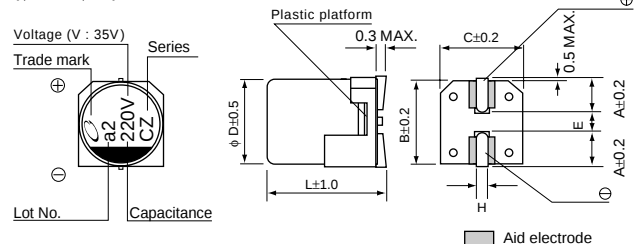

| Standard          | (mm)       |            |            |            | Vibration Resistance (mm) | (mm)       |            |
|-------------------|------------|------------|------------|------------|---------------------------|------------|------------|
| $\phi D \times L$ | 6.3 × 5.8  | 6.3 × 7.7  | 8 × 10     | 10 × 10    | $\phi D \times L$         | 8 × 10     | 10 × 10    |
| A                 | 2.4        | 2.4        | 2.9        | 3.2        | A                         | 2.9        | 3.2        |
| B                 | 6.6        | 6.6        | 8.3        | 10.3       | B                         | 8.3        | 10.3       |
| C                 | 6.6        | 6.6        | 8.3        | 10.3       | C                         | 8.3        | 10.3       |
| E                 | 2.2        | 2.2        | 3.1        | 4.5        | E                         | 3.1        | 4.5        |
| L                 | 5.8        | 7.7        | 10         | 10         | L                         | 10         | 10         |
| H                 | 0.5 to 0.8 | 0.5 to 0.8 | 0.8 to 1.1 | 0.8 to 1.1 | H                         | 1.1 to 1.5 | 1.1 to 1.5 |

| Rated Voltage |    |    |    |    |    |    |    |     |  |
|---------------|----|----|----|----|----|----|----|-----|--|
| V             | 10 | 16 | 25 | 35 | 50 | 63 | 80 | 100 |  |
| Code          | A  | C  | E  | V  | H  | J  | K  | 2A  |  |

## ■Dimensions

| V<br>Code |     | 10                                                            | 16                                                             | 25                                                             | 35                                                             | 50                                                                                                                                                   |
|-----------|-----|---------------------------------------------------------------|----------------------------------------------------------------|----------------------------------------------------------------|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Cap. (μF) |     | 1A                                                            | 1C                                                             | 1E                                                             | 1V                                                             | 1H                                                                                                                                                   |
| 10        | 100 |                                                               |                                                                |                                                                | 6.3×5.8   1.60   24   —   69                                   | 6.3×5.8   2.80   42   —   51                                                                                                                         |
| 22        | 220 |                                                               |                                                                |                                                                | 6.3×5.8   1.60   24   —   69                                   | 6.3×7.7   0.50   5   40   197                                                                                                                        |
| 33        | 330 |                                                               |                                                                | 6.3×5.8   1.60   24   —   69                                   | 6.3×7.7   0.45   5   40   197                                  | ● 6.3×7.7   0.50   5   40   197<br>8×10   0.25   3.5   6   270                                                                                       |
| 47        | 470 |                                                               | 6.3×5.8   1.60   24   —   69                                   | Recommend 35V ➡                                                | ● 6.3×7.7   0.45   5   40   197<br>8×10   0.20   3   4.5   270 | ● 6.3×7.7   0.50   5   40   197<br>8×10   0.25   3.5   6   270                                                                                       |
| 68        | 680 |                                                               |                                                                |                                                                | 8×10   0.20   3   4.5   270                                    |                                                                                                                                                      |
| 100       | 101 | Recommend 16V ➡                                               | ● 6.3×7.7   0.45   5   40   197<br>8×10   0.20   3   4.5   270 | ● 6.3×7.7   0.45   5   40   197<br>8×10   0.20   3   4.5   270 | 8×10   0.20   3   4.5   270                                    | 10×10   0.20   2.5   4.5   500                                                                                                                       |
| 220       | 221 | 8×10   0.20   3   4.5   270                                   | 10×10   0.15   2   3.5   500                                   | ● 8×10   0.20   3   4.5   270<br>10×10   0.15   2   3.5   500  | 10×10   0.15   2   3.5   500                                   |                                                                                                                                                      |
| 330       | 331 | ● 8×10   0.20   3   4.5   270<br>10×10   0.15   2   3.5   500 | 10×10   0.15   2   3.5   500                                   | 10×10   0.15   2   3.5   500                                   |                                                                | Case size<br>φD × L<br>(mm)<br>Initial<br>20°C<br>Initial<br>-40°C<br>after<br>endurance<br>test<br>2000<br>hours<br>-40°C<br>Rated<br>ripple<br>ESR |
| 470       | 471 | 10×10   0.15   2   3.5   500                                  | 10×10   0.15   2   3.5   500                                   |                                                                |                                                                |                                                                                                                                                      |

| Cap. (μF) | V   | Code | 63                                                          | 80                                                         | 100                                                                                                                                                  |
|-----------|-----|------|-------------------------------------------------------------|------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
|           |     |      | 1J                                                          | 1K                                                         | 2A                                                                                                                                                   |
| 10        | 100 |      | 6.3×7.7   2.00   100   —   60                               | 8×10   0.75   50   —   70                                  | 8×10   0.75   50   —   70                                                                                                                            |
| 22        | 220 |      | 8×10   0.70   35   —   100                                  | ● 8×10   0.75   50   —   70<br>10×10   0.55   35   —   115 | ● 8×10   0.75   50   —   70<br>10×10   0.55   35   —   115                                                                                           |
| 33        | 330 |      | ● 8×10   0.70   35   —   100<br>10×10   0.50   25   —   170 | ● 8×10   0.75   50   —   70<br>10×10   0.55   35   —   115 | 10×10   0.55   35   —   115                                                                                                                          |
| 47        | 470 |      | ● 8×10   0.70   35   —   160<br>10×10   0.50   25   —   170 | 10×10   0.55   35   —   115                                | Case size<br>φD × L<br>(mm)<br>Initial<br>20°C<br>Initial<br>-40°C<br>after<br>endurance<br>test<br>2000<br>hours<br>-40°C<br>Rated<br>ripple<br>ESR |

Max. ESR (Ω) at 20°C / -40°C 100kHz, Rated ripple Current (mA rms) at 125°C 100kHz  
 ● : In this case, ⑥ will be put at 12th digit of type numbering system.

## ●Frequency coefficient of rated ripple current

| Frequency   | 50Hz | 120Hz | 300Hz | 1kHz | 10kHz or more |
|-------------|------|-------|-------|------|---------------|
| Coefficient | 0.35 | 0.50  | 0.64  | 0.83 | 1.00          |

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9