
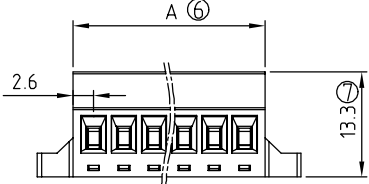



1	2	3	4	5	6	7																																																																						
				<table><tr><td>SIGN</td><td>DATE</td><td>DESCRIPTION</td><td>APPROVER</td></tr><tr><td>△</td><td>2009.09.09</td><td>The part No is changed</td><td>Jacke</td></tr><tr><td>△</td><td>2011.02.25</td><td>The wire is changed from 14-30(AWG) to 14-28(AWG)</td><td>Aaron</td></tr><tr><td>△</td><td>2011.02.25</td><td>Add is cULus</td><td>Aaron</td></tr><tr><td colspan="4">THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</td></tr></table>			SIGN	DATE	DESCRIPTION	APPROVER	△	2009.09.09	The part No is changed	Jacke	△	2011.02.25	The wire is changed from 14-30(AWG) to 14-28(AWG)	Aaron	△	2011.02.25	Add is cULus	Aaron	THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!																																																					
SIGN	DATE	DESCRIPTION	APPROVER																																																																									
△	2009.09.09	The part No is changed	Jacke																																																																									
△	2011.02.25	The wire is changed from 14-30(AWG) to 14-28(AWG)	Aaron																																																																									
△	2011.02.25	Add is cULus	Aaron																																																																									
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!																																																																												
				Material: ● Item a Clamp: Brass Ni plated ● Item b Male contact pin: Brass,Tin plated. ● Item c Terminal screw: Steel Zinc plating ● Item d Terminal housing: Thermoplastic (UL94V-0) ● Item e Terminal cover: Thermoplastic (UL94V-0) Electrical: cULus ● Voltage rating: 300V ● Current rating: 8A ● Wire range: △ ● Solid wire(AWG): 14-28 △ ● Stranded wire(AWG):14-28 ● Torque(Lb-In): 2.17 ● Screw:M2 ● Wire strip length:6 mm ● Withstanding Voltage:1.6KV ● Operating temperature: -40°C to +115°C △ ● Safety Approval:  V5 xx 31 x 0 xxxx G No. OF POLES 02 2 CONTACTS 03 3 CONTACTS 24 24 CONTACTS Color 0 Black (RAL9005) 2 Red (RAL3001/D) 3 Orange(RAL2011/P) 4 Yellow(RAL1018/A) 5 Green(RAL6018/T) 6 Blue (RAL5015/A) 8 Grey(RAL7035/D) G: Pb<40000ppm 0000: "@" Logo (Standard) 000A: "ANYTEK" Mark Any special item by customer request. please contact sales department.																																																																								
																																																																												
																																																																												
																																																																												
N = Number of poles Dim A=Nx3.81+1.39 Dim B=(N-1)x3.81 Dim C=Nx3.81+5.19 Dim D=Nx3.81+10.39 <table><tr><td></td><td>Dim A</td><td>Dim B</td><td>Dim C</td><td>Dim D</td></tr><tr><td>2-6p</td><td>±0.15</td><td>±0.15</td><td>±0.15</td><td>±0.15</td></tr><tr><td>7-12p</td><td>±0.20</td><td>±0.20</td><td>±0.20</td><td>±0.20</td></tr><tr><td>13-18p</td><td>±0.30</td><td>±0.30</td><td>±0.30</td><td>±0.30</td></tr><tr><td>19-24p</td><td>±0.35</td><td>±0.35</td><td>±0.35</td><td>±0.35</td></tr></table>					Dim A	Dim B	Dim C	Dim D	2-6p	±0.15	±0.15	±0.15	±0.15	7-12p	±0.20	±0.20	±0.20	±0.20	13-18p	±0.30	±0.30	±0.30	±0.30	19-24p	±0.35	±0.35	±0.35	±0.35																																																
	Dim A	Dim B	Dim C	Dim D																																																																								
2-6p	±0.15	±0.15	±0.15	±0.15																																																																								
7-12p	±0.20	±0.20	±0.20	±0.20																																																																								
13-18p	±0.30	±0.30	±0.30	±0.30																																																																								
19-24p	±0.35	±0.35	±0.35	±0.35																																																																								
				<table><tr><td colspan="2">TITLE</td><td colspan="4">V5 3.81 mm W/O Flange Bottom cover fixed type Series</td></tr><tr><td colspan="2">PART NO.</td><td colspan="2">V5xx31x0xxxxG △</td><td colspan="2">DWG NO.</td><td colspan="2">8V50101</td></tr><tr><td>APPROVED</td><td>CHECKED</td><td>DESIGNED</td><td>DRAWN</td><td colspan="2">CUST NO.</td><td colspan="2"></td></tr><tr><td></td><td></td><td>Aaron 2011.02.25</td><td>Jacke 2009.08.27</td><td colspan="2"></td><td colspan="2">Tolerance</td></tr><tr><td colspan="4"></td><td colspan="2">SHEET: 01/01</td><td colspan="2">UNIT: mm</td></tr><tr><td colspan="4"></td><td colspan="2">SCALE: NONE</td><td colspan="2">X. ±0.50</td></tr><tr><td colspan="4"></td><td colspan="2">REV.: D</td><td colspan="2">X.X ±0.30</td></tr><tr><td colspan="4"></td><td colspan="2"></td><td colspan="2">X.XX ±0.10</td></tr><tr><td colspan="4"></td><td colspan="2"></td><td colspan="2">X° ±1°</td></tr></table>			TITLE		V5 3.81 mm W/O Flange Bottom cover fixed type Series				PART NO.		V5xx31x0xxxxG △		DWG NO.		8V50101		APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.						Aaron 2011.02.25	Jacke 2009.08.27			Tolerance						SHEET: 01/01		UNIT: mm						SCALE: NONE		X. ±0.50						REV.: D		X.X ±0.30								X.XX ±0.10								X° ±1°	
TITLE		V5 3.81 mm W/O Flange Bottom cover fixed type Series																																																																										
PART NO.		V5xx31x0xxxxG △		DWG NO.		8V50101																																																																						
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.																																																																								
		Aaron 2011.02.25	Jacke 2009.08.27			Tolerance																																																																						
				SHEET: 01/01		UNIT: mm																																																																						
				SCALE: NONE		X. ±0.50																																																																						
				REV.: D		X.X ±0.30																																																																						
						X.XX ±0.10																																																																						
						X° ±1°																																																																						
1	2	3	4	5	6	7																																																																						

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9