


Low-Profile Full-HD-Flatpanel Controller with SD/HD-TV Video-Decoder

CRTtoLCD-71-LP

- DVI, Analog-RGB, DisplayPort, CVBS, S-Video and analog Component inputs
- Display resolution up to WUXGA (1920x1200)
- Displaying of two inputs simultaneous (PiP)
- Independent zoom/shrink for Main/PiP input
- Sound Input / Output
- Powerful software tools including Panel-Editor and Serial-API
- Scripting support
- Super low-profile (8mm)

Low-Profile Full-HD-Flatpanel Controller with SD/HD-TV Video-Decoder CRTtoLCD-71-LP

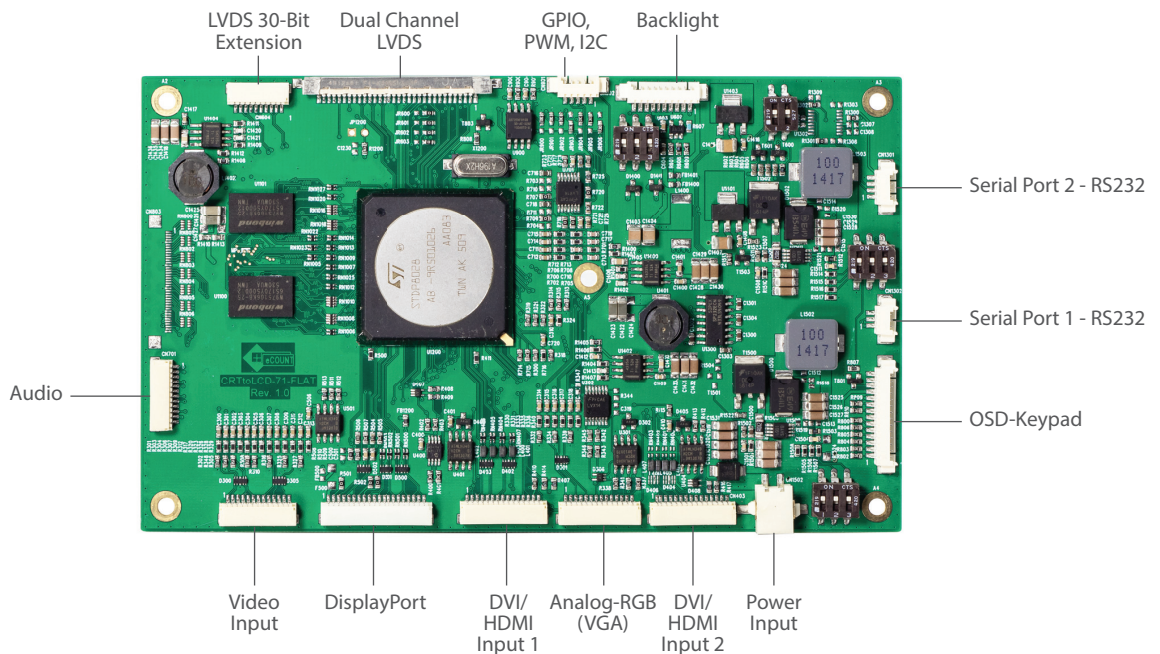

Description

The CRTtoLCD-71-LP is a super low-profile Full-HD-Flatpanel Controller that allows connection of standard Analog RGB, DVI, DisplayPort, Composite-Video, S-Video and Component-Video sources to TFT-LCD flatpanels.

From a single +12 to 24V DC power supply, the CRTtoLCD-71-LP generates all required supply voltages and power sequencing. LED or CCFL backlight dimming is supported and can be controlled by PWM or absolute voltage level.

The Multi-Standard Video-Decoder handles PAL, NTSC, SECAM and other video formats.

Typical Verticals

Point of Sales (POS):	Check-in terminals
Point of Information (POI):	Public displays
Industrial Automation & Medical:	Panel-PCs, Industrial monitors
Test & Measurement:	Smart displays
Transportation:	Rugged displays
Gaming:	Casino slot machines, Lottery systems, Open frame monitors

Low-Profile Full-HD-Flatpanel Controller with SD/HD-TV Video-Decoder CRTtoLCD-71-LP

Technical Information

DVI Input	<ul style="list-style-type: none"> • 2x DVI inputs up to WUXGA
Analog Input	<ul style="list-style-type: none"> • Analog-RGB up to WUXGA@60Hz, All color depths up to 24 bits
DisplayPort Input	<ul style="list-style-type: none"> • DisplayPort 1.1 compliant receiver up to WUXGA
Video Inputs	<ul style="list-style-type: none"> • Composite Video (CVBS) • S-Video • Analog component Video (YPbPr)
Video Decoder (integrated)	<ul style="list-style-type: none"> • 3D adaptive comb filter • SD-TV (CVBS, S-Video and analog component input) • HD-TV (Analog component input only)
De-Interlacing	<ul style="list-style-type: none"> • DCDi (Directional correlational de-interlacing) by Faroudja®
High Quality Advanced Scaling	<ul style="list-style-type: none"> • Horizontal & Vertical Zoom/Shrink allows pixel based independent positioning, zooming and shrinking of Main and PIP input
Specials	<ul style="list-style-type: none"> • Wide range input power supply 12 V- 24 V-DC • Two separate onboard power supplies for flatpanel (up to 3 A) and backlight (up to 3.5 A) • Ambient Light Sensor support to control backlight brightness via ADC inputs • Multi-function GPIO's configurable as I²C or PWM outputs and external interrupt source • PWM or voltage controlled backlight dimming • Scripting support • DDC2Bi / VCP (also accessible via script) • Serial-API for full access to various functions and features • Serial-OSD for keypad-less OSD control
Integrated On-Screen-Display	<ul style="list-style-type: none"> • On Screen Display (OSD) for control of all configured features
Display-Interface	<ul style="list-style-type: none"> • JLI30 (up to 24Bit dual channel LVDS) • 30Bit dual channel LVDS via additional connector • Output up to WUXGA@60 Hz (1920x1200)
Form Factor	<ul style="list-style-type: none"> • 150.01 mm x 89.97 mm x 8.00 mm (L/W/H)
Optional	<ul style="list-style-type: none"> • Inverter and display cable-kits for various flatpanels

Low-Profile Full-HD-Flatpanel Controller with SD/HD-TV Video-Decoder CRTtoLCD-71-LP

Ordering Information

Article	Part.-No.	Description
CRTtoLCD-71-LP	21118E	Low Profile Multimedia Full-HD-Flatpanel Controller with Analog-RGB(VGA), 2xDVI, DisplayPort and PAL/NTSC/SECAM video inputs and Dual channel LVDS output, Height: 8 mm
OSD-Panel-Set-LP	22011E	5-button keypad with dual color LED(red/green) IR-Receiver, Ambient Light Sensor (ALS) incl. cable
KAB-COMtoTTL	61021E	Serial-RS232 to TTL converter cable for CRTtoLCD-51-pro/-61-pro/-71-LP/-61-LP
ADAPT-71-LP	22014E	Input header adapter with Analog-RGB (VGA), DVI, DP, Video (Composite, S-Video, Component) inputs for CRTtoLCD-71-LP (P/N: 21118E)
KAB-ADAPT-71-LP	61030F	Cableset for ADAPT-71-LP (P/N: 22014E)
KAB-ADAPT-P-LP	61030P	Power input cable for KAB-ADAPT-X1-LP (P/N: 22012E & 22014E)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9