


Low-Profile Full-HD-Flatpanel Controller with SD/HD-TV Video-Decoder

## CRTtoLCD-71-LP

- DVI, Analog-RGB, DisplayPort, CVBS, S-Video and analog Component inputs
- Display resolution up to WUXGA (1920x1200)
- Displaying of two inputs simultaneous (PiP)
- Independent zoom/shrink for Main/PiP input
- Sound Input / Output
- Powerful software tools including Panel-Editor and Serial-API
- Scripting support
- Super low-profile (8mm)

## Low-Profile Full-HD-Flatpanel Controller with SD/HD-TV Video-Decoder CRTtoLCD-71-LP

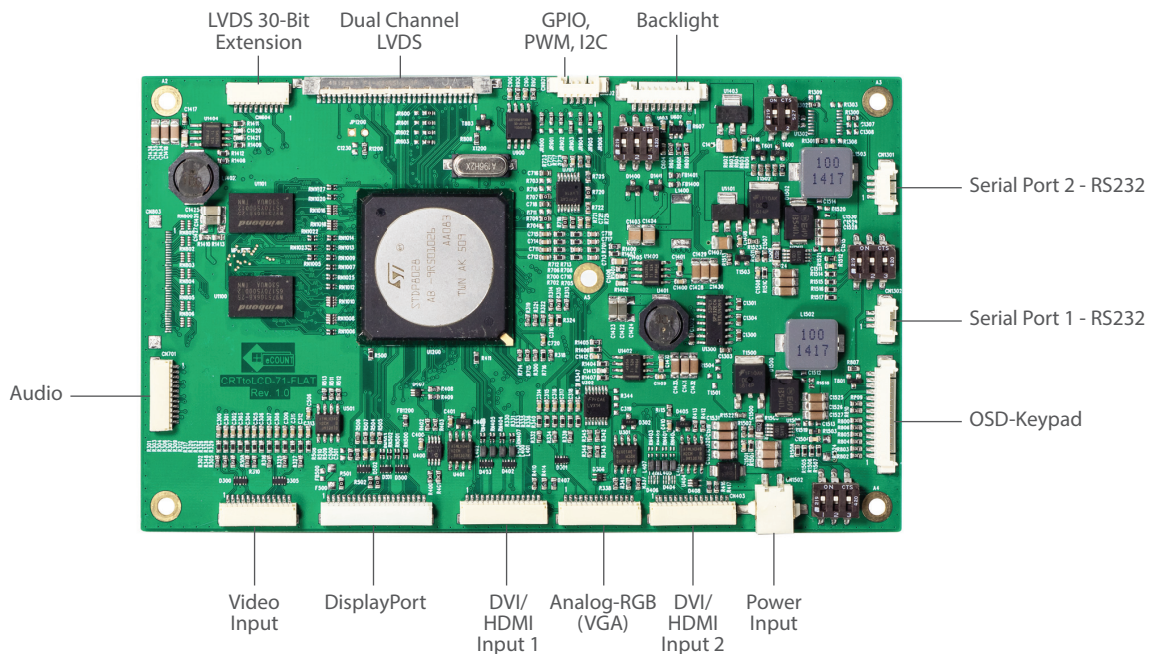

### Description

The CRTtoLCD-71-LP is a super low-profile Full-HD-Flatpanel Controller that allows connection of standard Analog RGB, DVI, DisplayPort, Composite-Video, S-Video and Component-Video sources to TFT-LCD flatpanels.

From a single +12 to 24V DC power supply, the CRTtoLCD-71-LP generates all required supply voltages and power sequencing. LED or CCFL backlight dimming is supported and can be controlled by PWM or absolute voltage level.

The Multi-Standard Video-Decoder handles PAL, NTSC, SECAM and other video formats.

### Typical Verticals

Point of Sales (POS):	Check-in terminals
Point of Information (POI):	Public displays
Industrial Automation & Medical:	Panel-PCs, Industrial monitors
Test & Measurement:	Smart displays
Transportation:	Rugged displays
Gaming:	Casino slot machines, Lottery systems, Open frame monitors

## Low-Profile Full-HD-Flatpanel Controller with SD/HD-TV Video-Decoder CRTtoLCD-71-LP

### Technical Information

DVI Input	<ul style="list-style-type: none"> <li>• 2x DVI inputs up to WUXGA</li> </ul>
Analog Input	<ul style="list-style-type: none"> <li>• Analog-RGB up to WUXGA@60Hz, All color depths up to 24 bits</li> </ul>
DisplayPort Input	<ul style="list-style-type: none"> <li>• DisplayPort 1.1 compliant receiver up to WUXGA</li> </ul>
Video Inputs	<ul style="list-style-type: none"> <li>• Composite Video (CVBS)</li> <li>• S-Video</li> <li>• Analog component Video (YPbPr)</li> </ul>
Video Decoder (integrated)	<ul style="list-style-type: none"> <li>• 3D adaptive comb filter</li> <li>• SD-TV (CVBS, S-Video and analog component input)</li> <li>• HD-TV (Analog component input only)</li> </ul>
De-Interlacing	<ul style="list-style-type: none"> <li>• DCDi (Directional correlational de-interlacing) by Faroudja®</li> </ul>
High Quality Advanced Scaling	<ul style="list-style-type: none"> <li>• Horizontal &amp; Vertical Zoom/Shrink allows pixel based independent positioning, zooming and shrinking of Main and PIP input</li> </ul>
Specials	<ul style="list-style-type: none"> <li>• Wide range input power supply 12 V- 24 V-DC</li> <li>• Two separate onboard power supplies for flatpanel (up to 3 A) and backlight (up to 3.5 A)</li> <li>• Ambient Light Sensor support to control backlight brightness via ADC inputs</li> <li>• Multi-function GPIO's configurable as I<sup>2</sup>C or PWM outputs and external interrupt source</li> <li>• PWM or voltage controlled backlight dimming</li> <li>• Scripting support</li> <li>• DDC2Bi / VCP (also accessible via script)</li> <li>• Serial-API for full access to various functions and features</li> <li>• Serial-OSD for keypad-less OSD control</li> </ul>
Integrated On-Screen-Display	<ul style="list-style-type: none"> <li>• On Screen Display (OSD) for control of all configured features</li> </ul>
Display-Interface	<ul style="list-style-type: none"> <li>• JLI30 (up to 24Bit dual channel LVDS)</li> <li>• 30Bit dual channel LVDS via additional connector</li> <li>• Output up to WUXGA@60 Hz (1920x1200)</li> </ul>
Form Factor	<ul style="list-style-type: none"> <li>• 150.01 mm x 89.97 mm x 8.00 mm (L/W/H)</li> </ul>
Optional	<ul style="list-style-type: none"> <li>• Inverter and display cable-kits for various flatpanels</li> </ul>

## Low-Profile Full-HD-Flatpanel Controller with SD/HD-TV Video-Decoder CRTtoLCD-71-LP

### Ordering Information

Article	Part.-No.	Description
CRTtoLCD-71-LP	21118E	Low Profile Multimedia Full-HD-Flatpanel Controller with Analog-RGB(VGA), 2xDVI, DisplayPort and PAL/NTSC/SECAM video inputs and Dual channel LVDS output, Height: 8 mm
OSD-Panel-Set-LP	22011E	5-button keypad with dual color LED(red/green) IR-Receiver, Ambient Light Sensor (ALS) incl. cable
KAB-COMtoTTL	61021E	Serial-RS232 to TTL converter cable for CRTtoLCD-51-pro/-61-pro/-71-LP/-61-LP
ADAPT-71-LP	22014E	Input header adapter with Analog-RGB (VGA), DVI, DP, Video (Composite, S-Video, Component) inputs for CRTtoLCD-71-LP (P/N: 21118E)
KAB-ADAPT-71-LP	61030F	Cableset for ADAPT-71-LP (P/N: 22014E)
KAB-ADAPT-P-LP	61030P	Power input cable for KAB-ADAPT-X1-LP (P/N: 22012E & 22014E)

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9