


# Axial Fiber Optic Isolator

## OPI1270 Series



### Features:

- Opaque plastic housings
- High noise immunity
- Visible Red LED with Phototransistor Output
- 0.05" (1.27 mm) lead spacing
- Data Transfer through plastic fiber optic cable
- Isolation voltage 15 KV (OPI1270-032), Longer versions higher

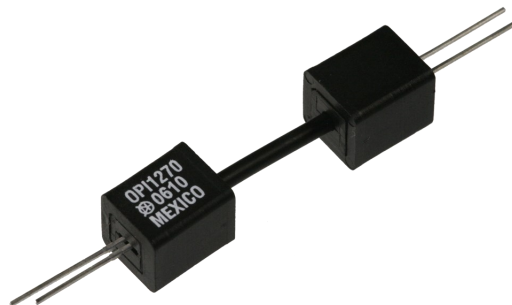

### Description:

Each **OPI1270** consists of a visible Red LED and a Phototransistor sensor, which are housed in separate opaque molded plastic housings and coupled by plastic fiber optic cable. The heavy-duty opaque housing shields the optical signal from dust, making this series of devices ideal for dust contaminated environments.

The OPI1270 series are designed for applications that require high voltage isolation between input and output or signal communication over short distances. Depending on the length of the fiber optic cable, the emitter does not have to be optically in-line with the sensor. The isolation voltage is greater than 10 K volts per inch (Isolation distance between components) for all versions of the **OPI1270**. **OPB1270-032** conforms to UL 1577 (File # E58730).


Custom electrical, wire and cabling and connectors are available. Contact your local representative or OPTEK for more information.

### Applications:


- Requiring High Voltage isolation between input and output
- Electrical isolation in dirty environments
- Industrial equipment
- Medical equipment
- Office equipment

### Ordering Information

| Part Number | Isolation Distance<br>±2mm | Device Length<br>±2mm | LED Peak Wavelength | Lead Length     |
|-------------|----------------------------|-----------------------|---------------------|-----------------|
| OPI1270-018 | 0.71" [18 mm]              | 1.26" [32.0 mm]       | 645 nm              | 0.45" [11.4 mm] |
| OPI1270-026 | 1.02" [26 mm]              | 1.57" [40.0 mm]       |                     |                 |
| OPI1270-032 | 1.26" [32 mm]              | 1.80" [45.8 mm]       |                     |                 |

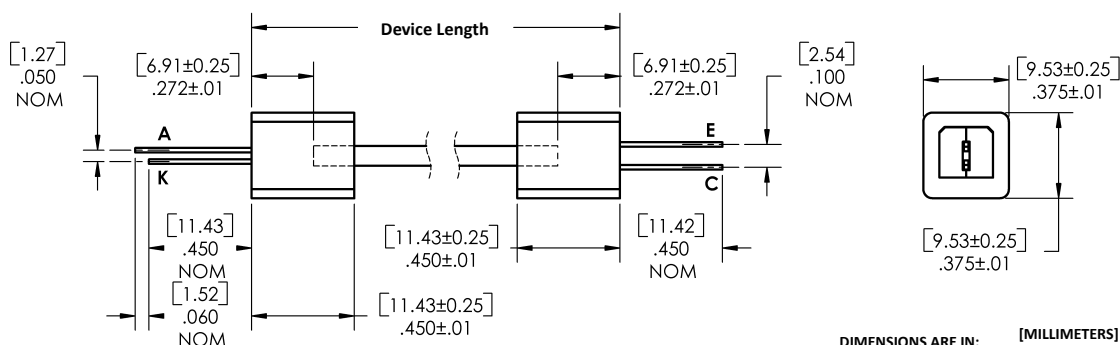

RoHS



DIMENSIONS ARE IN: [MILLIMETERS] INCHES

| Pin # | LED     | Pin # | Transistor |
|-------|---------|-------|------------|
| 1     | Anode   | 3     | Emitter    |
| 2     | Cathode | 4     | Collector  |

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

# Axial Fiber Optic Isolator

## OPI1270 Series



### Absolute Maximum Ratings ( $T_A=25^{\circ}\text{C}$ unless otherwise noted)

|                                                                                             |                                                |
|---------------------------------------------------------------------------------------------|------------------------------------------------|
| Storage Temperature Range (note 4)                                                          | $-40^{\circ}\text{C}$ to $+80^{\circ}\text{C}$ |
| Operating Temperature Range (note 4)                                                        | $-20^{\circ}\text{C}$ to $+75^{\circ}\text{C}$ |
| Lead Soldering Temperature [1/16 inch (1.6 mm) from case for 5 seconds with soldering iron] | $260^{\circ}\text{C}^{(1)}$                    |
| Power Dissipation <sup>(2)</sup>                                                            | 100 mW                                         |

### Electrical Characteristics ( $T_A = 25^{\circ}\text{C}$ unless otherwise noted)

| SYMBOL | PARAMETER | MIN | TYP | MAX | UNITS | TEST CONDITIONS |
|--------|-----------|-----|-----|-----|-------|-----------------|
|--------|-----------|-----|-----|-----|-------|-----------------|

#### LED (See OVLA56CB8 for additional information)

|       |                            |     |   |     |               |                      |
|-------|----------------------------|-----|---|-----|---------------|----------------------|
| $V_F$ | On-State Collector Current | 1.2 | - | 2.3 | V             | $I_F = 20\text{ mA}$ |
| $I_R$ | Collector-Dark Current     | -   | - | 80  | $\mu\text{A}$ | $V_R = 3.0\text{ V}$ |

#### SENSOR—Phototransistor (See OP506 for additional information)


|               |                                     |     |   |    |    |                                            |
|---------------|-------------------------------------|-----|---|----|----|--------------------------------------------|
| $I_{CEO}$     | Collector Dark Current              | -   | - | 50 | nA | $V_{CE} = 10\text{ V}$ , $E_E = 0$         |
| $V_{(BR)CEO}$ | Collector-Emitter Breakdown Voltage | 33  | - | -  | V  | $I_C = 100\text{ }\mu\text{A}$ , $E_E = 0$ |
| $V_{(BR)ECO}$ | Emitter-Collector Breakdown Voltage | 5.5 | - | -  | V  | $I_E = 100\text{ }\mu\text{A}$ , $E_E = 0$ |

#### COUPLED

|                 |  |      |   |     |               |                                                                       |
|-----------------|--|------|---|-----|---------------|-----------------------------------------------------------------------|
| $I_{C(ON)}$     |  | 0.36 | - | -   | mA            | $V_{CE} = 5\text{ V}$ , $I_F = 10\text{ mA}$                          |
| $I_{ISO}^{(3)}$ |  | -    | - | 1.0 | $\mu\text{A}$ | $I @ 7\text{ KV RMS}$ , $25^{\circ}\text{C}$ , Test Duration = 2 sec. |

#### Notes:

1. RMA flux is recommended. Duration can be extended to 10 seconds maximum when flow soldering. A maximum 20 grams force may be applied to the leads when soldering.
2. Derate linearly  $1.33\text{ mW}/^{\circ}\text{C}$  above  $25^{\circ}\text{C}$ .
3. Isolation voltage testing is required.
4. Storage and Operating temperature values are based on the plastic optical interface temperature ratings. Please reference UL1577 and UL file AVLZ.E89328

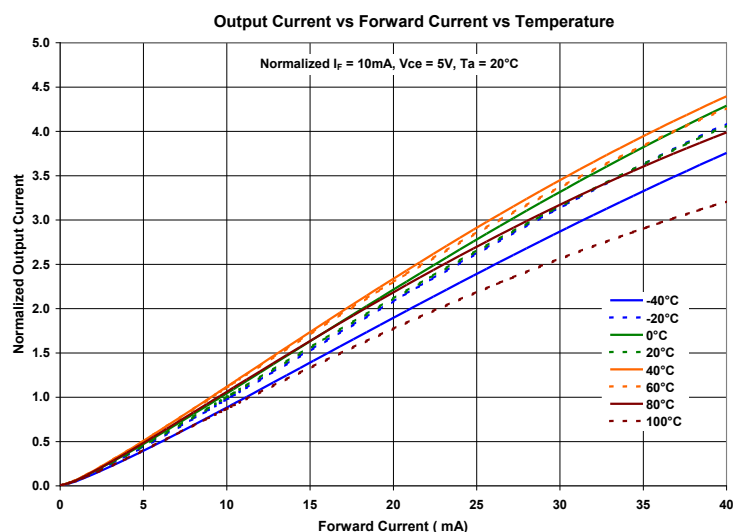

#### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.  
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200  
www.optekinc.com | www.ttelectronics.com

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9