# Schottky Rectifier, 10 A

TO-220AC




## FEATURES

- 175 °C $T_J$ operation
- Low forward voltage drop
- High frequency operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Lead (Pb)-free ("PbF" suffix)
- Designed and qualified for industrial level

Pb-free Available

RoHS* COMPLIANT

## DESCRIPTION

The 10TQ...PbF Schottky rectifier series has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 175 °C junction temperature. Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

| PRODUCT SUMMARY | |
|---|---|
| $I_{F(AV)}$ | 10 A |
| $V_R$ | 35/45 V |

| MAJOR RATINGS AND CHARACTERISTICS | | | |
|---|---|---|---|
| SYMBOL | CHARACTERISTICS | VALUES | UNITS |
| $I_{F(AV)}$ | Rectangular waveform | 10 | A |
| $V_{RRM}$ | | 35/45 | V |
| $I_{FSM}$ | $t_p$ = 5 µs sine | 1050 | A |
| $V_F$ | 10 Apk, $T_J$ = 125 °C | 0.49 | V |
| $T_J$ | Range | - 55 to 175 | °C |

| VOLTAGE RATINGS | | | | |
|---|---|---|---|---|
| PARAMETER | SYMBOL | 10TQ035PbF | 10TQ045PbF | UNITS |
| Maximum DC reverse voltage | $V_R$ | 35 | 45 | V |
| Maximum working peak reverse voltage | $V_{RWM}$ | | | |

| ABSOLUTE MAXIMUM RATINGS | | | | | |
|---|---|---|---|---|---|
| PARAMETER | SYMBOL | TEST CONDITIONS | | VALUES | UNITS |
| Maximum average forward current<br>See fig. 5 | $I_{F(AV)}$ | 50 % duty cycle at $T_C$ = 151 °C, rectangular waveform | | 10 | A |
| Maximum peak one cycle non-repetitive surge current<br>See fig. 7 | $I_{FSM}$ | 5 µs sine or 3 µs rect. pulse | Following any rated load condition and with rated $V_{RRM}$ applied | 1050 | |
| | | 10 ms sine or 6 ms rect. pulse | | 280 | |
| Non-repetitive avalanche energy | $E_{AS}$ | $T_J$ = 25 °C, $I_{AS}$ = 2 A, L = 6.5 mH | | 13 | mJ |
| Repetitive avalanche current | $I_{AR}$ | Current decaying linearly to zero in 1 µs<br>Frequency limited by $T_J$ maximum $V_A$ = 1.5 x $V_R$ typical | | 2 | A |

* Pb containing terminations are not RoHS compliant, exemptions may apply

| ELECTRICAL SPECIFICATIONS | | | | | |
|---|---|---|---|---|---|
| **PARAMETER** | **SYMBOL** | **TEST CONDITIONS** | | **VALUES** | **UNITS** |
| Maximum forward voltage drop<br>See fig. 1 | $V_{FM}$ (1) | 10 A | $T_J$ = 25 °C | 0.57 | V |
| | | 20 A | | 0.67 | |
| | | 10 A | $T_J$ = 125 °C | 0.49 | |
| | | 20 A | | 0.61 | |
| Maximum reverse leakage current<br>See fig. 2 | $I_{RM}$ (1) | $T_J$ = 25 °C | $V_R$ = Rated $V_R$ | 2 | mA |
| | | $T_J$ = 125 °C | | 15 | |
| Maximum junction capacitance | $C_T$ | $V_R$ = 5 $V_{DC}$ (test signal range 100 kHz to 1 MHz) 25 °C | | 900 | pF |
| Typical series inductance | $L_S$ | Measured lead to lead 5 mm from package body | | 8.0 | nH |
| Maximum voltage rate of change | dV/dt | Rated $V_R$ | | 10 000 | V/µs |

**Note**

(1) Pulse width < 300 µs, duty cycle < 2 %

| THERMAL - MECHANICAL SPECIFICATIONS | | | | | |
|---|---|---|---|---|---|
| **PARAMETER** | | **SYMBOL** | **TEST CONDITIONS** | **VALUES** | **UNITS** |
| Maximum junction and storage temperature range | | $T_J$, $T_{Stg}$ | | - 55 to 175 | °C |
| Maximum thermal resistance, junction to case | | $R_{thJC}$ | DC operation<br>See fig. 4 | 2.0 | °C/W |
| Typical thermal resistance, case to heatsink | | $R_{thCS}$ | Mounting surface, smooth and greased | 0.50 | |
| Approximate weight | | | | 2 | g |
| | | | | 0.07 | oz. |
| Mounting torque | minimum | | | 6 (5) | kgf · cm (lbf · in) |
| | maximum | | | 12 (10) | |
| Marking device | | | Case style TO-220AC | 10TQ035 | |
| | | | | 10TQ045 | |

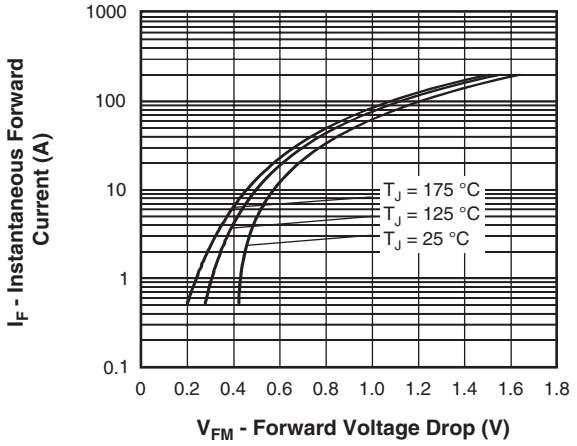


Fig. 1 - Maximum Forward Voltage Drop Characteristics

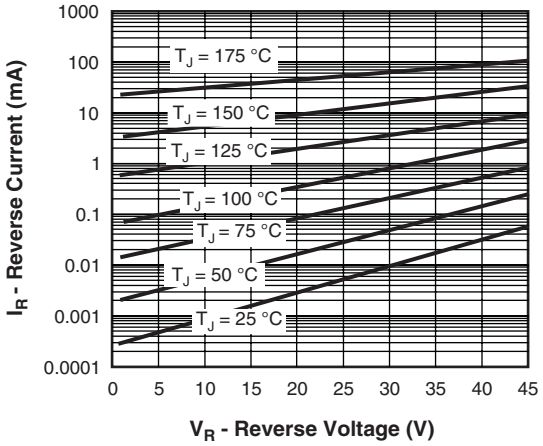


Fig. 2 - Typical Values of Reverse Current vs. Reverse Voltage

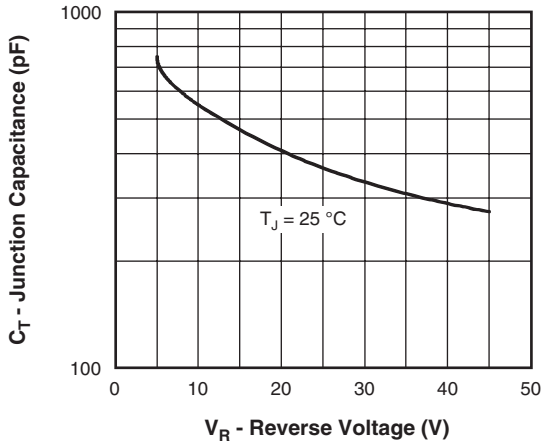


Fig. 3 - Typical Junction Capacitance vs. Reverse Voltage

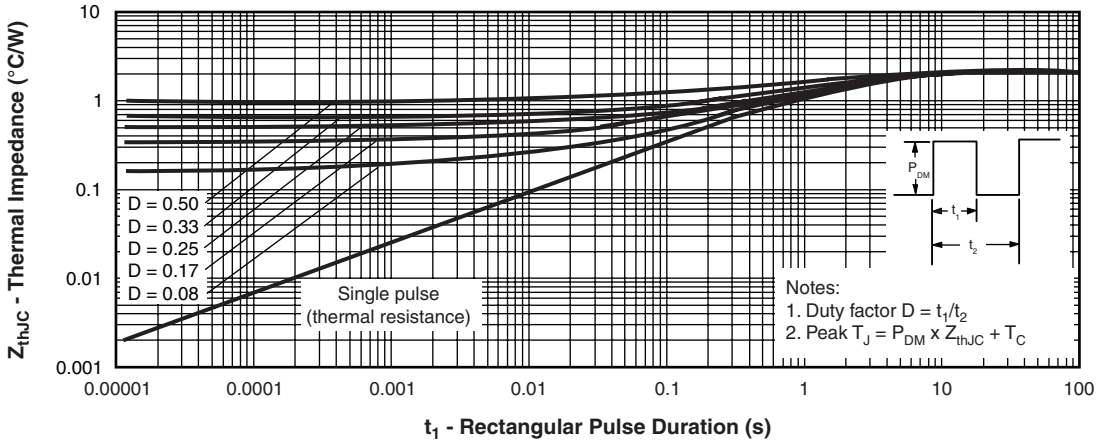


Fig. 4 - Maximum Thermal Impedance $Z_{thJC}$ Characteristics

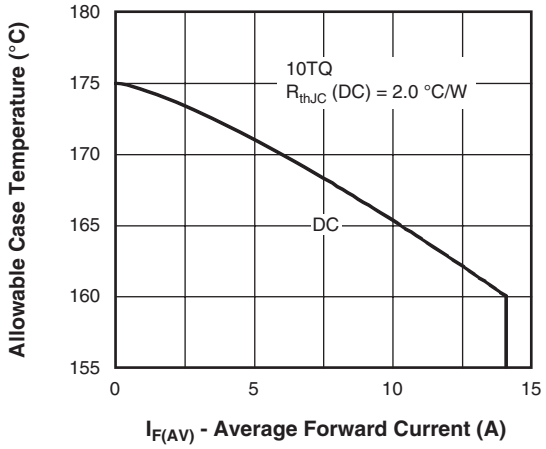


Fig. 5 - Maximum Allowable Case Temperature vs. Average Forward Current

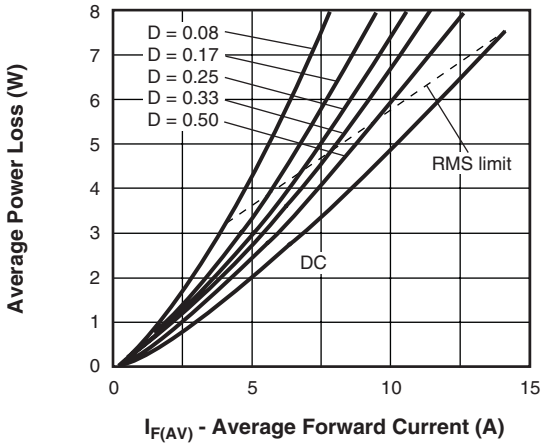


Fig. 6 - Forward Power Loss Characteristics

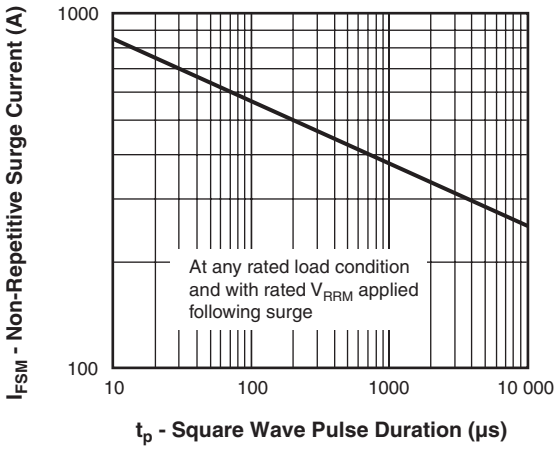


Fig. 7 - Maximum Non-Repetitive Surge Current

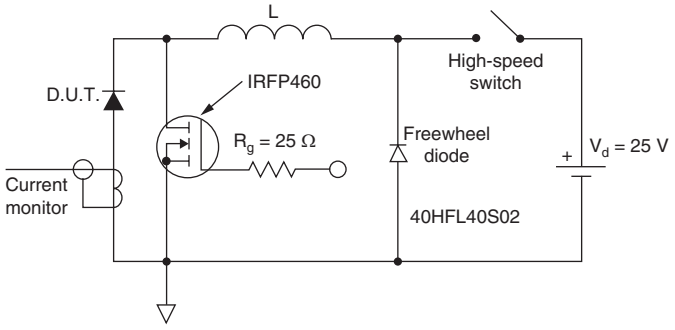


Fig. 8 - Unclamped Inductive Test Circuit

## ORDERING INFORMATION TABLE

Device code

| 10 | T | Q | 045 | PbF |
|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 |

1 - Current rating (10 = 10 A)

2 - Package:
T = TO-220

3 - Schottky “Q” series

4 - Voltage ratings
035 = 35 V
045 = 45 V

5 - • None = Standard production
• PbF = Lead (Pb)-free

Tube standard pack quantity: 50 pieces

| LINKS TO RELATED DOCUMENTS | |
|---|---|
| Dimensions | http://www.vishay.com/doc?95221 |
| Part marking information | http://www.vishay.com/doc?95224 |

# Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay’s knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer’s responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer’s technical experts. Product specifications do not expand or otherwise modify Vishay’s terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

**Данный компонент на территории Российской Федерации**

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

**Офис по работе с юридическими лицами:**

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9