



## Surface Mount Power Voltage-Regulating Diodes



DO-214AC (SMA)

### FEATURES

- Low profile package
- Ideal for automated placement
- Low Zener impedance
- Low regulation factor
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C
- Material categorization: For definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



RoHS COMPLIANT

PRIMARY CHARACTERISTICS	
V <sub>Z</sub>	5.6 V to 68 V
P <sub>tot</sub> at T <sub>L</sub> = 75 °C	1500 mW
P <sub>tot</sub> at T <sub>A</sub> = 25 °C	500 mW
T <sub>J</sub> max.	150 °C
V <sub>Z</sub> specification	Pulse current
Int. construction	Single

### MECHANICAL DATA

**Case:** DO-214AC (SMA)

Molding compound meets UL 94 V-0 flammability rating  
Base P/N-E3 - RoHS-compliant and commercial grade

**Terminals:** Matte tin plated leads, solderable per J-STD-002 and JESD 22-B102

E3 suffix meets JESD 201 class 1A whisker test

**Polarity:** Color band denotes cathode end

### TYPICAL APPLICATIONS

For general purpose regulation and protection applications.

MAXIMUM RATINGS (T <sub>A</sub> = 25 °C unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Maximum steady state power dissipation at T <sub>L</sub> = 75 °C (fig. 1) <sup>(1)</sup>	P <sub>tot</sub>	1500	mW
Maximum steady state power dissipation at T <sub>A</sub> = 25 °C (fig. 1) <sup>(2)</sup>	P <sub>tot</sub>	500	mW
Maximum instantaneous forward voltage at 200 mA for all types <sup>(3)</sup>	V <sub>F</sub>	1.5	V
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>	- 65 to + 150	°C


#### Notes

<sup>(1)</sup> Mounted on PCB with 5.0 mm x 5.0 mm copper pads attached to each terminal

<sup>(2)</sup> Mounted on minimum recommended pad layout

<sup>(3)</sup> Pulse test: 300 μs pulse width, 1 % duty cycle

ELECTRICAL CHARACTERISTICS	
SYMBOL	PARAMETER
$V_Z$	Reverse Zener voltage at $I_{ZT}$
$I_{ZT}$	Reverse current
$Z_{ZT}$	Maximum Zener impedance at $I_{ZT}$
$I_{ZK}$	Reverse current
$Z_{ZK}$	Maximum Zener impedance at $I_{ZK}$
$I_R$	Reverse leakage current at $V_R$
$V_R$	Reverse voltage
$I_F$	Forward current
$V_F$	Forward voltage at $I_F$
$I_{ZM}$	Maximum DC Zener current

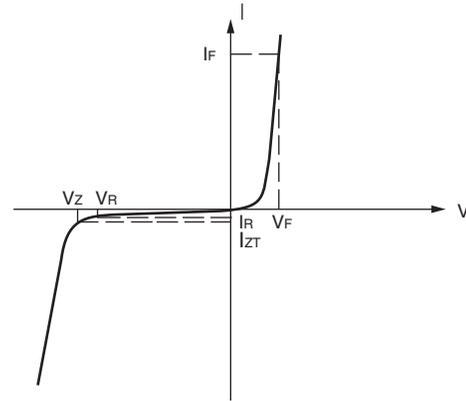

Zener Voltage Regulator

ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)											
PART NUMBER	DEVICE MARKING CODE	ZENER VOLTAGE RANGE			TEST CURRENT		MAXIMUM ZENER IMPEDANCE		REVERSE LEAKAGE CURRENT		MAXIMUM ZENER CURRENT
		$V_Z$ AT $I_{ZT}$			$I_{ZT}$	$I_{ZK}$	$Z_{ZT}$ AT $I_{ZT}$	$Z_{ZK}$ AT $I_{ZK}$	$I_R$ AT $V_R$		$I_{ZM}$
		V			mA		$\Omega$		$\mu\text{A}$	V	mA
		MIN.	NOM.	MAX.			MAX.	MAX.	MAX.		MAX.
SMAZ5919B	19B	5.32	5.6	5.88	66.9	1.0	5.0	700	200	3.0	268
SMAZ5920B	20B	5.89	6.2	6.51	60.5	1.0	2.0	700	200	4.0	242
SMAZ5921B	21B	6.46	6.8	7.14	55.1	1.0	2.5	400	200	5.2	221
SMAZ5923B	23B	7.79	8.2	8.61	45.7	0.5	5.0	700	10	6.5	183
SMAZ5924B	24B	8.64	9.1	9.56	41.2	0.5	5.0	700	10	7.0	165
SMAZ5925B	25B	9.5	10	10.5	37.5	0.25	5.0	700	10	8.0	150
SMAZ5926B	26B	10.5	11	11.6	34.1	0.25	5.5	550	5	8.4	136
SMAZ5927B	27B	11.4	12	12.6	31.2	0.25	6.5	550	1	9.1	125
SMAZ5928B	28B	12.4	13	13.7	28.8	0.25	7.0	550	1	9.9	115
SMAZ5929B	29B	14.3	15	15.8	25.0	0.25	9.0	600	1	11.4	100
SMAZ5930B	30B	15.2	16	16.8	23.4	0.25	10	600	1	12.2	94
SMAZ5931B	31B	17.1	18	18.9	20.8	0.25	12	650	1	13.7	83
SMAZ5932B	32B	19.0	20	21.0	18.7	0.25	14	650	1	15.2	75
SMAZ5933B	33B	20.9	22	23.1	17.0	0.25	17.5	650	1	16.7	68
SMAZ5934B	34B	22.8	24	25.2	15.6	0.25	19	700	1	18.2	62
SMAZ5935B	35B	25.7	27	28.4	13.9	0.25	23	700	1	20.6	56
SMAZ5936B	36B	28.5	30	31.5	12.5	0.25	28	750	1	22.8	50
SMAZ5937B	37B	31.4	33	34.7	11.4	0.25	33	800	1	25.1	45
SMAZ5938B	38B	34.2	36	37.8	10.4	0.25	38	850	1	27.4	42
SMAZ5939B	39B	37.1	39	41.0	9.6	0.25	45	900	1	29.7	38
SMAZ5940B	40B	40.9	43	45.2	8.7	0.25	53	950	1	32.7	35
SMAZ5941B	41B	44.65	47	49.35	8.0	0.25	67	1000	1	35.8	32
SMAZ5942B	42B	48.45	51	53.55	7.3	0.25	70	1100	1	38.8	29
SMAZ5943B	43B	53.2	56	58.8	6.7	0.25	86	1300	1	42.6	27
SMAZ5944B	44B	58.9	62	65.1	6.0	0.25	100	1500	1	47.1	24
SMAZ5945B	45B	64.6	68	71.4	5.5	0.25	120	1700	1	51.7	22



<b>THERMAL CHARACTERISTICS</b> ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)			
PARAMETER	SYMBOL	LIMIT	UNIT
Typical thermal resistance, junction to lead <sup>(1)</sup>	$R_{\theta JL}$	50	$^\circ\text{C/W}$
Typical thermal resistance, junction to ambient <sup>(2)</sup>	$R_{\theta JA}$	250	$^\circ\text{C/W}$

**Note**

(1) Mounted on minimum recommended pad layout

<b>ORDERING INFORMATION</b> (Example)				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
SMAZ5925B-M3/61	0.064	61	1800	7" diameter plastic tape and reel
SMAZ5925B-M3/5A	0.064	5A	7500	13" diameter plastic tape and reel

**RATINGS AND CHARACTERISTICS CURVES** ( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise noted)

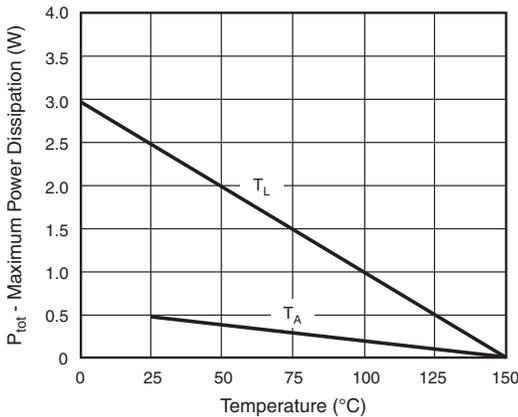


Fig. 1 - Steady State Power During

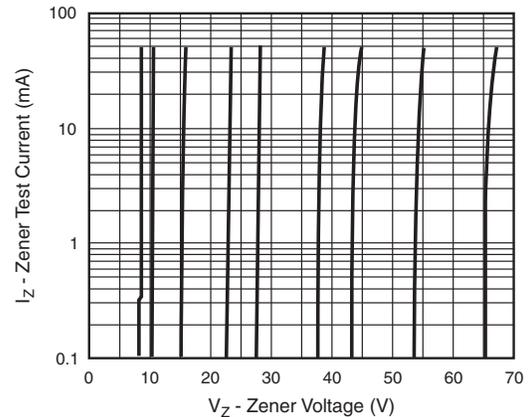


Fig. 3 - Typical Zener Voltage

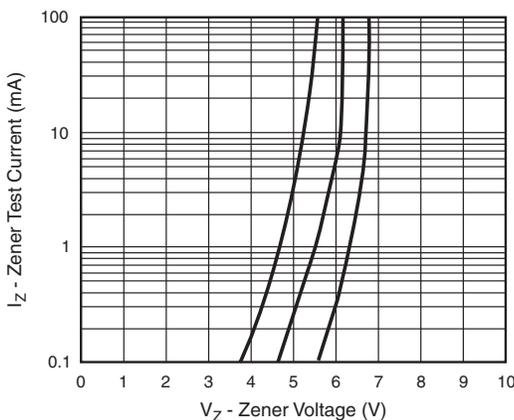


Fig. 2 - Typical Zener Voltage

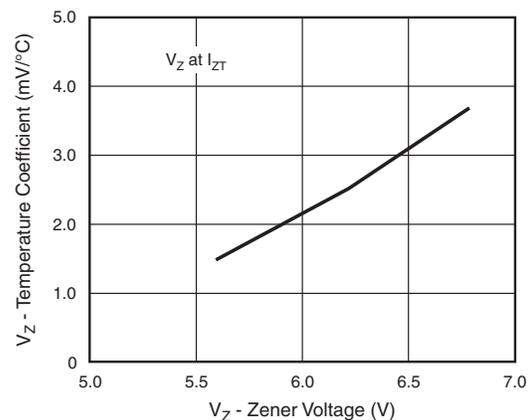


Fig. 4 - Typical Temperature Coefficients

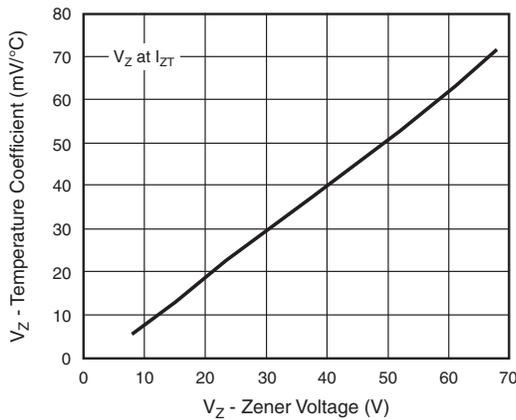


Fig. 5 - Typical Temperature Coefficients

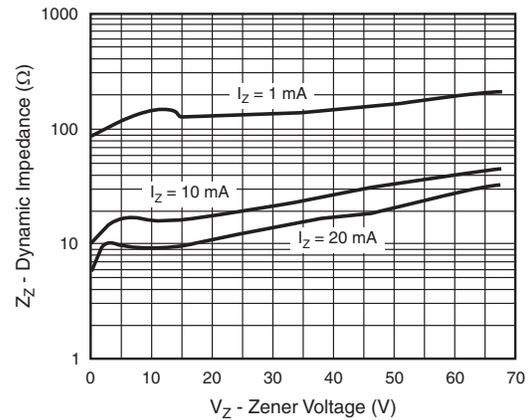


Fig. 7 - Typical Zener Impedance


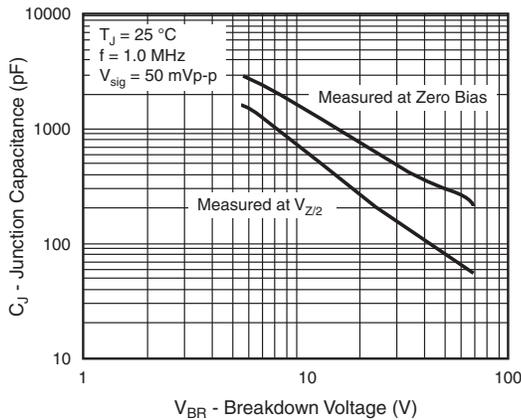



Fig. 6 - Typical Junction Capacitance

## PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

### DO-214AC (SMA)

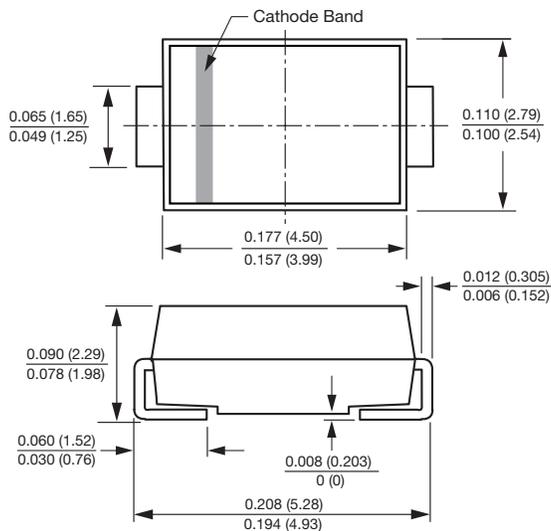

### Mounting Pad Layout

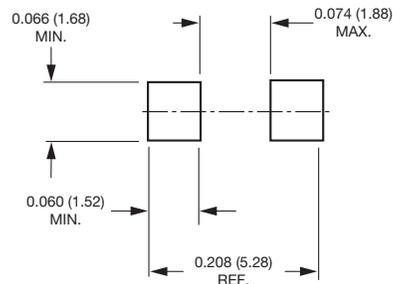



## **Disclaimer**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## **Material Category Policy**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9