

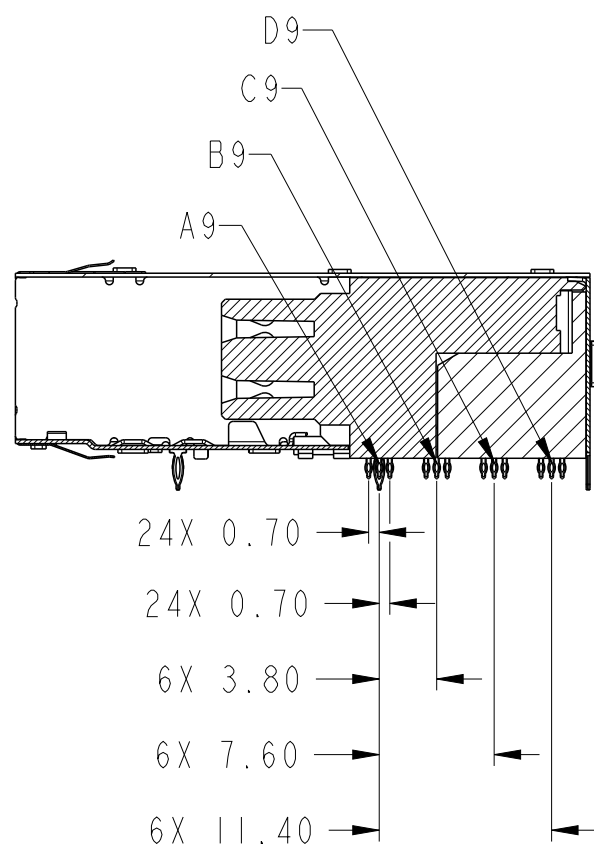
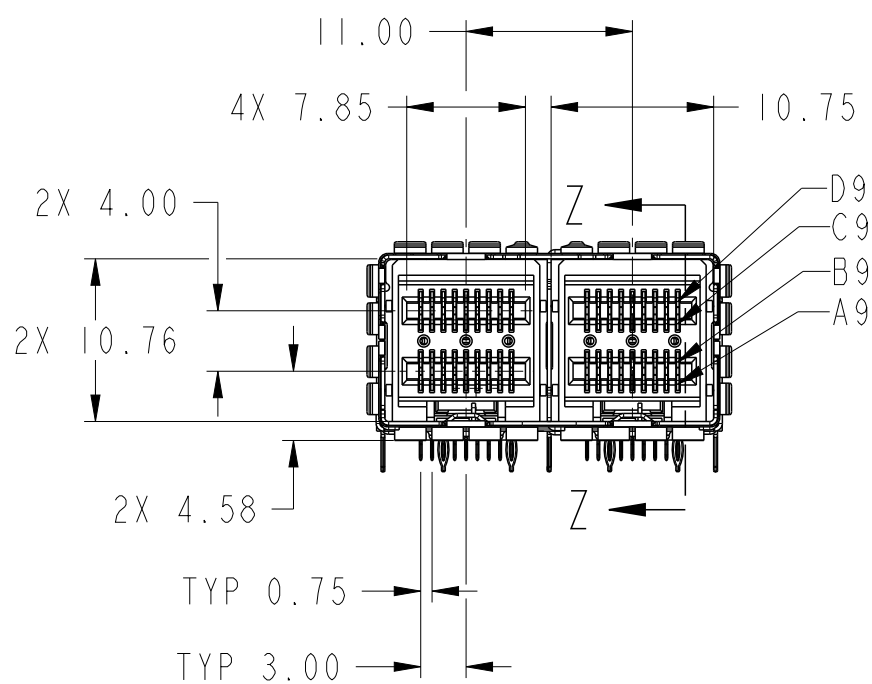
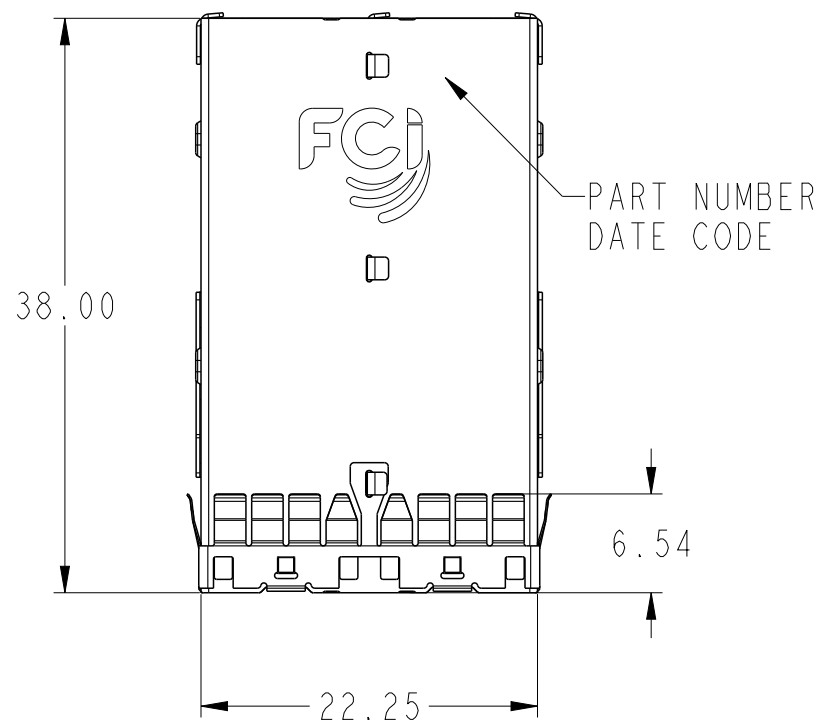



PRODUCT NUMBER	TAIL PLATING OPTION, SEE NOTE 2	DESCRIPTION
10112627-101	OPTION 1	WITHOUT STOPS
10112627-101LF	OPTION 2	WITHOUT STOPS
10112627-102	OPTION 1	WITH STOPS
10112627-102LF	OPTION 2	WITH STOPS

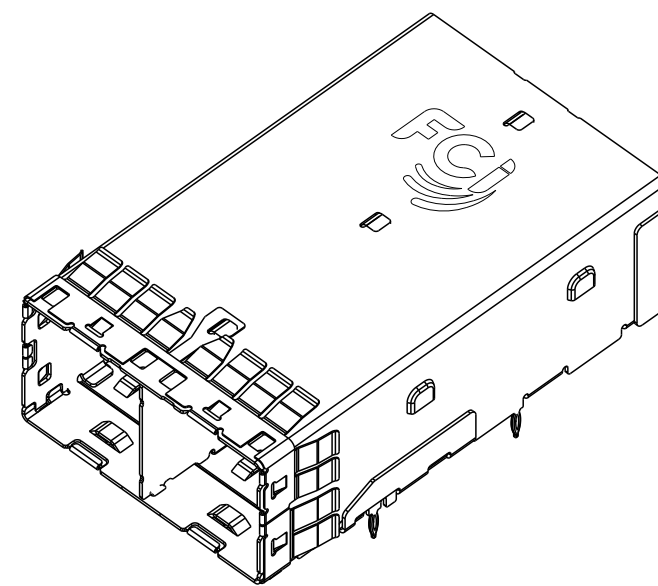

SECTION Z-Z
SCALE 2:1

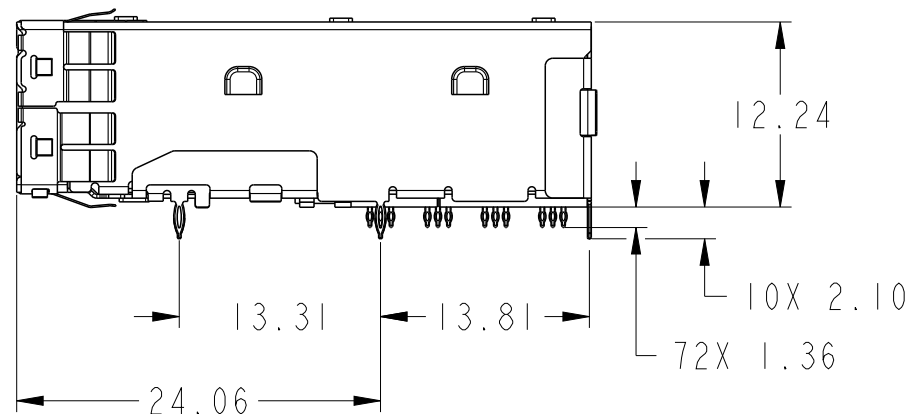

10112627-101 & 101LF
WITHOUT STOPS

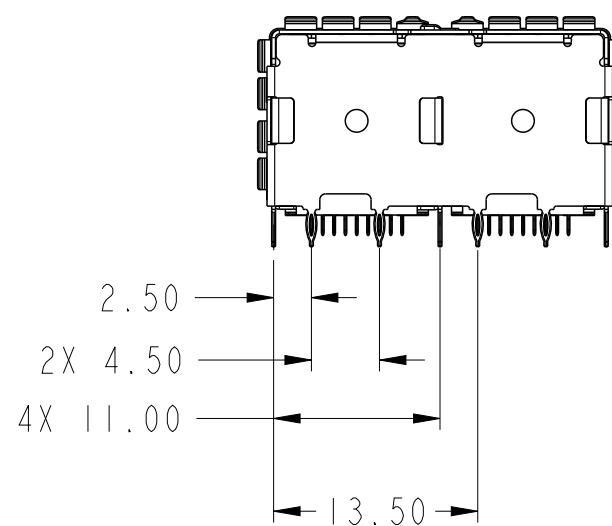



NOTES:

- MATERIALS:
CONNECTOR HOUSING: HIGH TEMPERATURE THERMOPLASTIC
GLASS FILLED, UL 94V-0
EMI CAGE: NICKEL SILVER ALLOY
EMI FINGERS: COPPER ALLOY
TERMINALS: COPPER ALLOY
- FINISHES:
EMI FINGERS: 0.50µm MIN NICKEL
CONTACT AREA: 0.76µm MIN GOLD OVER 2.54µm MIN NICKEL
TAIL AREA:
OPTION 1: 0.76µm - 1.52µm TIN/LEAD (90/10) OVER 2.54µm MIN NICKEL
OPTION 2: 0.76µm - 1.52µm TIN (LEAD FREE) OVER 2.54µm MIN NICKEL


- PRODUCT SPECIFICATION: GS-12-651.
APPLICATION SPECIFICATION: GS-20-0327
- MOUNTING HARDWARE: M2X0.4 BUTTON HEAD SCREW
MOUNTING SCREW LENGTH: BOARD THICKNESS + 1.4mm MAX (0.9mm MIN).
2 REQUIRED PER ASSEMBLY
- THIS CONNECTOR IS DESIGNED TO MEET THE REQUIREMENTS OF
INDUSTRY SPECIFICATION SFF-8644.
- THE USE OF A PCI BRACKET OR EQUIVALENT IS REQUIRED FOR THIS PRODUCT
- A  SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE THAT
HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

MATES WITH MINI-SAS HD ENDS IN:			
10112041 SERIES (4X)			
10117771 SERIES (4X)			
10117946 SERIES (4X)			
10117949 SERIES (4X)			
10117947 SERIES (8X)			
10112359 SERIES (8X)			
10117950 SERIES (8X)			
10117948 SERIES (8X)			

spec ref		-		dr	Mark Gray	2010/08/04	projection		MM	size	A2	scale	2:1
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	M Scholeno	2012/09/10	ecn no				ELX-V-012260-1			
ASME Y14.5			chr	-	-	rel level				Released			
-			appr		Brad Brubaker	2012/09/12	product family			MINI-SAS HD			
surface			linear	0.X	±0.25		title	IX2 EXTERNAL ASSEMBLY	dwg no	10112627	rev	D	
				0.XX	±0.13								
				0.XXX	±-								
			ASME Y14.5	angular	0°								±1/2°

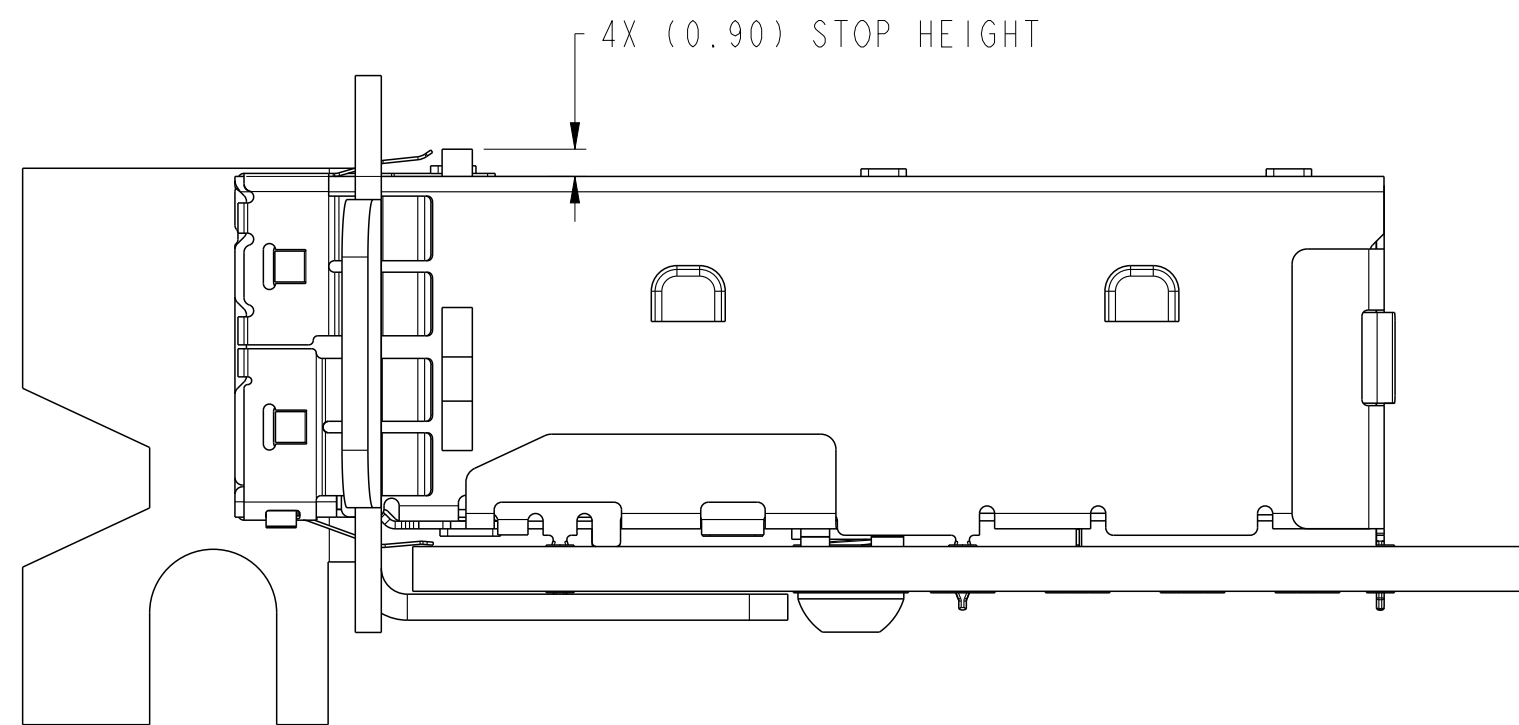

ASSEMBLED VIEW
WITH STOPS
SCALE 4:1

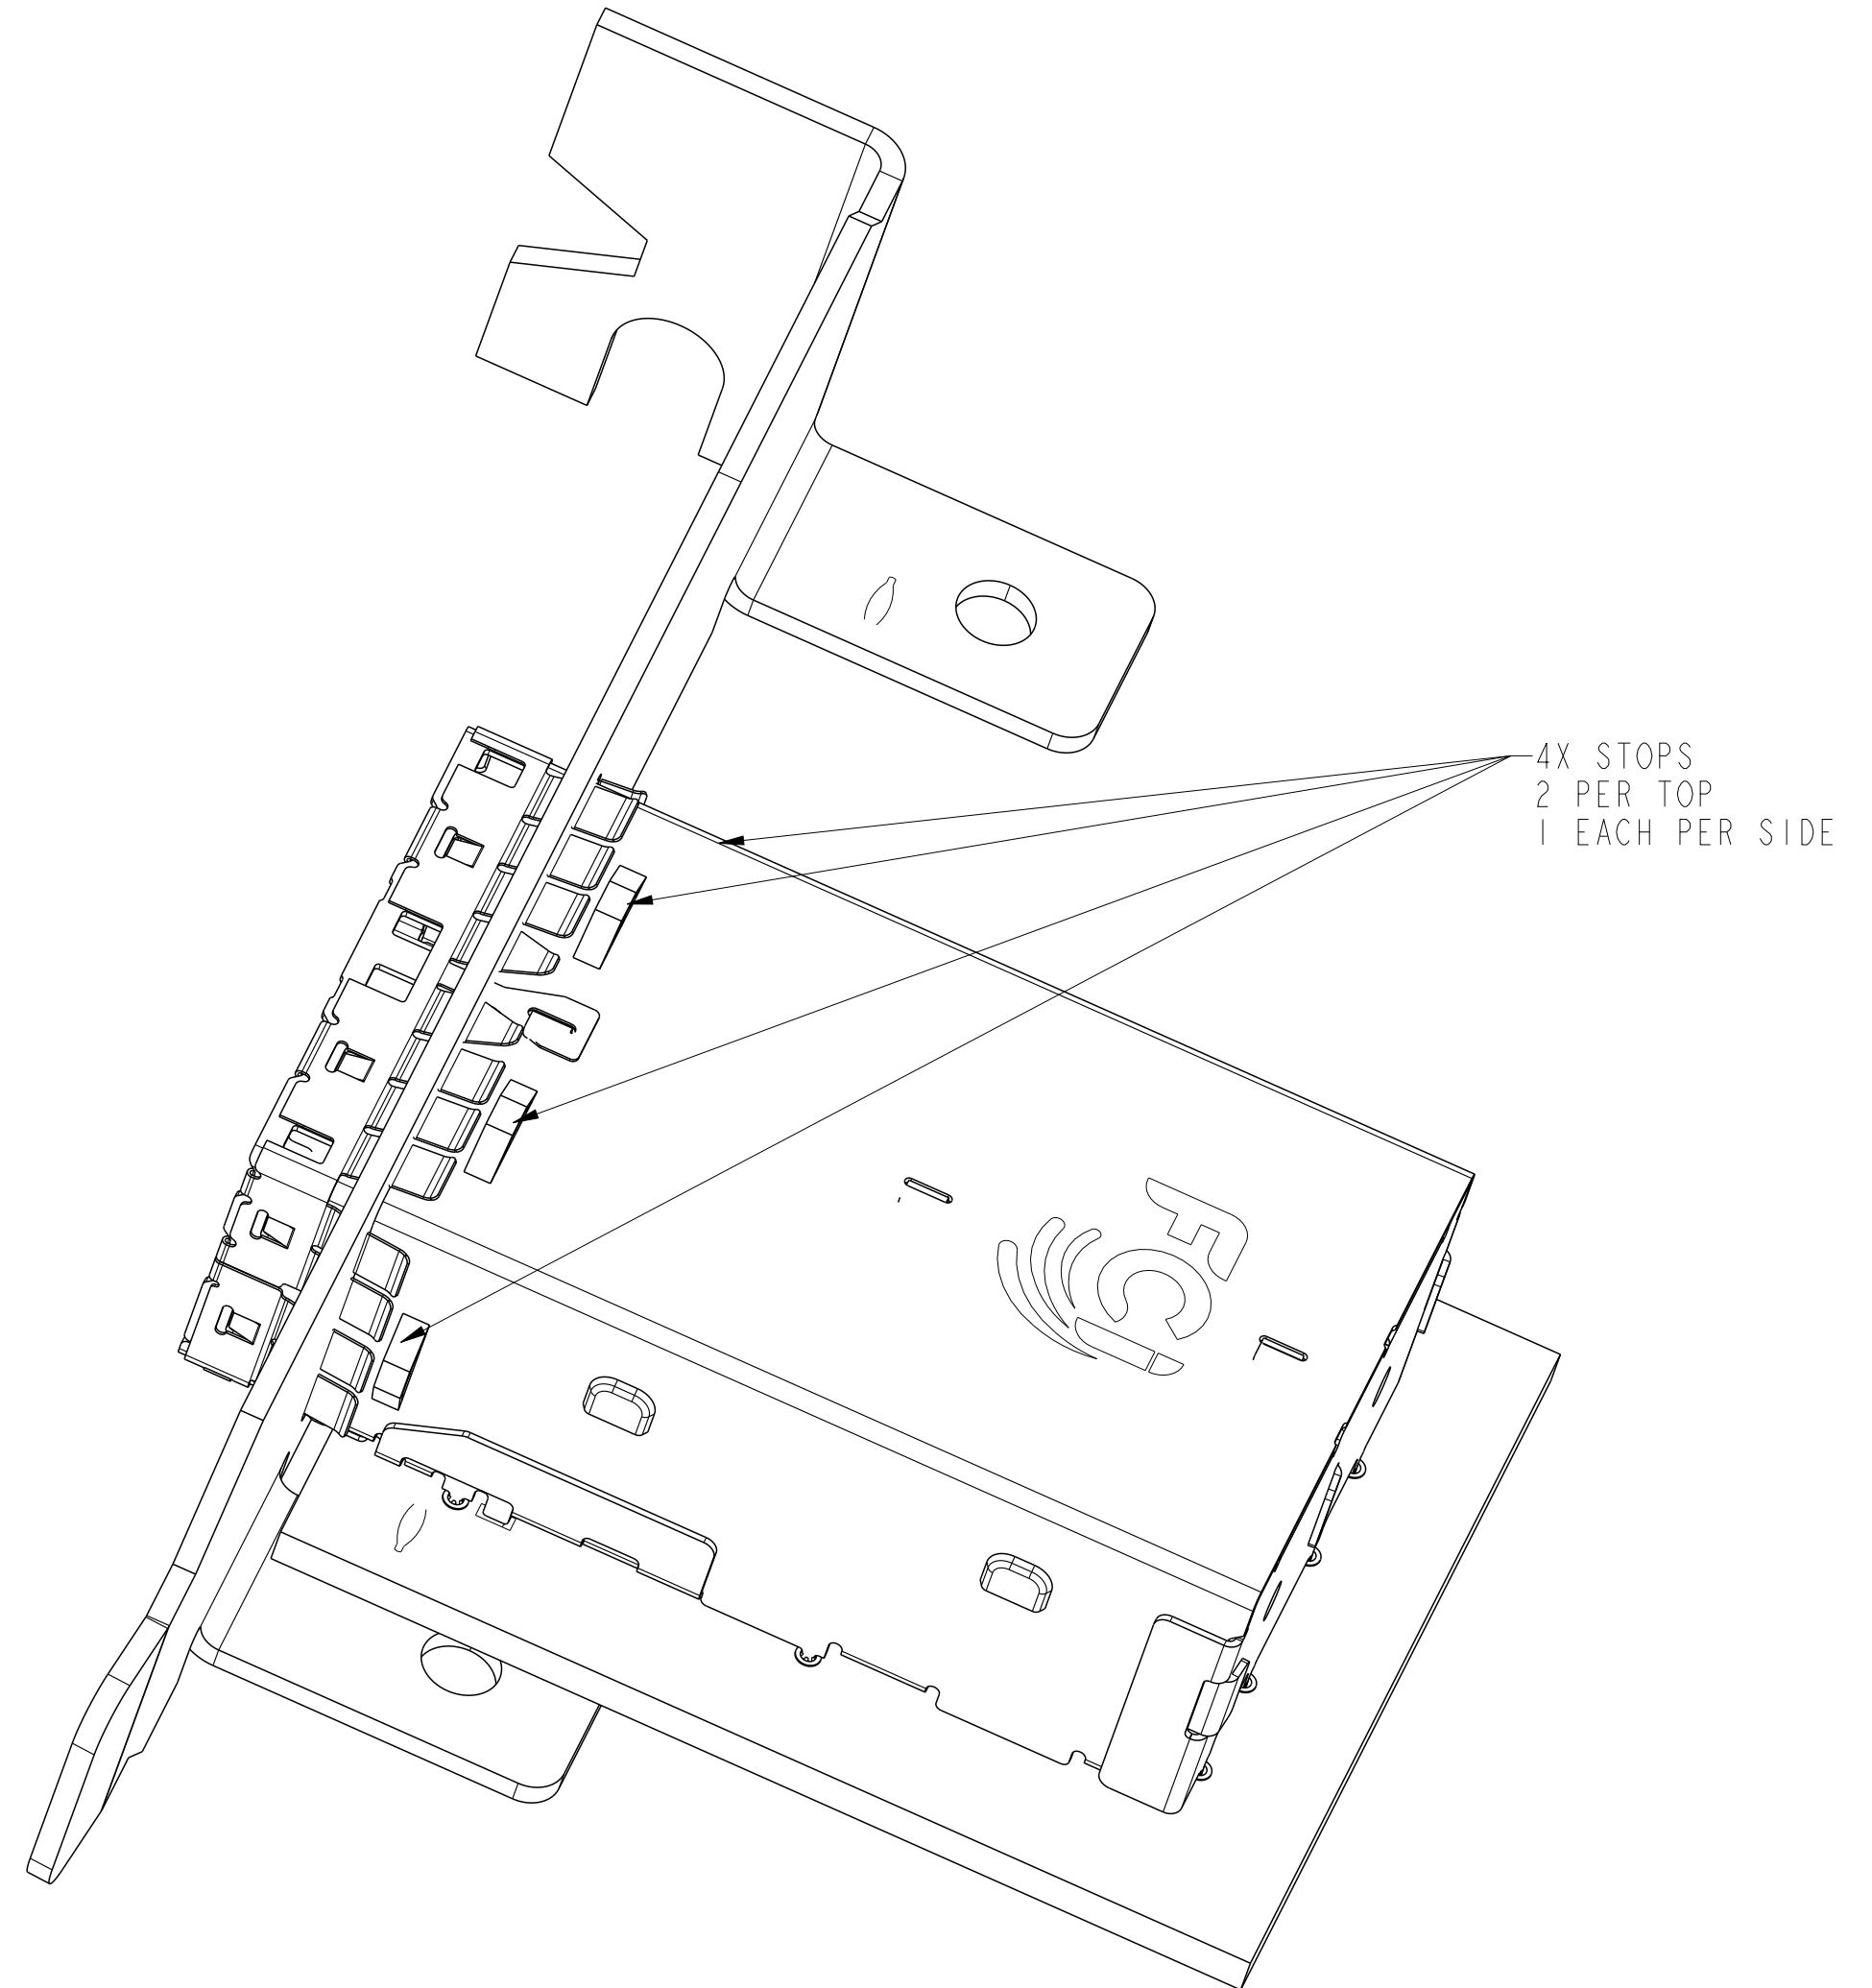

10112627-102 & 102LF
WITH STOPS
SCALE 4:1

spec ref -		dr Mark Gray		2010/08/04				size A2		scale 1:1					
tolerance std ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng M Scholeno		2012/09/10				ecn no ELX-V-012260-1		Released					
-		chr -		-				rel level							
-		appr Brad Brubaker		2012/09/12				product family MINI-SAS HD							
surface -		linear	0.X	±0.25			title IX2 EXTERNAL ASSEMBLY				dwg no 10112627	rev D			
			0.XX	±0.13											
			0.XXX	± -											
ASME Y14.5	angular	0°	±1/2°		www.fci.com		cat. no. -		Product - Customer Drw				sheet 3 of 7		




PDS: Rev :D

STATUS:Released

Printed: Sep 13, 2012

APPLICATION	DIM B
PCI ADD-IN CARD	17.10±0.15
ALL OTHER APPLICATIONS	18.19±0.15

RECOMMENDED BOARD LAYOUT

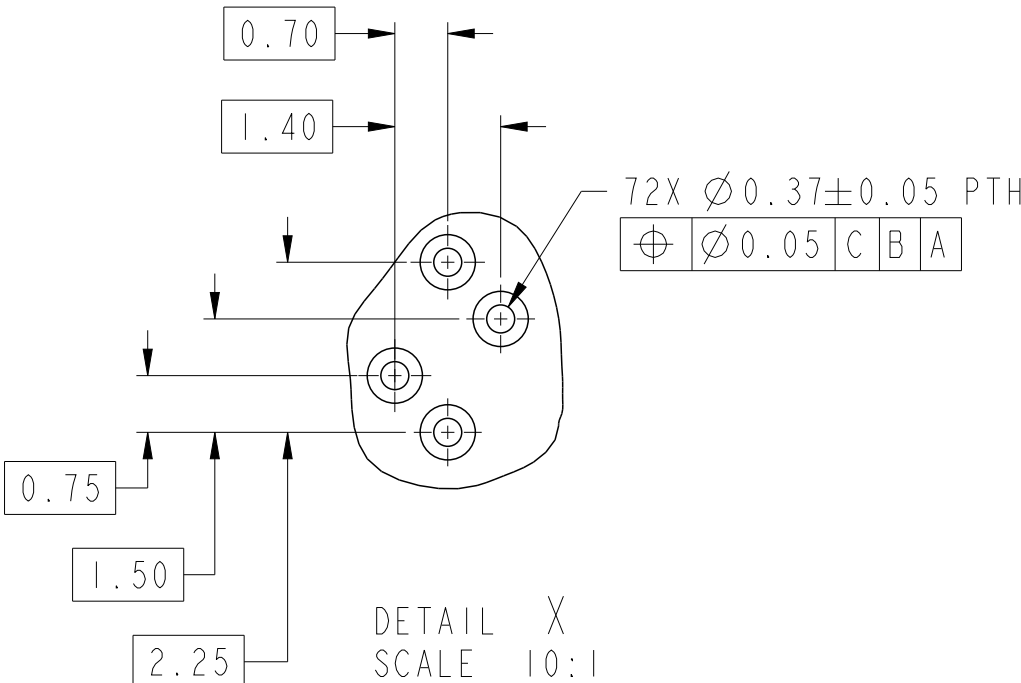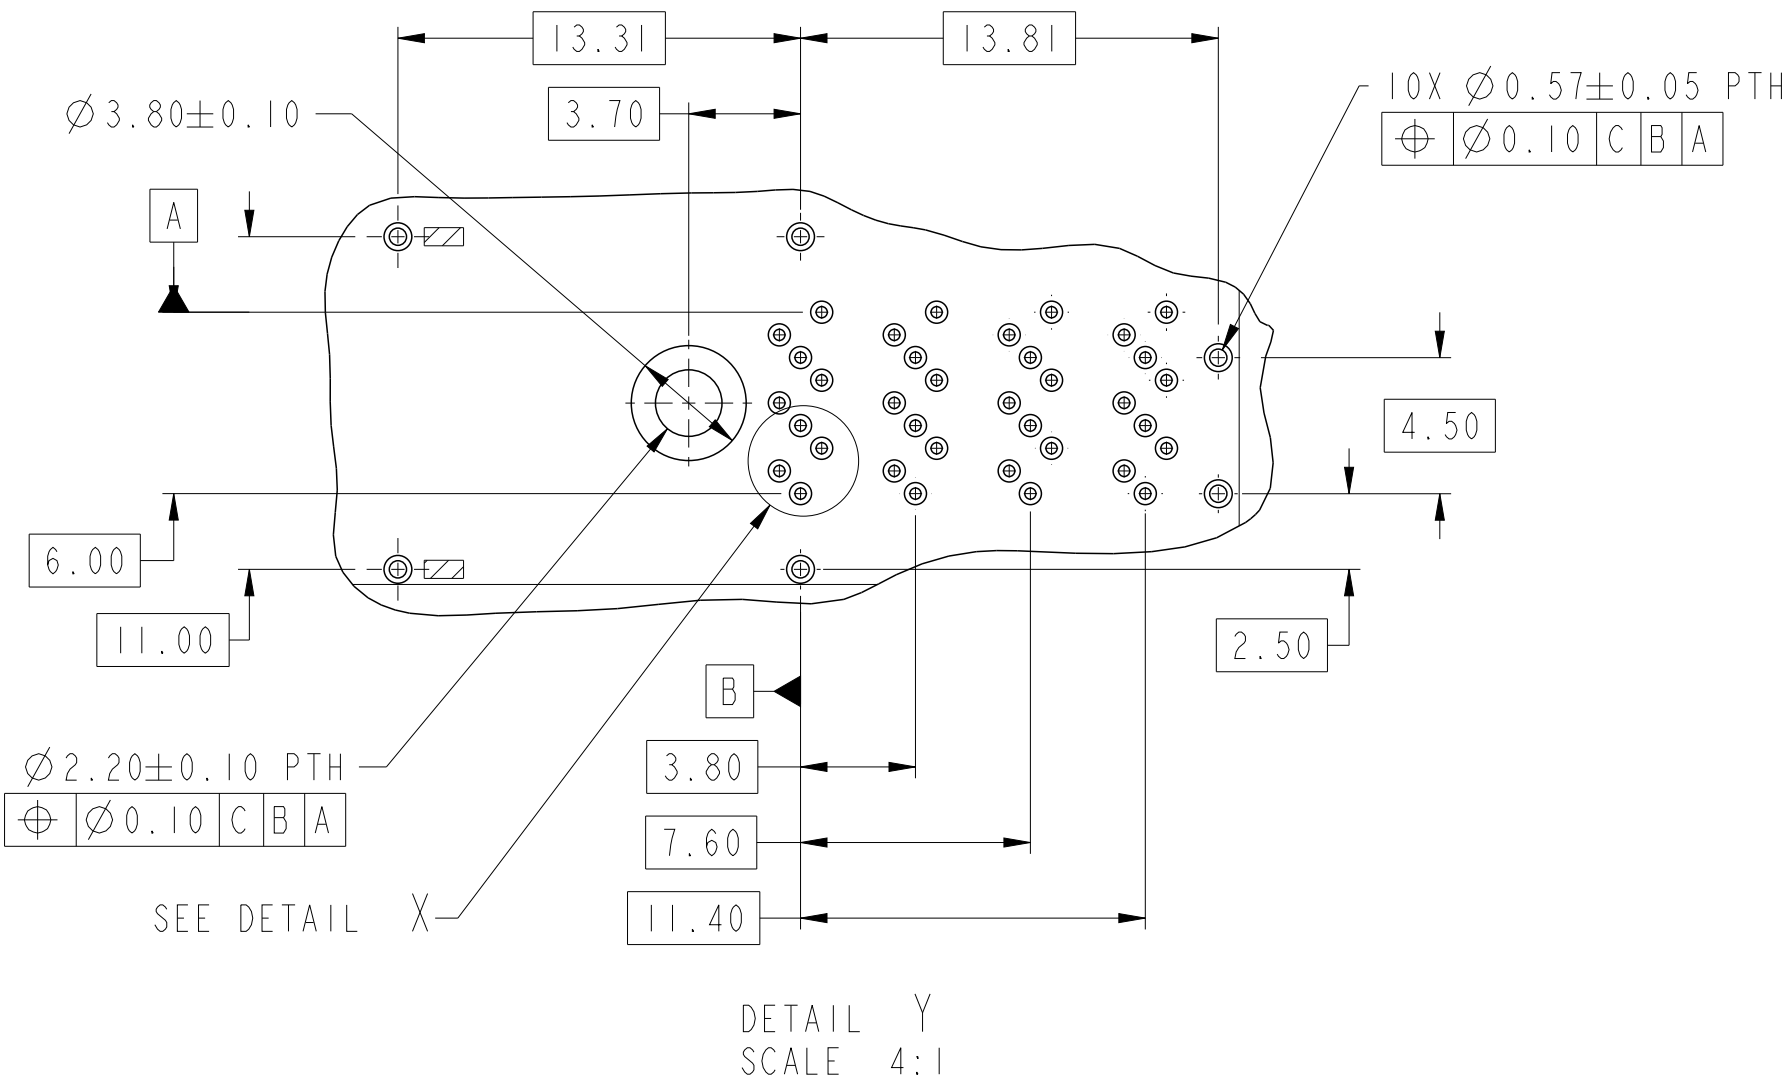
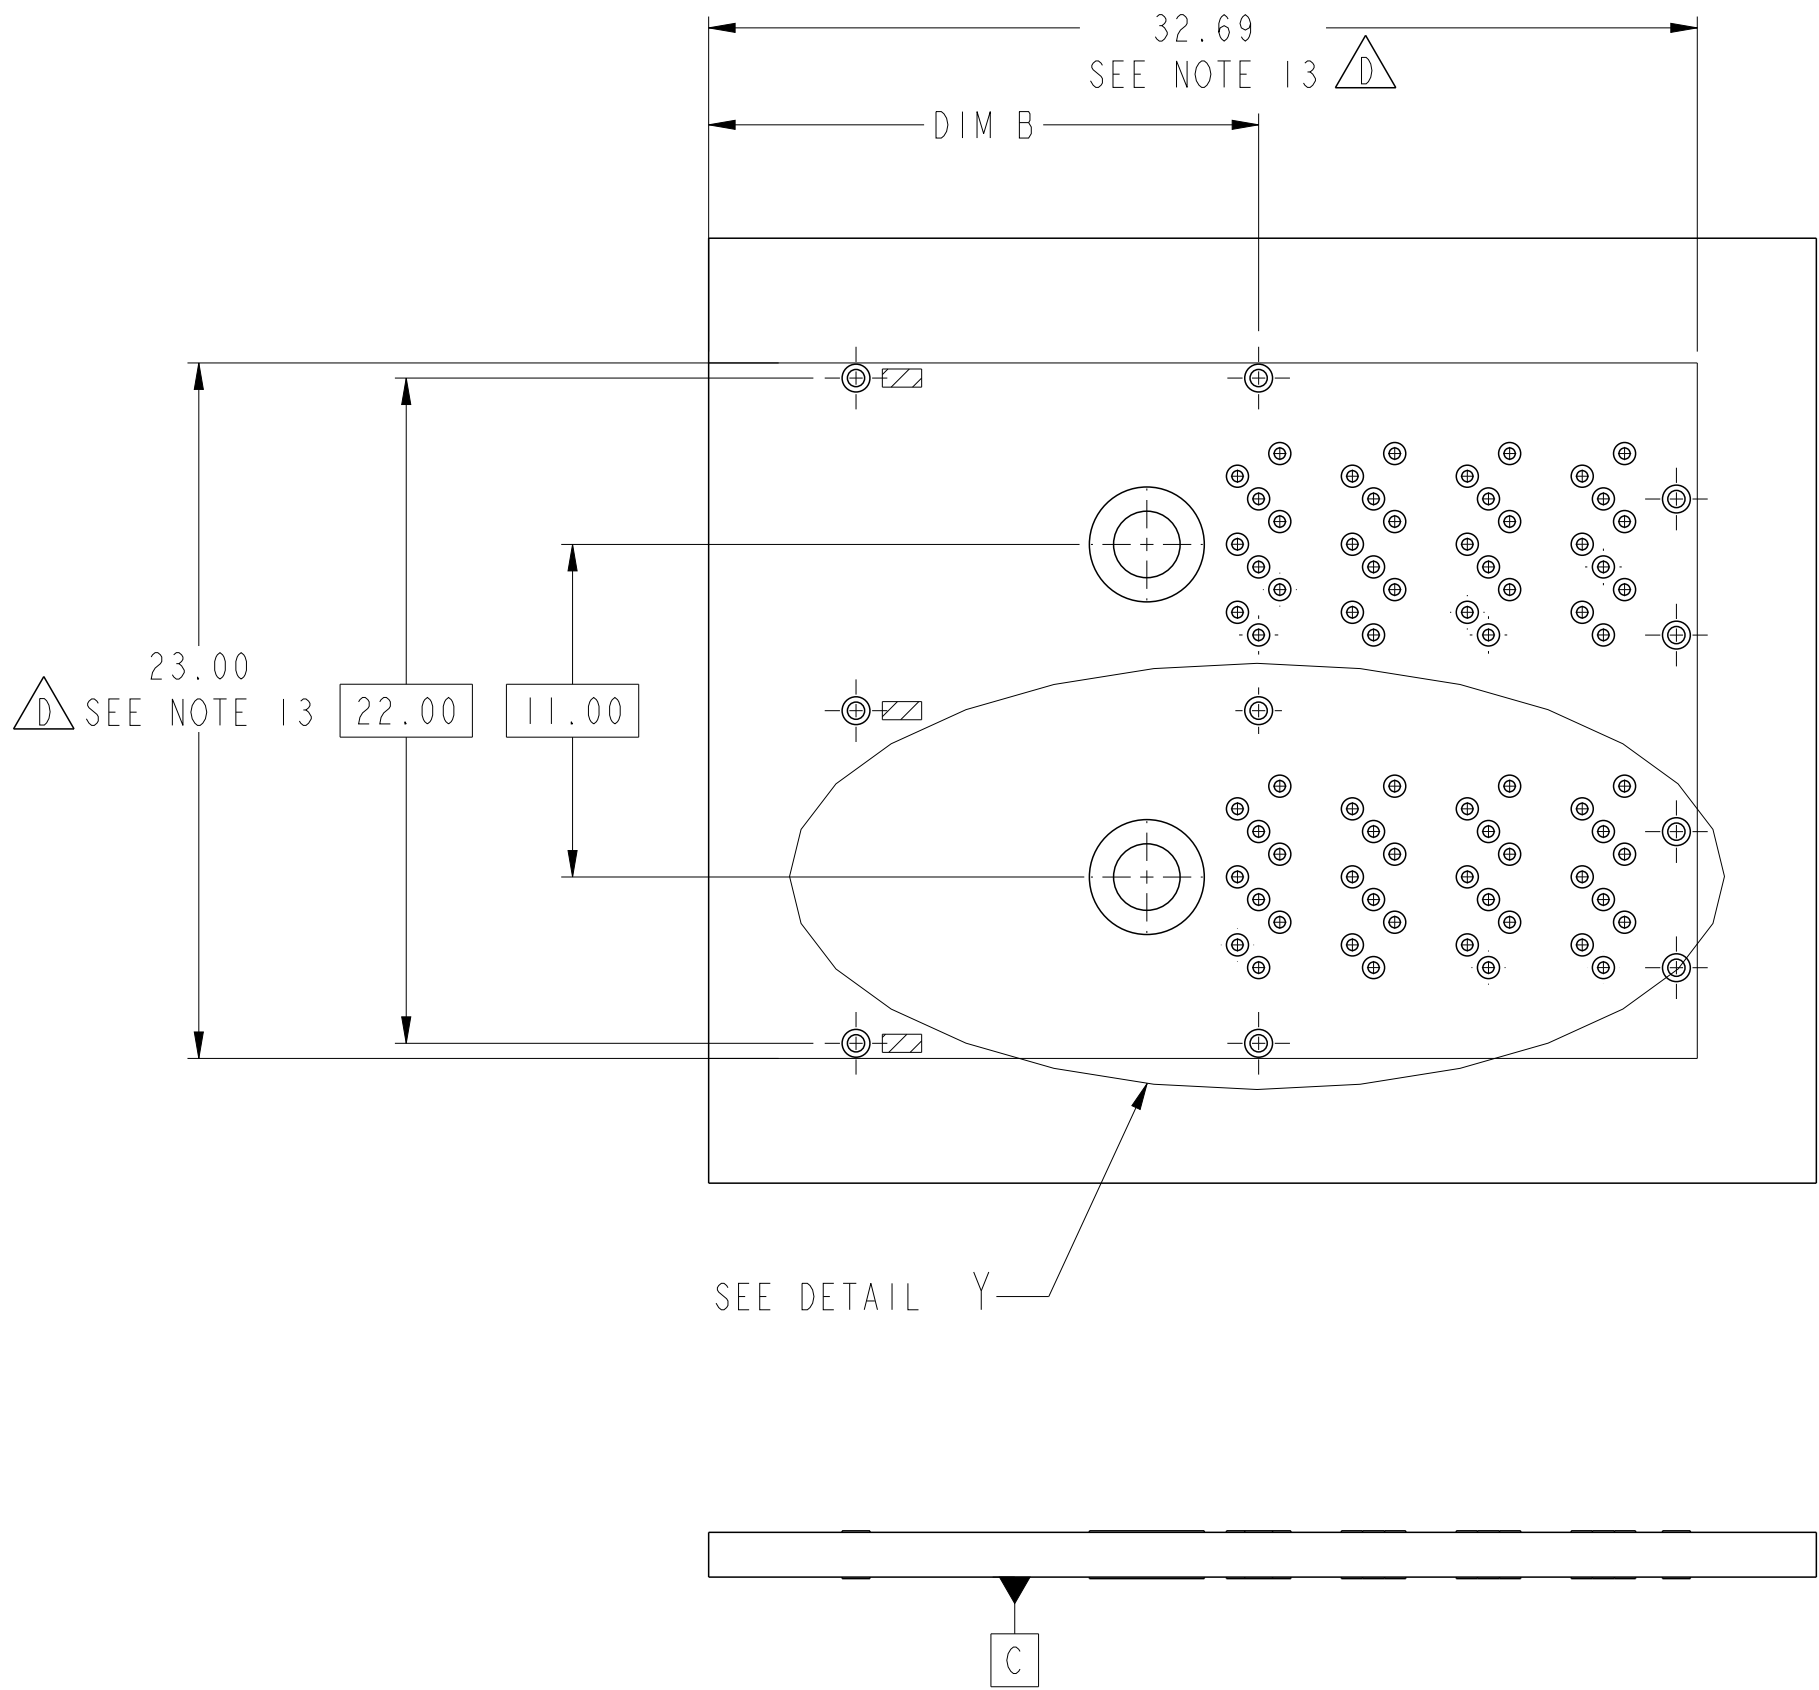


- NOTES:
- RECOMMENDED DRILL SIZE FOR A Ø0.37 FINISHED PTH IS Ø0.457.
 - RECOMMENDED ANNULAR RING AROUND Ø0.37 FINISHED PTH IS Ø0.73.
 - RECOMMENDED DRILL SIZE FOR A Ø0.57 FINISHED PTH IS Ø0.68.
 - RECOMMENDED ANNULAR RING AROUND Ø0.57 FINISHED PTH IS Ø0.93.
 - MINIMUM RECOMMENDED CENTER TO CENTER SPACING BETWEEN ADJACENT CONNECTORS: 25.00mm.
 - CONNECTOR KEEP OUT AREA.
 - MINIMUM PCB THICKNESS: 1.57mm.

spec ref	-	dr	Mark Gray	2010/08/04	projection	MM	size	A2	scale	1:1
tolerance std	ASME Y14.5	eng	M Scholeno	2012/09/10	chr	-	ecn no	ELX-V-012260-1	rel level	Released
surface	✓	appr	Brad Brubaker	2012/09/12	product family	MINI-SAS HD	rel level	Released	rev	D
ASME Y14.5	linear	0.X	±0.25	0.XX	±0.13	0.XXX	±-	angular	0°	±1/2°
title		IX2 EXTERNAL ASSEMBLY		cat. no.		Product - Customer Drw		sheet 4 of 7		

RECOMMENDED TOOLING KEEP OUT AREAS

RECOMMENDED INSERTION TOOL
KEEP OUT AREA
NO COMPONENTS IN THIS AREA
MORE THAN 7.50mm TALL

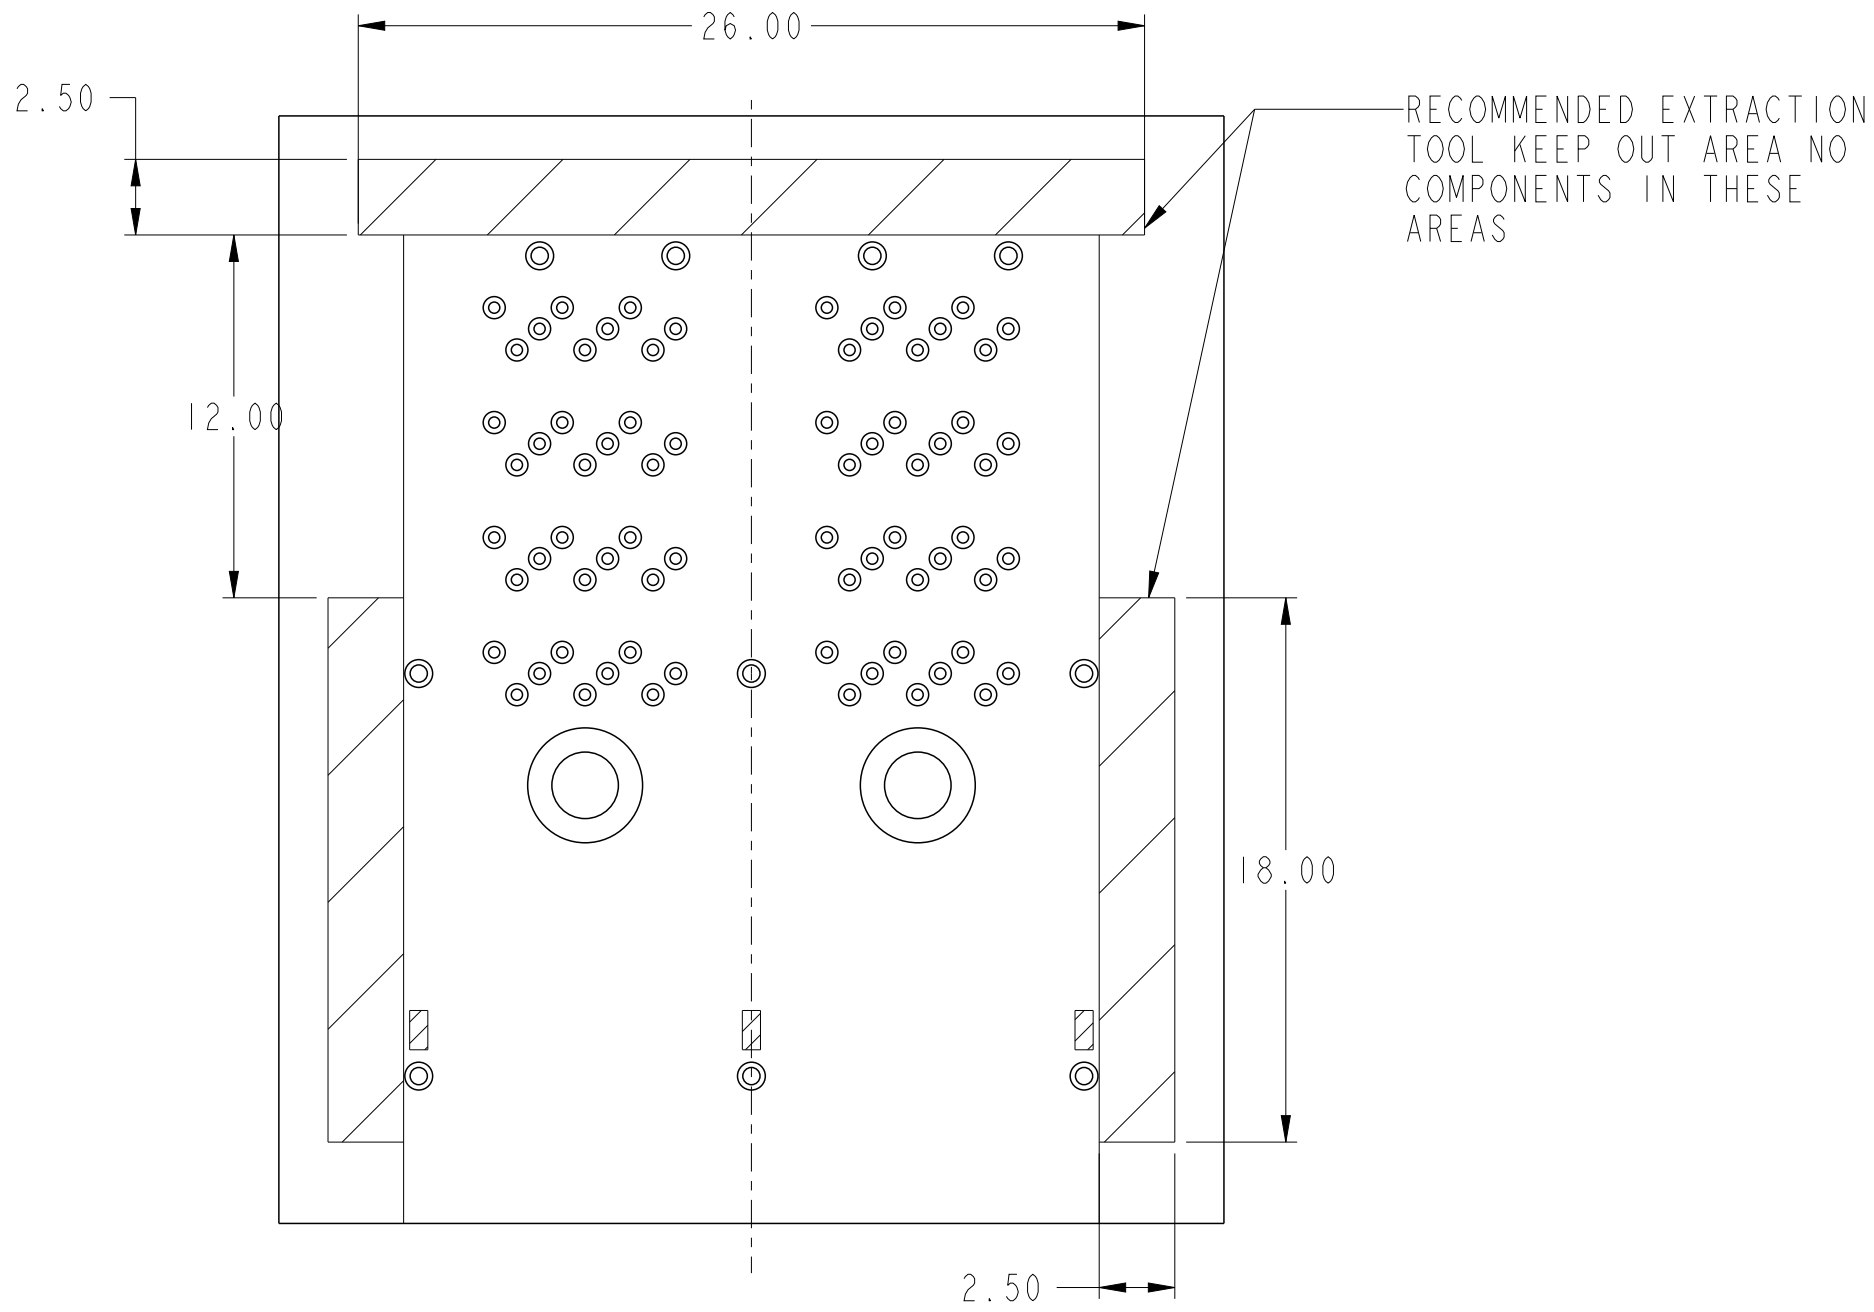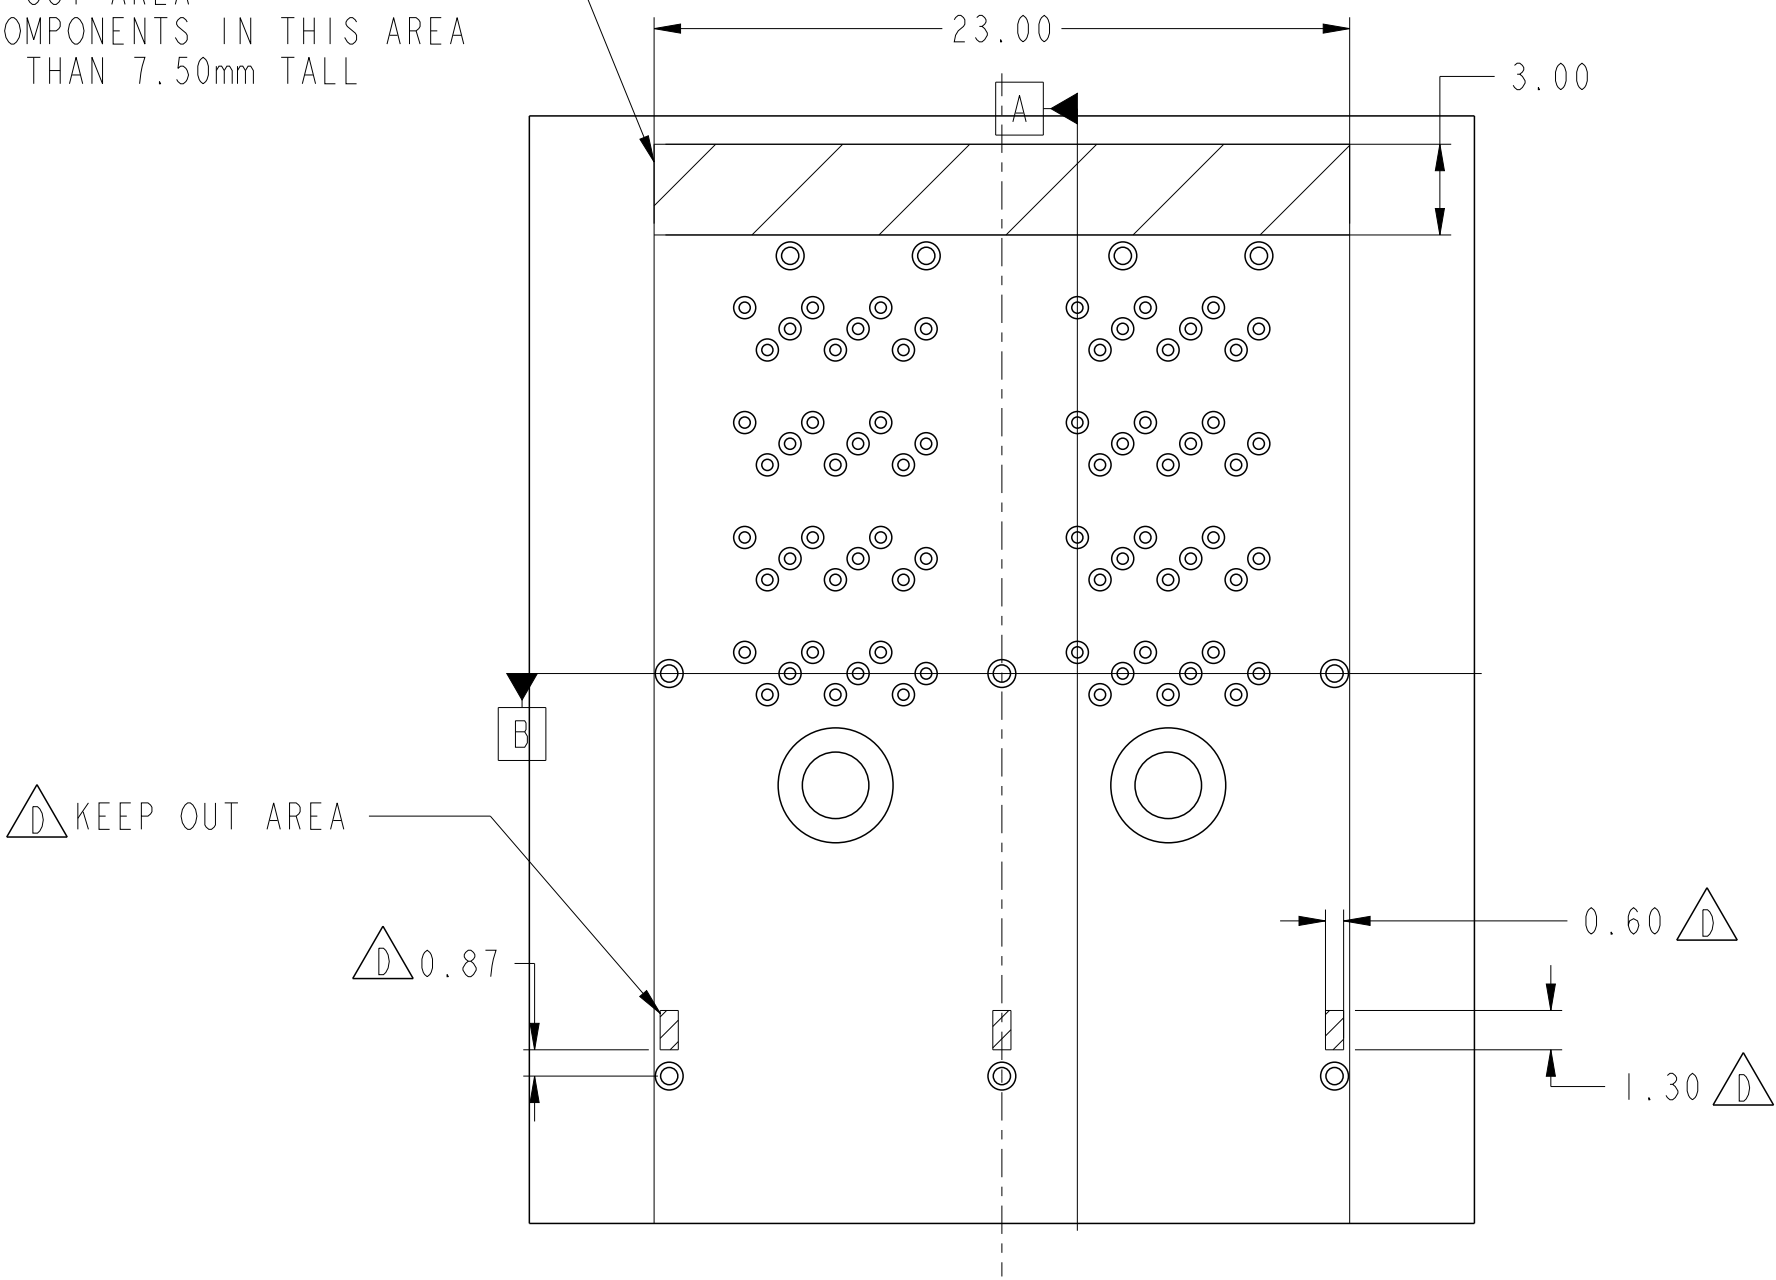

Copyright FCI.




spec ref	-	dr	Mark Gray	2010/08/04	projection	MM	size	A2	scale	1:1
tolerance std	ASME Y14.5	eng	M Scholeno	2012/09/10	chr	-	ecn no	ELX-V-012260-1	rel level	Released
surface	✓	appr	Brad Brubaker	2012/09/12	product family	MINI-SAS HD	dwg no	10112627	rev	D
ASME Y14.5	linear	angular	0°	±1/2°	www.fci.com	cat. no.	-	Product - Customer Drw	sheet 5 of 7	

PDS: Rev :D

STATUS:Released

Printed: Sep 13, 2012




PIN OUT DESIGNATIONS

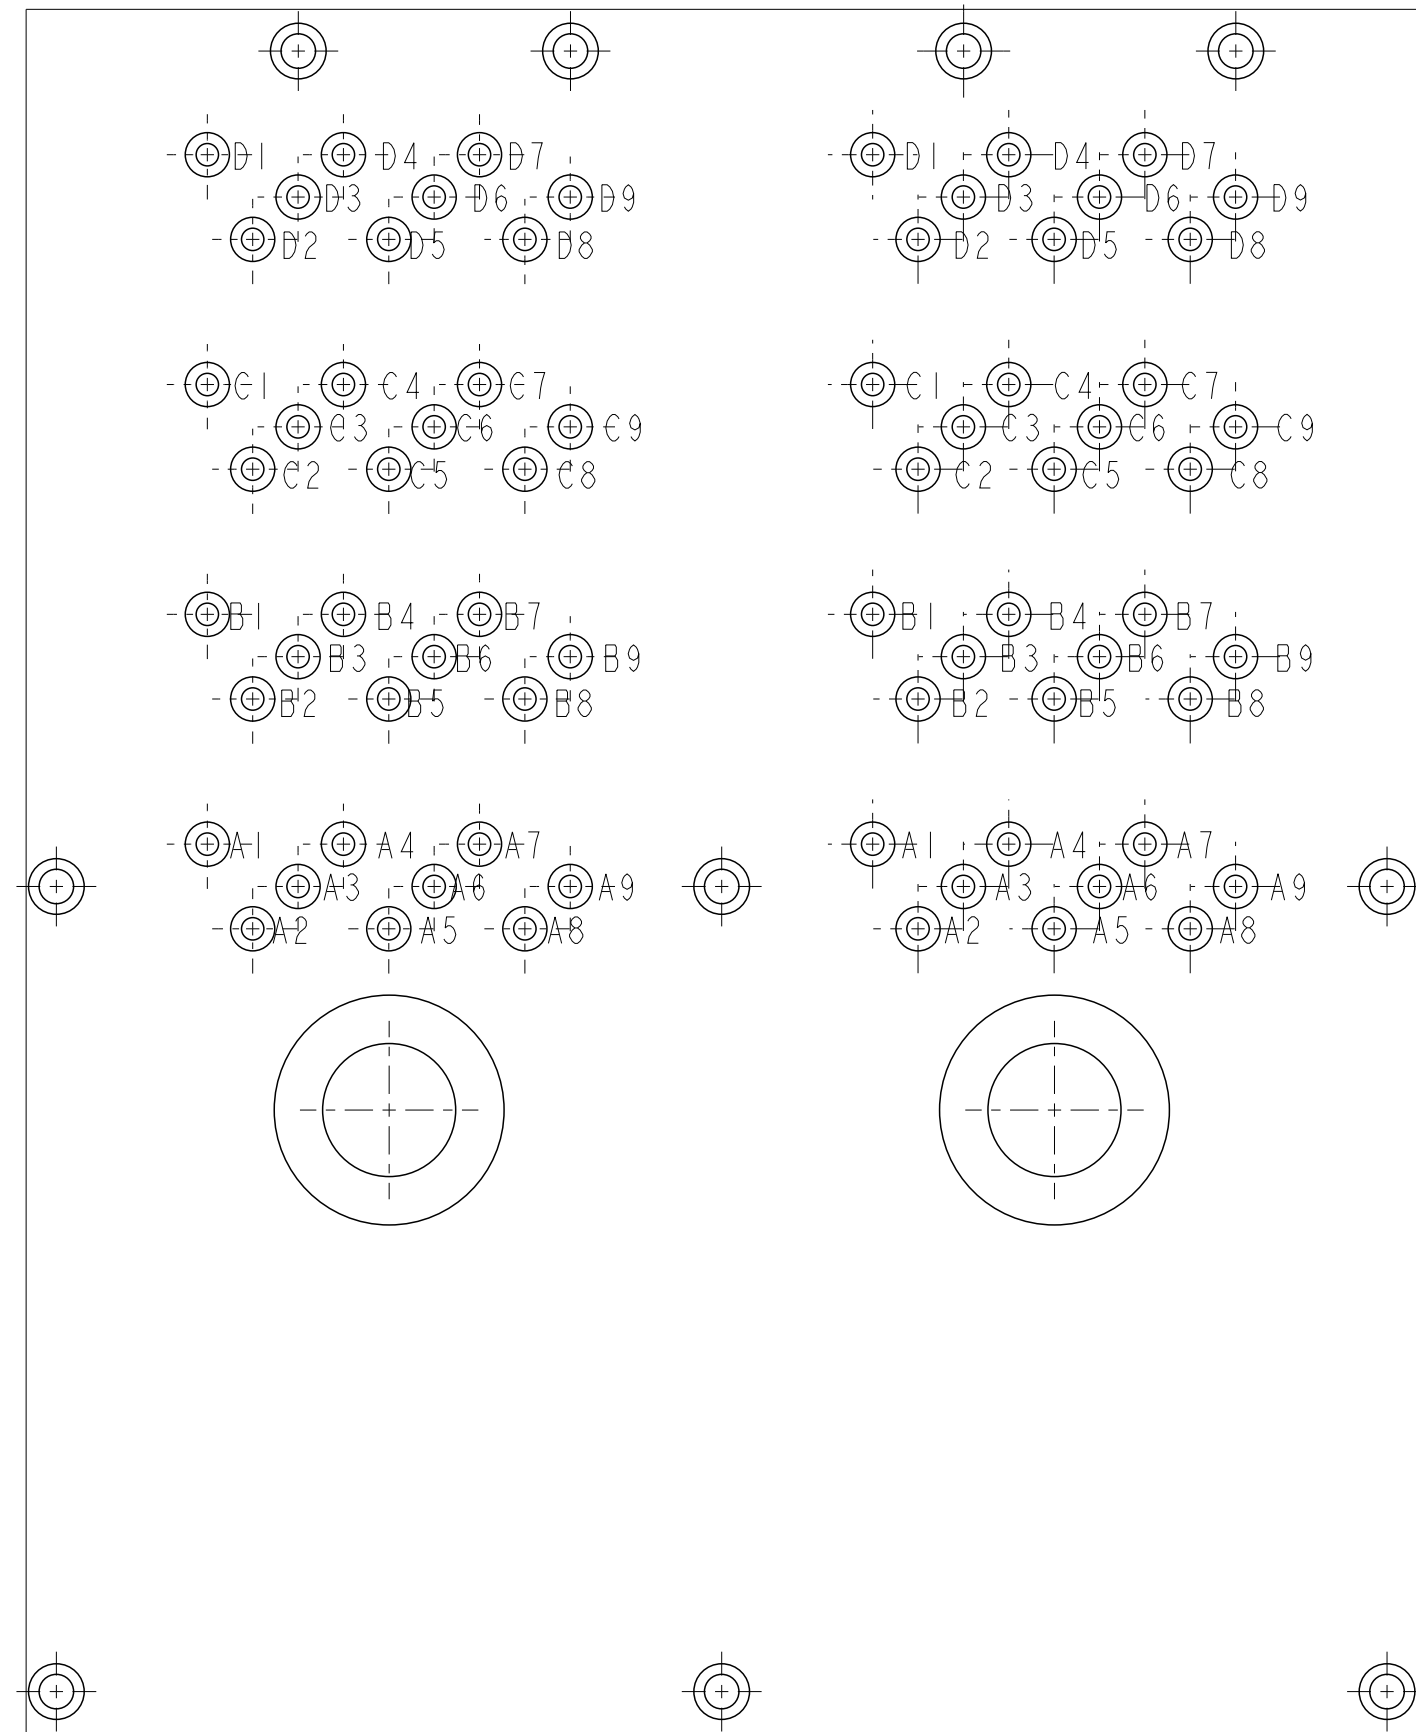

Copyright FCI.

spec ref		-		dr		Mark Gray		2010/08/04		projection		MM		size		A2		scale		1:1	
tolerance std		ASME Y14.5		eng		M Scholeno		2012/09/10						ecn no		ELX-V-012260-1					
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr		-		-		rel level						Released							
				appr		Brad Brubaker		2012/09/12		product family		MINI-SAS HD									
surface		✓		linear				title		IX2 EXTERNAL ASSEMBLY		dwg no		10112627		rev		D			
								0.X		±0.25											
								0.XX		±0.13											
ASME Y14.5				angular		0°		±1/2°		www.fci.com		cat. no.		-		Product- Customer Drw		sheet 6 of 7			

A
B
C
D
E
F

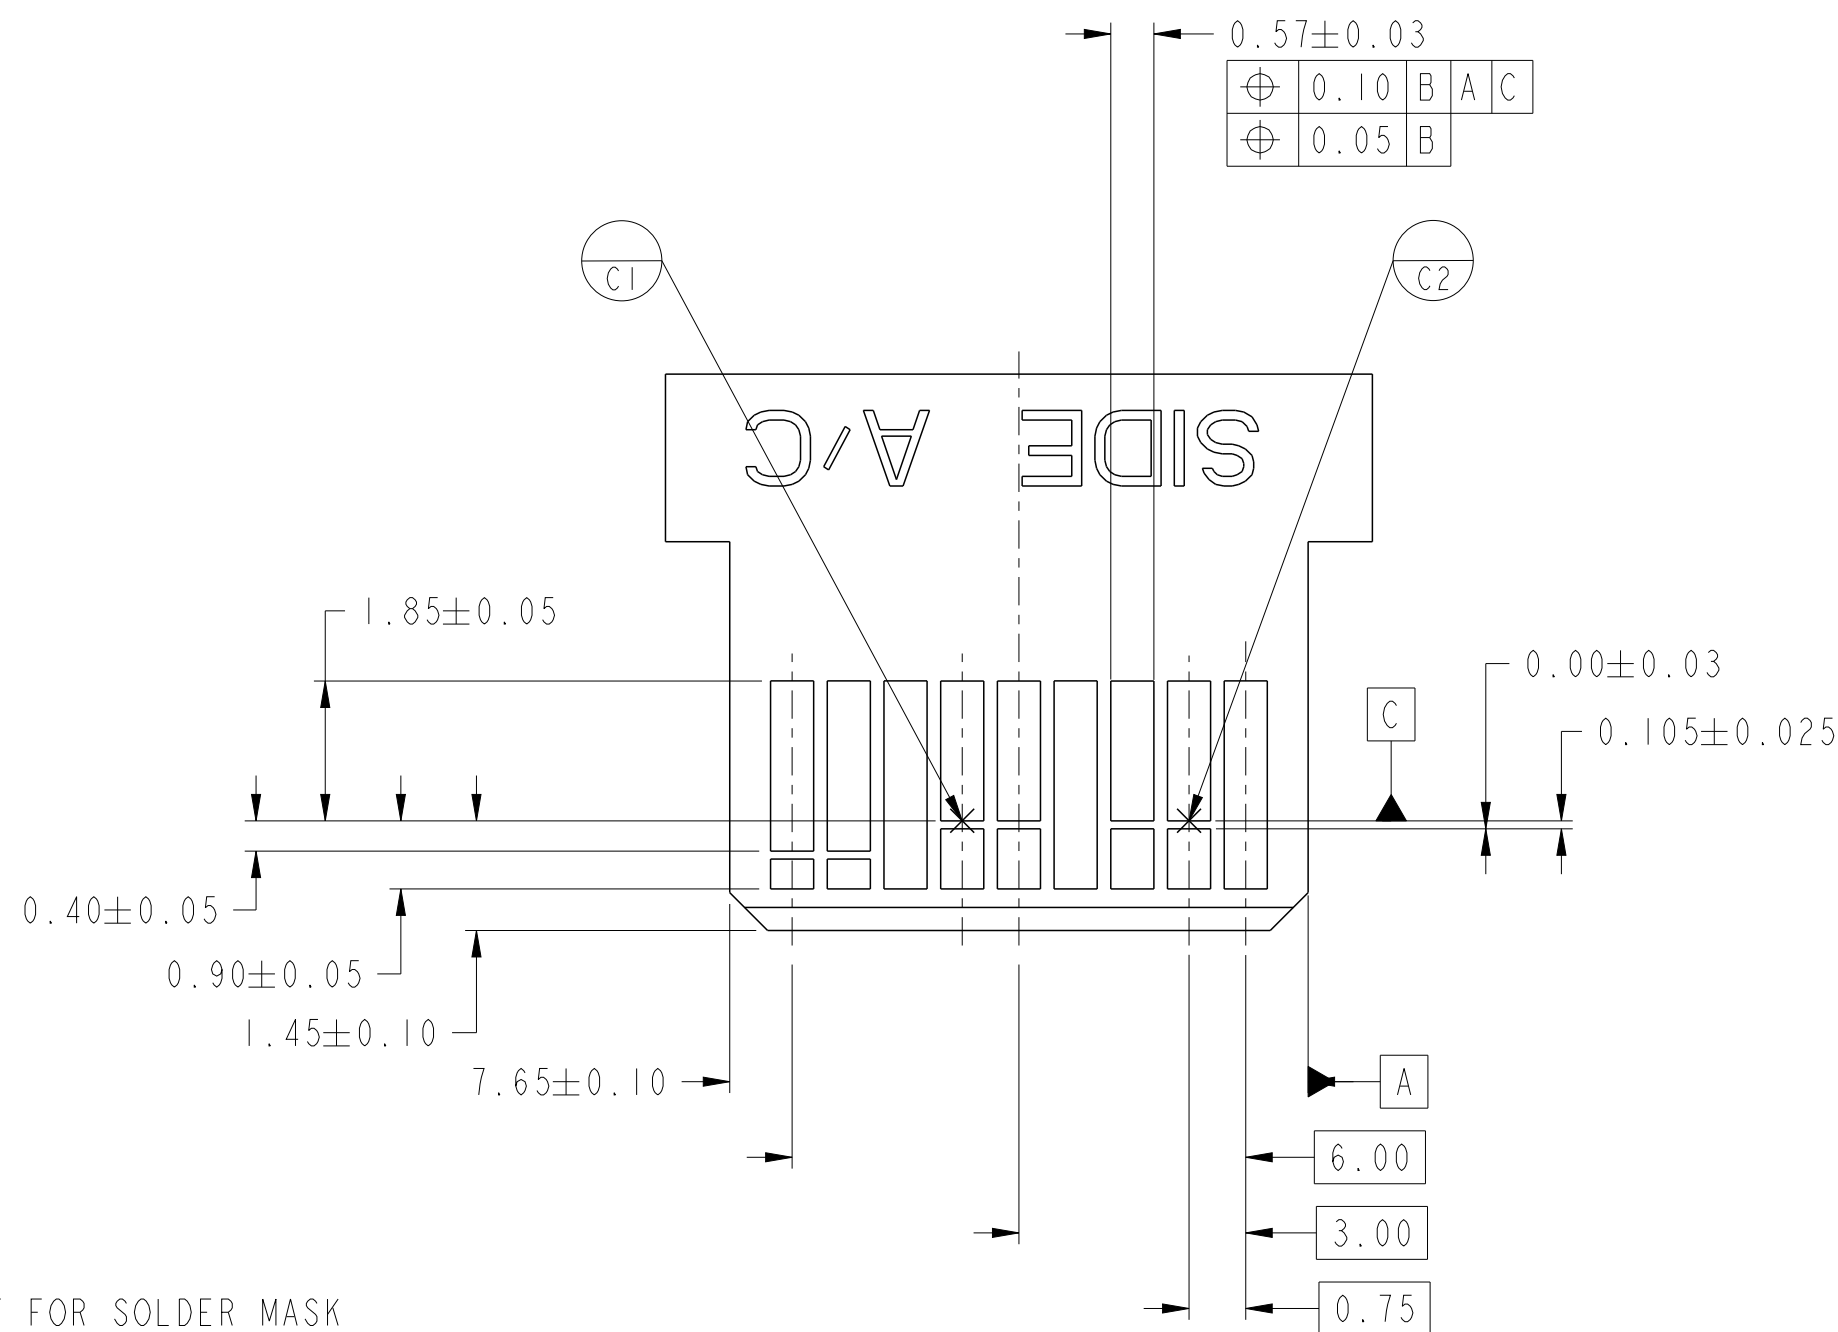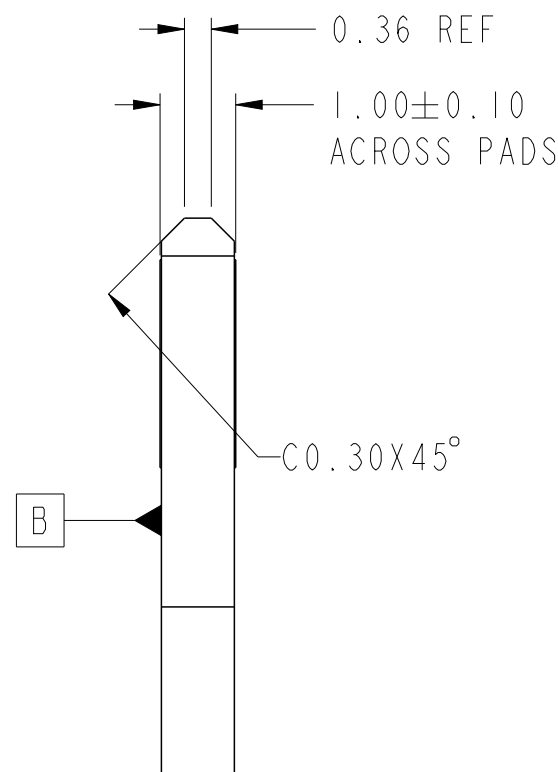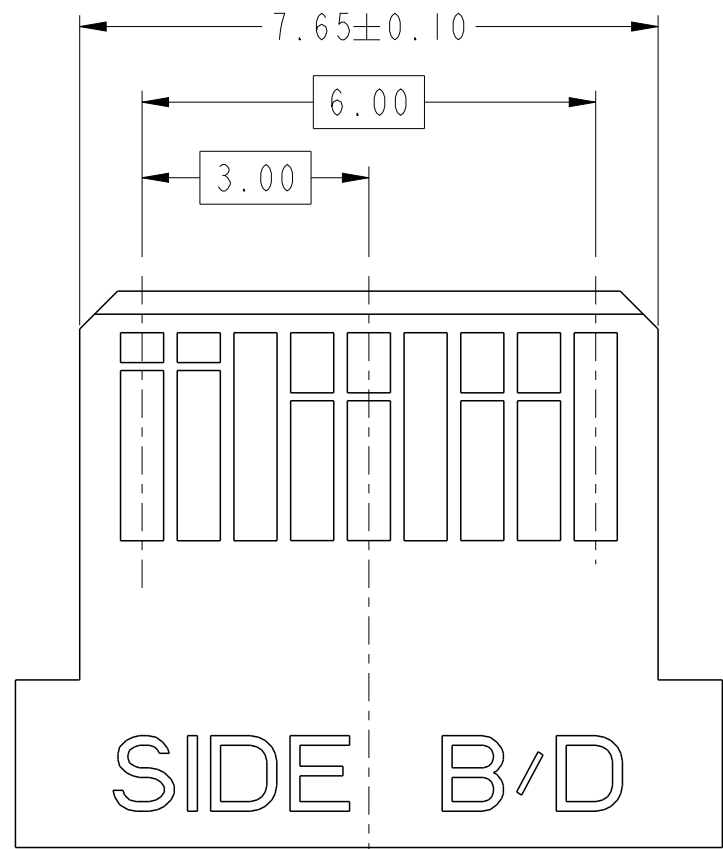

- NOTES:
15. 0.05 MINIMUM KEEP OUT FOR SOLDER MASK AROUND ALL PADS.
16. DATUM D TARGETS ARE DEFINED BY THE RESPECTIVE PAD CENTER LINES AND THE LEADING EDGE OF THE TARGET PADS.

spec ref	-	dr	Mark Gray	2010/08/04	projection	MM	size	A2	scale	1:1
tolerance std	ASME Y14.5	eng	M Scholeno	2012/09/10	chr	-	ecn no	ELX-V-012260-1	rel level	Released
surface	✓	appr	Brad Brubaker	2012/09/12	product family	MINI-SAS HD	cat. no.	10112627	rev	D
ASME Y14.5	linear	0.X	±0.25	0.XX	±0.13	0.XXX	±-	angular	0°	±1/2°

www.fci.com

PDS: Rev :D

IX2 EXTERNAL ASSEMBLY

MINI-SAS HD

Product - Customer Drw

STATUS:Released

sheet 7 of 7

Printed: Sep 13, 2012

A
B
C
D
E
F

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9