

**BEST OF
CLASS**



2000 Series Digital Panel Meters MODUTEC



2100 Series with DIP switch selections and multiple power options.

Backlighting Options

- Positive Green Black on Green Background
- Negative Green Green on Black Background
- Positive Red Black on Red Background
- Negative Red Red on Black Background
- Non-Backlit LCD Black on Grey Background

Customize for features that are important to you and rely on industry standards for routine digital PM elements.

You need flexibility. We provide it. We customize our meters to meet your specifications.

- Scalable in engineering units
- Custom labels for special readouts
- User Selectable functions, decimal point, offset, span, process voltage or current, DC voltage
- Red or green backlit display

You need reliability. The MODUTEC 2000 Series operates in the harshest environments.

- Splash and hose proof meeting NEMA 4, NEMA 12, and IPC 55 standards
- Resistant to damage with a high impact polycarbonate case
- Wide operating temperature ranging from -4°F to +140°F (-20°C to +60°C)


You need standards. The MODUTEC 2000 Series gives you industry standards designed in.

- 1/8 DIN industry standard cut-out and 1 inch depth
- Screw terminals
- Over range indication
- Low cost
- The MODUTEC 2100 includes user-friendly dipswitch selection features





Applications

- ▶ Telecommunications
- ▶ Water Purification
- ▶ Sewage Treatment
- ▶ Flow
- ▶ Process
- ▶ Desalinization
- ▶ Temperature
- ▶ AC & DC Amps
- ▶ AC & DC Volts

Panel Cutout



1. For optimum water resistance use cutout height of 43 MM (1.693 Inches).
2. Panel thickness .81 to 6.35 MM (.032 to .250 Inches).



Side View Non-backlit




Figure A

Side View Backlit





Figure B

Input Type	Figure	A (mm/in)	B (mm/in)
AC	A	25.1/0.99	29.2/1.15
DC	A	25.1/0.99	29.2/1.15
Temperature	A	25.1/0.99	29.2/1.15
4-20mA Process	B	37.8/1.49	50.8/2.00
Frequency	A	25.1/0.99	29.2/1.15

Connection for High Current Measurement

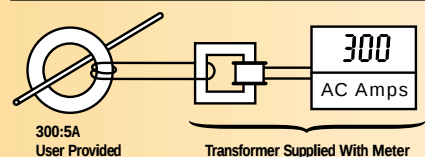

Display

Digits: 3 1/2 digits, 7 segments Backlit LCD (1999)

Polarity: Automatic (-) displayed

Overload: Three lower digits blank for readings greater than 1999

Digit Height: 0.5" (12.7 mm)

Decimal Point: Three positions, external selection

Performance

Conversion Rate: 2.5 per second

Common Mode Rejection: $\geq 100\text{db}$ 50 Hz-60 Hz¹

Tempco: ± 200 PPM/ $^{\circ}\text{C}$ typical²

Normal Mode Rejection: ≥ 40 db 50Hz-60Hz

Zero Adjust: Automatic

Warmup: 10 minutes

Environment

Operating Range: -4°F to 140°F (-20°C to + 60°C)

Storage Range: -22°F to 158°F (-30°C to + 70°C)

Power Options

115V +10%, -15%

230V +10%, -15%

10 to 28VDC

10 to 15VDC or 20 to 32VDC

50Hz to 400Hz at 2VA

50Hz to 400Hz at 2VA

150 mA (including backlighting)

150mA (including backlighting)

Weight

2 oz.

FCC Compliance

Complies with the class B Limits of FCC rules and regulations, part 15, sub part J for conducted and radiated emissions.


¹ except isolated DC powered which is ≥ 80 db 50 Hz-60Hz

² except thermocouple inputs which are .1%/ degree zero tempco for selectable process ranges
is only ± 2 count/ $^{\circ}\text{C}$


Specifications continued on back page.

2000 & 2100 Series Connection Drawings

Universal Switchable — Model 2100




Terminal	Description
IN+ IN- }	Signal Input
AC Power Low AC Power HI }	AC Power Input, 115VAC or 230VAC depending on model selected




12VDC Power GND }	12VDC power input (optional)
24VDC Power GND }	24VDC power input (optional)

Frequency Input



AC LO AC HI Earth GND }	Signal input and power, 115VAC or 230VAC depending on model selected.
12VDC Power GND }	12VDC power input (optional)
24VDC Power GND }	24VDC power input (optional)


DC Inputs (Non-Isolated DC Power)




V+ V- }	10-28VDC power input
IN HI IN LO }	Signal Input
BL+ BL- }	Backlight power input

DP1, DP2, DP3 — Decimal point selection, connect to V+ as follows: DP1=XXX.X, DP2=XX.XX, DP3=X.XXX

AC and DC Inputs (AC and Isolated DC power)




V+ IN HI IN LO }	10-28VDC power input Signal Input
DP1, DP2, DP3	Decimal point selection, connect to V+ as follows: DP1=XXX.X, DP2=XX.XX, DP3=X.XXX
AC Power LO AC Power HI }	AC Power Input, 115VAC or 230VAC depending on model selected




12V Power GND }	12VDC power input (optional)
24V Power GND }	24VDC power input (optional)

4-20mA Process & Flow Inputs



IN+ IN- }	Signal Input
DP1, DP2, DP3	Decimal point selection, connect to V+ as follows: DP1= XXX.X, DP2= XX.XX, DP3= X.XXX
V+ V+ }	DC voltage output to select decimal points

Temperature Inputs



TC+ TC- }	Thermocouple Inputs
AC Power Low AC Power HI }	AC Power Input, 115VAC or 230VAC depending on model selected
1 2 3 }	RTD inputs

2000 Series Scaling Chart

Model 2100, of the 2000 Series, provide the unique ability to switch-select a range and then scale and offset that range. Input will be displayed in engineering units. For example, by changing switch positions and recalibrating, a 2133-3419-04 may be set-up for any of the following displays:

- 4 to 20mA input display -148°F to 932°F (-100°C to +500°C) temperature
- 1 to 5V input displaying -60kPa to 300kPa differential pressure
- 0 to 10V input displaying +700°F to +950°F (+682°C to +932°C) temperature
- 0 to 50mV input displaying 0 to 300 amperes

Scaling Capability

Zero Range Adjustment

4mA to 20mA, 1V to 5V

0 to 200mV, 0 to 2V, 0 to 10V

Full Scale Span Adjustment

All ranges

Other ranges and scaling available.

-1000 counts to +1500 counts. Switch selectable in four ranges: a 25-turn potentiometer enables continuous adjustment.

-1500 counts to +1500 counts. Switch selectable in six ranges: a 25-turn potentiometer enables continuous adjustment.

0 to 2000 counts. Switch selectable in four ranges: a 25-turn potentiometer enables continuous adjustment.

How to Order

2

a	b
0	3

 3¹ - 3

c	d
4	6 1

 -

e	f
0 4	2

a	Configuration			
	0 = 1/8 DIN	1 = UPM		
	2 = TRMS (Inst)	3 = TRMS (Power)		

b	Display			
	1 = Non Bklit	3 = Pos Grn Bklit		
	4 = Neg Grn Bklit	5 = Neg Red Bklit		
	6 = Pos Red Bklit			

c	DPM Power²			
	0 = loop power	1 = 9 VDC		
	2 = ±5VDC	3 = +5 volts		
	4 = 115VAC	5 = 230VAC		
	6 = 10 to 28VDC	7 = 12 or 24VDC (Iso)		
	8 = 12 VDC	9 = 24VDC		

d	Input			
	00 = 100mVDC (1999 counts)			
	01 = 200mVDC scaled 0 to 199.9			
	02 = 2VDC scaled 0 to 1.999			
	03 = 20VDC			
	04 = 200VDC			
	05 = 1V to 5 VDC scaled 0 to 100.0			
	06 = 10VDC scaled 0 to 10.00			
	07 = 500VDC			
	10 = 200uADC			
	11 = 2mADC			
	12 = 20mADC			
	13 = 200mADC			
	18 = 4 to 20mADC Sq Rt ³			
	19 = 4 to 20mADC scaled 0 to 100.0 ³			
	21 = 200.0mVAC RMS			
	22 = 2.000VAC RMS			
	23 = 20.00VAC RMS			
	24 = 200.0VAC RMS			
	25 = 500VAC RMS			
	27 = 500VAC Avg			
	28 = 80.0 - 130.0VAC Avg			
	29 = 80 - 260VAC Avg			
	30 = 250VAC RMS			
	31 = 2.000mAAC RMS			
	32 = 20.00mAAC RMS			
	33 = 200.0mAAC RMS			
	34 = 2.000AAAC RMS			
	36 = 5.00AAC ⁴ RMS			
	37 = 50.0AAC ⁴ RMS			
	38 = 0 - 5AAC ⁴ AVG			
	39 = 0 - 50AAC ⁴ AVG			
	60 = 40 to 440Hz			
	61 = 40.0 to 199.9Hz			
	70 = 100 Ohms Pt 1° Resolution			
	71 = 100 Ohms Pt .1° Resolution			
	80 = Type J Thermocouple			
	81 = Type K Thermocouple			
	82 = Type T Thermocouple			

e	Backlit Power²			
	00 = No Backlight	01 = 5VDC		
	02 = 12VDC	03 = 24VDC		
	04 = 115VAC	05 = 230VAC		
	06 = 10 to 28VDC	07 = 12 or 24VDC		

f	Display⁵			
	1 = 2000	2 = 1500	3 = 1000	
	4 = 600	5 = 500	6 = 300	
	7 = 200	8 = 100		

2000 and 2100 Series Specifications (continued)

DC Inputs	Accuracy	Input Resistance	Overload Protection
200mVDC & 2VDC	±(.1% +1 count) typical ±(.2% +1 count) max.	≥ 100 Meg Ohms	200V continuous 300V intermittent
20VDC & 200VDC	±(.1% +1 count) typical ±(.2% +1 count) max.	1 Meg Ohm	350V continuous 500V intermittent
DC Current	±(.1% +1 count) typical ±(.2% +1 count) max.	200mV drop full scale	3 times f.s. current
Universal Selectable Process	±(.1% +2 counts)	4 to 20mA, 10 Ohms ≥ 200mV, ≥ 200K Ohms 2V and up, ≥ 1Meg Ohm	4 to 20 mA, ±100mA Voltage Inputs, 200V continuous 300V intermittent
AC Inputs	Accuracy	Input Resistance	Overload Protection
AC Voltage	±(.5% +1 count)	1 Meg Ohm	350V continuous 500V intermittent
5A AC Current	±(.5% +1 count)	Current transformer	3 times f.s. current
50A AC Current	±(.5% +5 counts)	Current transformer	3 times f.s. current
Frequency Inputs	Accuracy	Distortion	
40.0 to 199.9Hz	±.2Hz (40 to 70Hz) ±.5Hz (above 70Hz)	≤ .1 Hz for up to 20% third harmonic distortion	
40 to 440Hz	±1Hz	≤ .1 Hz for up to 20% third harmonic distortion	
Temperature Inputs	Accuracy	Input Characteristic	Overload Protection
Type J thermocouple			
-10°F to +1200°F (-23°C to +649°C)	±(.1% +1 count) accuracy ±1.3°C (2.8°F) conformity error	45 uV max per 100 Ohms thermocouple lead resistance	200V continuous
Type K thermocouple			
-40°F to +1500°F (-40°C to +815°C)	±(.1% +1 count) accuracy ±1.2°C (2.5°F) conformity error	45 uV max per 100 Ohms thermocouple lead resistance	200V continuous
Type T thermocouple			
-100°F to +600°F (-73°C to +315°C)	±(.1% +1 count) accuracy ±1.5°C (3.5°F) conformity error	45 uV max per 100 Ohms thermocouple lead resistance	200V continuous
100 Ω Pt. α =.00385			
-200°F to +600° F (-129°C to +315°C)	±(.2% +1 count) max	1mA RTD current	±5V
100 Ω Pt. α =.00385			
-100.0°F to +199.9°F (-73°C to +98°C)	±(.2% +1 count) max	1mA RTD current	±5V

¹ Change Order Number to "4" for 200 VDC Input

² Backlit power must be the same as the selected DPM power.

³ Available on Non-Backlit meters only.

⁴ Rated for use with 5A or 50A external current transformer supplied with DPM. See high current connection on inside page.

⁵ For 5A current transformer inputs only.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9