



LOC		DIST		REVISONS			
A	66	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-


FEED TYPE
MECHANICAL

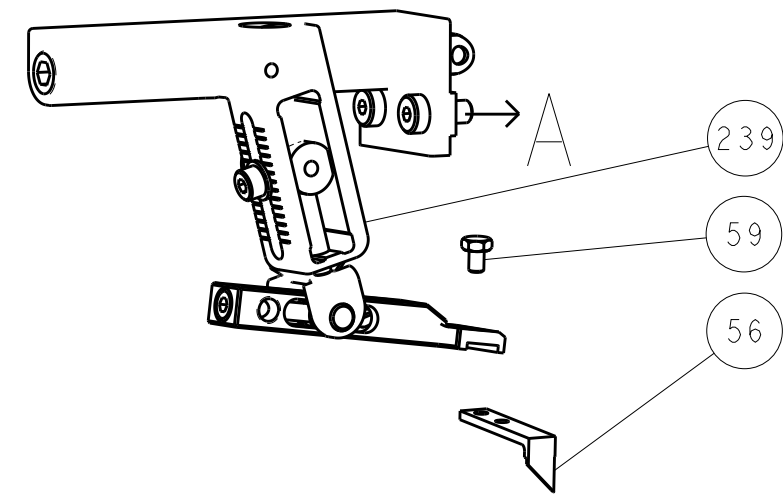






PNEUMATIC

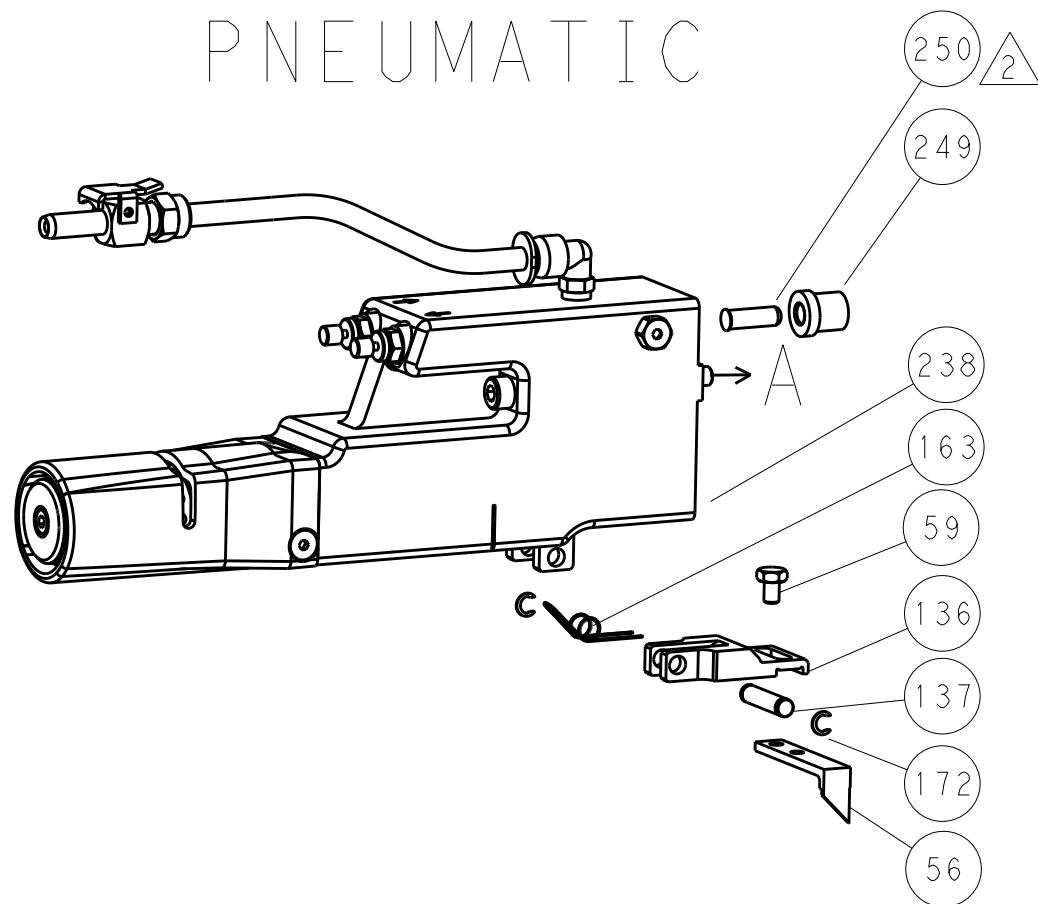

SERVO
LATCH PLATE

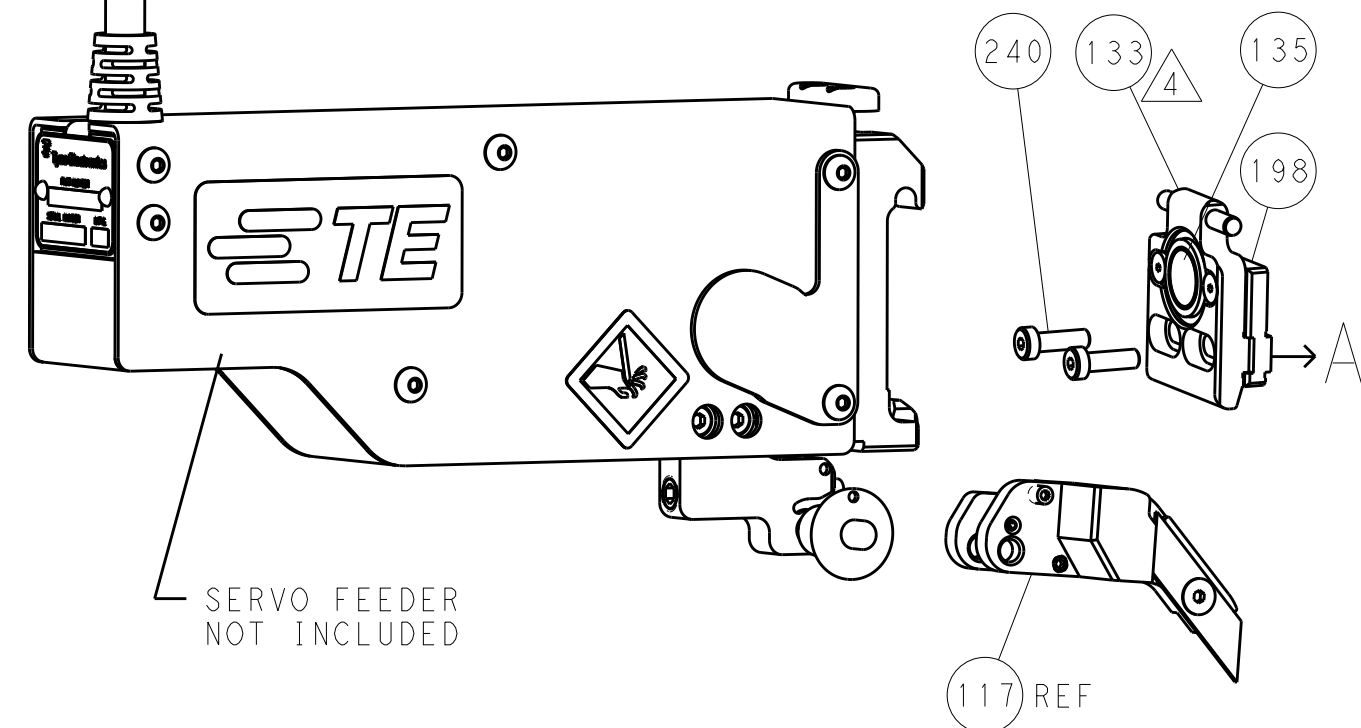

CAM POSITIONS

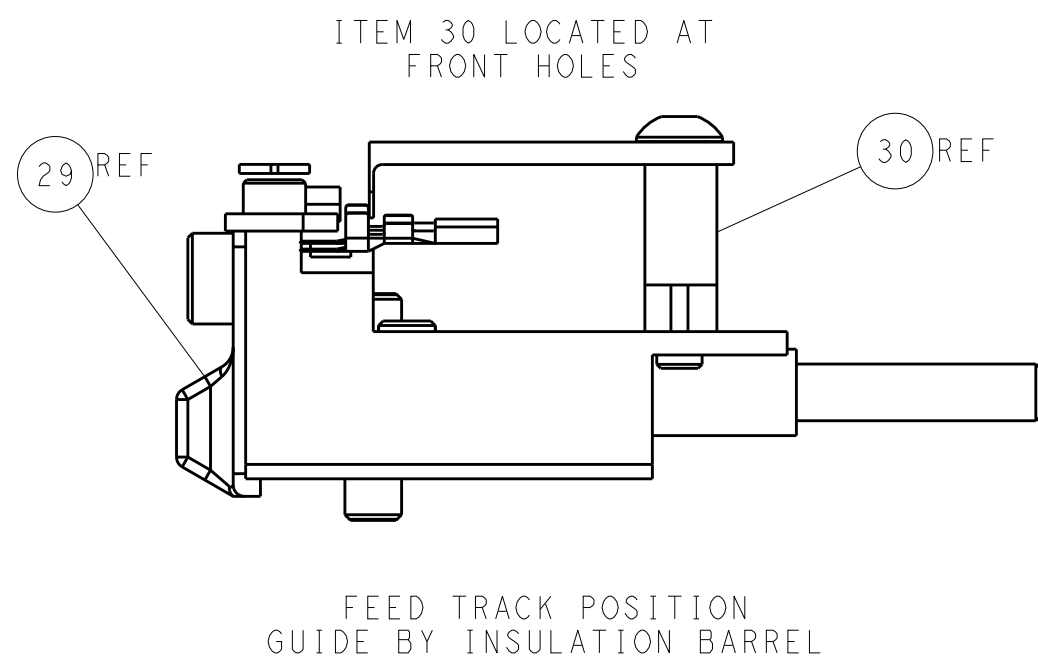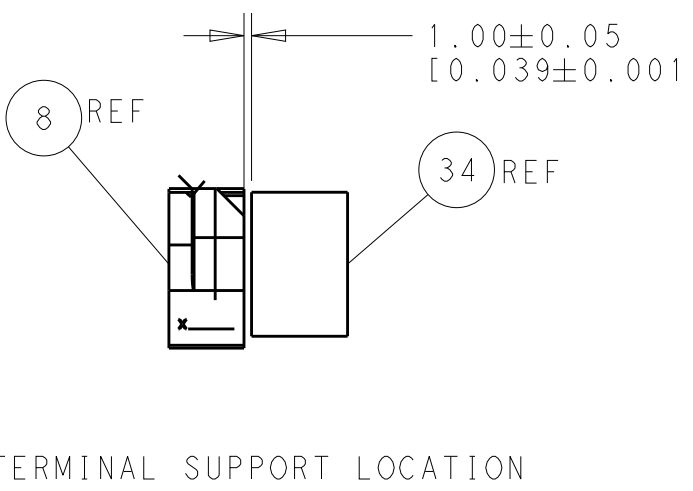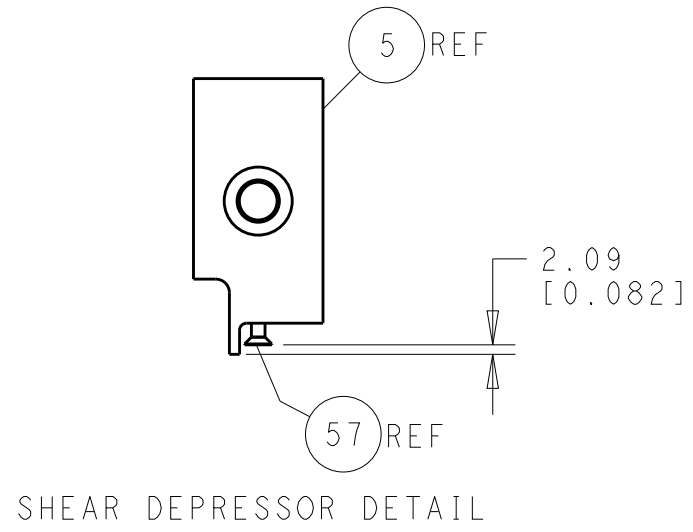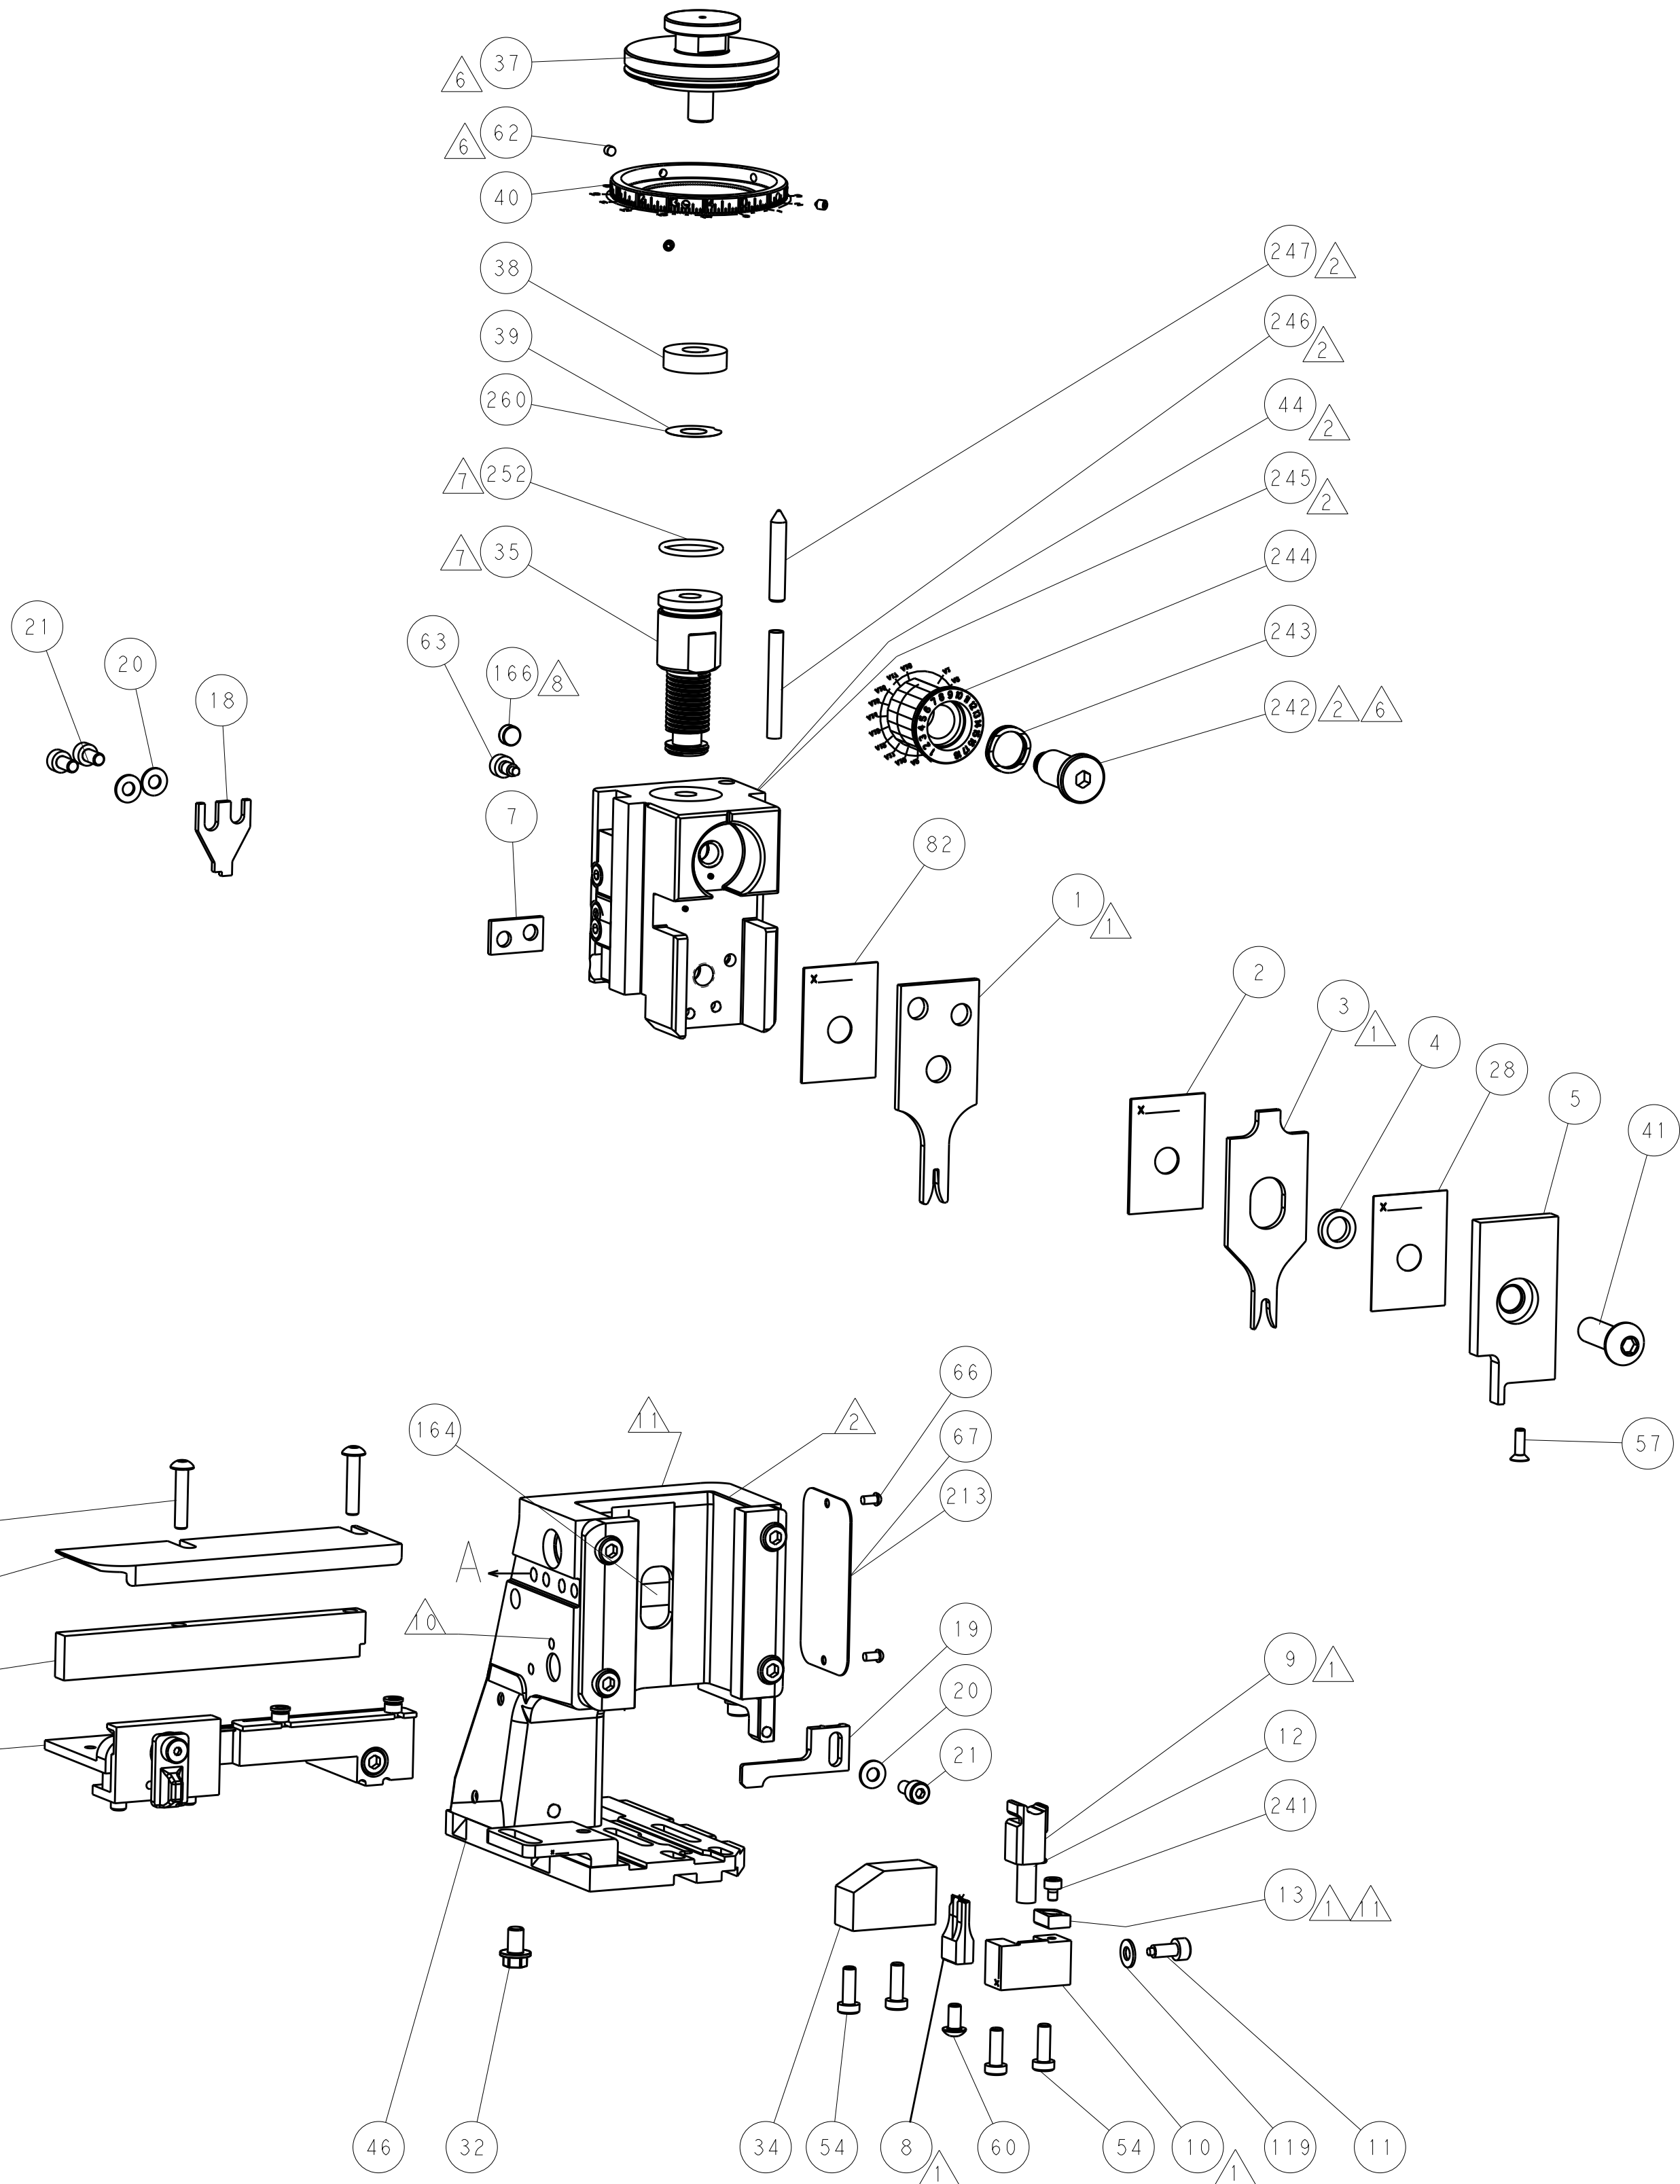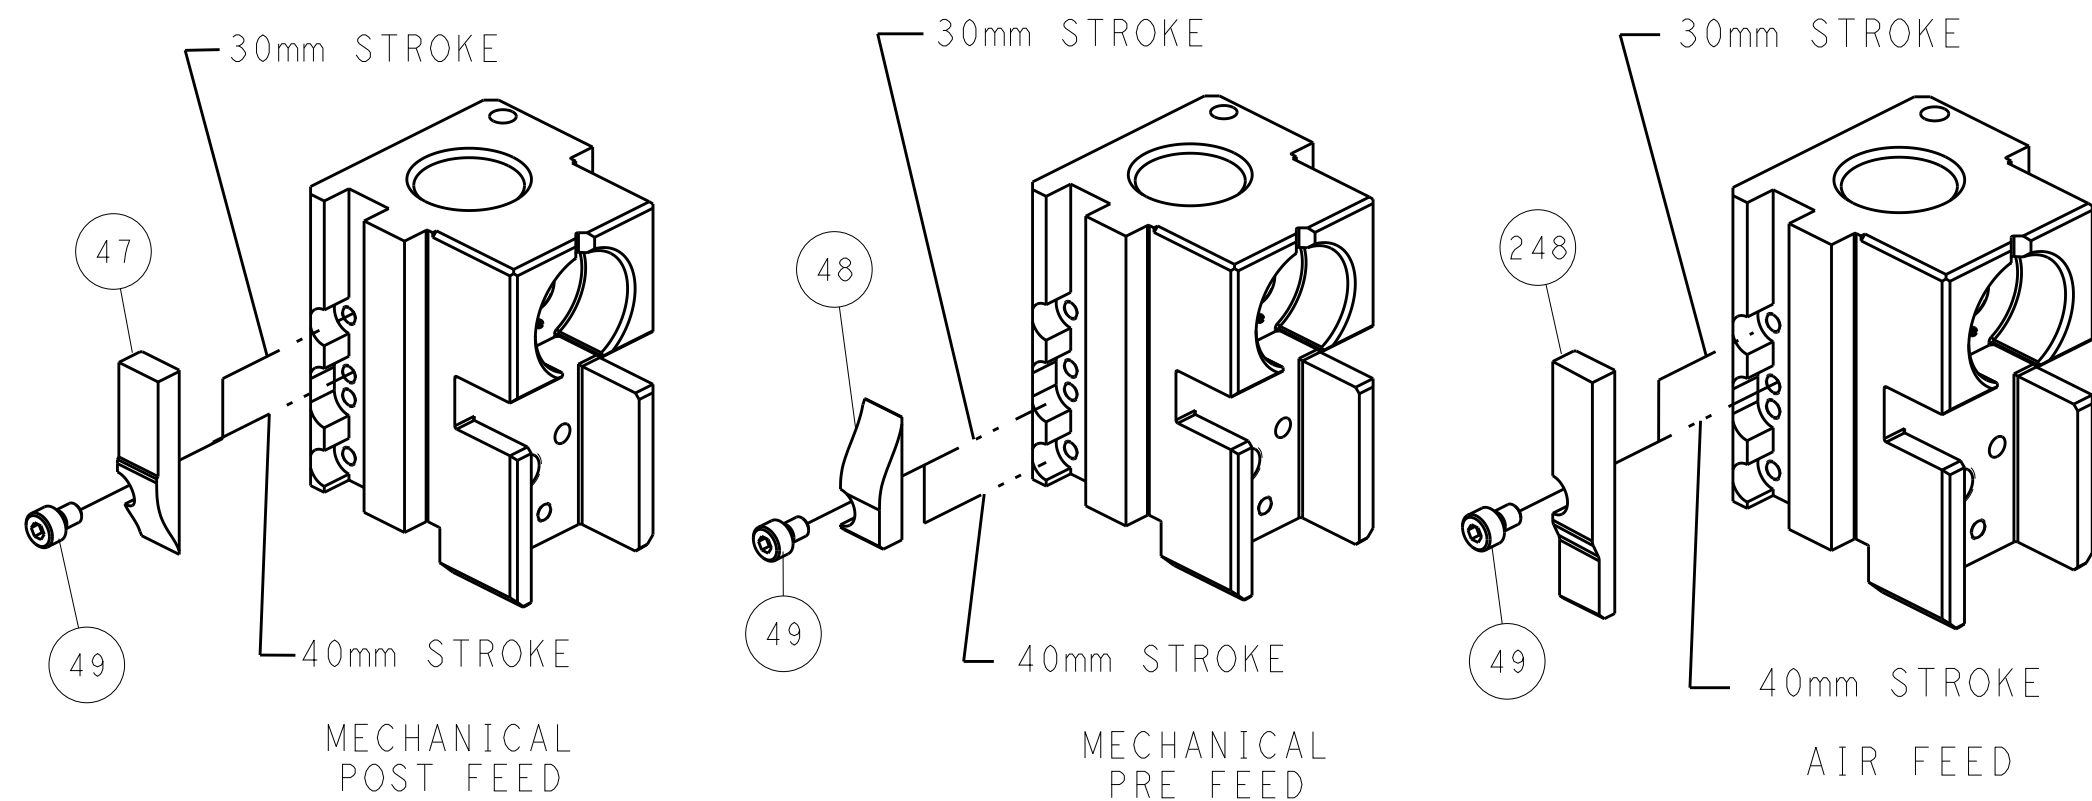

ATLANTIC VERSION
Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN		CHK		APVD		NAME		TE Connectivity	
mm		0 PLC ±0.5		R. STANEM		G. BAILEY		T. ELBIN		Ocean Side Feed Applicator		Harrisburg, PA 17105-3608	
1 PLC ±0.13		2 PLC ±0.13		3 PLC ±0.13		4 PLC ±0.001		FINISH		SIZE		CAGE CODE	
MATERIAL		WEIGHT		CUSTOMER ACCESSIBLE PRODUCTION DRAWING		SCALE		SHEET		REV		RESTRICTED TO	

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

PACIFIC VERSION
TERMINATOR
INTERFACE ADAPTER

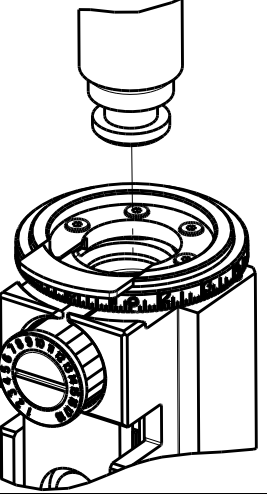

PART
NUMBER

2-2151104-1

REVISION

E

DESCRIPTION

FINE CRIMP HEIGHT ADJUST

FEED TYPE

MECHANICAL

CONVERT TO

PNEUMATIC FEED

PART NUMBERS REQUIRED

2119950-1

2-2151104-2

E

FINE CRIMP HEIGHT ADJUST

PNEUMATIC

MECHANICAL FEED

2119949-1

2-2151104-5

E

FINE CRIMP HEIGHT ADJUST

SERVO LATCH PLATE⁴

MECHANICAL FEED

2119949-1

2-2151104-7

E

FINE CRIMP HEIGHT ADJUST

NONE

-

2119950-1

7-2151104-7

E

CRIMP TOOLING KIT

-

-

-

APPLICATOR DATA

CRIMP

SIZE

TYPE

WIRE

1.40 mm [.055]

F

INSUL

2.90 mm [.114]

O

APPLICATOR INSTRUCTIONS

408-10389

TERMINAL DATA: TE TERMINAL

TE CRIMP SPECIFICATION

TERMINAL NAME: MICRO QUADLOCK SYSTEM W/SEAL

WIRE STRIP LENGTH

3.05-3.35 mm [.120-.132 IN]

INSULATION DIAMETER RANGE

Ø

△2

TERMINAL APPLICATION SPECIFICATION

114-18025

-

-

-

TERMINALS APPLIED

TE TERMINAL

TE TERMINAL

TE SEAL

TE SEAL

CABLE DIAMETER^{△2}

962885-1

2-962886-2

967067-1

Ø1.4-2.1 mm

962885-5

5-962886-1

967067-2

Ø0.9-1.4 mm

962885-6

5-962886-2

963142-2

Ø0.9-1.3 mm

2-962885-5

7-962886-2

5-962885-1

963927-1

5-962885-5

963927-2

5-962885-6

963929-1

7-962885-5

963929-2

962886-1


1-963929-1

962886-2

1-963929-2

1-962886-1

WIRE SIZE



CRIMP HEIGHT mm [INCH]

CRIMP HEIGHT REFERENCE SETTING

△9

0.50mm2

0.86+/-0.03 [.034+/- .0011]

7.7

0.35mm2

0.76+/-0.03 [.030+/- .0011]

8.7

0.25mm2

0.72+/-0.03 [.028+/- .0011]

9.1

0.20mm2

0.69+/-0.03 [.027+/- .0011]

9.4

1

RECOMMENDED SPARE PARTS

2

GREASE BEARING SURFACES LIGHTLY

3

LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.

4

APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151104-4
PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151104-4
SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2151104-5
SERVO FEED WITH "NON-CRIMP HEIGHT ADJUST": 8-2151104-6

5

ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.

6

APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEM 62.
APPLY PART NUMBER 2-23419-6 LOCTITE TO THREADS OF ITEM 242.

7

GREASE THREADS, GROOVE AND O-RING ON ITEMS 139 & 152.

8

MAGNET MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.

9

CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.

10

SPARE FEED CAM STORAGE LOCATION REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.

11

TO CONVERT THE APPLICATOR TO A NON-CARRIER CUTTING STYLE, REMOVE ITEM 13 AND ATTACH TO THE LOCATION ON BACK SIDE OF THE HOUSING. REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.

12

THIS APPLICATOR APPLIES TERMINAL WITH A SEAL.

13

APPLY TORQ-SEAL IN ALLEN SOCKET TO FILL HOLE AFTER FLAT HD HAS BEEN ADJUSTED TO CORRECT HEIGHT AT QUALIFICATION.
APPLY #1-23419-5 LOC-TITE TO THREADS.

APPLICATOR STYLE CONVERSION CHART

CONVERT TO

PART NUMBERS REQUIRED

PNEUMATIC FEED

2119950-1

1338685-1

5-18022-5

2119641-2

2119799-1

2063440-1

SERVO LATCH PLATE

2119951-1

-

8-2151104-5

1901094-3

-

2168400-6 (QUANTITY 2)

SMART APPLICATOR

2161326-1

-

8-2151104-4

-

-

-

MECHANICAL FEED

2119949-1

1338685-1

5-18022-5

2119653-2

-

-

SERVO LATCH PLATE

2119951-1

-

8-2151104-5

1901094-3

-

2168400-6 (QUANTITY 2)

SMART APPLICATOR

2161326-1

-

8-2151104-4

-

-

-

MECHANICAL FEED

2119949-1

1338685-1

5-18022-5

2119653-2

-

-

PNEUMATIC FEED

2119950-1

1338685-1

5-18022-5

2119641-2

2119799-1

2063440-1

-

-

-

-

-

-

-

-

-

-

-

-

-

-

APPLICATOR DATA

CRIMP

SIZE

TYPE

WIRE

1.40 mm [.055]

F

INSUL

2.90 mm [.114]

O

APPLICATOR INSTRUCTIONS

408-10389

TERMINAL DATA: TE TERMINAL

TE CRIMP SPECIFICATION

TERMINAL NAME: MICRO QUADLOCK SYSTEM W/SEAL

WIRE STRIP LENGTH

3.05-3.35 mm [.120-.132 IN]

INSULATION DIAMETER RANGE

Ø

△2

TERMINAL APPLICATION SPECIFICATION

114-18025

-

-

-

TERMINALS APPLIED

TE TERMINAL

TE TERMINAL

TE SEAL

TE SEAL

CABLE DIAMETER^{△2}

962885-1

2-962886-2

967067-1

Ø1.4-2.1 mm

962885-5

5-962886-1

967067-2

Ø0.9-1.4 mm

962885-6

5-962886-2

963142-2

Ø0.9-1.3 mm

2-962885-5

7-962886-2

5-962885-1

963927-1

5-962885-5

963927-2

5-962885-6

963929-1

7-962885-5

963929-2

962886-1


1-963929-1

962886-2

1-963929-2

1-962886-1

WIRE SIZE



CRIMP HEIGHT mm [INCH]

CRIMP HEIGHT REFERENCE SETTING

△9

0.50mm2

0.86+/-0.03 [.034+/- .0011]

7.7

0.35mm2

0.76+/-0.03 [.030+/- .0011]

8.7

0.25mm2

0.72+/-0.03 [.028+/- .0011]

9.1

0.20mm2

0.69+/-0.03 [.027+/- .0011]

9.4

1

RECOMMENDED SPARE PARTS

2

GREASE BEARING SURFACES LIGHTLY

3

LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.

4

APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151104-4
PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151104-4
SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2151104-5
SERVO FEED WITH "NON-CRIMP HEIGHT ADJUST": 8-2151104-6

5

ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.

6

APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEM 62.
APPLY PART NUMBER 2-23419-6 LOCTITE TO THREADS OF ITEM 242.

7

GREASE THREADS, GROOVE AND O-RING ON ITEMS 139 & 152.

8

MAGNET MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.

9

CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.

10

SPARE FEED CAM STORAGE LOCATION REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.

11

TO CONVERT THE APPLICATOR TO A NON-CARRIER CUTTING STYLE, REMOVE ITEM 13 AND ATTACH TO THE LOCATION ON BACK SIDE OF THE HOUSING. REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.

12

THIS APPLICATOR APPLIES TERMINAL WITH A SEAL.

13

APPLY TORQ-SEAL IN ALLEN SOCKET TO FILL HOLE AFTER FLAT HD HAS BEEN ADJUSTED TO CORRECT HEIGHT AT QUALIFICATION.
APPLY #1-23419-5 LOC-TITE TO THREADS.

APPLICATOR STYLE CONVERSION CHART

CONVERT TO

PART NUMBERS REQUIRED

PNEUMATIC FEED

2119950-1

1338685-1

5-18022-5

2119641-2

2119799-1

2063440-1

SERVO LATCH PLATE

2119951-1

-

8-2151104-5

1901094-3

-

2168400-6 (QUANTITY 2)

SMART APPLICATOR

2161326-1

-

8-2151104-4

-

-

-

MECHANICAL FEED

2119949-1

1338685-1

5-18022-5

2119653-2

-

-

SERVO LATCH PLATE

2119951-1

-

8-2151104-5

1901094-3

-

2168400-6 (QUANTITY 2)

SMART APPLICATOR

2161326-1

-

8-2151104-4

-

-

-

MECHANICAL FEED

2119949-1

1338685-1

5-18022-5

2119653-2

-

-

PNEUMATIC FEED

2119950-1

1338685-1

5-18022-5

2119641-2

2119799-1

2063440-1

-

-

-

-

-

-

-

-

-

-

-

-

-

-

APPLICATOR DATA

CRIMP

SIZE

TYPE

WIRE

1.40 mm [.055]

F

INSUL

2.90 mm [.114]

O

APPLICATOR INSTRUCTIONS

408-10389

TERMINAL DATA: TE TERMINAL

TE CRIMP SPECIFICATION

TERMINAL NAME: MICRO QUADLOCK SYSTEM W/SEAL

WIRE STRIP LENGTH

3.05-3.35 mm [.120-.132 IN]

INSULATION DIAMETER RANGE

Ø

△2

TERMINAL APPLICATION SPECIFICATION

114-18025

-

-

-

TERMINALS APPLIED

TE TERMINAL

TE TERMINAL

TE SEAL

TE SEAL

CABLE DIAMETER^{△2}

962885-1

2-962886-2

967067-1

Ø1.4-2.1 mm

962885-5

5-962886-1

967067-2

Ø0.9-1.4 mm

962885-6

5-962886-2

963142-2

Ø0.9-1.3 mm

2-962885-5

7-962886-2

5-962885-1

963927-1

5-962885-5

963927-2

5-962885-6

963929-1

7-962885-5

963929-2

962886-1


1-963929-1

962886-2

1-963929-2

1-962886-1

WIRE SIZE



CRIMP HEIGHT mm [INCH]

CRIMP HEIGHT REFERENCE SETTING

△9

0.50mm2

0.86+/-0.03 [.034+/- .0011]

7.7

0.35mm2

0.76+/-0.03 [.030+/- .0011]

8.7

0.25mm2

0.72+/-0.03 [.028+/- .0011]

9.1

0.20mm2

0.69+/-0.03 [.027+/- .0011]

9.4

1

RECOMMENDED SPARE PARTS

2

GREASE BEARING SURFACES LIGHTLY

3

LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.

4

APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151104-4
PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151104-4
SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2151104-5
SERVO FEED WITH "NON-CRIMP HEIGHT ADJUST": 8-2151104-6

5

ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.

6

APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEM 62.
APPLY PART NUMBER 2-23419-6 LOCTITE TO THREADS OF ITEM 242.

7

GREASE THREADS, GROOVE AND O-RING ON ITEMS 139 & 152.

8

MAGNET MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.

9

CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.

10

SPARE FEED CAM STORAGE LOCATION REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.

11

TO CONVERT THE APPLICATOR TO A NON-CARRIER CUTTING STYLE, REMOVE ITEM 13 AND ATTACH TO THE LOCATION ON BACK SIDE OF THE HOUSING. REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.

12

THIS APPLICATOR APPLIES TERMINAL WITH A SEAL.

13

APPLY TORQ-SEAL IN ALLEN SOCKET TO FILL HOLE AFTER FLAT HD HAS BEEN ADJUSTED TO CORRECT HEIGHT AT QUALIFICATION.
APPLY #1-23419-5 LOC-TITE TO THREADS.

APPLICATOR STYLE CONVERSION CHART

CONVERT TO

PART NUMBERS REQUIRED

PNEUMATIC FEED

2119950-1

1338685-1

5-18022-5

2119641-2

2119799-1

2063440-1

SERVO LATCH PLATE

2119951-1

-

8-2151104-5

1901094-3

-

2168400-6 (QUANTITY 2)

SMART APPLICATOR

2161326-1

-

8-2151104-4

-

-

-

MECHANICAL FEED

2119949-1

1338685-1

5-18022-5

2119653-2

-

-

SERVO LATCH PLATE

2119951-1

-

8-2151104-5

1901094-3

-

2168400-6 (QUANTITY 2)

SMART APPLICATOR

2161326-1

-

8-2151104-4

-

-

-

MECHANICAL FEED

2119949-1

1338685-1

5-18022-5

2119653-2

-

-

PNEUMATIC FEED

2119950-1

1338685-1

5-18022-5

2119641-2

2119799-1

2063440-1

-

-

-

-

-

-

-

-

-

-

-

-

-

-

APPLICATOR DATA

CRIMP

SIZE

TYPE

WIRE

1.40 mm [.055]

F

INSUL

2.90 mm [.114]

O

APPLICATOR INSTRUCTIONS

408-10389

TERMINAL DATA: TE TERMINAL

TE CRIMP SPECIFICATION

TERMINAL NAME: MICRO QUADLOCK SYSTEM W/SEAL

WIRE STRIP LENGTH

3.05-3.35 mm [.120-.132 IN]

INSULATION DIAMETER RANGE

Ø

△2

TERMINAL APPLICATION SPECIFICATION

114-18025

-

-

-

TERMINALS APPLIED

TE TERMINAL

TE TERMINAL

TE SEAL

TE SEAL

CABLE DIAMETER^{△2}

962885-1

2-962886-2

967067-1

Ø1.4-2.1 mm

962885-5

5-962886-1

967067-2

Ø0.9-1.4 mm

962885-6

5-962886-2

963142-2

Ø0.9-1.3 mm

2-962885-5

7-962886-2

5-962885-1

963927-1

5-962885-5

963927-2

5-962885-6

963929-1

7-962885-5

963929-2

962886-1


1-963929-1

962886-2

1-963929-2

1-962886-1

WIRE SIZE



CRIMP HEIGHT mm [INCH]

CRIMP HEIGHT REFERENCE SETTING

△9

0.50mm2

0.86+/-0.03 [.034+/- .0011]

7.7

0.35mm2

0.76+/-0.03 [.030+/- .0011]

8.7

0.25mm2

0.72+/-0.03 [.028+/- .0011]

9.1

0.20mm2

0.69+/-0.03 [.027+/- .0011]

9.4

1

RECOMMENDED SPARE PARTS

2

GREASE BEARING SURFACES LIGHTLY

3

LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.

4

APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151104-4
PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151104-4
SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2151104-5
SERVO FEED WITH "NON-CRIMP HEIGHT ADJUST": 8-2151104-6

5

ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.

6

APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEM 62.
APPLY PART NUMBER 2-23419-6 LOCTITE TO THREADS OF ITEM 242.

7

GREASE THREADS, GROOVE AND O-RING ON ITEMS 139 & 152.

8

MAGNET MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.

9

CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.

10

SPARE FEED CAM STORAGE LOCATION REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.

11

TO CONVERT THE APPLICATOR TO A NON-CARRIER CUTTING STYLE, REMOVE ITEM 13 AND ATTACH TO THE LOCATION ON BACK SIDE OF THE HOUSING. REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.

12

THIS APPLICATOR APPLIES TERMINAL WITH A SEAL.

13

APPLY TORQ-SEAL IN ALLEN SOCKET TO FILL HOLE AFTER FLAT HD HAS BEEN ADJUSTED TO CORRECT HEIGHT AT QUALIFICATION.
APPLY #1-23419-5 LOC-TITE TO THREADS.

APPLICATOR STYLE CONVERSION CHART

CONVERT TO

PART NUMBERS REQUIRED

PNEUMATIC FEED

2119950-1

1338685-1

5-18022-5

2119641-2

2119799-1

2063440-1

SERVO LATCH PLATE

2119951-1

-

8-2151104-5

1901094-3

-

2168400-6 (QUANTITY 2)

SMART APPLICATOR

2161326-1

-

8-2151104-4

-

-

-

MECHANICAL FEED

2119949-1

1338685-1

5-18022-5

2119653-2

-

-

SERVO LATCH PLATE

2119951-1

-

8-2151104-5

1901094-3

-

2168400-6 (QUANTITY 2)

SMART APPLICATOR

2161326-1

-

8-2151104-4

-

-

-

MECHANICAL FEED

2119949-1

1338685-1

5-18022-5

2119653-2

-

-

PNEUMATIC FEED

2119950-1

1338685-1

5-18022-5

2119641-2

2119799-1

2063440-1

-

-

-

-

-

-

-

-

-

-

-

-

-

-

APPLICATOR DATA

CRIMP

SIZE

TYPE

WIRE

1.40 mm [.055]

F

INSUL

2.90 mm [.114]

O

APPLICATOR INSTRUCTIONS

408-10389

TERMINAL DATA: TE TERMINAL

TE CRIMP SPECIFICATION

TERMINAL NAME: MICRO QUADLOCK SYSTEM W/SEAL

WIRE STRIP LENGTH

3.05-3.35 mm [.120-.132 IN]

INSULATION DIAMETER RANGE

Ø

△2

TERMINAL APPLICATION SPECIFICATION

114-18025

-

-

-

TERMINALS APPLIED

TE TERMINAL

TE TERMINAL

TE SEAL

TE SEAL

CABLE DIAMETER^{△2}

962885-1

2-962886-2

967067-1

Ø1.4-2.1 mm

962885-5

5-962886-1

967067-2

Ø0.9-1.4 mm

962885-6

5-962886-2

963142-2

Ø0.9-1.3 mm

2-962885-5

7-962886-2

5-962885-1

963927-1

5-962885-5

963927-2

5-962885-6

963929-1

7-962885-5

963929-2

962886-1


1-963929-1

962886-2

1-963929-2

1-962886-1

WIRE SIZE



CRIMP HEIGHT mm [INCH]

CRIMP HEIGHT REFERENCE SETTING

△9

0.50mm2

0.86+/-0.03 [.034+/- .0011]

7.7

0.35mm2

0.76+/-0.03 [.030+/- .0011]

8.7

0.25mm2

0.72+/-0.03 [.028+/- .0011]

9.1

0.20mm2

0.69+/-0.03 [.027+/- .0011]

9.4

1

RECOMMENDED SPARE PARTS

2

GREASE BEARING SURFACES LIGHTLY

3

LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.

4

APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT

LOC		DIST		REVISIONS			
A	66	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

D

C

B

A


D

C


B

A


FEED TYPE MECHANICAL

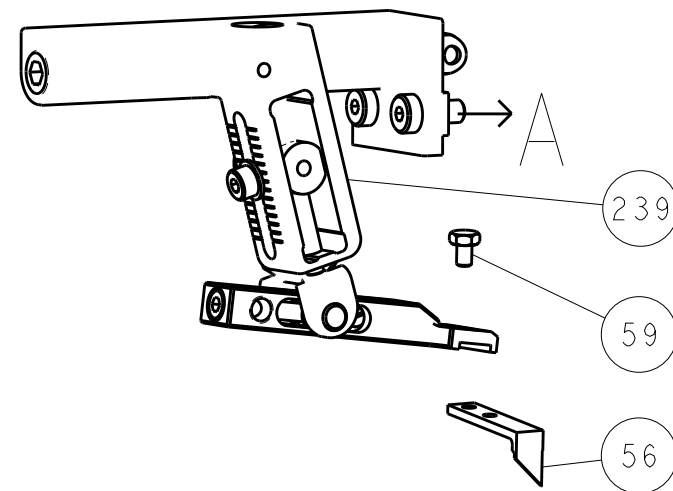




PNEUMATIC

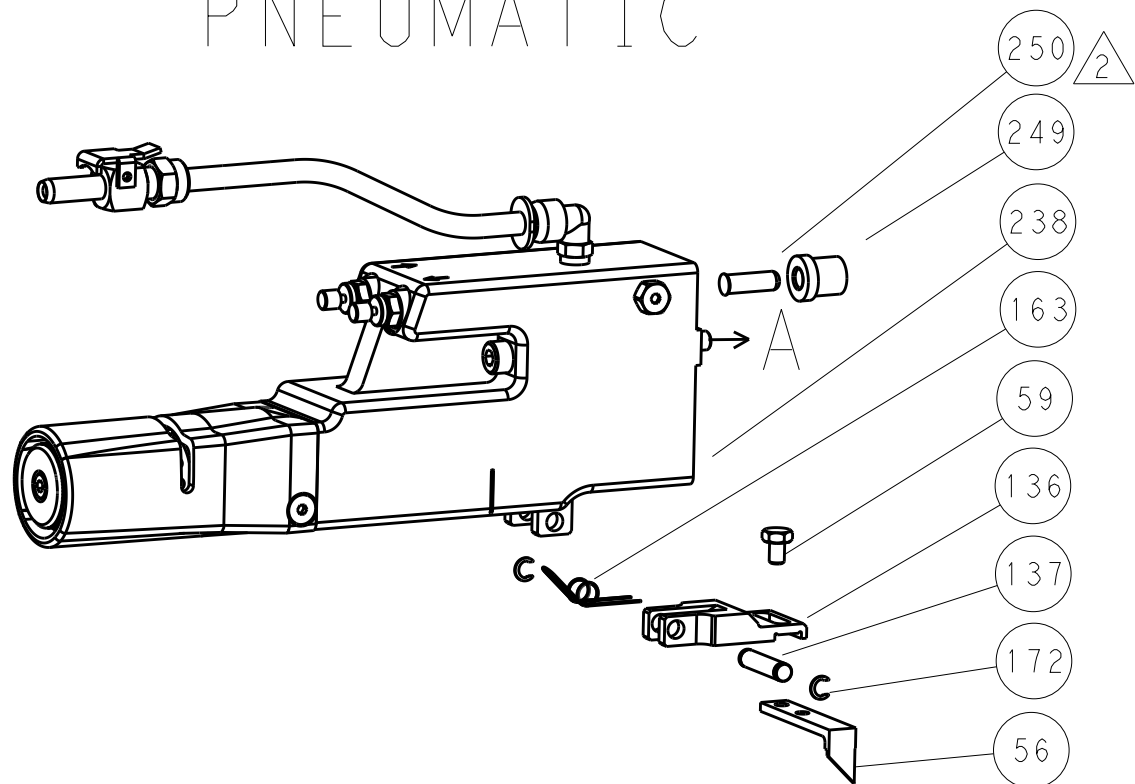


SERVO LATCH PLATE

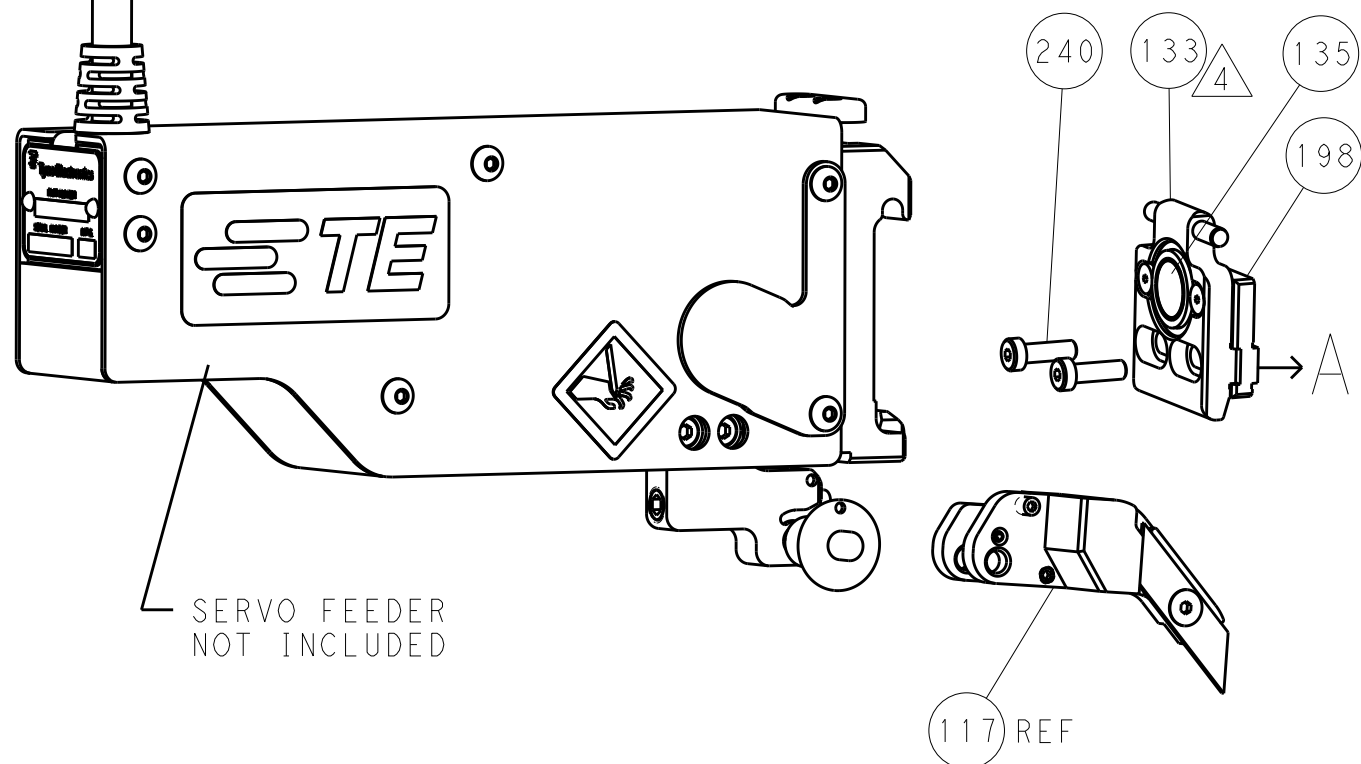


CAM POSITIONS

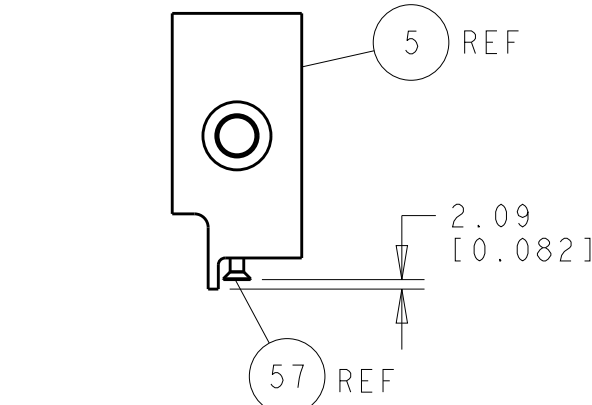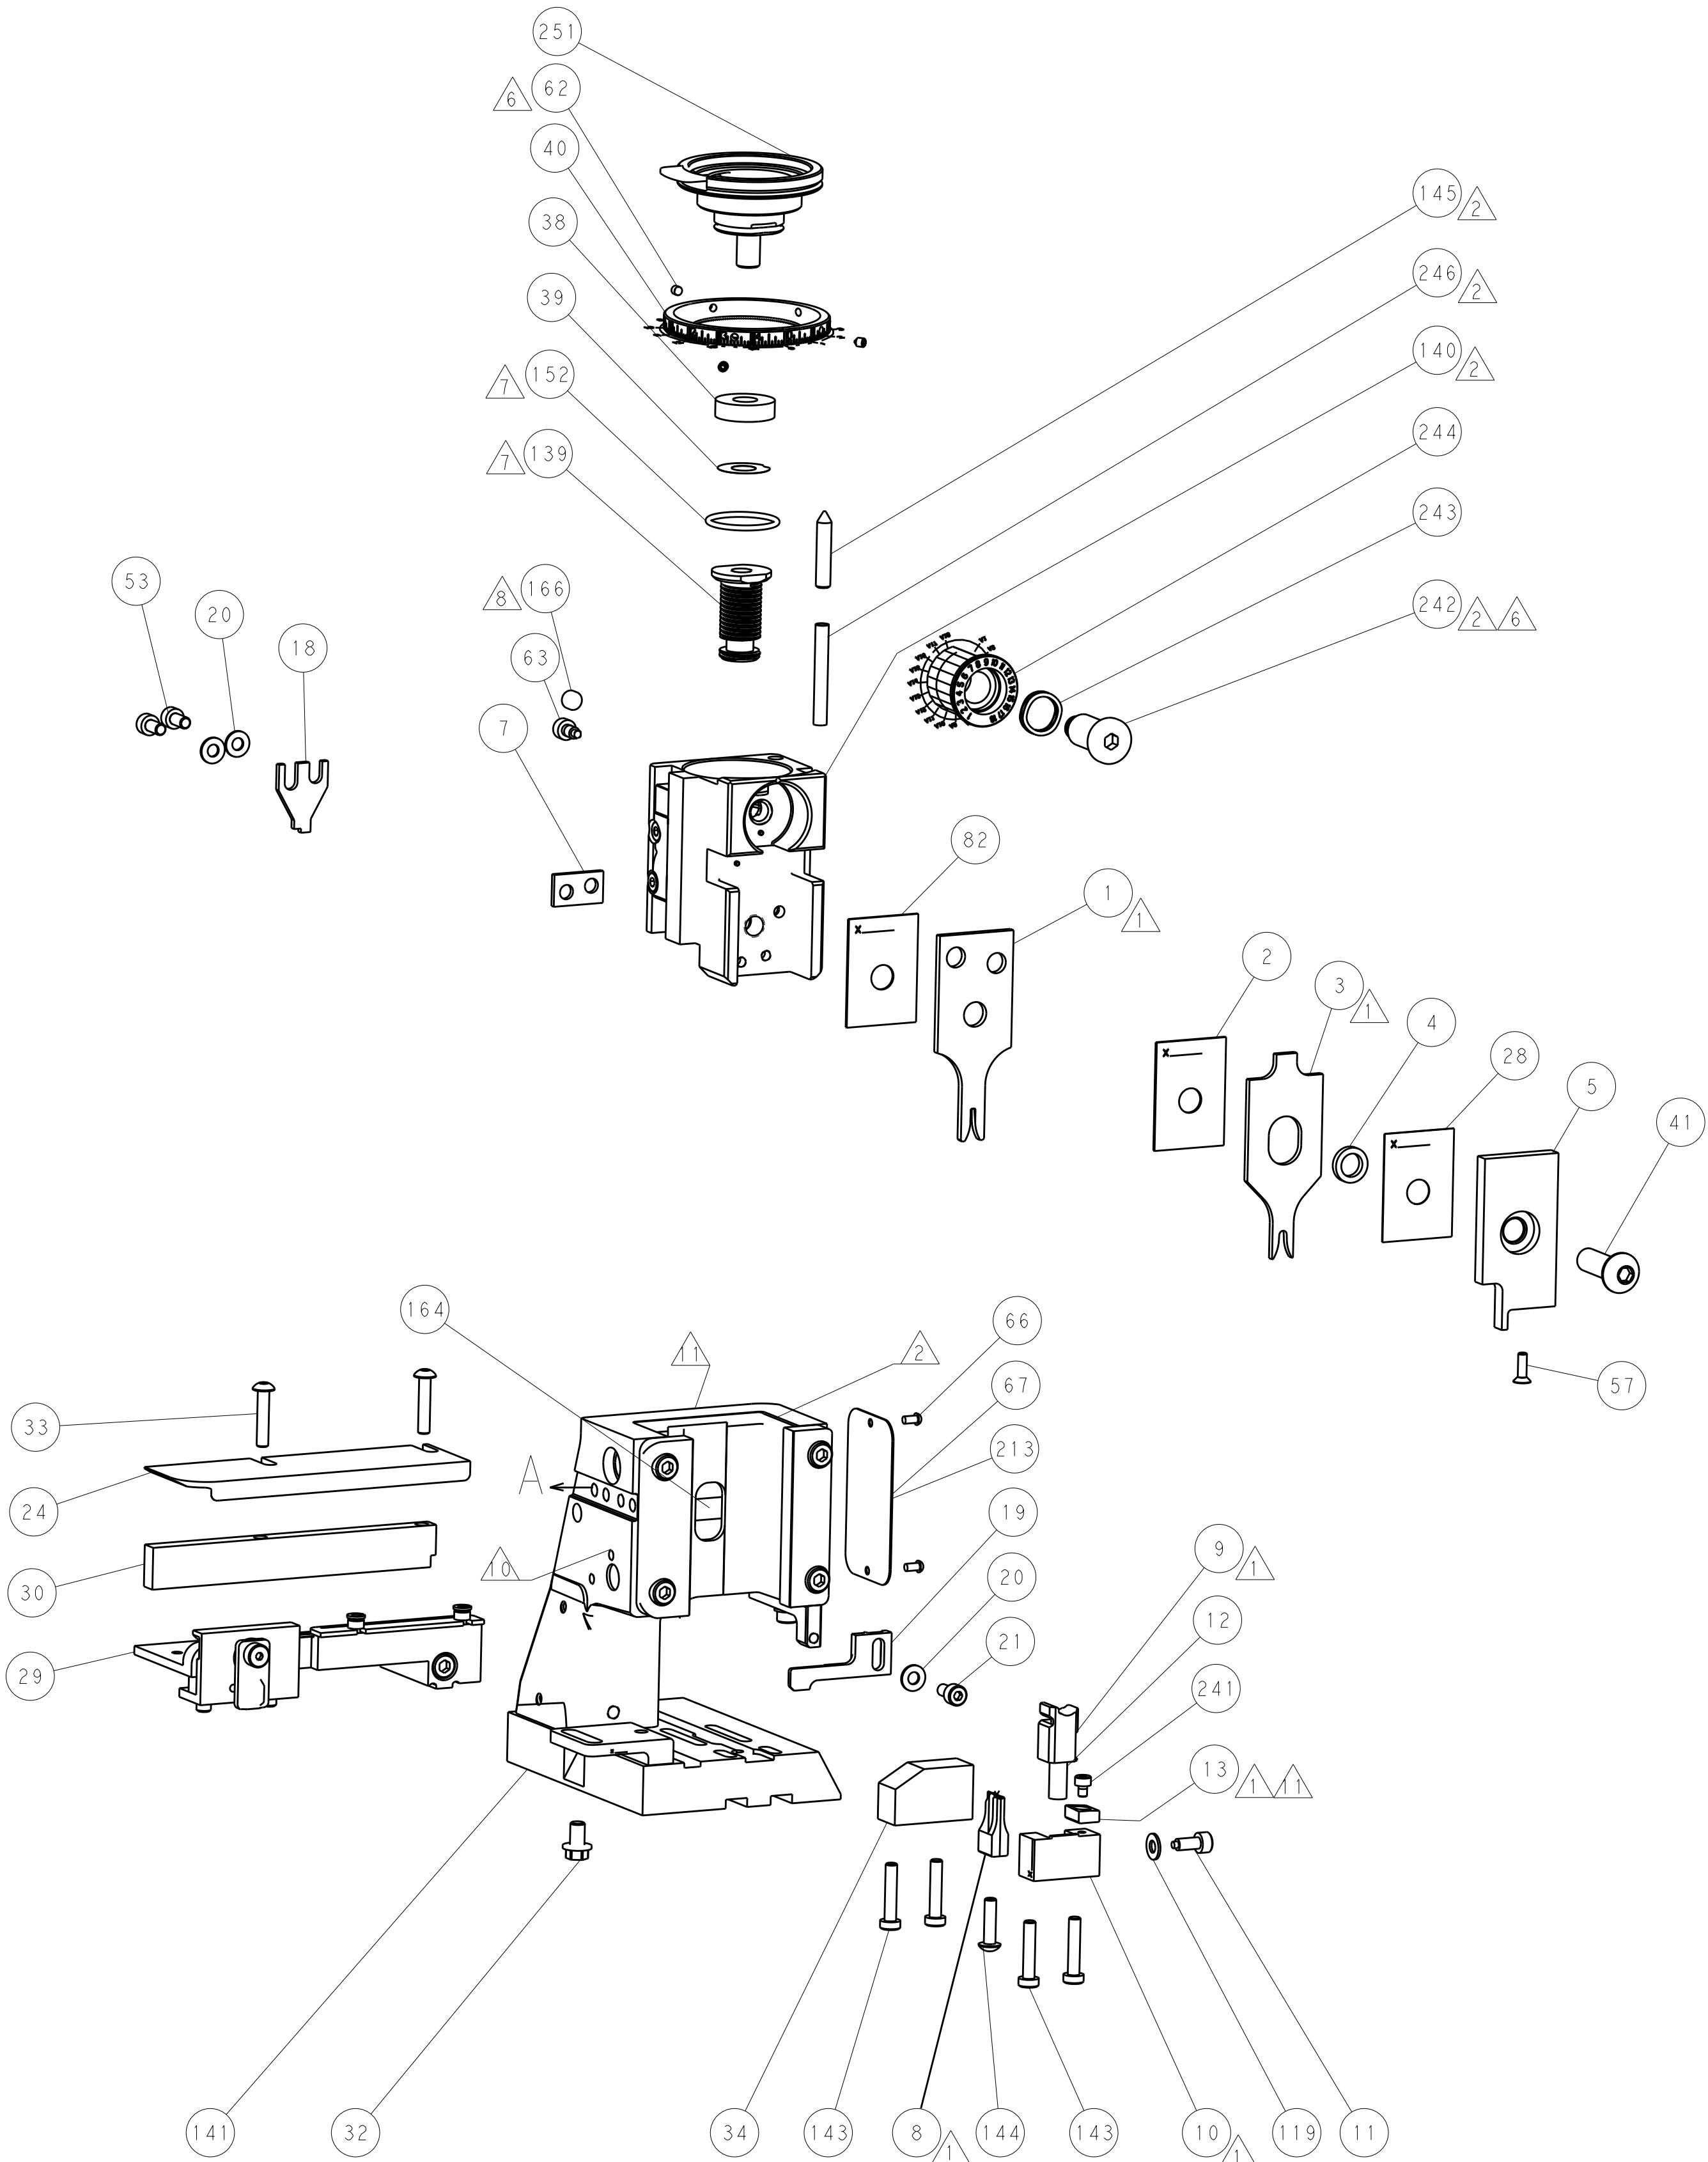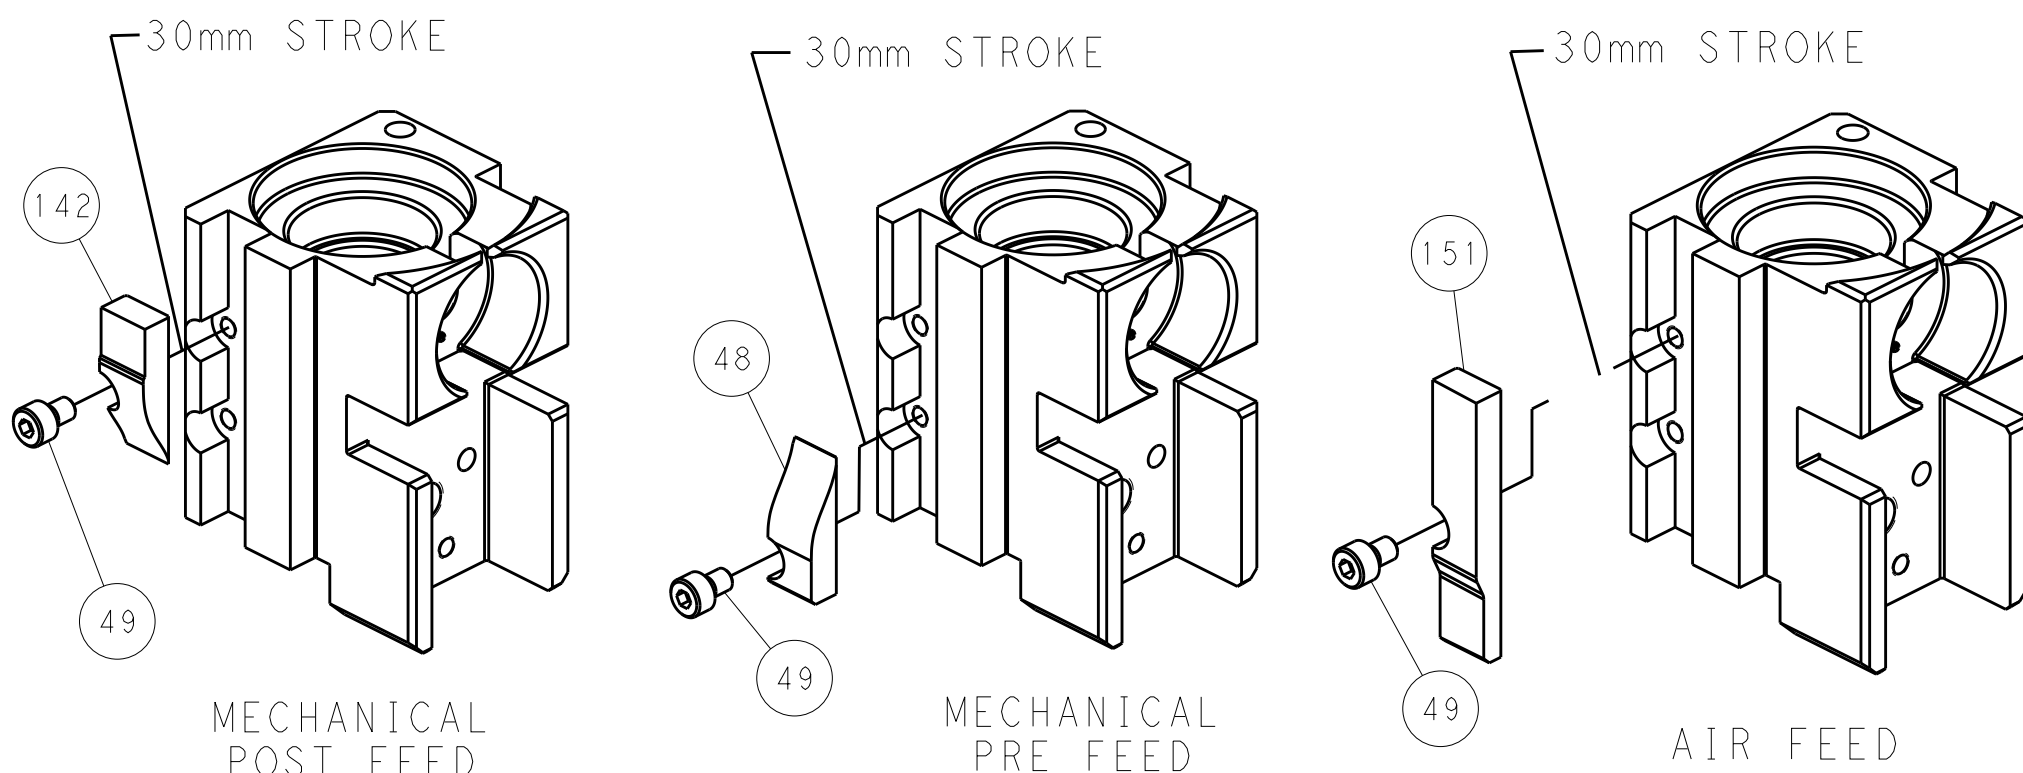

SHEAR DEPRESSOR DETAIL

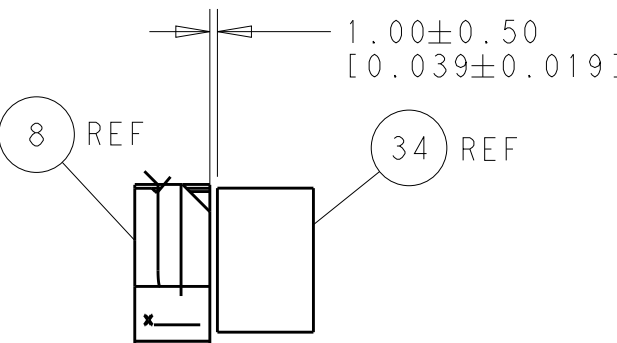

TERMINAL SUPPORT LOCATION

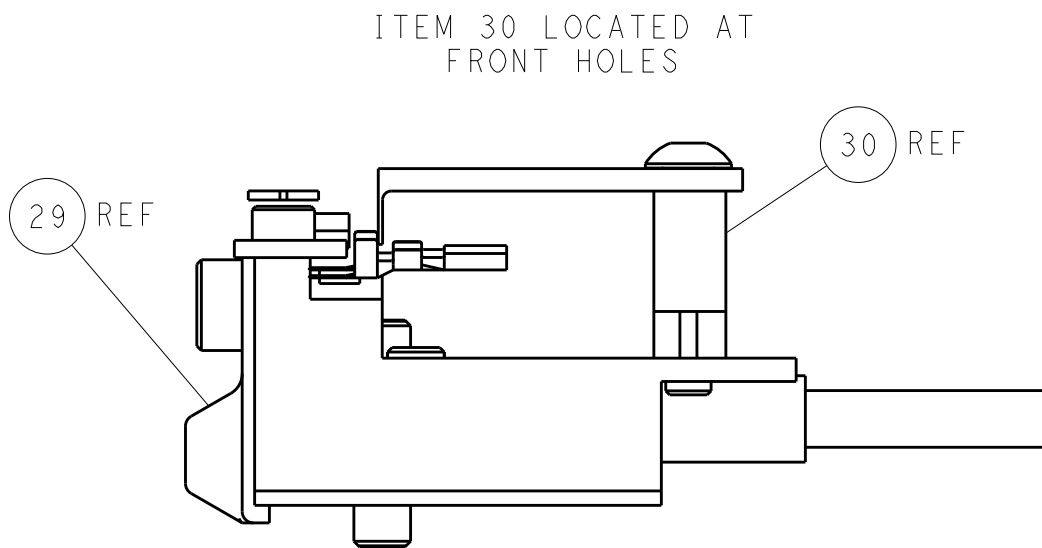

FEED TRACK POSITION
GUIDE BY INSULATION BARREL

PACIFIC VERSION
Shown on sheets 3 of 4 & 4 of 4
(Atlantic version shown on sheets 1 of 4 & 2 of 4)

THIS DRAWING IS UNPUBLISHED. IT IS SUBJECT TO CHANGE WITHOUT NOTICE. ANY CHANGES TO THIS DRAWING MUST BE APPROVED BY THE DESIGNING ORGANIZATION. IT IS SUBJECT TO CHANGE WITHOUT NOTICE. ANY CHANGES TO THIS DRAWING MUST BE APPROVED BY THE DESIGNING ORGANIZATION.				OWN: R. STANEM 06OCT2011 CHK: G. BAILEY 06OCT2011 APVD: T. ELBIN 06OCT2011				TE Connectivity Harrisburg, PA 17105-3608			
DIMENSIONS: mm				TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.5 1 PLC ±.5 2 PLC ±.13 3 PLC ±.013 4 PLC ±.0001 ANGLES FINISH				NAME: Ocean Side Feed Applicator			
MATERIAL: -				WEIGHT: -				SIZE: A1 CAGE CODE: 00779 DRAWING NO: C=2151104			
CUSTOMER ACCESSIBLE PRODUCTION DRAWING				SCALE: 1:2				SHEET 4 OF 4 REV E1			

SHEETS 1 & 2 ARE NOT REQUIRED FOR PACIFIC VERSION

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9