

## FEATURES

- Digital Codes Available:  
Incremental: A/B or Quadrature  
Absolute: Binary or Gray
- Up to 98 pulses per revolution (PPR)
- Analog resistive output for use as a potentiometer
- High temperature materials meet 85° requirements
- Push button feature allows dual function with single shaft input

The 700 Series is the economical solution to virtually any digital encoder or potentiometer requirement. As the latest version in our new generation of rotary encoder products, the 700 Series has been freshly tooled to include resistive analog output for potentiometer applications, as well as the standard digital code for direct interface with a microprocessor. The .890" package enhances the original design concept, delivering high performance and quality levels in the triple digit PPMs.

Electroswitch leads the market in rotational torque management for encoders. Our process includes digital maps to ensure repeatable and quantitative measurement.

Newly introduced in the 700 Series is an integrated push-button, which permits two functions in a single shaft. This feature provides system cost savings and user-friendly interface for input selection. The push-button feature is offered in the same package size as the standard 700, with a complete interface for scrolling through a menu and making a selection.

The 700 Series features a wide range of standard configurations to fulfill most needs. As with standard product, customized versions for volume applications also benefit from Electroswitch's cost-effective, automated production processes to build in quality performance.

# 700 SERIES

## MECHANICAL ENCODERS

## APPLICATIONS



### TIMER AND TEMPERATURE SELECTION

Incremental output codes are ideal for scroll functions required for input devices. Resistive output for temperature input selection.



### HVAC TEMPERATURE AND FAN CONTROL

Digital or analog output for temperature with direct drive to display and fan control for automotive use.



### ELECTRONIC RANGE CONTROL

Control of bake time, temperature and duration in residential and commercial applications.



### PANEL INPUT DEVICE

Used to scroll through menu via shaft rotation; for selecting menu item via push-button.



### AUDIO INPUT

Volume control for all amplifier applications; automotive, musical, home, and professional.



**ELECTROSWITCH**  
•ELECTRONIC PRODUCTS  
UNIT OF ELECTRO SWITCH CORP.

# 700 SERIES

## MECHANICAL ENCODERS

### 700 Series Application Notes

With the introduction of the 700 Series Mechanical Encoder and Potentiometer, Electroswitch delivers a low cost, multifunctional rotary interface with repeatable torque and 'feel' to match the user's needs.

New to the 700 Series is the addition of resistive (analog) output. Therefore, users have the unprecedented option of choosing between two types of outputs; digital or resistive. The digital outputs are available in absolute or incremental code, and reflect Electroswitch's many years of technological expertise in this area. The resistive outputs are available in 5K or 10K linear tapers; custom outputs can be developed upon request. All of these variations are offered in the same package size and may be used in any combination. The typical absolute code is either gray or binary. The four or five bit output gray code provides the benefit of only one bit change per change of state.

The incremental output code is known as an A/B counting code. As the shaft is rotated, two wave forms are generated and the A/B code 'counts' these pulses, sending them to the microprocessor to determine a 'relative' position. The counts or pulses continue with the rotation of the shaft, which allows the position to change infinitely, or as the microprocessor allows. Direction may be determined by analyzing the phase difference between the two channels.

The A/B code is also known as a quadrature. In full quadrature, each change of state in the two waveforms is counted, providing the highest form of resolution at 4 counts per cycle. In half quadrature, only the changes of state in one wave form are counted, providing 2 counts per cycle. While in quarter quadrature, only the rise in one wave form is counted, providing 1 count per cycle.




The 700 Series features 12, 16, 24, 32 or 36 mechanical detent positions that provide up to 36 electrical outputs per revolution in standard offering. Without mechanical detents, the resolution per rotation can be much higher. Electroswitch offers up to 96 electrical outputs per revolution in this non-detented method in custom applications.

Several options within the 700 Series make it unique and a valuable choice for any user. Our push-button feature allows two functions to be controlled by one shaft. By integrating the push-button function into its standard design, Electroswitch has been able to keep the package size the same for all of the 700 Series products. This push-button feature is ideal for scrolling and select functions, or to incorporate an on-off option in one rotary package size.




Standard mounting configuration is shaft perpendicular to the mounting board, with a bracket for additional mounting strength.

# Applications




## 700 Series Encoder Configurations

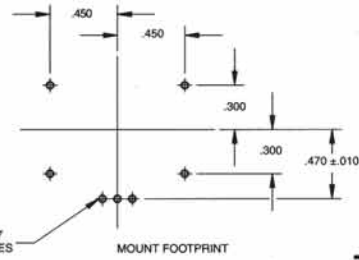




**700 Series**

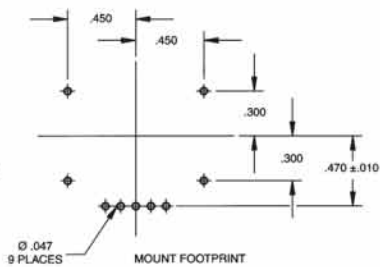




**12 or 16 position 702 Series**

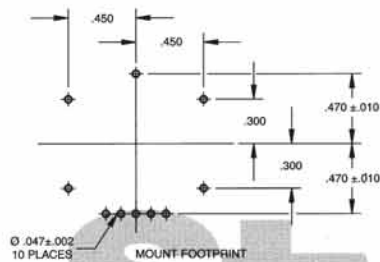

**24 or 32 position 702 Series**

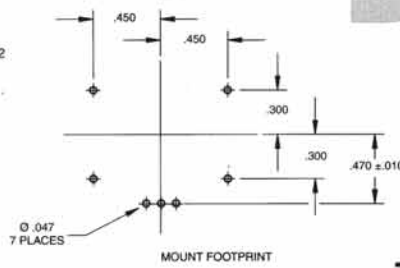


**703 Series**

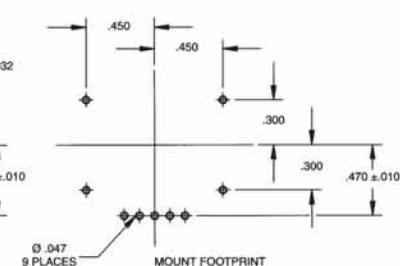


**701 Series or 704 Series**

## Truth and Output Tables

### QUADRATURE CODE FULL CYCLE PER DETENT (12, 16, 24 POSITION)



### QUADRATURE CODE 1/4 CYCLE PER DETENT (12, 16, 24, 32, OR 36 POSITION)



QUADRATURE CODE  
FULL CYCLE  
12, 16, 24 POSITION

| SWITCH POSITIONS | OUTPUT |   |
|------------------|--------|---|
|                  | A      | B |
| 1                | •      |   |
| 2                |        | • |
| 3                | •      | • |
| 4                |        | • |
| 5                | •      |   |
| 6                |        | • |
| 7                | •      | • |
| 8                |        | • |
| 9                | •      |   |
| 10               |        | • |
| 11               | •      | • |
| 12               |        | • |
| 13               | •      |   |
| 14               |        | • |
| 15               | •      | • |
| 16               |        | • |
| 17               | •      |   |
| 18               |        | • |
| 19               | •      | • |
| 20               |        | • |
| 21               | •      |   |
| 22               |        | • |
| 23               | •      | • |
| 24               |        | • |
| 25               | •      |   |
| 26               |        | • |
| 27               | •      | • |
| 28               |        | • |
| 29               | •      |   |
| 30               |        | • |
| 31               | •      | • |
| 32               |        | • |
| 33               | •      |   |
| 34               |        | • |
| 35               | •      | • |
| 36               |        | • |

QUADRATURE CODE  
1/4 CYCLE  
ALL POSITION

| SWITCH POSITIONS | OUTPUT |   |
|------------------|--------|---|
|                  | A      | B |
| 1                | •      |   |
| 2                |        | • |
| 3                | •      | • |
| 4                |        | • |
| 5                | •      |   |
| 6                |        | • |
| 7                | •      | • |
| 8                |        | • |
| 9                | •      |   |
| 10               |        | • |
| 11               | •      | • |
| 12               |        | • |
| 13               | •      |   |
| 14               |        | • |
| 15               | •      | • |
| 16               |        | • |
| 17               | •      |   |
| 18               |        | • |
| 19               | •      | • |
| 20               |        | • |
| 21               | •      |   |
| 22               |        | • |
| 23               | •      | • |
| 24               |        | • |
| 25               | •      |   |
| 26               |        | • |
| 27               | •      | • |
| 28               |        | • |
| 29               | •      |   |
| 30               |        | • |
| 31               | •      | • |
| 32               |        | • |
| 33               | •      |   |
| 34               |        | • |
| 35               | •      | • |
| 36               |        | • |

• INDICATES LOGIC LOW

GRAY CODE  
16 POSITION (\*)

| SWITCH POSITIONS | OUTPUT |   |   |   |    |
|------------------|--------|---|---|---|----|
|                  | 1      | 2 | 4 | 8 | 16 |
| 1                | •      |   |   |   |    |
| 2                |        | • |   |   |    |
| 3                | •      | • |   |   |    |
| 4                |        |   | • |   |    |
| 5                | •      | • | • |   |    |
| 6                |        | • | • | • |    |
| 7                | •      |   | • | • |    |
| 8                |        | • |   | • |    |
| 9                | •      | • | • | • |    |
| 10               |        | • | • | • |    |
| 11               | •      | • | • | • |    |
| 12               |        | • | • | • |    |
| 13               | •      |   | • | • |    |
| 14               |        | • |   | • |    |
| 15               | •      | • | • | • |    |
| 16               |        | • |   | • |    |

\* - 12 position gray code is the same as a 16 position without positions 11 through 14.

GRAY CODE  
32 POSITION (\*\*)

| SWITCH POSITIONS | OUTPUT |   |   |   |    |
|------------------|--------|---|---|---|----|
|                  | 1      | 2 | 4 | 8 | 16 |
| 17               |        |   |   |   |    |
| 18               | •      |   |   |   |    |
| 19               |        | • |   |   |    |
| 20               | •      | • |   |   |    |
| 21               |        |   | • |   |    |
| 22               | •      | • | • |   |    |
| 23               |        | • | • | • |    |
| 24               | •      |   | • | • |    |
| 25               |        | • |   | • |    |
| 26               | •      | • | • | • |    |
| 27               |        | • | • | • |    |
| 28               | •      |   | • | • |    |
| 29               |        | • |   | • |    |
| 30               | •      | • | • | • |    |
| 31               |        | • |   | • |    |
| 32               | •      |   | • | • |    |

\*\* - 24 position gray code is the same as a 32 position without positions 21 through 28.

## Ordering the 700 Series Encoder

### Code

- 700: Quadrature
- 701: Quadrature with Push-button
- 702: Absolute
- 703: Resistive
- 704: Resistive with Push-button

### Electrical Cycles or Resistive Value

- 700: 06, 08, 09, 12, 16, 24, 32 or 36
- 701: 06, 08, 09, 12, 16, 24, 32 or 36
- 702: 01
- 703: 05K or 10K
- 704: 05K or 10K

### Number of Detent Positions

- 700: 12, 16, 24, 32, 36 or 00: No Detents
- 701: 12, 16, 24, 32, 36 or 00: No Detents
- 702: 12, 16, 24, or 32
- 703: 00: No Detents
- 704: 00: No Detents

**701**

**08**

**32**

### 700 Series Standard Offerings

|           |           |           |           |           |
|-----------|-----------|-----------|-----------|-----------|
| 700-09-36 | 701-08-32 | 702-01-12 | 703-05-00 | 704-05-00 |
| 700-16-16 | 701-04-16 | 702-01-16 | 703-10-00 | 704-10-00 |
| 700-24-24 | 701-06-24 | 702-01-24 |           |           |

## Specifications

|                           |                                                                                                      |
|---------------------------|------------------------------------------------------------------------------------------------------|
| Current Carrying Capacity | Resistive 0.5 watt                                                                                   |
| Switching Load            | 1mA at 115 VAC, 15mA at 14 VDC                                                                       |
| Shock Humidity            | MIL-STD 202E                                                                                         |
| Dielectric Strength       | 750 volts                                                                                            |
| Contact Resistance        | 1 ohm typical                                                                                        |
| Contact Bounce            | 5 ms @ 15 RPM                                                                                        |
| Contacts                  | Phosphor-bronze gold interface with program board                                                    |
| Codes                     | Resistive, Quadrature, A/B, Binary, Gray                                                             |
| Code Program              | Non-shorting typical                                                                                 |
| Operating Forces          | 16 position = 7.5 in.-oz. ±20%, 36 position = 4.5 in.-oz. ±20%                                       |
| Life                      | 50,000 cycles<br>(50% loss in torque over life. High temperature operation will reduce detent life.) |
| Operating Temperature     | -40°C to +85°C                                                                                       |
| Shaft Material            | Molded plastic                                                                                       |
| Anti-Rotation Device      | Flatted mounting bushing .375" dia. x .320", double "D"                                              |

Detent Angles 36°, 30°, 22.5°, 15°, 11.25°, 10°; others upon request

|                             |                                              |
|-----------------------------|----------------------------------------------|
| Molded Construction         | Valox plastic rated 94 V-0 or better         |
| Board Material              | FR-4 with 1 oz. copper clad, plated          |
| Push-Button Characteristics | Stroke: .065 ±.015                           |
|                             | Push-Button Force: 15 oz. max.               |
|                             | Push-Button Resistance: 80 ohms max.         |
|                             | Torque: 12, 24 position = 1.6 ±.3 in.-oz.    |
|                             | Torque: 16 position = 2 ±.3 in.-oz.          |
|                             | Torque: 32, 36 position = 1.2 ±.3 in.-oz.    |
|                             | Contact Resistance: 5 ohms max.              |
|                             | Contact Bounces: 5 ms max. @ 15 RPM          |
|                             | Push-Button Life: minimum 250,000 operations |

# 700 SERIES

## MECHANICAL ENCODERS



## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9