


PCL-818HD/HG

PCL-818L

**100 kS/s, 12-bit, 16-ch ISA
Multifunction Card**

**40 kS/s, 12-bit, 16-ch ISA
Multifunction Card**

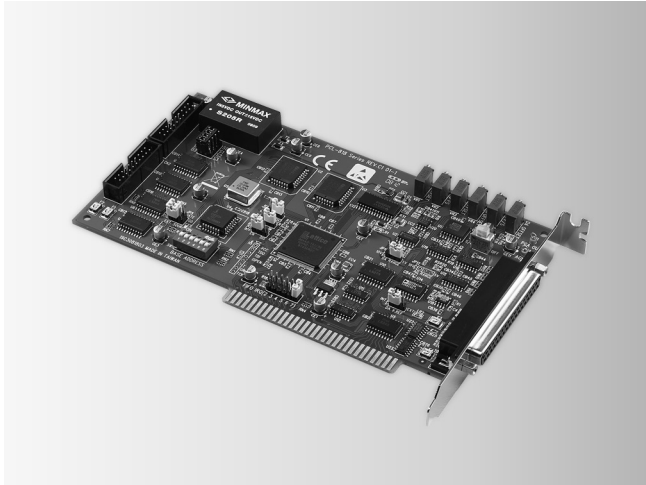

Features

- 16-ch single-ended or 8-ch differential analog input
- 12-bit A/D converter, with up to 100 kHz sampling rate
- Programmable gain
- Automatic channel/gain scanning
- Onboard FIFO memory (1,024 samples, PCL-818HD/HG only)
- One 12-bit analog output channel
- 16-ch digital input and 16-ch digital output
- Onboard programmable counter

Introduction

The PCL-818L series was designed for entry-level models to the PCL-818 series. The cards have been designed with the cost-sensitive customer in mind, but still offers the same functions as the rest of the series, except that they have a 40 kHz sampling rate and only accepts bipolar inputs. They are fully software and connector compatible with the PCL-818HD and PCL-818HG. This lets you upgrade your applications to these higher performance cards without hardware or software changes.

The PCL-818LS bundle consists of the PCL-818L card, the PCLD-8115 wiring terminal board and a DB37 cable assembly. The PCLD-8115 accommodates onboard passive signal conditioning components (resistors and capacitors), allowing you to easily implement a low-pass filter, a voltage attenuator or a 4 – 20 mA voltage converter.

Specifications

Analog Input

- **Channels** 16 single-ended / 8 differential
- **Resolution** 12 bits
- **Max. Sampling Rate** 100 kS/s for all input ranges (PCL-818HD/HG only)
40 kS/s for all input ranges (PCL-818L only)
- **FIFO Size** 1,024 samples
- **Overvoltage Protection** 30 Vp-p
- **Input Impedance** 10 M Ω
- **Sampling Modes** Software, pacer or external
- **Input Range** (V, software programmable)

PCL-818L/818HD					
Bipolar	± 10	± 5	± 2.5	± 1.25	± 0.625
Unipolar*	N/A	0 ~ 10	0 ~ 5	0 ~ 2.5	0 ~ 1.25
Accuracy (% of FSR ± 1LSB)	0.1	0.1	0.2	0.2	0.4

* Note: PCL-818L doesn't support unipolar input range.

PCL-818HG								
Bipolar	± 10	± 5	± 1	± 0.5	± 0.1	± 0.05	± 0.01	± 0.005
Unipolar	N/A	0 ~ 10	N/A	0 ~ 1	N/A	0 ~ 0.1	N/A	0 ~ 0.01
Accuracy (% of FSR ± 1LSB)	0.1	0.1	0.2	0.2	0.4	0.4	0.8	0.8

Analog Output

- **Channels** 1
- **Resolution** 12 bits
- **Output Rate** Static update
- **Output Range** (V, software programmable)

Internal Reference	Unipolar	0 ~ 5, 0 ~ 10
External Reference		0 ~ 10, 0 ~ -10

Digital Input

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.
Logic 1: 2.0 V min.

Digital Output

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Output Voltage** Logic 0: 0.4 V max.
Logic 1: 2.4 V min.
- **Output Capability** Sink: 8 mA
Source: -0.4 mA

Timer/Counter

- **Channels** 1
- **A/D Pacer** 32-bit with 10 MHz or 1 MHz time base
- **Max. and Min. Rates** 2.5 MHz and 0.00023 Hz
- **Counter** One 16-bit counter with 100 kHz time base

General

- **Power Consumption** 5 V @ 210 mA typical, 500 mA max.
12 V @ 20 mA typical, 100 mA max.
-12 V @ 20 mA typical, 40 mA max.
- **I/O Connector** 1 x DB37 female connector
2 x 20-pin box header
- **Dimensions (L x H)** 155 x 100 mm (6.1" x 3.9")
- **Operating Temperature** 0 ~ 50 $^{\circ}$ C (32 ~ 122 $^{\circ}$ F)
- **Storage Temperature** -20 ~ 65 $^{\circ}$ C (-4 ~ 149 $^{\circ}$ F)
- **Operating Humidity** 5 ~ 95% RH, non-condensing (refer to IEC 68-2-3)

Ordering Information

- **PCL-818HD** High-performance Half-size Multifunction Card
- **PCL-818HG** High-performance and High-gain Multi. Card
- **PCL-818L** Low-cost High-perform. Half-size Multi. Card
- **PCL-818LS** PCL-818L w/ PCLD-8115 and DB37 Cable

Accessories

- **PCL-10137-1** DB37 Cable, 1 m
- **PCL-10137-2** DB37 Cable, 2 m
- **PCL-10137-3** DB37 Cable, 3 m
- **PCL-10120-1** 20-pin Flat Cable, 1 m
- **PCL-10120-2** 20-pin Flat Cable, 2 m
- **ADAM-3920** 20-pin DIN-rail Flat Cable Wiring Board
- **PCLD-8115** Wiring Board w/ CJC Circuit & One DB37 Cable
- **PCLD-880** Wiring Board w/ Two 20-pin Flat Cables & Adapter

Pin Assignments

CN1			CN2			
D/O 0	1	2	D/O 1	D/I 0	1	2
D/O 2	3	4	D/O 3	D/I 2	3	4
D/O 4	5	6	D/O 5	D/I 4	5	6
D/O 6	7	8	D/O 7	D/I 6	7	8
D/O 8	9	10	D/O 9	D/I 8	9	10
D/O 10	11	12	D/O 11	D/I 10	11	12
D/O 12	13	14	D/O 13	D/I 12	13	14
D/O 14	15	16	D/O 15	D/I 14	15	16
D.GND	17	18	D.GND	D.GND	17	18
+5 V	19	20	+12 V	+5 V	19	20

CN3 (Single ended)

A/D S0	1	20	A/D S8	A/D S8	20
A/D S1	2	21	A/D S9	A/D S9	21
A/D S2	3	22	A/D S10	A/D S10	22
A/D S3	4	23	A/D S11	A/D S11	23
A/D S4	5	24	A/D S12	A/D S12	24
A/D S5	6	25	A/D S13	A/D S13	25
A/D S6	7	26	A/D S14	A/D S14	26
A/D S7	8	27	A/D S15	A/D S15	27
A.GND	9	28	A.GND	A.GND	28
A.GND	10	29	A.GND	A.GND	29
VREF	11	30	DA0.OUT	DA0.OUT	30
S0*	12	31	DA0.VREF	DA0.VREF	31
+12 V	13	32	S1*	S1*	32
S2*	14	33	S3*	S3*	33
D.GND	15	34	D.GND	D.GND	34
NC	16	35	EXT.TRIG	EXT.TRIG	35
Counter	17	36	Counter 0	Counter 0	36
Counter	18	37	PACER	PACER	37
+5 V	19				

CN3 (Differential)

A/D H0	1	20	A/D L0	A/D L0	20
A/D H1	2	21	A/D L1	A/D L1	21
A/D H2	3	22	A/D L2	A/D L2	22
A/D H3	4	23	A/D L3	A/D L3	23
A/D H4	5	24	A/D L4	A/D L4	24
A/D H5	6	25	A/D L5	A/D L5	25
A/D H6	7	26	A/D L6	A/D L6	26
A/D H7	8	27	A/D L7	A/D L7	27
A.GND	9	28	A.GND	A.GND	28
A.GND	10	29	A.GND	A.GND	29
VREF	11	30	DA0.OUT	DA0.OUT	30
S0*	12	31	DA0.VREF	DA0.VREF	31
+12 V	13	32	S1*	S1*	32
S2*	14	33	S3*	S3*	33
D.GND	15	34	D.GND	D.GND	34
NC	16	35	EXT.TRIG	EXT.TRIG	35
Counter	17	36	Counter 0	Counter 0	36
Counter	18	37	PACER	PACER	37
+5 V	19				

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9