



**COMPONENTS FOR A
CONNECTED
PLANET®**

Stewart Connector

modular interconnect products



ARJ45™ Category 7a

SS-77100-004 - Single port, horizontal, shielded jack

CA77-XXXM0-8 - Cable assemblies, up to 10 meters

Features / Benefits

- Meets IEC 60603-7-7 standard for Category 7 performance up to 600 MHz
- Meets proposed Category 7a standard for increased frequency up to 1000 MHz
- Meets IEC 60603-7-7 Category 7 interface standards and is compatible with Nexans GG45 connectors
- Includes built-in strain relief boot and anti-snap feature for plug tab protection

Part Number	Orientation	Shield Type
SS-60300-014	180 Degree	Panel Grounds
SS-60300-016	180 Degree	No Panel Grounds
SS-60300-017	180 Degree	Unshielded
SS-60300-002	90 Degree	Panel Grounds
SS-60300-004	90 Degree	No Panel Grounds
SS-60300-021	90 Degree	Unshielded
SS-60300-023	45 Degree	Panel Grounds
SS-60300-024	45 Degree	No Panel Grounds

Category 6 Jacks

SS-60000 Series - Shielded and unshielded


Features / Benefits

- Through hole jacks for PCB soldering
- Designed for Category 6 patch panel and wall jack applications
- Patented design of contacts creates consistent performance for use in Category 6 applications
- 45 degree, 90 degree, and 180 degree shielded and unshielded versions available

Modular Jacks

Features / Benefits

- Minimum of 750 insertion cycles
- UL 94-V0 plastic
- Preloaded, formed wire contacts offer superior mechanical and electrical performance
- 45 degree, 90 degree, 180 degree, multi-port, and cable-ready versions available

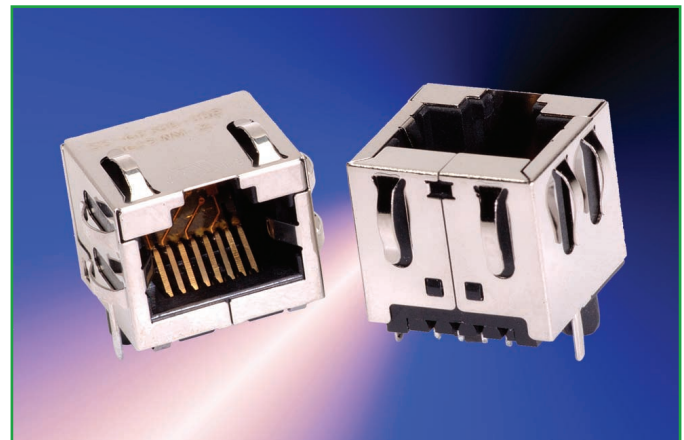

Category 6a

SS-60300 Series - Shielded and unshielded

Features / Benefits

- Integrated, flexible PCB design (patent pending) helps cancel Near End Cross Talk (NEXT)
- 45 degree, 90 degree, and 180 degree shielded and unshielded versions available
- Designed to meet Category 6a 500 MHz requirements
- Designed for use in 10Gigabit Ethernet applications

Part Number	Orientation	Shield Type
SS-60000-008	180 Degree	No Panel Grounds
SS-60000-007	180 Degree	Unshielded
SS-60000-009	90 Degree	No Panel Grounds
SS-60000-010	90 Degree	Unshielded
SS-60000-011	45 Degree	No Panel Grounds
SS-60000-014	45 Degree	Unshielded



COMPONENTS FOR A
CONNECTED
PLANET®

Stewart Connector

modular interconnect products

Modular Jacks

Features / Benefits

- Minimum of 750 insertion cycles
- UL 94-V0 plastic
- Preloaded, formed wire contacts offer superior mechanical and electrical performance
- 45 degree, 90 degree, 180 degree, multi-port, and cable-ready versions available




Category 5E Jacks

SS-71 Series - Unshielded

Features / Benefits

- Through hole jacks for PCB soldering
- Designed for Category 5E patch panel and wall jack applications
- 45 degree, 90 degree, and 180 degree shielded and unshielded versions available

Part Number	Orientation	Shield Type
SS-7188VS-A-NF	180 Degree	No Panel Grounds
SS-7188V-A-NF	180 Degree	Unshielded
SS-7188S-A-NF	90 Degree	No Panel Grounds
SS-7188-A-NF	90 Degree	Unshielded
SS-71100-001	45 Degree	No Panel Grounds
SS-71100-003	45 Degree	Unshielded

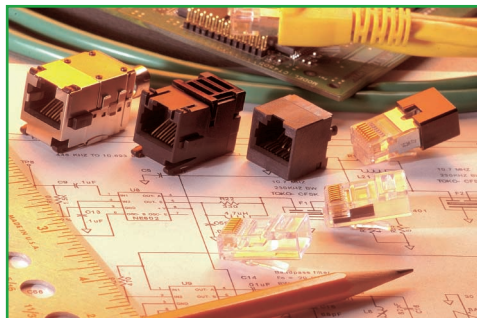

Category 5E Cable Ready

SS-82000-002 - Unshielded

SS-82100-001 - Shielded

Features / Benefits


- Meets EIA/TIA Category 5E standard when terminated to Category 5E compliant cable
- Double IDC termination for reliable connections
- Load and lace wire management system reduces termination errors
- Can be panel or face plate mounted
- Shielded version provides 360° coverage
- Great for dangle or extension applications
- Requires Bel Stewart Connector termination tools



COMPONENTS FOR A
CONNECTED
PLANET®

Stewart Connector

modular interconnect products

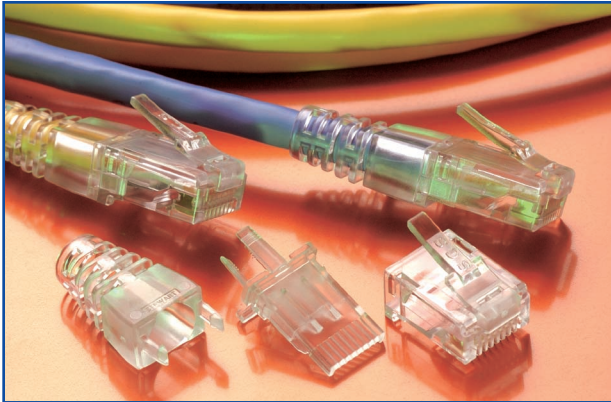

Category 6

SS-39100-021 - Unshielded

450-034 - Optional snagless boot for SS-39100-021

SS-39100-008 - Unshielded with integral boot

Features / Benefits

- Meets EIA/TIA Category 6 component standard when terminated to Category 6 compliant cable
- Patented wire locking load bar for easy assembly
- Field installable with Category 6 termination tool

SS-39200-011 - Shielded

Features / Benefits

- Meets EIA/TIA Category 6 standard when terminated to Category 6 compliant cable
- Load bar for ease of assembly
- Reliable crimped shield grounding system
- One step termination process
- Field installable with shielded termination tool

Category 5 and T1

940-SP-3088R-A133 - Unshielded

Features / Benefits

- Meets EIA/TIA Category 5 standard when terminated to Category 5 compliant cable
- Handles conductor OD of .040"
- Field installable with standard termination tool

940-SP-360808-A108 - Shielded

Features / Benefits

- Meets EIA/TIA Category 5 standard when terminated to Category 5 compliant cable
- Conductor management bar for easy assembly
- Reliable crimped ferrule grounding system
- Field installable with shielded termination tool and ferrule crimp tool

Modular Plugs

Features / Benefits

- Designed for solid and stranded conductors
- Electro-polished contacts for minimum of 750 insertion cycles
- UL 94-V0 plastic
- Keying options available

Category 5E

SS-37000-007 - Unshielded

450-034 - Optional snagless boot for SS-37000-007

Features / Benefits

- Meets EIA/TIA Category 5E standard when terminated to Category 5E compliant cable
- Single piece plug with staggered contact design reduces crosstalk
- Field installable with standard termination tool

943-SP-370808SM2-A264 - Shielded

Features / Benefits

- Meets EIA/TIA Category 5E standard when terminated to Category 5E compliant cable
- Staggered contact design reduces crosstalk
- Conductor management bar for easy assembly
- Reliable crimped ferrule grounding system

SS-37200-028 - Shielded

Features / Benefits

- Meets EIA/TIA Category 5E standard when terminated to Category 5E compliant cable
- Single piece design
- Staggered contact design reduces crosstalk
- Field installable with unshielded termination tool



RJ11 and RJ12 Applications

940-SP-3046 - Unshielded (4 contact, 6 position)


940-SP-3066 - Unshielded (6 contact, 6 position)



COMPONENTS FOR A
CONNECTED
PLANET®

Stewart Connector

modular interconnect products

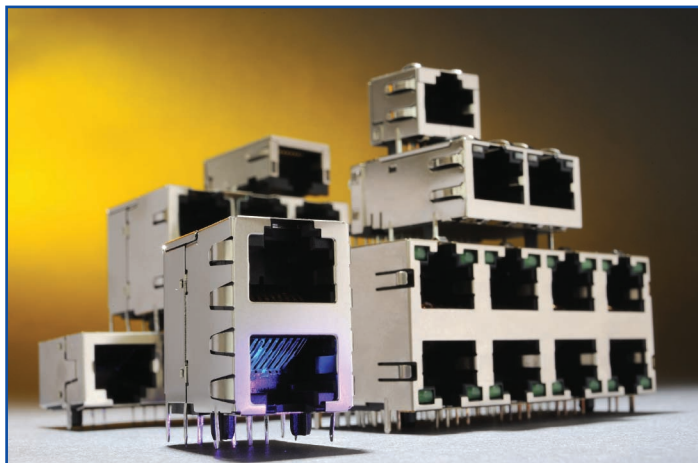

EPP-918A Environmental Protectant


Features / Benefits

- Improves durability and reliability for RJ11 and RJ45 jacks
- Prevents corrosion from harsh environmental conditions
- Withstands high temperature soldering (in excess of 260° C for 10 seconds)
- Superior resistance to wear-and-tear during insertion testing
- Low Level Contact Resistance (LLCR) testing to 2500 cycles with no measurable change to gold-plated contacts
- Contains UV tracer for visible inspection of EPP-918A coating on contacts
- Can be used with any Bel Stewart Connector product to increase durability and reliability
- RoHS6 compliant

SS-51 Series Punch Down Blocks

Features / Benefits

- Designed for Category 6a applications
- Facilitates field cable termination
- Notched-head design secures cable prior to termination
- Compatible with industry standard termination tools
- Designed for AWG 22-26 solid copper wire
- Pre-printed with TIA 568A/B color coding
- Block design provides excellent pair-to-pair crosstalk performance
- Design allows staggered pair-to-pair spacing to reduce alien crosstalk in multi-port configurations
- RoHS6 compliant

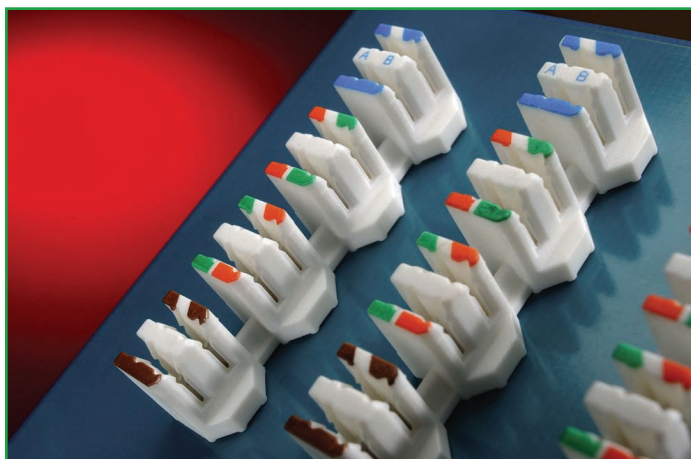

Part Number	Description
SS-51000-003	8 Way Punch Down Block, no printing
SS-51000-004	8 Way Punch Down Block, with printed color code

Bel Stewart Connector

11118 Susquehanna Trail South
Glen Rock, PA 17327 USA
Tel 717-235-7512
Fax 717-235-4675
www.belstewart.com

Bel Fuse Europe Ltd.

Preston Technology Mgmt Centre
Marsh Lane, Suite G7
Preston PR1 8UQ
Lancashire, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com

Bel Stewart GmbH

Industriestrasse 20, D-61381
Friedrichsdorf
Germany
Tel 49-6172-9552-0
Fax 49-6172-9552-40
www.belstewart.com

Bel Fuse Ltd.

8F/8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9